
AUDIO ENGINEERING

NOVEMBER
1949
Coulon
35c

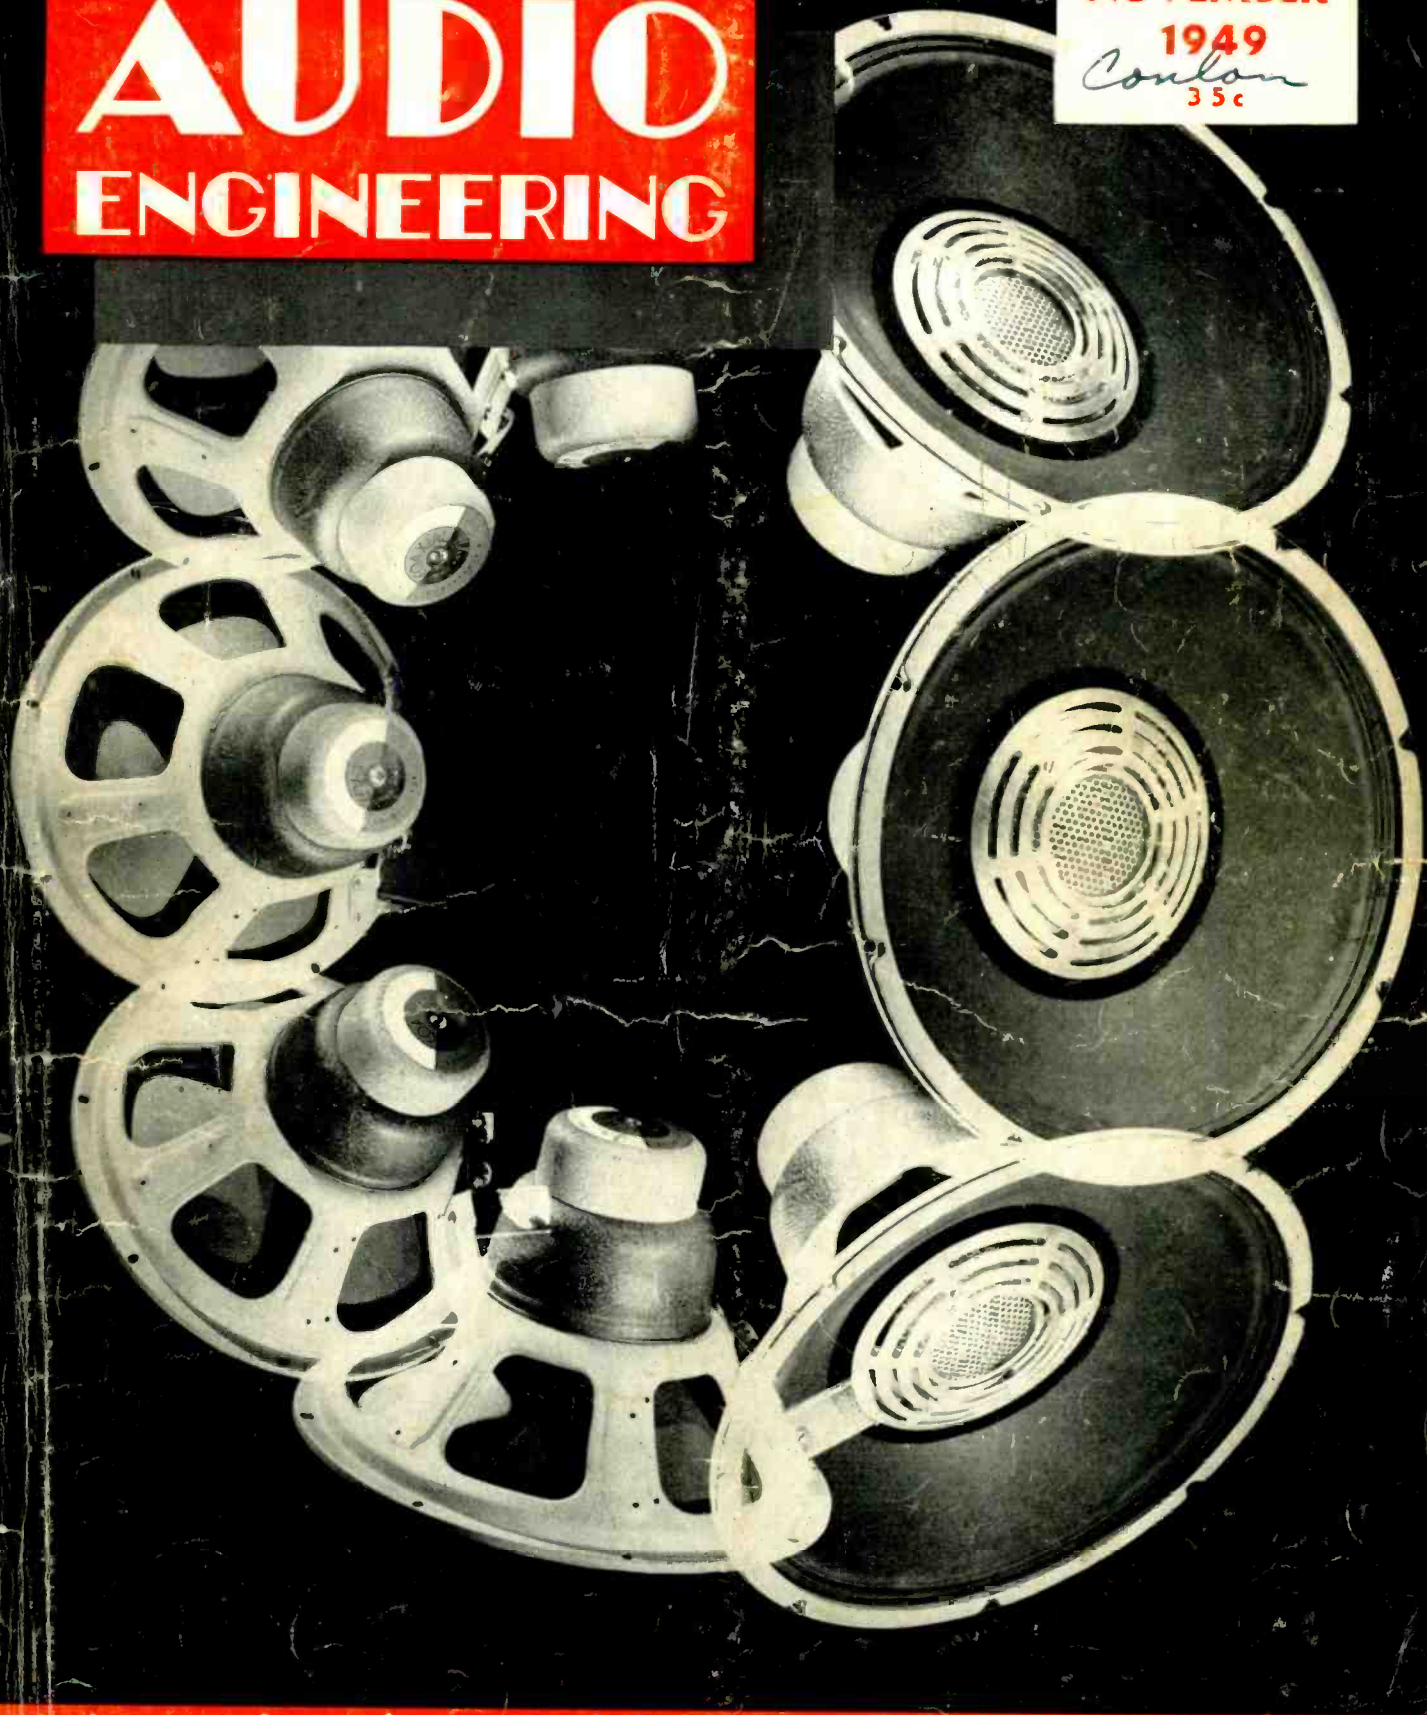

Published by RADIO MAGAZINES, INC.

www.americanradiohistory.com

Choice of the MASTERS



MASTER

audiodiscs*



Gold-sputtered Master Audiodiscs recorded at 78, 45 and 33⅓ rpm.

The record buying public is far more fidelity-conscious today than ever before—more critical of surface noise and distortion. Perhaps that's why so many more recordists are insisting on Audiodisc masters.† For they know that no pressing is any better than the master from which it is made! And they know, too, that they can always depend on Audiodiscs for consistent, uniform quality, flawless surface, freedom from humidity effects, excellent cutting characteristics and ease of processing—whether making conventional or microgroove recordings.

Yes—when buying masters, it pays to ask for Audiodiscs.

†The number of Master Audiodiscs sold so far in 1949 has far exceeded the rate of sales in every other year in our history, except for the boom record year of 1946.

*Trade Mark



audiopoints*

To get the best out of your Audiodiscs, cut them with precision sharpened Audiopoints, and reproduce with perfectly matched playback Audiopoints. Their low cost, together with Audio's convenient resharpening service, makes them an important factor in recording economy.



audiotape*

Now recordists can get a magnetic tape with the same consistent, uniform quality that has characterized Audiodiscs for the past decade. Paper-base Audiotape is now available with either red or black oxide. *And now plastic base Audiotape is also in production!* Send for free samples.

AUDIO DEVICES, INC.
444 Madison Ave., New York 22, N. Y.

Gentlemen: Please send me the following:

- ☐ One 200-foot sample reel of plastic-base Audiotape.
- ☐ Two 200-foot sample reels of paper-base Audiotape—one with red oxide, and the other with black oxide coating.

NAME_____

COMPANY_____


ADDRESS_____

CITY_____ STATE_____

Audiodiscs are manufactured in the U.S.A. under exclusive license from PYRAL, S.A.R.L., Paris

Audio Devices Export Dept.: ROCKE INTERNATIONAL
13 East 40th St., New York 16, N. Y.

www.americanradiohistory.com

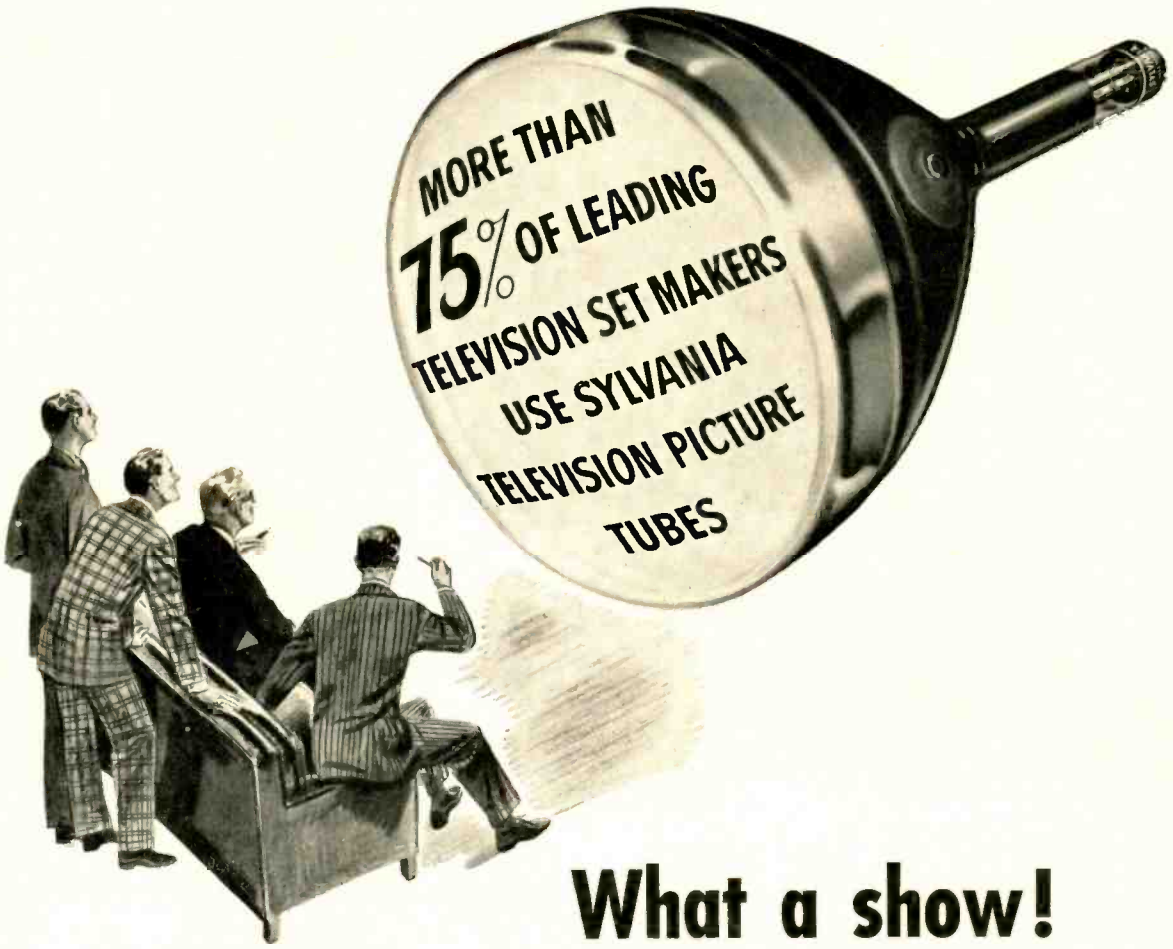

What a show!

A recent intensive survey discloses that among the major television set manufacturers, more than 75% use Sylvania cathode ray tubes!

This impressive showing is a tribute to the research and quality production techniques employed by Sylvania in the making of picture tubes that are unsurpassed.

If you wish full information about the entire Sylvania line of television picture tubes made by the manufacturers of highest quality radio tubes and electronic equipment, write Sylvania Electric Products Inc., Dept. R 1411, 500 5th Ave., N. Y.

These leading television set manufacturers use Sylvania Television Picture Tubes

Admiral • Air King • Andrea • Ansley • Automatic
Bendix • Crosley • DeWald • Emerson • Fada
Farnsworth • Garod • Hallicrafters • Hoffman
Magnavox • Midwest • Motorola • National • Olympic
Packard-Bell • Philco • Pilot • Raytheon-Belmont
Regal • Scott • Sentinel • Silvertone • Spartan
Stromberg-Carlson • Tele-King • Tele-tone • Temple
Trav-ler • Westinghouse • Zenith

SYLVANIA ELECTRIC

CATHODE RAY TUBES; RADIO TUBES; ELECTRONIC DEVICES; FLUORESCENT LAMPS, FIXTURES, WIRING DEVICES, SIGN TUBING; LIGHT BULBS; PHOTOLAMPS

www.americanradiohistory.com

Listen for the words "Transcribed by AMPEX" after the great shows in radio

Here's why.....

the new series 300

AMPEX

MAGNETIC TAPE RECORDER

answers industry need!





Portable model

Designed by engineers who had your engineering needs in mind!

Console Model 300* $1,573.75
Portable Model 300 $1,594.41
Rack Mounted $1,491.75

*Meter panel extra

F. O. B. Factory, San Carlos, Calif.

★ ***Original program quality preserved***

Use of independent reproduction facilities allows instantaneous monitoring and makes possible the most stringent comparisons between recordings and originals.

★ ***Tape and playback noise non-existant***

Use of special record and bias circuits has eliminated tape noise.* Extreme care has been exercised to eliminate hum pick-up.

★ ***Editing made easy***

With Ampex editing is almost instantaneous. Single letters have been actually cut off the end of words. Scissors and scotch tape are all the tools needed.

★ ***You can depend on Ampex***

Read what Frank Marx, Vice President in charge of Engineering, American Broadcasting Company, says: "For the past two years A.B.C. has successfully used magnetic tape for rebroadcast purposes... A.B.C. recorded on AMPEX in Chicago... 17 hours per day. For 2618 hours of playback time, the air time lost was less than 3 minutes: a truly remarkable record."

SPECIFICATIONS

FREQUENCY RESPONSE:
At 15" ± 2 db. 50—15,000 cycles
At 7.5" ± 2 db. 50— 7,500 cycles

***SIGNAL-TO-NOISE RATIO:** The overall unweighted system noise is 70 db. below tape saturation, and over 60 db. below 3% total harmonic distortion at 400 cycles.

STARTING TIME: Instantaneous. (When starting in the Normal Play mode of operation, the tape is up to full speed in less than .1 second.)

FLUTTER AND WOW: At 15 inches per second, well under 0.1% r.m.s., measuring all flutter components from 0 to 300 cycles, using a tone of 3000 cycles. At 7.5 inches, under .2%.

Manufactured by Ampex Electric Corporation, San Carlos, Calif.

DISTRIBUTED BY

BING CROSBY ENTERPRISES
9028 Sunset Blvd., Hollywood 46, Calif.

AUDIO & VIDEO PRODUCTS CORPORATION
1650 Broadway, New York, New York

GRAYBAR ELECTRIC CO. INC.
420 Lexington Ave., New York 17, N. Y.

www.americanradiohistory.com

AUDIO ENGINEERING

Successor to RADIO
Established 1917

MEMBER AUDIT BUREAU OF CIRCULATIONS

C. G. McProud, Editor
Luci Turner, Edit. Prod. Mgr.
David Saltman, Production Manager
E. E. Newman, Circulation Manager

D. S. Potts, Publisher
S. L. Cahn, General Manager
H. N. Reizes, Adv. Mgr.
L. B. Devine, Asst. Circ. Mgr.

Editorial Advisory Board
Howard A. Chinn
John D. Colvin
C. J. LeBel
J. P. Maxfield
George M. Nixon
Winston Wells
S. Young White

Representatives
Sanford R. Cowan. Mid-West Sales
342 Madison Ave., New York 17, N. Y.
James C. Galloway. Pacific Coast Sales
816 W. 5th St., Los Angeles 13, Calif.
Dale International Publications, Ltd.
106 Bolsover St., London W. 1, England
Technical Book & Magazine Co.
297 Swanston St., Melbourne. C. I.
Victoria. Australia

CONTENTS NOVEMBER, 1949 Vol. 33, No. 11

Editor's Report 6
Letters 8
Musician's Amplifier—*David Sarser and Melvin C. Sprinkle* 11
An Instructional Broadcast Studio—*Eugene F. Coriell* 14
Simplified Preamplifier Design—*Howard T. Sterling* 16
Audio Frequency Measurements—*W. L. Black and H. H. Scott* 18
Audio Transformer Applications—*A. J. Avis* 20
Practical Aspects of Logarithmic Amplifiers—*C. J. LeBel* 22
Record Revue—*Edward Tatnall Canby* 26
Audio Engineering Society Section Convention Program and Exhibitors 28
New Products 43
Techni-Briefs 47
Additional Test Records 55
Advertising Index 56

COVER

Montage of the new Jensen H-510 loudspeakers. This model employs a direct radiator cone for the low frequencies and a separate high-frequency horn and driver for the high channel. As in optics, the acoustic lens with the central opening and offset circumferential slots controls time delay by progressively increasing the acoustic ray path from the center to the edge of the lens. This use of an optical lens principle produces a polar pattern that is uniform over an unusually wide angle.

AUDIO ENGINEERING (title registered U. S. Pat. Off.) is published monthly at New York, N. Y., by Radio Magazines, Inc., D. S. Potts, President. Executive and Editorial Offices at 342 Madison Avenue, New York 17, N. Y. Subscription rates—United States, U. S. Possessions and Canada, $3.00 for 1 year, $5.00 for 2 years; elsewhere $4.00 per year. Single copies 35c. Printed in U. S. A.


All rights reserved. Entire contents copyright 1949 by Radio Magazines, Inc.

Entered as Second Class Matter July 29, 1948 at the Post Office, New York, N. Y. under the Act of March 3, 1879.




www.americanradiohistory.com

High Fidelity in small space

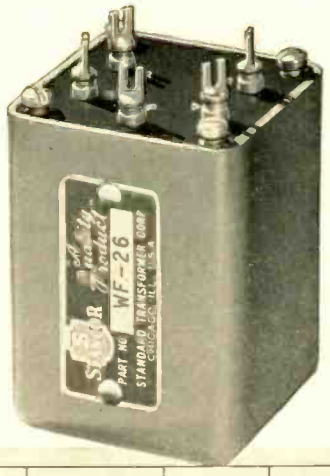

Companion series to the outstanding "HF" line. Stancor's compact "WF" transformers are designed for applications that demand the combination of high fidelity response with economy of space.

Superior construction including nickel alloy laminations results in a guaranteed response within ±2 db from 30-20,000 cycles. All units, except those carrying DC in the primary winding, employ a hum-balanced coil structure and/or internal, high permeability, magnetic shielding to minimize hum pickup from an external field. Cast cases, measuring only 1½" x 1½" x 2", provide adequate shielding together with an attractive finish that adds to the appearance of your apparatus. Cases are tapped for top or bottom mounting and lug terminals are provided on a permanently marked phenolic panel.

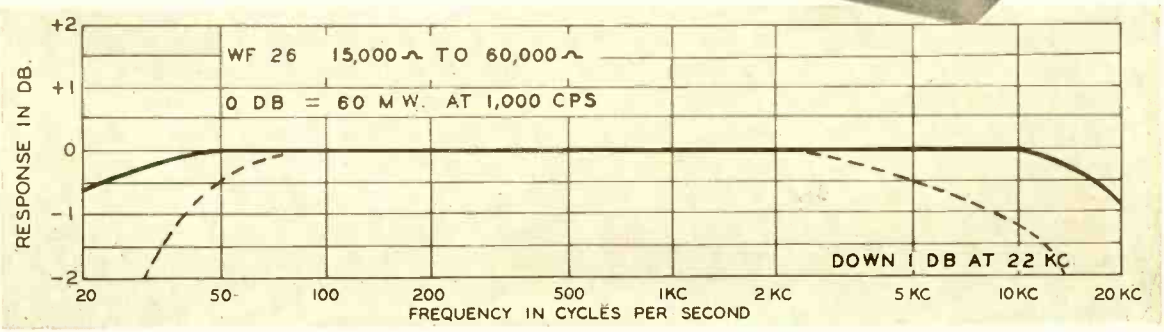

● The dotted line indicates the performance of a competitive brand equivalent unit tested under identical conditions.

STANCOR WF Series

Part Number	Application	Primary Impedance In Ohms	Secondary Impedance In Ohms	Response ±2 DB From
		INPUT		
WF-20	Low Impedance Microphone, Pickup or Multiple Line to Single Grid	50, 125/150, 200/250, 333, 500/600	50,000	30-20,000
WF-21	Low Impedance Microphone, Pickup or Multiple Line to Single or P.P. Grids	50, 200, 500	50,000	50-20,000 Multiple alloy shield for extremely low hum pickup
WF-22	Low Impedance Microphone, Pickup or Multiple Line to P.P. Grids	50, 125/150, 200/250, 333, 500/600	80,000 overall, in two sections	30-20,000
WF-24	Dynamic Microphone to Single or P.P. Grids	30 ohms	50,000 In two sections	30-20,000
		INTERSTAGE		
WF-26	Single Plate to Single Grid	15,000 ohms	60,000, 2:1 turns ratio	30-20,000
WF-28	Single Plate to P.P. Grids. Can use split pri. for P.P. Plates	15,000 ohms	80,000 overall. 2.3:1 turns ratio overall	30-20,000
		MIXING		
WF-30	Low Impedance Mixer, Microphone, Pickup or Multiple Line to Multiple Line	50, 125/150, 200/250, 333, 500/600	50, 125/150, 200/250, 333, 500/600	30-20,000
		LOW LEVEL OUTPUT		
WF-34	Single Plate to Multiple Line	15,000	50, 125/150, 200/250, 333, 500/600	30-20,000
WF-36	P.P. Low Level Plates to Multiple Line	30,000 Plate to Plate	50, 125/150, 200/250, 333, 500/600	30-20,000
WF-35	Single Plate to Multiple Line Primary DC 8.0 ma	15,000	50, 125/150, 200/250, 333, 500/600	50-20,000

WE WELCOME COMPARISON, under identical test conditions, of Stancor "WF" units with equivalent types of any other brand of high fidelity transformer, regardless of published claims. Frequency response curve charts sent on request.

For complete information on the Stancor "WF" series and the larger "HF" units, see your Stancor radio parts dealer or write for the 1949 Stancor catalog B, listing over 400 transformers and related components for sound, radio and television.

STANDARD TRANSFORMER CORPORATION
ELSTON, KEDZIE & ADDISON, CHICAGO 18, ILLINOIS

www.americanradiohistory.com





Somerset Laboratories offer a new High Definition 12 watt AMPLIFIER with the SOMERSET Dynamic NOISE SUPPRESSOR — the last Link in High Fidelity Reproduction — a combination having unusual performance characteristics and giving the finest in High Fidelity Reproduction.

Claims of high quality audio amplifiers based only on a showing of frequency response beyond audible limits or low distortion and noise percentages evidence engineering skill, but do not guarantee High quality Reproduction.

Such an Amplifier may accentuate defects of the program source or distortions originating within the loudspeaker. The use of tone controls to offset these effects may degenerate performance and the High Fidelity characteristics are virtually unuseable.

The SOMERSET FEEDBACK AMPLIFIER was designed not as a laboratory exhibit but as the controlling unit in the reproducing system. Its performance with respect to frequency response, and distortion is superb. In addition it has the ability,

First—To reject unwanted portions of the input signal,

Second—to subject the loudspeaker to a rigid discipline the consequence of which is Reproduction with perfect definition.

These outstanding qualities are produced by the SOMERSET DYNAMIC NOISE SUPPRESSOR and a UNIQUE MULTIPLE FEEDBACK CIRCUIT whereby the Amplifier acquires a more perfect control of the movements of the loudspeaker diaphram throughout the audible range.

In this CIRCUIT beam power tetrodes are used in a manner which greatly reduces output impedance. Extraordinarily effective loudspeaker damping and substantial improvement in bass tone response are obtained without distortion or intermodulation. Thus, even inexpensive loudspeakers become capable of high quality reproduction rarely equalled by the most costly equipment.

A New 12 Watt

HIGH QUALITY AMPLIFIER

Including

The SOMERSET DYNAMIC NOISE SUPPRESSOR

Somerset **LABORATORIES, INC.**

1701 PALISADE AVENUE, UNION CITY, N. J.

www.americanradiohistory.com

EDITOR'S REPORT

EDITORIALS are accepted as a necessity in most magazines—for some obscure reason—and are usually regarded as an outlet for the ideas of the magazine's staff. This is not always so in our case, for no one can presume to know exactly all the needs of an industry, and many of the ideas presented herein are effectively "borrowed" from letters. Such was the case last month, with the original idea about furniture cabinets being gleaned from a letter by Milton J. Lichtenstein; such is the case again this month, with John van Heijenoort furnishing the motivation.

While some form of cabinet is necessary to house a residence radio system, and while myriads of amplifiers are described for home construction and many more are available commercially, the list of acceptable radio tuners is relatively small. And not all of those that are available commercially are ideally adaptable for home usage.

Among desirable features of tuners—either FM or AM—should be listed a self-contained filament supply. Sufficient plate current can usually be furnished by conventional amplifiers, but most of them will not provide the additional three to four amperes of filament current for a modern FM or combination FM-AM tuner.

Another desirable feature—available on some tuners—is the automatic frequency control circuit. Mistuning of an FM receiver can result in considerable distortion, and even though correctly tuned in the first place, warm-up drift may cause an increase in distortion. Since a control voltage is obtainable from the discriminator without the addition of any components of importance, the extra cost can usually be due only to a redesign of the oscillator circuit to include a reactance tube. These two features should be adequate to simplify residence radio installations immeasurably.

RECORDED MUSIC ENTHUSIASTS

Congratulations to the newly formed New York Society of Recorded Music which already has some fifty members who meet bi-weekly and listen to programs arranged from their individual record collections. Peter Hugh Reed, noted critic and publisher of the American Record Guide, was drafted as president and is active in promoting the organization. The first few meetings were held in the Music Room of the New York Public Library, but the need for more space and a later closing hour made it desirable to hold future meetings at St. John's Auditorium, 224 Waverly Place, in Greenwich Village. The next meeting is scheduled for the evening of November 17th, and all interested in recorded music are invited to attend.

James B. Lansing

A letter recently received from friend and contributor Ross H. Snyder of KJBS, San Francisco, brought sad news and a tribute which expresses the sentiment of many of us in words which need no improvement.

With the death on the 30th of September this year of James B. Lansing, the industry and those who knew and loved him have suffered an incalculable loss.

Jim was more than a brilliant engineer: he was an artist of the first order. That his field was the creation of fine machinery in no way diminishes the stature of his art. Impatient of mediocrity to the point that he threw aside personal gain time after time. Jim lived and died in the grip of a fierce ideal. His contributions to the art of re-creating sound were not confined to the inventive genius he applied to the developments of the 'thirties' nor to the products which bore his name, but were extended and multiplied by those whom he infected with his enthusiasms.

On the day before his death, Jim was laying plans for the writing and publication of a work which was to have incorporated the knowledge with which he implemented his art. He felt keenly the responsibility of communicating this to others, and deeply regretted that the pressures of active creation which drove him so relentlessly had prevented that communication, now lost.

The loss of the kind gray man whose devotion to an artistic and scientific ideal was matched only by the depth of his own warm humanity is a bitter tragedy.

www.americanradiohistory.com

Magnetic Materials

The Arnold Engineering Company offers to the trade a complete line of Magnetic Materials

PERMANENT MAGNET MATERIALS

- Cast Magnets, Alnico I, II, III, IV, V, VI, XII, X-900
- Sintered Magnets, Alnico II, IV, V, VI, X-900, Remalloy*
- Vicalloy* • Remalloy* (Comol)
- Cunico • Cunife • Cast Cobalt Magnet Steel

HIGH PERMEABILITY MATERIALS

- Deltamax Toroidal Cores • Supermalloy* Toroidal Cores
- Powdered Molybdenum Permalloy* Toroidal Cores • Permendur*

*Manufactured under licensing arrangements with WESTERN ELECTRIC COMPANY

Write for information relating to any of these Magnetic Materials

THE ARNOLD ENGINEERING COMPANY

SUBSIDIARY OF ALLEGHENY LUDLUM STEEL CORPORATION

147 EAST ONTARIO STREET, CHICAGO 11, ILLINOIS

www.americanradiohistory.com



World's Largest Manufacturer of Instantaneous Sound Recording Equipment and Discs

— Letters —

Figures-of-Merit

Sir:

I have just noted Mr. Powell's suggestion for a driver figure-of-merit with interest. While there are many factors which govern the merit of tubes as adequate drivers for a given power amplifier, Mr. Powell is to be commended for suggesting the product of the grid bias and amplification factor. As Mr. Powell points out, his figure-of-merit is somewhat oversimplified and is therefore valid only when the "all-other-factors-the same" condition exists. It appears that a more reliable figure-of-merit for driver tubes might be the product of the grid bias and the transconductance rather than grid bias and amplification factor. Thus the plate resistance, which is a significant factor in a tube's ability to deliver adequate undistorted output, is also taken into consideration.

This can be illustrated by considering a tube such as a 6N7 for driver duty. One section of this tube may be used separately as a driver, or the two sections may be operated in parallel. In either case, the recommended grid bias as well as the amplification factor remain unaltered, indicating no change in the merit of the combination as a driver. However, the effective plate resistance of the two sections in parallel is only one-half of either section alone, which results in doubling the transconductance. The reduction in effective generator impedance therefore results in a larger output voltage for a given load resistance.

Since the dimension of the grid bias–transconductance figure-of-merit is that of a current, which represents the maximum possible signal current available in the plate circuit, it is necessary only to multiply this figure-of-merit by the effective load impedance offered to the tube to determine the maximum possible drive available to the power output stage.

The revised "figures-of-merit" for the tubes mentioned by Mr. Powell and his own "figures-of-merit" are tabulated below for purposes of comparison.

Tube Type	E_{cg_m} (ma)	$E_{c\mu}$ (volts)
27	20.5	189
76 or 6P5	19.5	186
½-6SN7 or 6J5	20.8	160
½-6N7	15.5	210

It is observed that the table indicates that the 6SN7 is somewhat superior to the 6N7.

In conclusion, it appears that one must consider other factors in addition to the ones mentioned by Mr. Powell (non-linearity and hence intermodulation distortion, etc.) in choosing the most suitable tube for a driver. For example, a choice based on any figure-of-merit defined so far may lead to a tube exhibiting power-output capabilities far greater than the tubes chosen for the output stage. It is believed, however, that a figure-of-merit defined as the product of grid bias and transconductance may prove a more adequate index of a tube's ability as a driver for power output audio stages since it includes an additional factor—the plate resistance of the tube.

William J. Kessler,
Project Engineer,
Engrg. & Ind. Experiment Station
University of Florida,
Gainesville, Florida.

www.americanradiohistory.com



Good Listening! for EVERYONE!

with the NEW Genuine JENSEN WIDE-RANGE LOUDSPEAKERS

16 COMPLETELY NEW MODELS
Three 15-inch Coaxials, one 12-inch Coaxial
Eleven 5-inch to 15-inch Single-Radiator Models

● No longer is truly *good* listening ruled out by cost or size restrictions. Now music can come to life for everyone, for Genuine JENSEN Wide-Range Loudspeakers include *small sizes* as well as large . . . *low cost units* as well as more expensive models.

● Not alone in frequency range but also in smooth response, wide-angle distribution, low distortion, good efficiency and power handling capacity . . . in all 7 Performance Points Genuine JENSEN Wide-Range loudspeakers establish new standards of reproduction quality.

● So whether you choose a 5" single-unit direct-radiator type loudspeaker at $8.00 list, a 12" Coaxial at $33.40 list, or a 15" Coaxial with the new JENSEN Wide-Angle Acoustic Lens, you get superior performance all the way . . . in every attribute that makes for enhanced listening pleasure.

New WIDE-ANGLE ACOUSTIC LENS

Typical of JENSEN leadership in loudspeakers engineering is the Acoustic diverging Lens used on Model H-510 illustrated at the left. Adapting optical principles to acoustics, this lens acts in conjunction with the h-f horn to distribute h-f radiation uniformly over a wide angle . . . insures constant balance and high quality reproduction throughout the whole room.

Write now for Data Sheet No. 152 describing all the new loudspeakers in the new Genuine JENSEN Wide-Range series, and booklet, "Let Music Come to Life."

GENUINE Jensen WIDE RANGE

This trademark identifies an advanced-design loudspeaker . . . with performance to meet today's exacting requirements for faithful music reproduction . . . achieved through the most modern applications of acoustics.

JENSEN MANUFACTURING COMPANY
Division of the Muter Company
6633 SOUTH LARAMIE AVENUE • CHICAGO 38, ILLINOIS
In Canada: Copper Wire Products, Ltd., 351 Carlaw Avenue, Toronto

www.americanradiohistory.com

ANNOUNCEMENT

To users of Western Electric Microphones, Loudspeakers and Disc Reproducing Equipment

Effective October 1, 1949, the Western Electric Company has discontinued the sale, servicing and maintenance of sound system products, including the following major items:

Microphones	Loudspeakers
633 Type	728B
639 Type	755
	757

Reproducing Equipment

109 Type Reproducer Group
9A Reproducers
9B Reproducers

To assure uninterrupted service and maintenance to owners of these products, we have entered into an agreement, effective Oct. 1, 1949, with the ALTEC LANSING CORPORATION of Hollywood, California. Under the terms of this agreement the Altec Lansing Corporation receives all necessary engineering information, as well as our inventory of the above equipments and their parts, and will make available service, maintenance, repair and replacement parts for the products listed.

The Graybar Electric Company will act as distributor for the Altec Lansing Corporation, as it has for Western Electric, in serving customers' needs on these equipments, under terms of an agreement recently concluded between the Graybar Electric Company and the Altec Lansing Corporation.

The leadership and integrity of the Altec Lansing Corporation make us completely confident that all users of the Western Electric equipments listed will continue to have available to them service of the very highest quality.

F. R. Lack
Vice President

Western Electric Company
INCORPORATED

www.americanradiohistory.com

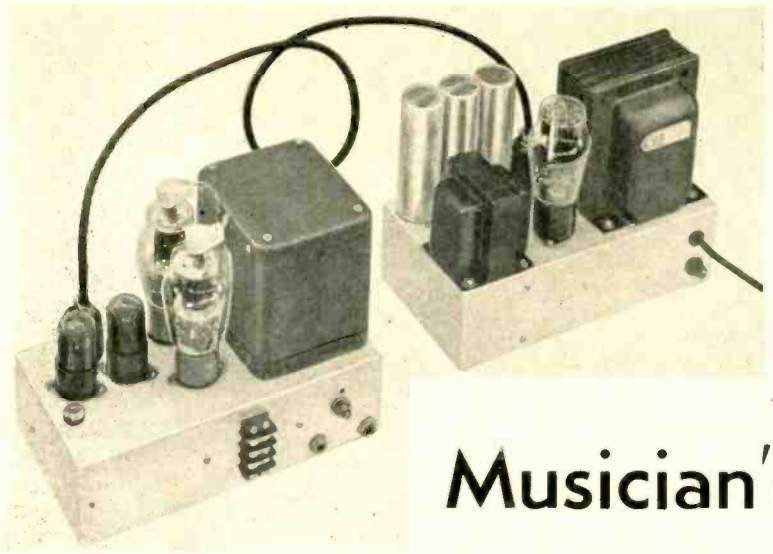


Fig. 1. The two chassis comprising the amplifier patterned after the "Williamson."

DAVID SARSER*

and

MELVIN C. SPRINKLE**

Musician's Amplifier

An adaptation of a famous English circuit which has already earned an enviable reputation for quality.

Amplifiers are something like women—there are a lot of 'em. And—like women—amplifiers come in all sizes, shapes, and degrees of appeal. The readers of radio magazines have seen dozens of different amplifier designs, and audio enthusiasts are as vociferous in praise of their pet circuits as Kentucky colonels about their pet way of making a mint julep.

The writers of this article—one a professional violinist in Toscanini's NBC Symphony, owner of the famous Lamoreux Stradivarius, and a builder of amplifiers, the other a professional electronic engineer whose avocation is serious music—have both made a baker's dozen of amplifiers, but have felt that most of these amplifiers in one way or another never completely recreated a satisfactory "studio sound."

The writers, then, have pooled their resources and have come to the conclusion that there should be a simple, easy-to-make, and thoroughly foolproof circuit which gives out with that intangible something called "presence effect." In doing so, we are going to duck controversies regarding beam-power tubes versus triodes, transformers versus resistance coupling, and all the other perennial areas of enthusiastic conflicts and ideologies. All we're really after—how simple it sounds!—is to reproduce music in the home which sounds the same way it does in the concert hall or broadcast studio.

Recently, we heard about the "Williamson" circuit which has been widely publicized in England and Australia as the absolute tops for obtaining natural reproduction. It was written up in *Wireless World* (an English publication) for April and May, 1947. This circuit has become so popular in England that it was reprinted with minor modifications in the August, 1949, issue of the *Wireless World*.

Having studied the Williamson circuit and having read the comments on its intermodulation distortion in Audio Engineering for September, 1948, we became interested in the possibilities of the amplifier.

Strictly from the technical point of view, the output tubes are 807's with triode connection. The 807 has much to recommend it as an audio tube. It is a standard type, available everywhere, and though it is usually considered to be a transmitting tube, its price makes it no more expensive than other tubes used by amplifier constructors. It has a fairly high plate dissipation, and draws enough plate current to provide adequate audio power. It is a cathode type, rather than direct heated and hence the completed amplifier has no hum even when used with efficient speakers with fine bass response such as the Altec Lansing 604B.

The output transformer presented somewhat of a problem as the original circuit called for a transformer not manufactured in this country. If it were specially made to Williamson's specifications the cost would be prohibitive. A careful survey and trial on various transformers available through jobbing channels disclosed that one transformer—the Peerless S-265Q—would best meet the rigid specifications for performance.

The resistance network in the cathode circuit of the 807 tubes contains a variable resistor P_1, which is set to give equal current in each tube. A closed circuit jack is provided in the cathode circuit of each 807 to permit insertion of a milliammeter when making this adjustment, and the plate current should be balanced by P_1 to exact equality, at 50 ma per tube.

The original Williamson diagram contained a series resistor to adjust the total plate current drain of both tubes. After building several of these amplifiers it was decided to omit this control and substitute a fixed resistor, since once it is set it is never changed.

The driver stage consists of a single 6SN7GT tube connected in push pull and resistance coupled to the 807's. Here one of the points of superiority of the 807 is evident. Most low-mu triodes such as the 2A3 and its six-volt counterpart, the 6B4G, have a high bias of the order of 60 volts and, hence, require a driver stage capable of putting out signals whose peak values are of this magnitude. As a result, resistance coupling to low-mu triodes is not practicable unless elaborate precautions are taken to supply adequate driving voltage with low distortion, a difficult task. The triode-connected 807 requires about 35 volts bias and thus the use of 6SN7 as a driver becomes practical. The first two stages are unique as they consist of a single 6SN7 tube using the first section as a voltage amplifier which is directly coupled to a "cathodyne" or split load type of

* 548 *Riverside Drive, New York 27, N. Y.*
** 5 *Melrose Ave., Bergenfield, N. J.*

www.americanradiohistory.com

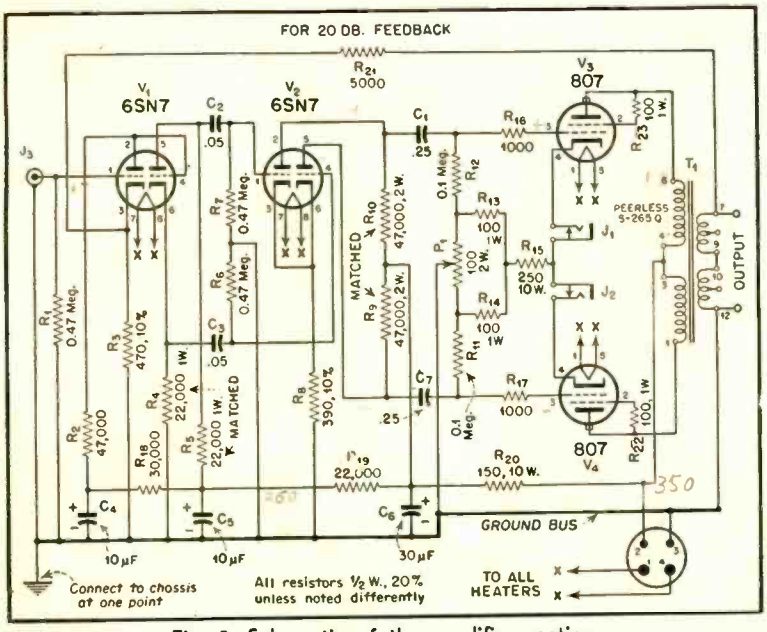


Fig. 2. Schematic of the amplifier section.

phase inverter. Use of this type of phase inverter permits direct coupling, as the positive voltage on the phase inverter grid is offset by the high positive voltage on its cathode. Direct coupling to the phase inverter permits the extension of the low-frequency response in this stage to d.c. and eliminates coupling networks which can cause phase shift and low-frequency attenuation. It will be seen from the schematic, *Fig.* 2, that there are only four coupling capacitors in the entire amplifier, two on each side of the push pull system. Thus the response of this amplifier at low frequencies is remarkably good.

Inverse Feedback

It will be noted that inverse feedback is used in this amplifier. Inverse feedback has been used with beam power amplifiers, but the circuit is not confined to this type of amplifier. Our amplifier incorporates approximately 20 db of feedback which is put around four stages and the output transformer. With this much feedback there is absolutely no trace of supersonic or subaudible oscillation, a tribute to the design of the output transformer. Feedback greatly improves the linearity and response of the amplifier and reduces the source impedance looking back into the output terminals to the unbelievably low figure of about ⅔ of an ohm on the 16-ohm output tap. When this amplifier is used with highly damped, high-efficiency speakers, the clarity of reproduction is more than satisfactory.

In connection with source impedance, there are two schools of thought. One group holds that the source impedance should be made as low as possible by using triode tubes, by the use of inverse feedback, or possibly both. The other group maintains that the source impedance should be low, but not necessarily as small as possible—their claims being based upon listening tests. This second group feels that a representative value of source impedance should be from 0.5 to 1.0 times the load impedance; thus on a 16-ohm tap the source impedance would be between 8 and 16 ohms. This amplifier has been constructed so that the source impedance is very low and those persons who prefer a slightly higher value may increase the feedback resistor (R-21) to approximately 22,000 ohms, or they may insert a resistor in series with the speaker voice coil should they prefer to retain the effects of the high feedback in this amplifier.

The power supply, *Fig.* 3, is built on a separate chassis to eliminate hum and also to provide a more compact construction, which simplifies installation. It is conventional with the exception that high grade 600-volt oil-filled capacitors are used in the filter. The recommended power transformer is designed for continuous operation with a drain of 200 ma in the plate supply. In practice it is found that after the amplifier has been on all day the transformer is just moderately warm.

Construction Details

Construction of this amplifier is simple. The amplifier and power supply are both placed on a 5 x 10 x 3 chassis; there is plenty of room for parts with complete accessibility for service should it be required. All resistors and capacitors are mounted on a terminal strip which is mounted on one side of the chassis as shown in *Fig.* 4. This type of construction, long used by professional amplifier builders, has been much neglected by amateur constructors and its use is encouraged to provide neatness as well as ease of construction and repair.

In order to reduce hum and undesired coupling between stages to a minimum, a grounding bus is used. This begins in the amplifier where the B— from the power supply enters the chassis, connects to the grounded side (terminal 12) of the output transformer secondary and then is carried along on the terminal strip toward the input, picking up cathode circuits and filter capacitor cans as it goes. It is grounded to the chassis at only one point near the input connector. Use of a grounding bus in amplifiers is also well known to professionals, and a large part of the difficulties encountered by amateur constructors is due to haphazard ground connections. The layout of parts is shown in *Fig.* 5.

At this point it might be well to review a few of the beliefs held by amateur constructors of amplifiers. Many amplifier designs which have appeared in magazines have had their virtues

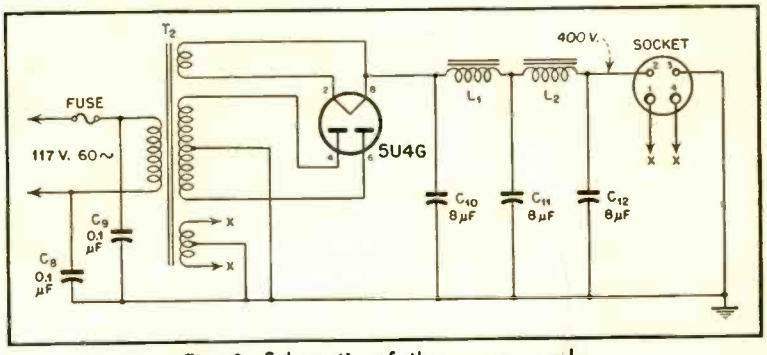


Fig. 3. Schematic of the power supply.

www.americanradiohistory.com

extolled solely on the basis of frequency measurements. The measurement of frequency response is an important property of an amplifier, but it is not the *only* property which contributes to naturalness in the reproduced sound. Frequency response is a measure of how the gain of the amplifier changes as a function of frequency. If, for example, the absolute gain is 75 db at 1,000 cps and 70 db at 10,000 cps, then the amplifier is said to be down 5 db at 10,000 cps. For this reason frequency response measurements are usually made at low output levels.

Power Output vs. Frequency

One important property of an amplifier which has long been neglected in the previous literature on the subject is power output at various frequencies. Magazine articles and manufacturers' literature will state that an amplifier will put out "10 watts." Sometimes they state the frequency and the degree of distortion that was present when this measurement was made. The importance of power output over the audible spectrum is so great that it cannot be over-emphasized, and it is this factor which is to a large degree responsible for naturalness of reproduction and freedom from distortion. Full power output over a wide band of frequencies is largely determined by the output transformer, the most important component in an audio amplifier.

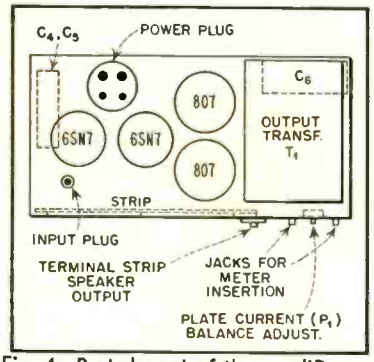


Fig. 4. Parts layout of the amplifier on a 5 x 10 chassis.

The manufacturers of output transformers more often than not fail to make any statement as to the power output of amplifiers using their transformers at various frequencies. Regarding the transformer we used, the manufacturer states that the output will be down no more than 3 db from midrange power at 20 cps and at 20,000 cps. Audio enthusiasts who make measurements of power at various frequencies from 20 to 20,000 cps would be amazed to see the very poor power characteristic of a favorite amplifier.

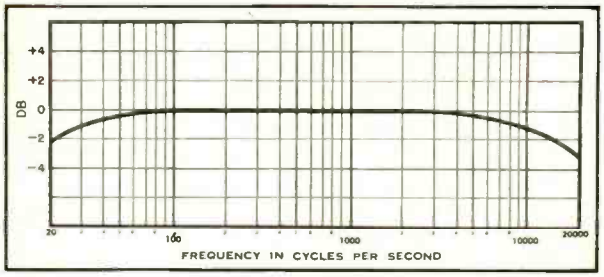


Fig. 6. Relative power output with respect to frequency.

Performance

The absolute gain of this amplifier, with about 20 db of feedback, is 70.8 db. The frequency response was measured by feeding in a signal at constant level from an audio oscillator, the signal being fed through a series resistor of 500,000 ohms which is equal to the input impedance of the amplifier. This is the customary way of measuring amplifiers professionally. The output was measured across a 16-ohm non-inductive resistor and high grade meters were used which had a minimum of frequency error. Under these conditions the amplifier is flat from 20 to 80,000 cps. There is a rise of 3.4 db at 96,000 cps and the output begins to fall at about 100,000 cps. In the revised article, Mr. Williamson states that his amplifier is flat from 20 to 100,000 cps, but he does not state the manner in which the response was measured.

The amplifier performs exceptionally well when tested with square waves. This test consists of feeding square waves into the input and observing the wave form on an oscilloscope at various points throughout the circuit. If the output waveforms have sharp corners and no tilt on top and bottom the following things can be said about the amplifier:

1. The frequency response is flat to at least 20 times the fundamental frequency of the square waves.
2. There is no time delay; i.e., the phase shift through the amplifier is proportional to frequency.
3. There is no spurious oscillation produced by steep-wave-front signals, such as the usual music and speech programs.

Square wave testing is a sensitive method of testing amplifiers, especially with regard to phase shift, and it was found that this amplifier passed without distortion square waves having fundamental frequencies from 20 cps to 5,000 cps. These signals were passed through the entire amplifier and not just one stage. This confirms the frequency-response measurements and showed that there is uniform time delay for all frequencies between 20 and 100,000 cps. It is entirely possible that the startling realism in reproduced music is due to the excellent phase characteristics of the amplifier, as a non-linear phase characteristic disturbs the arrangement of harmonics in complicated signals such as program material.

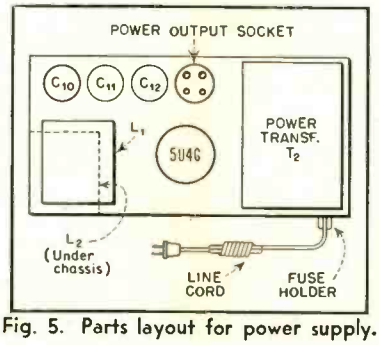


Fig. 5. Parts layout for power supply.

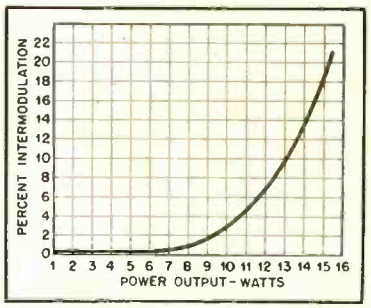


Fig. 7. Intermodulation distortion curve plotted against power output.

Mr. Williamson does not state the power characteristics of his amplifier, but does say that the power output is 15 watts. As our output tubes are not exactly the same as the KT66 valves originally used, we cannot make accurate comparison, but with 807 tubes and a 400-volt plate supply it will deliver 12.2 watts to the load resistor at 1,000 cps at 7 per cent intermodulation distortion. As may be seen from *Fig.* 6, the power begins falling off at low frequencies and is approximately 0.7 db down at 40 cps and 2.1 db down at 20 cps. It is down 2.1 db from full power at 15,000 cps and down 3 db at 20,000 cps. This power curve on the surface may appear to be excessive, but tests run by the authors on several well-known makes of audio amplifiers have shown the power to be down as much

[*Continued on page 53*]

www.americanradiohistory.com

An Instructional Broadcast Studio

EUGENE F. CORIELL*

Radio studios for instructional purposes may resemble professional installations, but must have special consideration in their design to be of greatest value.

WHEN BETTER MILITARY RADIO shows are built, better military writers, announcers and directors will build them. This briefly is the philosophy behind the installation of an instructional broadcasting studio at the Armed Forces Information School at Carlisle Barracks, Pennsylvania. Here, selected enlisted and commissioned personnel of all the armed services are trained in the techniques of public information. One of these techniques is radio, and the pupose of this article is to describe some of the audio and related features of this studio occasioned by its educational character.

To a radio man faced with the job of building a broadcasting studio for instructional purposes, it might seem that any conventional studio would do if it were big enough—and it is true that size has a lot to do with it. The studio proper at Carlisle Barracks is forty-seven by twenty feet and for demonstrations it can seat fifty students as observers. The control room is sixteen by twenty feet and seats up to twenty-five persons.

However, size is not the only difference between instructional and operational studios. Since the facilities are primarily for student use, they should be planned with student habits and limitations in mind. For example, students will sometimes blow into an expensive velocity microphone to see if it's working, after which, due to a ruptured ribbon, it works no more. When the script calls for a yell, the student generally puts his heart into the yell—and the yell right into the microphone. A careless sneeze "on mike" will sometimes finish off a ribbon microphone that has somehow weathered many a class session. That these things happen is generally not the fault of the students, who in most cases have never been under studio discipline before.

*Captain, Radio Instructor, Armed Forces Information School, Carlisle Barracks, Pa.

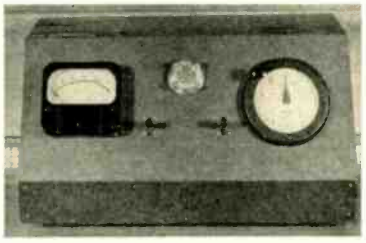


Fig. 1. Preliminary layout of director's turret. The keys control the talkback microphone and monitor speaker.

One solution — in addition to careful briefing — is to use comparatively rugged dynamic microphones until the students have become somewhat accustomed to the limitations of studio gear.

Another aid in acquiring microphone technique is a VU meter out in the studio where the student announcer can see it. The meter will give him some idea of the volume limitations of broadcast equipment, not so much in terms of volume units or decibels as in terms of the variations of his own voice. It might be argued, and with some merit, that this is an artificial prop and therefore unrealistic, since most stations do not have VU meters visible from the studio. One answer is that the meter is used only during the student's first few times at the microphone. Another answer is that after a few sessions with the meter, the embryo announcer rarely yells into the microphone any more.

VU meters also come in handy for the organist who is sometimes a student. It is often difficult for non-radio organists to accustom themselves to the restricted volume range the equipment can tolerate. A VU meter helps considerably in the early stages, if you can get the musician to look at it. One way to encourage him to look at it is to put the meter on top of the organ console as shown in *Fig.* 3, approximately in the organist's line of sight to the director in the control room. Since he has to watch the director for cues, he can hardly remain unaware of the meter seen at the same time out of the corner of his eye.

Director's Turret Facilities

Another use of the VU meter in an instructional set-up is on the producer's or director's turret in the control room, as seen in *Figs.* 1 and 2. This not only gives the student director a visual check on each actor's volume; it also shows him very graphically that the meter alone doesn't tell the whole story. Due to differences in harmonic content, some voices will sound too soft or too loud in comparison with others, even though the VU meter is peaking properly. With the meter apparently lying to his face, he is impelled to do something about this confusing anomaly, rather than leave it to the engineer. After a little practice with this set-up, the student director is in a much better position to listen critically in an operational control room where the only VU meter is in front of the engineer. The reason is that he has learned not to believe all he hears, volume-wise.

The director's turret has another gadget not usually needed in most control rooms — a key that switches a fixed pad into the monitor speaker circuit. This reduces the volume enough to allow the director or student director to comment to the student observers seated behind him regarding the performance of the cast.

The director's turret also contains the usual stop clock and the microphone and associated key switch for the familiar talkback to the studio. Some stations may tolerate poor speech quality from the talkback, with the idea that anything is good enough for what is essentially only a one-way intercom. However, this is highly questionable in an instructional studio. The student announcer or actor is likely to be a little on edge in the relatively strange surroundings of the studio, and

www.americanradiohistory.com



Fig. 2. Control room equipment as seen from student observers' seats. Director's position is at right of turntables, with recording rack and disc recorders at far right. Power supplies, patch panel, and radio tuners are in rack to left of the console.

his nerves are not soothed by a gravelly voice barking at him through the talkback speaker. Good speech quality in the talkback is a good investment for this type of work.

While on the subject of the talkback, here is another feature that is unusual, although not original. It is customary to interlock the talkback with the on-the-air sign switch or the outgoing-line key to prevent accidental operation while on the air or while recording. However, when working with students, it is often desirable to maintain closer control over the cast than is possible with the usual hand signals. The reason is that students tend to concentrate so much on the script that they forget to keep an eye on the director in the control room. One way of getting around this is to have the output of the talkback amplifier automatically switched from the studio speaker to a pair of phones when the on-the-air sign switch is thrown. The phones are fed through a fixed-loss pad and are worn by the assistant director, usually a student, to whom the director can give instructions while the show is on the air. This arrangement is used sparingly because, as explained to the students, the announcers and actors in operational studios must keep an eye on the director, even while reading their lines, without benefit of a prompter.

The devices mentioned above are helpful, certainly, but it soon becomes apparent to the instructor that no amount of VU meters and other gadgets will prevent occasional heavy peaks from getting through to the recorder. The result is apt to be severe distortion and, in the case of disc recorders, the peak may cost "ghosting" in the adjacent groove. This points up the need for a limiting amplifier, adjusted for the usual maximum compression of 5 db. Compression in excess of this amount is, in itself, a likely cause of distortion.

Program Phones

Some stations provide program earphones in the studio so that the show may be monitored there if desired. These phones, which are not to be confused with the talkback phones mentioned earlier, are often used by the sound man and the organist. This arrangement is particularly helpful in training directors of military programs who, due to lack of radio personnel at their home commands, will often have to take part in shows they direct. Monitoring a program with earphones is not very satisfactory, due to the distortion introduced by the phones themselves. However, it is possible to get a fair idea of relative volumes, the effectiveness of fades, and so on. The program phones also allow the announcer-director to know when to cue in cast members who have speeches that follow music played on the control room turntables. This is important since the studio speaker is automatically turned off when the microphones are alive to prevent feedback. As there is little chance of feedback from the earphones, these need not be interlocked with the microphones and are fed by a separate amplifier bridged across the outgoing line.

Another item of instructional studio gear is the turntable equipment. Turntables intended for student use or for use with students should be rugged, and that applies to everything about them, including the pick-up. The light-weight variable reluctance type with permanent stylus has worked out very well, although the replaceable-stylus models probably would be a safer choice for this service. The light-weight heads have the additional advantage of low needle talk, which is important for instructional use, as students have not had enough experience to learn to ignore the annoying noise of the needle.

While on the subject of turntables, there is a seemingly simple improvement that would save considerable maintenance on this equipment. It has been our experience that sooner or later, in spite of warning, somebody puts a dictionary or other heavy object down on the platter of the turntable — or even leans on it. The result is often a sprung platter productive of plaintively wavering music. To correct this, somebody — usually somebody else — has to spring the platter just the right amount the other way, which is no fun. If the center shaft cannot be made heavier, some enterprising manufacturer might provide some deflection stops spaced around the circumference of the platter just under its rim. Then when some thoughtless individual leans on the table, the resulting deflection would be limited to the small clearance above the stop. If this clearance were within the elastic limit, no permanent set to the platter would result.

[*Continued on page 51*]



Fig. 3. To assist student organist in maintaining safe volume limits during rehearsals or broadcast, a standard VU meter is mounted on the organ console directly in his line of vision.

www.americanradiohistory.com

Simplified Preamplifier Design

HOWARD T. STERLING*

Unnecessary complication in phono preamplifiers may be avoided by making practical compromises in the performance requirements.

THE PREAMPLIFIER has been a bone of argument and contention for so long that editors will shortly look to some other subject for material, but there are a number of considerations which have not as yet been thoroughly brought to light, and it is the intention in this paper to discuss their application to the development of a new plug-in preamplifier.

This unit is shown in *Fig.* 1, both open and with the shield in place. It measures approximately 1½ x 2 inches and its seated height is 3 inches. Inspection of the open view will show that particular effort has been made to assure good mechanical construction. This is in direct contrast to some recent plug-in preamplifier designs, where tube sockets have been secured only by their leads, and electrical connections left floating, rather than tied down, on the apparent theory that since they are hidden by the shield, good practice is unnecessary.

The plug-in feature has a number of advantages, including interchangeability with preamplifiers of other equalization characteristics, and with crystal equalizers; independent shielding; and the fact that since it is not an integral part of the equipment with which it is to be used, it may be added when and if desired, with a significant improvement in the simplicity and economy of the amplifier system.

*Chief Engineer, Electronic Workshop, 351 Bleeker Street, New York City.

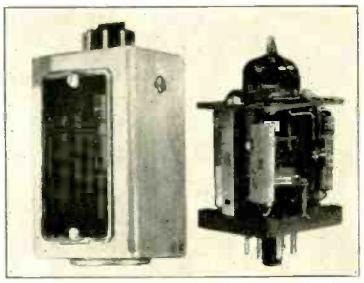


Fig. 1. External and internal appearance of plug-in phonograph preamplifier.

While these preamplifiers may, of course, be equalized for the NAB transcription recording characteristic, their immediate application was to be for playing standard records in the home.

Equalization


There has been considerable attention recently to equalization of the preamplifier for the various recording characteristics now in use. St. George and Drisko[1] have performed a valuable service in providing as exact information as can be obtained as to these characteristics and have gone to some pains to equalize for each of them. Such complication is not wholly desirable in many applications, and there is some question as to whether it is necessary. Actually, it is possible to equalize for all these characteristics, with a maximum error of 3 db, using a single low-frequency turnover and the simplest type of high-frequency shunt tone control.


Figure 2 shows the response curve of the plug-in preamplifier, together with the ideal equalization characteristics for the various turnover frequencies in use. It will be seen immediately that the maximum deviation from these ideals is a little over 3 db, while actually, as will be shown later, it is less than that.

Figure 3(A) shows the familiar high-frequency shunt type of tone control, and if C is chosen so that X_c equals R at 2500 cps, the resulting characteristics will be those of the solid lines at (B) for various settings of the control. The dash lines again indicate ideal correction for the different types of preemphasis, and the approximation is better than 3 db at all points.

Combining the low- and high-frequency characteristics now, and adjusting the base line for reasonable symmetry, the curves of *Fig.* 4 are obtained. Here the maximum error is still less than 3 db, and is actually in a desirable direction for Victor and Columbia. The most frequent complaint about the

Fig. 2 (left). Response of plug-in preamplifier compared with ideal curves for turnover characteristics now in use. Fig. 3 (right). (A) Simple high-frequency shunt tone control will give curves of *B* if R = X_c at 2500 cps. (B) Characteristics of high-frequency shunt tone control for different settings, together with ideal compensation (shown in dotted lines) for pre-emphasis characteristics now in use.

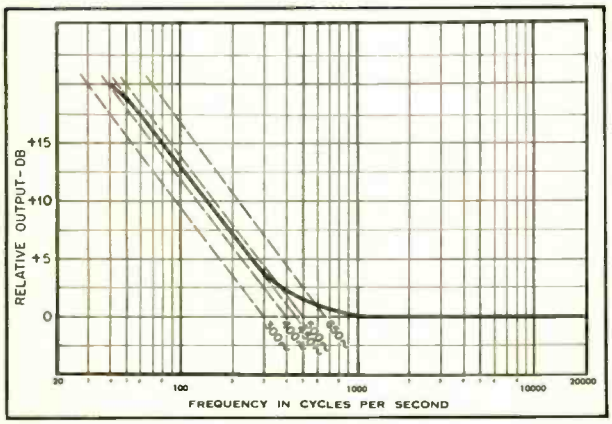

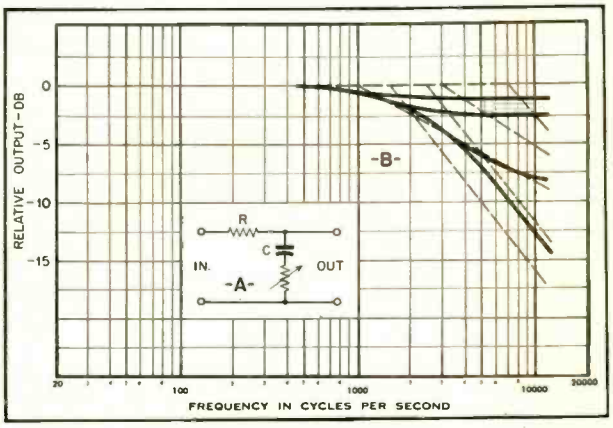

www.americanradiohistory.com

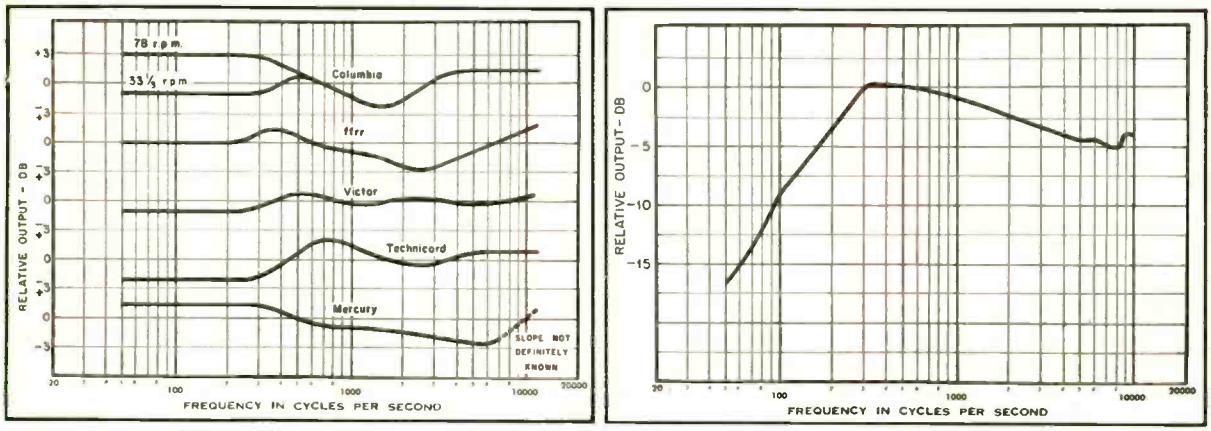


Fig. 4 (left). Composite of *Figs.* 2 and 3B showing approximation of ideal characteristics possible with single low-frequency turnover point and simple high-frequency tone control. Fig. 6 (right). Characteristic of Columbia 10003-M test record.

Columbia 78-rpm records is that they are "thin," so we have about 3 db of bass boost; the LP's have, if anything, an uncomfortable amount of bass, and the 1-db drop will not be a serious loss. Both types are inclined toward excessive brilliance in the middle highs which will neatly complement the dip at 1500 cps. Victor is also likely to be a little heavy in the bass, and the loss of one and a half db will be all to the good. Actually these deviations are significantly less than may be expected from other parts of the system, and there is every reason to believe that the records themselves show an even wider variation.

It is not necessary, of course, to use the precise circuit of *Fig.* 3 (A). A treble boost-cut circuit[2] may be modified to give the same characteristics in addition to the flexibility of treble boost.

With regard to the LP's, incidentally, there has been a wide divergence of opinion—some saying that they are distortion and noise free, and some saying that they are very poor in these respects. Experimental work with one of the better recordings (Scheherazade, with Ormandy) has indicated that there is a serious amount of both noise and distortion, but that it seems to occur only above about 10,000 cps. Since most "wide range" speaker systems roll off at about this point, it was audible only on the RCA LC1A and the James Lansing D1000 of the speakers checked. In these cases a 10-kc low-pass filter with a slope of about 36 db/octave, critically damped, was found to be the solution. Statements with regard to the fidelity of these records seem to be justified, incidentally, since this filter noticeably altered the quality of high-frequency recorded sounds.

Circuit Design

A number of circuit configurations, such as shown in *Fig.* 5, were considered before that shown at (C)—a modified Pickering circuit—was finally decided upon. The familiar circuit of (A), popularized in the G.E. preamplifier, was rejected because it can be overdriven easily and because it has a fairly high output impedance for use where the capacitance of long shielded lines may be encountered. The circuit of Burwen[3], shown at (B), is also easy to overdrive, and it is difficult to obtain flat high-frequency response due to the loading of the feedback network by the Miller effect in the second stage.

There has been some criticism of Pickering's circuit as a result of hum pickup between the heater and the unbypassed first cathode of the 6SL7, but this is not a serious consideration with the 12AY7, a tube recently made available by General Electric, and designed particularly for low noise, hum, and microphonics. Actually, the 12AT7 or the 12AX7 may also be used in the preamplifier, since the feedback effectively equalizes gain, and the only difference will be in the noise level. The circuit as used here will take an input signal as high as 0.8 volts without overload at 1000 cps, and hence will accommodate any of the low-level magnetic cartridges without adjustment. The internal impedance at high frequencies is 2500 ohms, which is sufficiently low to drive a line capacitance of .005 μf without frequency discrimination.

It was found that some noise was being produced by current flow in the plate resistor for the first stage. Care-

(Continued on page 44)

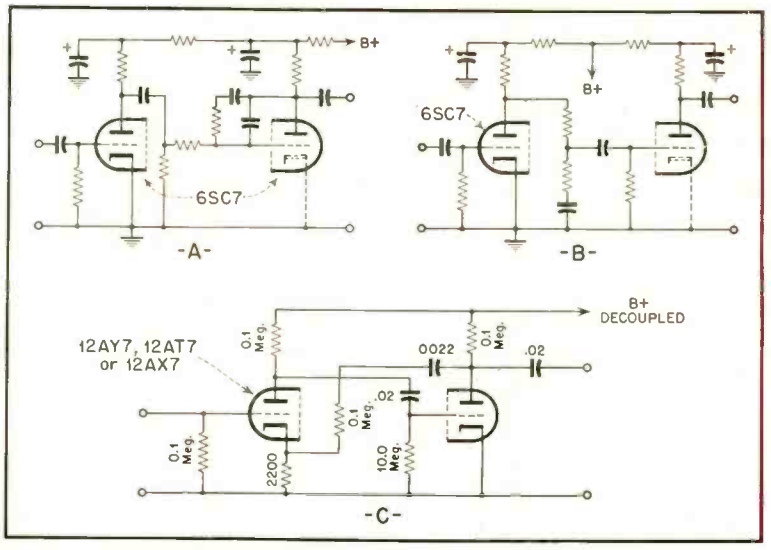


Fig. 5. Preamplifier circuits: (A) Burwen; (B) General Electric; (C) Modified Pickering circuit used in plug-in preamplifier (see text).

www.americanradiohistory.com

Audio Frequency Measurements

W. L. BLACK* and H. H. SCOTT**

Part II: Design, development, and maintenance all depend on the measuring procedures employed. The author discusses these methods thoroughly, and presents reasons for every step.

This paper was originally presented at the joint IRE-RMA Meeting at Syracuse, New York, on April 28, 1948, and is presented in its entirety in AUDIO ENGINEERING *by authorization of The Institute of Radio Engineers.*

WAVE ANALYZER DETERMINATION of harmonic distortion at the output of the equipment under test involves separate measurement of the individual harmonics and the calculation of the square root of the sum of their squares. The wave analyzer is connected as shown in *Fig.* 2 and *Fig.* 11. The percentages of the harmonic components with respect to the fundamental are determined by calibrating the wave analyzer by tuning to the fundamental and setting the meter to 100 per cent, and then reading the other components referred to this calibration. The total harmonic distortion in per cent is then the ratio of square root of the sum of the squares of the voltages of the individual components to the voltage of the fundamental frequency. The wave analyzer can be used to check the signal source for harmonic content. Such a check should be made to insure that measurements are being made of harmonics generated in the equipment under test as indicated in *Fig.* 11.

For such tests on balanced equipment the same precautions must be observed as outlined in the section on response and gain measurements. However, in the case of wave analyzer measurements it probably will not be possible to connect directly to the output terminals of the equipment under test without producing unbalance since the usual wave analyzer has one terminal at ground potential. In this case it will be necessary to insert an isolating transformer in the input leads to the wave analyzer. To check that such a transformer does not introduce appreciable distortion, the arrangement for checking distortion in test equipment indicated in *Fig.* 11 should be used.

The measurement of distortion with a wave analyzer tends to be more precise than measurements with a noise and distortion meter under some conditions, as discussed later. However, it has the disadvantages that the actual observations are more time consuming and that calculations are necessary to determine the total distortion percentages.

In making distortion measurements, the same absolute gain as well as the same relative distribution of gains and losses in the equipment under test as were used for the gain and frequency response measurements must be used to insure correlation of results.


It is also advisable to make a check at the output of the equipment under test with the signal removed to see if actual components of the signal are causing the indication or if it is due to noise or hum generated in the equipment. If noise causes a reading approaching the order of magnitude of the expected distortion readings, the selective method of measuring the harmonics with a wave analyzer will ordinarily result in more accurate determination of distortion than a non-selective method.

A distortion factor meter,[11] when used for distortion measurements, attenuates the fundamental of the test signal output of the equipment under test and passes the remaining signal, which is composed of harmonics and noise. The rejection of the fundamental is achieved either by the use of a high-pass filter or by the use of a sharply selective circuit. Comparative measurements may thus be difficult to correlate, particularly if the amplitude of the remaining noise approximates that of the harmonics being measured. Such meters are sometimes so arranged that the frequency-selective circuits may be disconnected for use in measuring noise as discussed later. Such a device is ordinarily termed a distortion and noise meter.

The harmonic and noise content at the output of the equipment under test is indicated as a percentage of the total value of these components with respect to the value of the entire output signal. As is the case in all harmonic-distortion measurements, the signal source and any isolating transformer used must not introduce appreciable distortion.

A distortion factor meter may be substituted for the output meter as shown in *Figs.* 2 and 11. It will be necessary to preserve the desired grounding condition of the circuit under test and to terminate the output attenuator properly. This termination can be in part or in whole the input of the distortion and noise meter. For example, suppose that the latter has a 500-ohm resistive input and the proper termination required is 600 ohms. It will then be necessary to add 100 ohms of series

*Bell Telephone Laboratories, Murray Hill, N. J.
**Herman Hosmer Scott, Inc., 385 Putnam Ave., Cambridge 39, Mass.

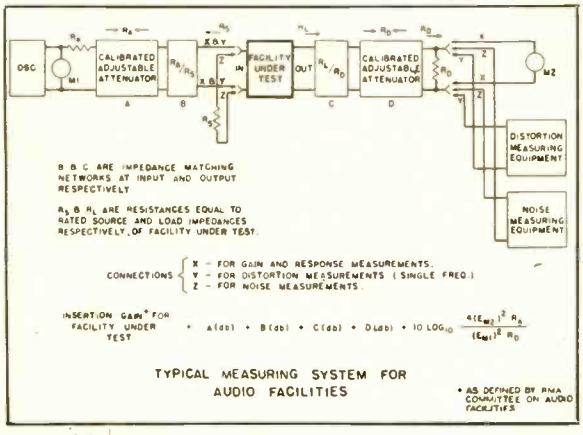

TYPICAL MEASURING SYSTEM FOR AUDIO FACILITIES

Figure 2

www.americanradiohistory.com

resistance, properly arranged to maintain the desired grounding relations.

In addition to the errors caused by noise as already mentioned, this method of distortion measurement may be subject to other errors. The readings may be accentuated or reduced by phase relationships between different harmonics or between the same harmonics introduced by each of several elements in the equipment under test. Furthermore, when the magnitude of the harmonics exceeds a few per cent there is a metering error as the distortion factor meter indicates the ratio of the harmonics to the fundamental plus the harmonics rather than to the fundamental only.

Intermodulation Measurements

By substituting two signal sources at the input, two signals can be simultaneously applied to the equipment under test and, by means of an analyzer connected at the output, the intermodulation between the two signals can be measured. Different methods of making such measurements have been discussed in the literature [12, 13, 14, 18]. In general such tests require that the maximum possible peak voltage value of the composite signal does not exceed the peak test voltage which would be applied to the equipment under test in making single-frequency harmonic measurements. The magnitudes of sum and difference frequencies resulting from modulation within the equipment under test are then determined at the output.

The results of such intermodulation measurements on a system composed of amplifiers and related components such as attenuators can ordinarily be correlated with measurements of single-frequency harmonic distortion on the same equipment. However, in connection with the interpretation of such results in terms of minimum standards and associated methods of measurement the Committee on Audio Facilities of the Transmitter Section of RMA has taken the position that "there is not sufficient data available at this time based on subjective observation to establish recommended conditions for test for intermodulation measurement."

Noise Measurements

The measurement of electrical noise in a complex audio system such as the complete audio facilities for an elaborate broadcasting studio is very simple in theory. The reference output power at the reference frequency is first determined. The signal is then removed, the input is terminated with a resistance equal to the rated source impedance and the residual output level is measured. The ratio of the two levels expressed in decibels is then the signal - to - noise ratio. In actuality there are two major complications in measuring the noise, as well as questions which arise in defining the signal and its measurement. These complications are the nature of the noise and the characteristics of the noise meter.

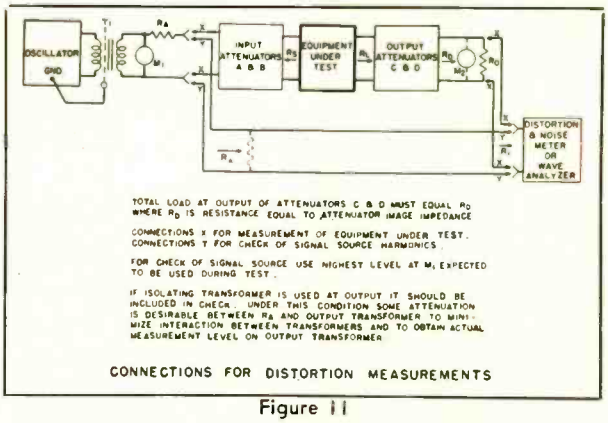


Figure 11

The nature of the noise is important basically even though it is measured as electric energy, in the actual application of the equipment under test it is ultimately converted to acoustical energy and as such is a disturbance on a subjective basis to the listener. The noise energy present in audio facilities for radio broadcasting is ordinarily composed mainly of two types. The first is random energy distributed substantially uniformly over the frequency spectrum and of relatively uniform amplitude. This is primarily caused by thermal noise in resistances. Vacuum tube disturbances such as "shot effect" may also be contributing. The second is energy concentrated at one or more frequencies. A typical cause of such noise is operation of equipment from an alternating-current power source. In addition to these two types ordinarily present, peaks of relatively high amplitude but of short duration may be experienced. Such peaks may occur at random intervals or may recur at reperitive time intervals.

The characteristics of the noise meter become a problem because of the possible variations in the nature of the noise energy. If all noises had the same wave-shape, then any meter capable of indicating steady state electrical energy and having the requisite sensitivity could be used. However, when noises have different frequency make-ups, either due to various mixtures of single-frequency and random noise or due to various mixtures of different single frequencies, then if the noise meter is to give equal readings on noises which are equally disturbing to a listener, the frequency response characteristic of the noise meter is important and should not be flat. Finally the possible presence of random pulses emphasizes the time of integration of the meter and the ballistic properties of the indicating instrument.

As a temporary arrangement for measuring the noise on audio facilities for radio broadcasting (not including studio-transmitter loops), the Committee on Audio Facilities has agreed upon making noise measurements with a device having a frequency response flat within plus or minus two decibels from 50 to 15,000 cps and having the ballistic characteristics of the "standard VU meter" but reading (responsive to) the rms value of a complex wave approximating a steady state condition. The Committee also notes that measurement of pulse noise conditions has not been included because of lack of definition and equipment.

The results of the measurement of noise with a meter having a substantially flat frequency response are ordinarily reasonably adequate for comparative use in the field outlined herein, particularly on like equipment. For example, in audio facilities for radio broadcasting, the noise problem frequently simplifies to that of the control of hum from power supply when power is supplied as alternating current to the heaters of indirectly heated cathodes and as rectified and filtered alternating current for the other elements. Where a diversity of conditions exists, it may be necessary to qualify the results of noise measurements to insure proper interpretation: this results largely from employing flat response measurement of electrical noise, as generally the ultimate criterion is disturbance on an acoustical basis. For this reason, frequency weighting in the meter has been generally resorted to in noise tests on telephone systems and in acoustical measurements, to simulate human ears at representative listening levels. Examples of this are the Bell System program noise measuring equipment and the American Standard Sound Level Meter. [15, 16, 17] There are incorporated in the latter device two frequency weightings, corresponding to ear characteristics for 40 db and 70 db acoustical levels. Re-

[*Continued on page 48*]

www.americanradiohistory.com

Audio Transformer Applications

A. J. AVIS*

Impedance calculations for transformers are encountered regularly in audio work. The author clarifies relations between impedances in tapped and multi-winding coils.

AUDIO TRANSFORMERS are essential elements of high quality audio systems. The broadcast engineer, to whom quality performance is a prime consideration, uses audio transformers in practically every phase of his work. Modern design, high quality materials, and up-to-date manufacturing processes contribute to the superb performance of present day transformers.

In this connection, the writer recalls some experiences with transformers in the humid climate of the Netherlands East Indies in the early 1930's. Transformers were difficult to obtain and demanded highly developed protective techniques to combat the onslaughts of humidity, termites, fungi and many other threats to the delicate life of the fragile and valuable components.

Radio amateurs spent many evenings comparing, arguing, and defending their latest developed protective techniques, which they claimed were guaranteed to allow a tranformer to remain unattended for fully two months. Regularly removing transformers from the sets and drying them slowly in hot boxes was old stuff—it took more courage to dip the pride of one's collection in a hot bubbling mixture of rosin and beeswax, praying that the latest treatment would not again result in a horribly sticky mess that eventually would seep through the entire set. Reliability was a touchy characteristic then, and not many makes of transformers were able to take both the climate and the protective practices to which they were subjected by the zealous amateurs.

Most readers, however, living in less trying climates, may feel assured that their investment in high quality audio transformers is a safe one, without having to resort to any maintenance program. An investment it will be, however, for good quality transformers are not cheap, and mediocre ones are not worth wasting time and money on if the utmost in performance is your goal.

*312 Stowell Ave., Sunnyvale, Calif.

Specific Uses

Sometimes a transformer is needed that must operate satisfactorily over a wide range of operating levels and over a wide frequency band. An example of such an application is the matching transformer used in certain audio signal generators equipped with an output meter and variable attenuator with 110-db range in 1-db steps. The output of the attenuator is fed into this matching transformer, which provides various output impedances while handling a power range from −60 to +35 dbm over a frequency band from 20 to 20,000 cps and with less than 1 per cent harmonic distortion. The fact that such transformers are produced in commercial quantities at reasonable cost is a good example of the high standards of design and manufacture in the transformer industry.

The application of audio transformers as a rule requires a certain amount of impedance matching. In most cases, little difficulty is encountered with interstage transformers, which normally are selected to operate with a specific set of tubes and therefore are not subject to a change in conditions. With care, good resistance-capacitance coupled circuits may be designed to replace interstage transformers, but it is not so simple to find a substitute for input or output transformers, which are often called upon to accomodate a wide variety of impedances.

Microphones and pickups require a wide range of input values, and loudspeaker voice coils vary with speaker size, type, and manufacturer. Telephone

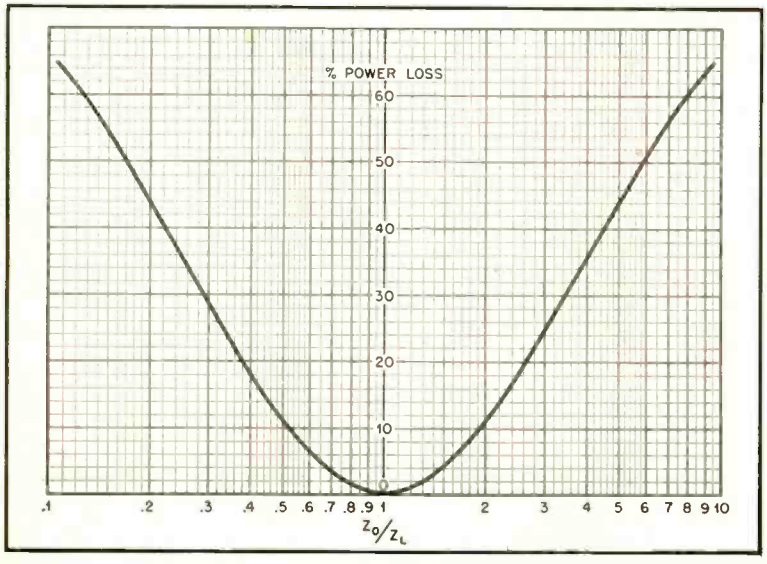


Fig. 1. Curve showing power loss due to impedance mismatch between circuits.

www.americanradiohistory.com

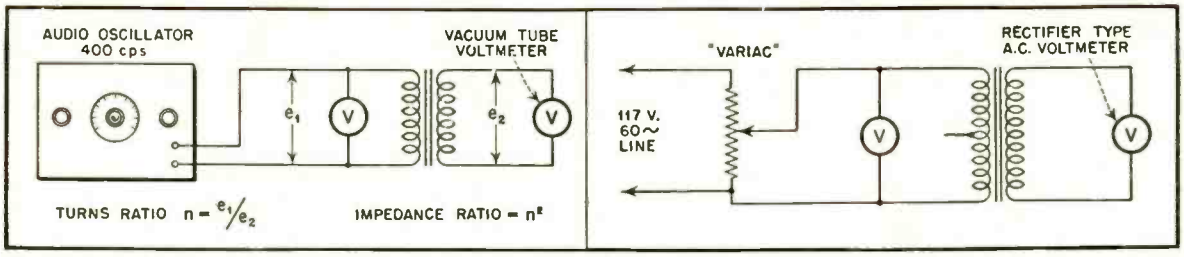


Fig. 2 (left). Simple method of measuring turns ratio of transformers when v-t voltmeter is available. This arrangement is suitable for all types of transformers. Fig. 3 (right). Method of measuring turns ratio of output or speaker coupling transformers.

lines and multiple-speaker installations complicate the picture even more and emphasize the importance of suitable input and output transformers.

Transformer Selection

The selection and application of each type require special considerations, which often are not obvious to the non-professional designer. Transformers are usually designed for a definite application, and optimum performance is obtained only under specified operating conditions. The performance of a unit when applied under different circumstances may differ appreciably from that which is expected. Furthermore, the frequency characteristic of input and output transformers and the available output from the amplifier are definitely affected by incorrect impedance matching. A few cases are described to illustrate some of these effects. 1. A 500-ohm to 8-ohm voice coil matching transformer with a power handling capacity of 20 watts may perform superbly with low losses when driving a heavy duty speaker. However, when used as an input transformer to match an 8-ohm dynamic microphone to a 500-ohm line, unsatisfactory operation may result. The low-level signal may be inadequate to provide sufficient flux excitation in the large core, since the minimum signal level depends on the grade of lamination iron used. Inasmuch as operations under these conditions have not been anticipated in the design, no provision has been made to utilize special costly core materials which are capable of developing adequate flux densities at exceedingly low signal levels. On the other hand, a transformer designed for dynamic microphone matching purposes would transmit the low signal levels efficiently in that service, but would be unable to handle a speaker power level because of core saturation and limited current-carrying ability in its fine wire. 2. When a transformer is used at a different impedance level than the rated value, the frequency response may be affected to a marked degree. Consider for example an output transformer designed to match an 8000-ohm plate-to-plate load to a 500-ohm line, and having a frequency response within 0.5 db from 30 to 15,000 cps. It is desired to use this transformer to match a 5000-ohm plate-to-plate load by reducing the secondary load in the same proportion to about 313 ohms.

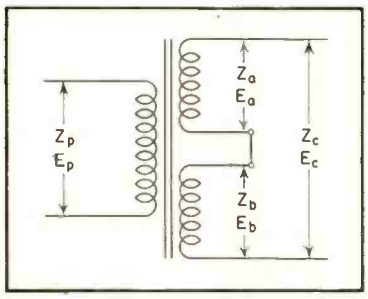


Fig. 4. Coil arrangement using two separate windings connected in series.

The inductance of the primary is sufficient to maintain only 0.5 db loss at 30 cps when shunting a 8000-ohm generator. The effect of reduced generator impedance by a ratio of 8:5 is such that the primary inductance is now sufficient to maintain 0.5 db loss at only 20 cps. On the other hand, the effect of leakage reactance, which controls the high-frequency response, is increased by the ratio 8:5 and the response of the transformer will be down 0.5 db at 10,000 cps. The reverse holds when the transformer is used in a higher impedance level circuit. Similar conditions exist in input transformers. 3. The effect of power loss due to mismatching is shown in *Fig.* 1, where power loss is plotted in per cent against the ratio of optimum output impedance Z_o to actual load impedance Z_L. The following example illustrates an application of the graph. An amplifier is available with 8- and 16-ohm taps, and it is desired to determine which one to use to connect a 12-ohm voice coil. The 8-ohm connection gives a ratio of Z_o/Z_1 of 8/12 or 0.667 and from *Fig.* 1 a loss of 4 per cent. The 16-ohm connection results in a ratio of 16/12 or 1.33 and a loss of only 2.5 per cent. indicating the more desirable connection. *

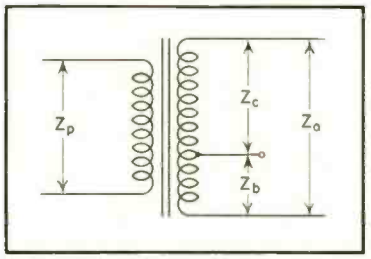


Fig. 5. Coil arrangement for single tapped secondary.

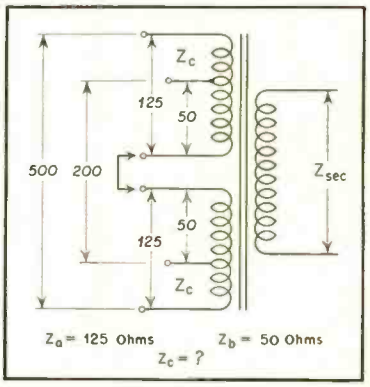


Fig. 6. Typical input transformer connections. Two 125-ohm windings connected in series provide a 500-ohm winding; similarly, two 50-ohm windings in series equal a 200-ohm winding.

In the first part of this acticle, transformer applications involving known impedance values have been considered. Most designers and experimenters are limited in selecting suitable transformers to commercially available lines, which include a great many with tapped or multiple windings. The values available at the taps may not always provide as close a match as would be desirable, and one may won-

(Continued on page 45)

(*Note that this applies only when maximum power output is the primary consideration. Ed.)

www.americanradiohistory.com

Practical Aspects of Logarithmic Amplifiers

C. J. LeBEL*

Amplifiers having wide-range linear db scales have wide use in audio measurement work. Various design problems are discussed, together with their solutions.

METHODS OF CONVERTING an audio signal to an output voltage which would be proportional to level in decibels were discussed by the writer last month.[1] In the following paragraphs some phases of the practical application of logarithmic circuits will be discussed, including their application in a high sensitivity voltmeter for measuring surface noise on recordings. An easy-to-make experimental log circuit will be shown, and a scale-expansion meter circuit will be covered.

*Audio Instrument Co., 1947 Broadway, New York 23, N. Y.

[1] "New Developments in Logarithmic Amplifiers," C. J. LeBel, AUDIO ENGINEERING, Vol. 33, No. 9, Sept. 1949.

Recording Speed

Oscillograph recordings of radio program level and of acoustical decay in a room were shown in last month's article. These curves present a number of examples of recording speeds between 1000 and 1500 db per second, showing that the old high-speed level-recorder with its limit of 600 db per second was too slow for many applications, and that a speed of at least 1500 to 2000 db per second should be available. The modern direct-writing oscillograph with a logarithmic amplifier preceding it should replace the level-recorder in any careful analysis. The oscillograph having no tapped attenuator, one can be sure that any detail in the curve is not the result of step-by-step motion over a tapped attenuator, nor of erratic action of servo-system clutches.

Some Practical Matters

Judging from recent discussions with a number of ordinarily well-informed engineers, there is little general realization of the variation of gain of an ordinary amplifier with input level, and the need of instrument-quality amplifiers for the input and output elements of a logarithmic system. In *Fig.* 1 the gain variation of an ordinary single-stage amplifier has been compared with that of a section of an instrument amplifier (of equal gain) employing a large amount of negative feedback. In a complete amplifier system, the overall gain variation would be three to four times the value given for a single stage or section. It is desirable to use at least 20 db of negative feedback if a highly stable amplifier is to be produced or the accuracy of the logarithmic relation is not to be injured.

Regardless of which logarithmic material is employed, the correct value of series resistance must be employed. The amount required depends on the material chosen and on its physical dimensions. As in so many other audio problems, the quickest method is the experimental. *Figure* 2 shows how an increase in series resistance increases the linearly logarithmic range by improving the linearity at the lower end of the curve. This is done at the expense of sensitivity. If carried too far, the driving voltage requirement becomes prohibitive. Stray capacitance across the series resistance also begins to affect the frequency response. This tends to limit the resistance to 50,000

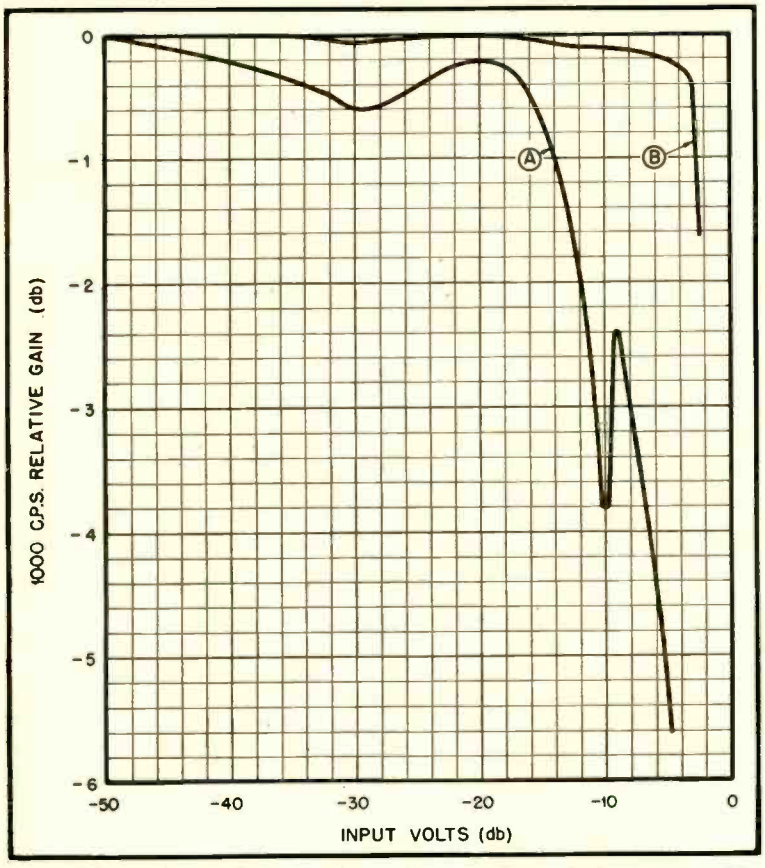


Fig. 1. Gain variation with output voltage for an ordinary single stage amplifier (A) and for an instrument amplifier of different design (B) using 20 db of negative feedback. Both amplifiers have same nominal gain.

www.americanradiohistory.com

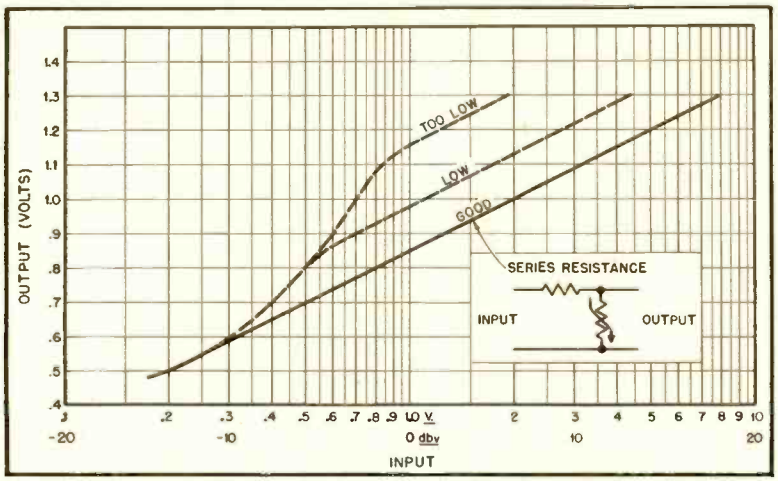


Fig. 2. Effect of varying resistance in series with logarithmic resistor.

or 100,000 ohms for work up to 100 kc, and 10,000 or 20,000 ohms for frequencies above that.

After the resistance has been increased to its maximum value, it will often be found that the accurately logarithmic range is still not great enough. A further extension of the linear range, by 10 or 15 db at the lower level limit, can be achieved by adding bias, by means of the circuit shown in the previous article. The polarity of the bias will depend on the particular material used, and must be determined by experiment. An example of the variation in linearity with bias is given in *Fig.* 3. It is desirable to stabilize the bias voltage, and a convenient circuit for the purpose is shown in *Fig.* 4. This utilizes the negative voltage-current relationship of an ordinary half-wave selenium rectifier junction. For closest regulation, a two-stage stabilizer circuit is desirable, as shown.

There are a large number of logarithmic materials, and the main difference between them lies in the range of accurately logarithmic effect. For the engineer who would like to do a little experimenting, the most convenient material is copper oxide in the form of a meter rectifier. A circuit for using a bridge-type unit without bias is shown in *Fig.* 5. If the range is to be extended by using bias, half-wave copper oxide rectifiers are obtainable from some manufacturers. Two should be used in a full-wave circuit, as shown in the previous article. Since a copper oxide junction itself rectifies, the rectifiers in that circuit can be omitted.

Scale Spreading

It is often found that a 50- or 60-db scale is too big, and that a 20- or 30-db range would be desirable. If the sensitivity of the vacuum-tube voltmeter fed from the log element is varied, it will be found that the top limit of the db scale is shifted on the meter, but the effective logarithmic range is unchanged. The way to get the desired result is to spread the scale by using a suppressed zero type of meter. The lower, undesired, part of the db range is thereby shifted off the lower part of the scale and suppressed.

Two methods of zero suppression are available — mechanical and electrical. The mechanical method has been widely used, but it has the disadvantage that the pointer is drawn against the left hand stop whenever the meter is not in use. The spring is under constant tension, and fatigue and permanent set will result eventually.

The answer to this is to use electrical zero suppression, as shown in *Fig.* 6. An adjustable bias current is passed through the meter, of such polarity as to draw the pointer to the left hand stop. When the level rises above the bias value, the meter will indicate. The method can be used with virtually any vacuum-tube voltmeter circuit. To line up the meter scale with the log element, both VTVM sensitivity and meter suppression current should be adjustable. First set the desired maximum level into the log element, then adjust VTVM sensitivity until the pointer comes to the top of the scale. Decrease the input to the log element by the range of the meter scale (for example, 30 db for a 0 to 30 meter scale) and adjust the suppression current until the pointer is on the lowest line of the scale. If the range chosen calls for a great deal of suppression, such as a 20-db scale, then the two controls interact and two or three adjustments will be necessary to

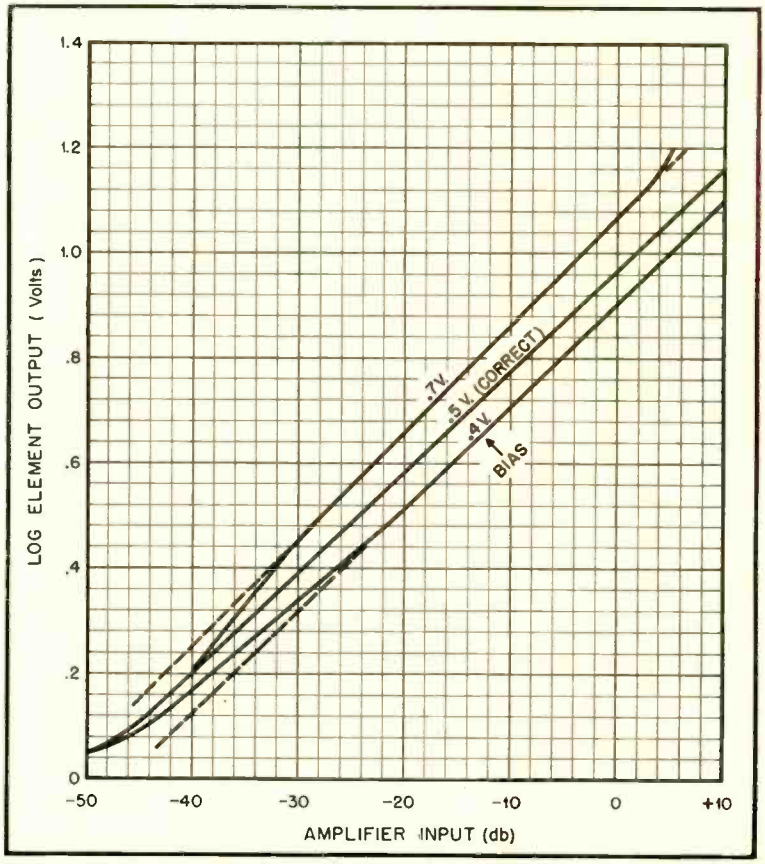


Fig. 3. Effect of varying bias of logarithmic material on low level linearity.

www.americanradiohistory.com

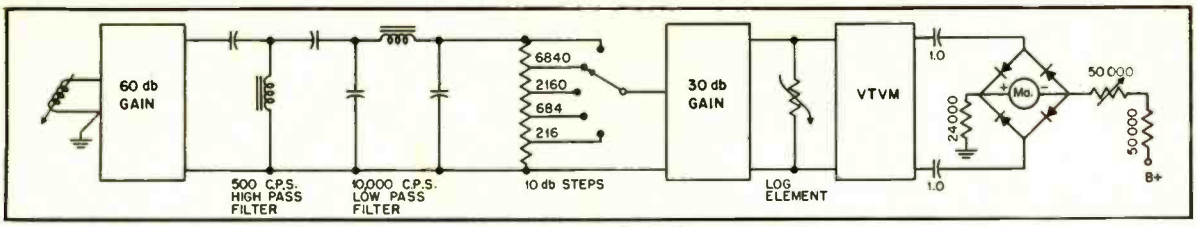


Fig. 7. Disc-noise meter using methods discussed in this article.

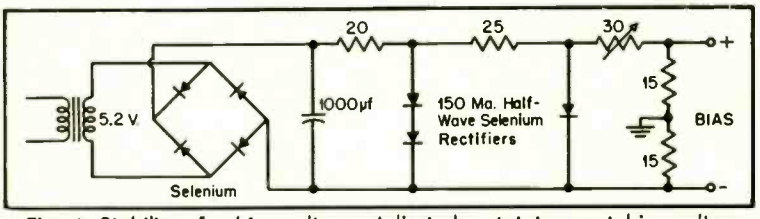


Fig. 4. Stabilizer for bias voltage. Adjust rheostat to exact bias voltage.




Fig. 5. Full-wave copper-oxide meter rectifier used as logarithmic element.

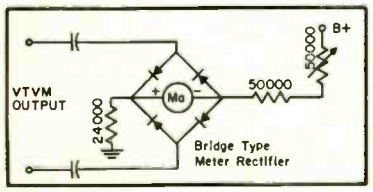


Fig. 6. Electrical zero suppression circuit.

put both ends of the scale in simultaneous alignment. Electrical zero suppression is so convenient that it is a pity it has been so little used.

The circuit design is very straightforward, and it is only necessary to make the resistors in the suppression circuit of such value that they do not disturb the linearity of the VTVM, for they form a load across its output.

Disc-Noise Meter

For years it has been customary for well-run recording studios to measure the noise level of every lacquer master and mother cut and every test pressing as a means of checking the operation of equipment and personnel. The meters used have generally been built up from a combination of standard amplifiers, a VU meter, and occasionally a limiter of some sort. Not being an instrument amplifier, the gain has generally drifted with time and use. Furthermore, there has been some question as to how the results compared with the ear's judgment when different materials, such as different pressing stocks, were used for comparison.

There is a sound theoretical basis for such doubt. Whereas the human ear measures logarithmically, then integrates the result, ordinary rectifier meters, such as the VU meter, do the reverse. They integrate the energy of a noise wave and then translate the integrated average logarithmically by means of a VU scale.

An objection may also be raised to the use of a limiter or clipper for meter protection, an objection which is peculiar to noise measurement—the peak factor of noise is at least five or ten to one. If clipping is to start just above the full-scale meter indication, on a sine wave basis, the accuracy on noise of the top half of the meter scale is destroyed. If clipping starts 25 db above full scale, also on a sine wave basis, the initial meter accuracy will not be affected, but the meter will receive occasional 20:1 overloads. It will not burn out, but the cumulative effect of mechanical mistreatment will eventually damage it enough to require its repair.

The solution to both of these problems is to have the logarithmic action *precede* the meter movement. Then the meter operates as the ear does and yet is protected from overload. The overload protection results from the fact that the meter receives the *logarithm* of the current, not the current itself. A 40-db overload will give twice normal meter current, not 100 times normal.

A disc-noise meter may be put together from what has already been discussed. It is necessary only to add filters to limit the frequency range to that specified in the NAB disc-noise standard—a 500-cps high-pass section and a 10,000-cps low-pass section, both of the constant-K type. *Figure* 7 shows such a circuit, and *Fig.* 8 the frequency response.

There may be some question as to the need for such large amounts of gain. However, this design contemplates measuring the noise of the quietest lacquer at the center of a 20-db meter scale.


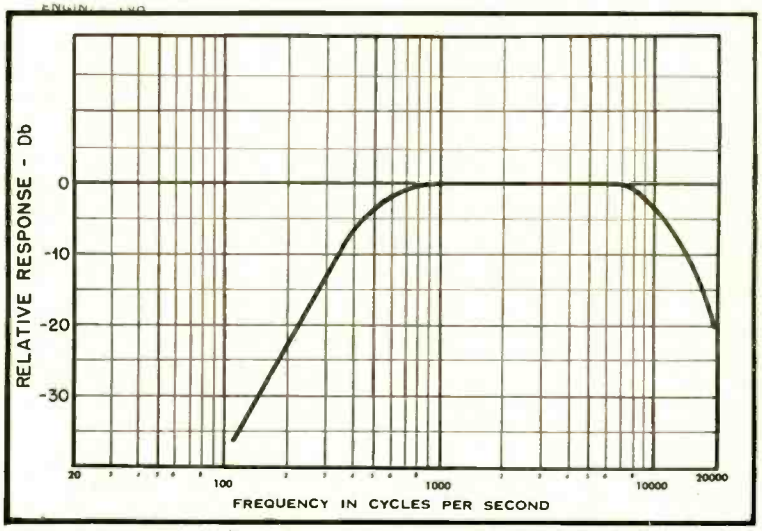


Fig. 8. Frequency response of disc-noise meter.

www.americanradiohistory.com

FONO-FITTED TORQUE & DRIVE **CARTRIDGES**

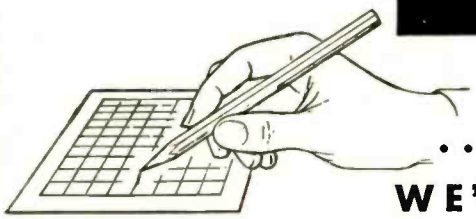

...you draw the curve

WE'LL BUILD THE CARTRIDGE

*Your specifications . . . your special requirements in phono pickup cartridges . . . are ideally "custom-solved" through E-V creative engineering . . . unusual manufacturing facilities . . . and inherent advantages of exclusive TORQUE DRIVE.**

CUSTOM RESPONSE

Smooth upper response with roll off frequency to your specifications or wide range, peak-free response to 10 kc. You draw the curve, we'll build the cartridge.

VOLTAGE

E-V TORQUE DRIVE cartridges provide the highest compliance per volt output. For example, the E-V 14 cartridge tracks at 5 grams with excellent wave form down through 50 c.p.s. on the RCA 12-5-31V record at 1 volt at 1,000 c.p.s.

TRACKING FORCE

With the high compliance and low mass of the driving system, needle forces at 5 grams for both one and three mil records are used in everyday production by leading manufacturers. Cartridges with even lower needle force with slight reduction in voltage are thoroughly practical. 3 gram tracking pressures are definitely in sight.

COMBINATION
One and Three Mil

E-V TORQUE DRIVE again leads in twin needle cartridge design. Tracking force of 5 grams on both one and three mil records precludes weight changing. Straight line needle position assures accurate set down when used with changers. Approximately the same output is obtained on both stylii. The E-V Twin-Tilt cartridge mounts in any arm with ½" mounting holes with no modification except adjustment for correct needle force.

MOISTURE PROOFING

The cartridge is *entirely filled* with DC4 Silicone jelly—the material that is used for inhibiting moisture on aircraft wiring. Tests indicate that it increases the life of an ordinary crystal *some 20 times*. This is a *plus* feature, found in all E-V crystal cartridges.

Our engineering staff and full facilities are at your service. Contact us today.



Modern One-Acre Plant with Complete Internal Facilities for Quality-Controlled Volume Production

From original conception to final product, you get full benefit of the unusual E-V processes. Here are E-V laboratories, where constant research keeps making new contributions to the Art. Here we make tools and dies . . . die cast, plate, screw machine, stamp, mold plastics, and assemble. Here we use specially designed test equipment for quality control. With all these facilities, we produce high standard acoustical products in quantity, with utmost economy. Come—see this plant in action.

NO FINER CHOICE THAN


Electro-Voice

*E-V Pat. Pending
Licensed under Brush patents

*Export: 13 East 40th St., New York 16, U.S.A.
Cables: Arlab*

ELECTRO-VOICE, INC. • BUCHANAN, MICHIGAN

www.americanradiohistory.com

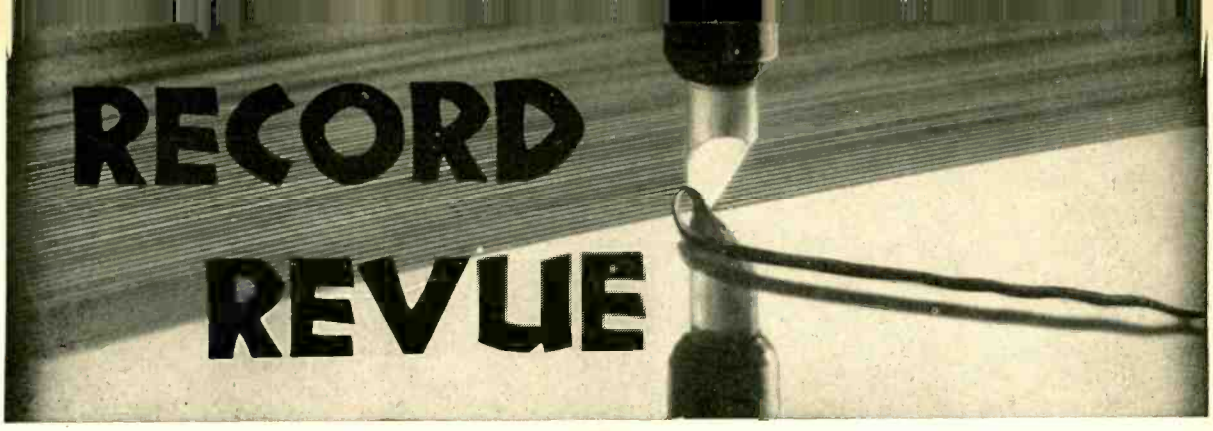

Those Fuzzy (?) LP's

EDWARD TATNALL CANBY*

SPECULATION is the stock in trade of this department, but this month's speculations are going to have even more if's and but's than usual—for this is the account of a decidedly unfinished bit of continuing questioning. The subject is familiar—the LP record. The questioning involves (1) is there unwarranted distortion in some (or many) LP's and if so, how come? (2) Is the magnetic pickup the best for LP playing, as most engineers automatically assume?

After a year and a quarter of LP history the confusions over LP quality continue unabated and at all levels, and this I find most remarkable. It's OK for us non-engineers to disagree, what with a million and one amateurish mistakes liable to gum up the issue—blaming the records, for instance, for "too much bass" or "too little bass" when quite clearly the trouble is equalization, about which few record owners know anything—rather than anything wrong in the records themselves.

But when, after all this time, the engineers disagree still, and disagree mightily, there's something that needs clarifying somewhere along the line. And worse, when the very results themselves seem—as has been happening to me—to contradict themselves, then something has got to be done.

Let's take a few of the symptoms. Working with a GE cartridge, I have in the last few months consistently found that many LP's from Columbia produce on my machine a varying amount of "buzziness" and distortion in the highest range, particularly in the louder parts. The first and obvious explanation was a bad stylus. No such thing—that has been eliminated long since. Buzzings continued. Well, then something else in the equipment must be wrong. Perhaps a matter of tracking? Don't think so, for I have encountered the same effects quite uniformly with a player that, being semi-portable and used in many places, is bound not to sit at exactly the same tilt, if any, for each situation. I have arbitrarily tipped the machine this way and that, changed the stylus weight, without materially changing the buzzy distortion. Trouble in the amplifier or elsewhere along the electrical line? Sounds as though it must be there, since after all, Columbia is unwilling to admit to any pronounced distortion in the LP product okayed by them for release. Every engineering calculation would suggest that the trouble is with me and my equipment, not with the records.

I am always willing to accede to that sort of argument and assuredly would here—*except* for one nasty little thing that keeps coming up to bother me. Ever so often, along comes an LP that does not—but definitely does *not* distort, and that under identical conditions. I have a half dozen or so of these at least, and results are unfailing. Put on one of them at a loud part—the sound is clean. Slip one of the other LP's on, and there is that fuzziness again. No one has yet been able to explain this one for me, but I can demonstrate it. I have, only too obviously, in some semi-public "concerts" during this summer. I had to pick and choose. Certain LP's I could play. Others I could not, unless with a cut-off of 8000 or lower.

So far so good. To double-check I customarily listen to as many of my doubtful cases as I can on other people's equipment. From what I have heard on various engineer's outfits, my impression is that many an LP, played on a GE pickup, gives on other's equipment results more or less like mine, if anything with more unsatisfactory sound. Magnetic variants such as Pickering and Clarkstan give similar results but even more unpleasant (probably because of wider frequency range). I have heard it said that there are "no good LP's at all" when it comes to the really high tonal ranges. Though I violently disagree, I have heard some demonstrations that were most unhappy in the sound. How to explain them?

But this is far from the end. I am fortunate in having as a good friend the man who developed the LP in the first place, Dr. Peter Goldmark. When LP-itis begins to hit me badly and things just sound terrible, I go to him for consolation. And I am baffled. In Dr. Goldmark's office the very records which have buzzed and rattled for me play without a trace of audible distortion! It has happened over and over again. I have even taken a disc from his player that sounded perfectly clean and found when I got home that it was buzzy and seemingly overcut; nor could any juggling I do, including a large dose of roll-off in the highs, really clean it up. Two of the seven-inchers were particularly strange in this respect. One was the Welitch recording of a soprano aria from Weber's "Freischutz," the other a violin and piano piece called "Tsigane" by Ravel. Both were unbearable as I had heard them at home. Both were flawless as Goldmark played them. Why?

Lest you think this is an amateur argument, read further. Of course there were differences in the playing conditions. Let us leave aside acoustics in the listening rooms. The most vital item is that Dr. Goldmark uses his own *crystal* cartridge, not a magnetic, the LP-33 (now superseded by the Astatic U model, with replaceable needle, that fits both the Astatic FL arms and the old Philco player arm). It plays into an RCA amplifier and speaker system. It is, of course, equalized to the LP curve by the man who designed that curve. He ought to know. Dr. Goldmark apparently feels that crystals are here to stay, for he has designed a series of them for LP playing and has not, that I know of, done any work with magnetics. The crystals are recommended without reservation—for professional as well as amateur work—or so I have gathered. What's more, as begins to become clear, the things seem to work. At any rate, I have the evidence of my own ears corroborated by some crystal playing at home that the LP's do play with a great deal less apparent gross distortion when the crystals are used than when the theoretically superior magnetics are employed. At this point I'm willing to make that generalization, based on a lot of hearing.

I can hear some engineers snickering at my naivete. Let me throw in a few more arguments. Yes, it would seem obvious that the distortion (assuming it's there) shows up on the magnetics because of their better response in the high range; the crystals just don't get up in the distorted range. Now this is a weighty argument, but not, in my present opinion, quite weighty enough. The several crystal models that Columbia has recommended are good easily to 10,000 cps with a downward slope that is plenty flat enough to be managed. The "buzziness" that I complain of is high-up, but I would question seriously whether it is all of it *above* 10,000. An 8000-cps cut-off, tuned sharply at 10,000, still lets through some of it in most cases. Any such distortion should, everything else being equal, come through on the crystals more or less as it does on the magnetics, with equivalent equalization. It does *not*, to the best of my experience. Why?

Yes, the good LP's (the ones I have found good, if you wish) are to my ear better sounding via any magnetic than with any crystal. Doubtless because, after all, no crystal pickup has quite the even response that a fine magnetic pickup can give. Naturally, al-


[*Continued on page 36*]

*279 W. 4th St., New York 14, N. Y.

www.americanradiohistory.com

HARVEY TWO GREAT NAMES MAGNECORD

Combine these units to suit your needs and your purse. For portable or studio use. Conforms to all N.A.B. specifications. Precision capstan and drive assures perfect lip-synch for 16mm sound recording.

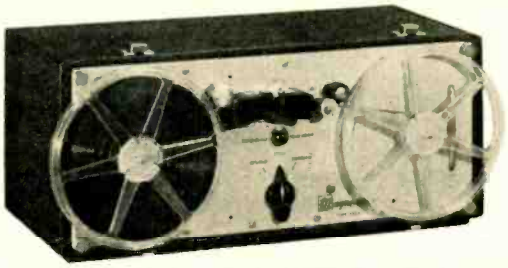


PT-6A . . . . $278 and PT-6AH $294

The PT-6A Tape Recorders are now in use in hundreds of broadcast stations and recording studios. Two tape speeds: 7½ and 15 inches plus high speed forward on the PT-6AH for cueing purposes.



PT-6P $462

BROADCAST QUALITY RECORDING AND REPRODUCTION

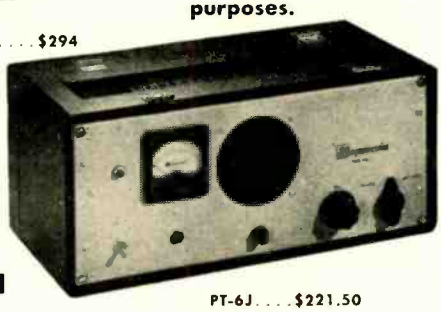

PT-6J $221.50

Designed for professional use, these units provide the highest quality. Frequency response ± 2 db from 40 to 15000 cycles, less than 2% harmonic distortion at full modulation. The recorder has high speed rewind (45 seconds) and high speed forward is available on the PT-6AH at slightly higher cost. The PT-6P amplifier is a fully portable record-playback-remote unit with 3 mike inputs and monitor speaker. The PT-6J has single mike input monitor speaker, jack for external speaker, can be used for public address. Full details of these remarkable units require pages. Come in for a demonstration or write us for full details.

PT-6A	Basic Recorder mechanism, includes 7½ and 15 inch capstans, interconnecting cords and portable carrying case	$278.00
PT-6AH	Basic recorder, same as above, with high speed forward	294.00
PT-6P	Portable Mixer Amplifier, in portable case	462.00
PT-6J	Amplifier	221.50
PT-6R	Rack mount amplifier	383.00
PT-6H	Rack Panel, for mounting PT-6A	6.85
PT-6M	Auxiliary spooling mechanism	135.00
PT-6T	Throwover Switch for using 2 PT-6A units with 1 PT-6P amplifier	19.60

McINTOSH AMPLIFIERS

The McIntosh Circuit for amplifier design, gives inherent odvontage over conventional circuits of over 16 to 1 and permits phenomenal performance chorocteristics.

Three years of concentrated laboratory work went into the development of an audio amplifier of almost distortionless output, both single frequency and intermodulation products which delivers o continuous full power for the 50W-1 amplifier of 50 watts and an instantaneous peak power of over 100 watts from two 6L6G tubes at substantially less than 1% distortion over the entire frequency range of 20 to 20,000 cycles without overloading the tubes. The 15W-1 gives similar performance for 15 watts. The McIntosh Circuit and transformers make this possible. The useful bandwidth of these amplifiers, 10 to 200 kilocycles, keep the harmonic and phase distortion at the low value achieved and desired.


Impulse distortion in amplifiers generally is very serious but in this amplifier it has been practically eliminated by careful design. This type of distortion is one of the basic reasons why amplifiers that meosure well do not necessarily sound good when coupled to loud speaker systems.

- HIGHEST QUALITY YET ATTAINED.
- HIGHEST EFFICIENCY YET ACHIEVED.
- FULL DYNAMIC RANGE.
- SMALLEST SIZE AND WEIGHT FOR POWER OUTPUT.
- WIDEST FREQUENCY RANGE.
- LOWEST PHASE SHIFT DISTORTION.
- LOWEST NOISE LEVEL.
- LOWEST COST CONSIDERING PERFORMANCE.
- NEGLIGIBLE IMPULSE DISTORTION.
- SIMPLIFIED SERVICING DUE TO MECHANICAL DESIGN.

"Ask the man who has heard one"

50W-1 . . . . . $299.50
15W-1 . . . . . 199.50

Shipping Weight 40 lbs. each

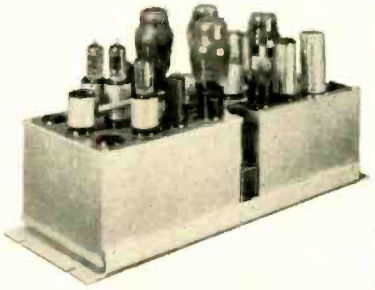

All in stock for immediate delivery.

All prices Net, F.O.B. New York and subject to change without notice.

Telephone: LUxemburg 2-1500

hrc HARVEY RADIO COMPANY INC

103 West 43rd St., New York 18, N. Y.

www.americanradiohistory.com

AUDIO engineering society

Containing the Activities and Papers of the Society, and published monthly as a part of AUDIO ENGINEERING Magazine

Audio Engineering Society,
Box F, Oceanside, N. Y.

OFFICERS
Theodore Lindenberg, President
J. D. Colvin.....Executive Vice-Pres. John G. Frayne.....Western Vice-Pres.
Norman C. Pickering.....Secretary Ralph A. Schlegel.....Treasurer

CONVENTION PROGRAM

Presenting a total of twenty-two subjects in four sessions, the First Annual Convention of the Audio Engineering Society opens on Thursday, October 27, at the Hotel New Yorker. This is a greater number of audio papers than have ever been presented in any one calendar year heretofore by all other societies combined.

In addition to the technical sessions, the Society will hold its annual business meeting, the installation of officers, and the first banquet. The newly created John H. Potts Memorial Award and the Society's annual award will be bestowed at the banquet, together with a number of Honorary Memberships.

The Audio Fair, the first exhibit ever devoted entirely to audio equipment, will be held during the three days on the sixth floor of the hotel.

Thursday, October 27, 1949

11:00 a.m. Registration.
Advance Sale of Banquet Tickets—Sixth Floor

Exhibits open.

1:30 to 2:30 p.m. Business Meeting—Installation of Officers—Grand Ballroom

2:30 to 5:00 p.m. Magnetic Recording Session—Grand Ballroom

Chairman.....C. J. Le Bel
Audio Instrument Company

1. Operating Problems & Experiences .....R. H. Barnaby—National Broadcasting Company
2. General Problem .....W. O. Summerlin Audio & Video Products Corp.
3. Standards—Present Status .....R. M. Morris—American Broadcasting Company
4. Improving Uniformity .....E. W. Franck—Consultant
5. Distortion Measurements .....G. L. Dimmick—Radio Corporation of America
6. Speed Regulation Problems .....P. Brubaker—Rangertone
7. Duplication by Contact Printing .....Robert Herr and J. E. Johnston—Minnesota Mining & Mfg. Corp.

Friday, October 28, 1949

9:30 a.m. Registration. Advance Sale of Banquet Tickets. Sixth Floor

Exhibits Open

9:30 a.m. to Noon **Papers** —North Ballroom

Chairman.....Theodore Lindenberg—Fairchild Recording Equipment Corp.

1. "Automatic Audio Gain Controls" .....J. L. Hathaway—National Broadcasting Company

The development and application of automatic audio gain controls at the National Broadcasting Company is reviewed from the simple filament type compressors of 1929 through the present day studio units.

General characteristics are described, such as attack and recovery times, gain reduction, and thump. Practical units are illustrated for various applications: for controlling or limiting in broadcast studios, transmitters, portable equipment, and recording system.

A complete description is given of the latest type of studio control unit incorporating an adjustable control characteristic, a double-time constant-gain recovery circuit, and a circuit which permits transmission of pistol shots at abnormally high peak levels in order to create realistic sound effects.

2. "A New Development in Directional Microphones" .....Dr. Harry F. Olson and John Preston — Radio Corporation of America Laboratories

The directional microphone is a second order gradient system exhibiting a uniform and narrow directivity pattern and a smooth response frequency characteristic over the frequency range of 50 to 15,000 cycles. The directional efficiency—that is, the energy response to random sounds—is one-tenth. This order of directivity makes it possible to use a pickup distance up to 12 feet with speech in conventional studios. The use of several of these microphones, fixed in position and each microphone covering a section of the total action, together with a monitoring console makes it possible to cover rapidly changing and larger areas of action with smaller variations in the output level than is possible with the conventional microphone and boom arrangement.

3. "Microphone Placement in AM & TV".....H. M. Gurin—National Broadcasting Company

The factors involved with sound in bringing intelligent information to the listener or viewer are analyzed, particularly with respect to the characteristics of the equipment, studio acoustics, and pickup techniques.

A number of variations of microphone placement in regular broadcasts, for different types of programs, will be demonstrated with an explanation of the methods employed. The differences in these techniques have been carefully studied and basic general methods are recommended.

The problems in television sound will also be indicated and the methods of handling some of these difficulties suggested. The differences between regular broadcasting or motion picture sound recording techniques will be discussed as well. The information of the type of program on the placement of microphones has been scrutinized and examples of current practices will be demonstrated.

Employment Register

Positions open and available personnel may be listed here at no charge to industry, or to members of the Society. For insertion in this column, brief announcements should be in the hands of the AES Editor before the tenth of the month preceding the date of issue. Address replies to AES Editor, Audio Engineering, 342 Madison Ave., New York 17, N. Y.

- **Audio Technician.** 12 yrs laboratory, mfg, and field experience. 1st phone, competent trouble-shooter and constructor with design background. Pleasing, effective personality. Desire responsible position with BC station or equipment manufacturer. Box 101.
- **Research and Development Engineer.** Ph. D., specialized in electronics, circuit design, electro-mechanical devices, acoustics, precision-mechanics, nuclear physics equipment. Would like to be your consultant or part-time adviser. Box 102.
- **Electrical Engineer,** over 20 yrs electronic, acoustic, dynamic audio devices, systems. Accomplishments in development, design, manufacture, for commercial, marine, govt equipment. Exp. supervision, planning, estimating. Early radio background. Residence NY area. Box 103.
- **RCA Institute** graduate wishes position with audio company or recording studio. Box 104.
- **Communications Engineer** (MIT) 22, single, with good theoretical background and some experience; interested in research, development, or teaching in audio, acoustics, electric circuits, and vacuum-tube circuits. Box 111.
- **Audio Engineer:** Three years experience in magnetic tape development including pigment research, coating formulation, coating techniques, pilot plant operation, manufacturing control equipment and techniques. Broad background in all phases of film and disc recording. Box 112.
- **Graduate Student** of radio and television desires Junior Engineering position in audio or recording industry. Age 23, married, child. Willing to travel occasionally. Prefer midwest or south. Box 113.

www.americanradiohistory.com

4. "Longitudinal Noise in Audio Circuits" .....H. W. Augustadt—Bell Telephone Laboratories

This paper discusses the general effect of the presence of longitudinal noise on a circuit. The difference between metallic circuit noise and longitudinal noise is indicated both by definition of terms and representative circuit illustration. Test circuits for identification of type are described and discussed. Representative conditions by means of which longitudinal noise is introduced into a circuit are illustrated and discussed. Practical means and other limitations for reducing the disturbing effect of longitudinal noise on a circuit are described. The paper closes with an illustration of the application of the principles discussed to the design of a quiet AC-DC amplifier.

5. "Control of Sound in the Theater" ....Professor Harold Burris-Meyer—

Electronic control of sound for theatrical purposes was undertaken in the early Thirties as a continuing research project at Stevens Institute of Technology, supported by several organizations and individuals. When the war started, electronic sound control equipment had been completed and in use experimentally in the Metropolitan Opera House for two seasons. The control of sound for all theatrical purposes was substantially completed. Since the war, the project has been devoted to the development of a modular system of sound control equipment which should conform to theatrical operating practices and provide for varying demands. It includes basic equipment with which small tasks may be accomplished and provisions for adding standard items to other equipment as needs increase, without revision of design or the use of tools. The design of this system and its capabilities will be described.

6. "Logic in Relay Switching Circuits" .....William Keister—Bell Telephone Laboratories

Four basic control paths for an electromagnetic relay are the operate, lock-up, shunt and lock-down paths. Contacts on switches or other relays are connected in one or more of these paths to control the actions of relays in automatic control circuits. These relays respond to particular combinations of control events and may "remember" certain events in order to influence later stages of the circuit action. The arrangement of contacts in a control path is determined by logical analysis of the combinations of events which must cause the relay to act. A concise statement of conditions for closing a path corresponds to a series parallel circuit configuration where the words and and or relating control events correspond respectively to series and parallel connection of electrical contacts representing these events. The circuit may be written in symbolic form and the configuration rearranged and simplified by elementary theorems of Boolean algebra.

2:00 to 4:30 p.m. Papers —East Room

1. "A New Coupling Circuit for Audio Amplifiers" .....F. M. McIntosh, Consulting Engineer

After three years of laboratory work directed towards producing a sound amplifier which would fully meet the band width, waveform distortion, transient distortion, and phase shift requirement for completely realistic reproduction, it was found that such an amplifier probably cannot employ conventional push-pull circuits, (the desirability of the push-pull circuit being presumed to be self-evident). The core of the impending problem is the apparent impossibility of manufacturing a transformer having a ratio of leakage inductance referred from one-half of the primary to the second half, to open circuit inductance to one-half of the primary in excess of 80,000.

Leakage inductance in a push-pull transformer from one-half of the primary to the second half is primarily responsible in a Class AB or B amplifier for the production of a repetitive transient which occurs at the instant of current switching. The new circuit described herein offers a complete solution to the problem and, in addition, possesses many other excelling features. The design of an amplifier embodying this circuit will also be discussed.

when you use the **Audax** POLYPHASE... **ONE** single unit plays **ALL** your records **SUPERBLY**... and at less than the cost of ordinary magnetic pick-ups

"The Standard by which Others Are Judged and Valued"



Also available complete with special arm

Enjoyment of today's discs (micro, 78 rpm, etc.) requires a single pick-up unit capable of delivering such quality performances as would be delivered by two or more separate high grade magnetic units, each designed expressly for a given type of recording.

The new AUDAX Reproducers *do just that!*

Your admiration will be aroused when you see and hear POLYPHASE. You will know that it performs important functions that no other unit does . . . that this is the logical instrument for YOU . . . whether you play one type or several types of records.

- Wide range performance with any type disc;
- Genuine sapphire or diamond styli, replaceable by the user himself;
- Needle radiation very low;
- Ear quality *par excellence!*

There's an AUDAX to suit every purpose . . . available also for Radio Stations.


Write for Editorial Reprint on POLYPHASE Principles

AUDAK COMPANY

500 Fifth Avenue **New York 18**

"Creators of Fine Electro-acoustical Apparatus since 1915"

www.americanradiohistory.com

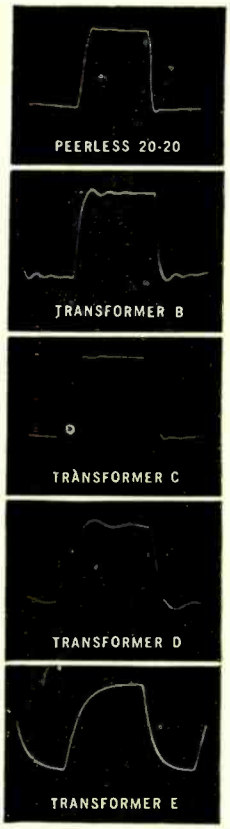

WHAT DOES THE SQUARE WAVE TELL ABOUT TRANSFORMER PERFORMANCE?

PEERLESS "20-20"—This square wave, with its nearly vertical rise, sharp corners, and flat top, tells us that the frequency response is flat to at least 20 times the square wave fundamental frequency; that there is no perceptible time delay or phase distortion for any of the component frequencies; and that there is no perceptible transient distortion.

TRANSFORMER "B"—This trace shows some loss of high frequency components, as evidenced by the curvature at the upper left corner; and it reveals a damped oscillation whose frequency is approximately 8 times the square wave fundamental frequency.

TRANSFORMER "C"—In this case, the square wave has degenerated into a trapezoidal pattern. The sloping sides indicate loss of high frequencies and phase distortion. Serious trouble will be experienced if feedback is used with this transformer.

TRANSFORMER "D"—This trace shows an exaggeration of the rounded corners of Transformer "B", with the resonance occurring at lower frequencies; the trace also shows an exaggeration of the sloping sides of Transformer "C". It may be expected that Transformer "D" will combine the shortcomings of Transformers "B" and "C".


TRANSFORMER "E"—This pattern reveals the behavior of a transformer with very little high frequency response, presumably the result of excessive leakage inductance. No transient distortion is revealed. It may be expected that Transformer "E" will have poor high frequency power handling capacity, and that application of feedback around the transformer will encounter very serious difficulties.

SEE THE SQUARE WAVE DEMONSTRATION IN ROOM 25 AT THE AUDIO FAIR. SEE THE SQUARE WAVE TEST APPLIED TO PEERLESS AND FOUR LEADING COMPETITIVE MAKES OF AUDIO TRANSFORMERS.

PEERLESS ELECTRICAL PRODUCTS DIVISION
1161 N. Vine St., Hollywood 38, Cal.
161 Sixth Avenue, New York 13, N. Y.

ALTEC LANSING CORPORATION

Frazar & Hansen Ltd., 301 Clay St., San Francisco 11, Cal.
Exclusive Export Agent

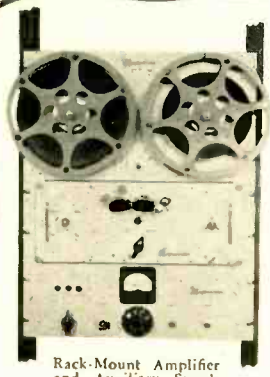

Rack-Mount Amplifier and Auxiliary Spooling Mechanism with Recorder in place.

Magnecorder

The FM STUDIO *Tape Recorder* you can CARRY in the FIELD

You want low distortion and wide band reproduction. The two-speed Magnecorder, choice of radio and recording studios throughout the world, meets NAB standards for AM and FM. Frequency response: ± 2 db 40 cy to 15 kc. You also want utility-portability and adaptability in use. One man can carry a complete, self-contained Magnecord field unit.





3-Channel Mixer-Amplifier and Power Supply make single carrying case.



Recorder Mechanism in carrying case.

UNIT CONSTRUCTION *PAYS OFF*

The several elements designed for use with the Magnecorder PT6-A Recording Mechanism are available as individual units. Buy only those you need. Carry and use them as you need them. Magnecorder units combine for every field and studio need. Buy *Magnecorder*, the only tape recorder featuring unit construction.

Write for specifications and the name of your nearest dealer.

Magnecord, INC. CHICAGO 1, ILLINOIS
360 NORTH MICHIGAN AVENUE
World's Largest and Oldest Manufacturers of Professional Magnetic Recorders.

2. "Standards—A General Discussion".....Cyril Ainsworth—American Standards Association

3. "Audio Techniques in TV broadcasting" .....S. R. Patremio—DuMont Television Network

The audio in television broadcasting is similar in many respects to the audio in AM or FM broadcasting. It deals with the pick-up of sound in the form of voice or music, both live and recorded. However, television differs slightly in the fact that the microphones must be out of view of the cameras. This alone is one of the most difficult problems to cope with.

Another problem is that the talent plays to the cameras and not the microphones. This makes it necessary to follow the talent with microphone booms to keep them within range of the microphones. In the case of an orchestra, the microphones must be concealed and still produce the desired balance. Therefore, new techniques must be used.

In order to fully cover the problems in television broadcasting, they will be separated into the following categories: studio and theatre, films, teletranscriptions, field transmitter, and master control, and will be discussed separately.

4. "Audio Consoles for TV" .....R. W. Byloff—National Broadcasting Company

The problems encountered in making good sound pickups for a television stage and controlling several sound channels satisfactorily have troubled sound engineers since the beginning of television broadcasting. In this talk the author will describe some of these problems, and compare them with the problems met in motion pictures, radio, and recording. Equipments now used in motion pictures and recording for original takes and re-recording, and equipment used for sound broadcasting and television will be described and compared. The features of a proposed audio console for television use will be described in detail.

5. "Sound Reinforcing System" .....A. W. Schneider—Commercial Radio-Sound Corp.

Basic principles for theoretically perfect results; relation of fidelity, loudness and illusion to practical problems and compromises required will be discussed. Several large basic sound reinforcing systems, illustrating applications of various types of apparatus and compromises that have to be effected, will be described. Discussion of sound reinforcing requirements for broadcast and television studios.

7:00 p.m. Audio Engineering Society Banquet —North Ballroom
Norman C. Pickering, Toastmaster
Presentation of Awards and Honorary Memberships
Special Feature:
A comparison test, behind screens, of loudspeakers of leading manufacturers, with identification at close of Banquet.

Saturday, October 29, 1949

9:30 a.m. Registration. —Sixth Floor
Exhibits Open
9:30 a.m. to 12 Noon. Audio Measurements Session—North Ballroom
Chairman .....W. L. Black—Bell Telephone Laboratories

1. The General Problem ..... W. L. Black—Bell Telephone Laboratories
2. Intermodulation ..... A. P. G. Peterson—General Radio; H. E. Roys—Radio Corporation of America; J. K. Hilliard—Altec-Lansing; N. C. Pickering—Pickering & Company
3. Transient Methods ..... M. S. Corrington—Radio Corporation of America
4. Operating Problems....J. D. Colvin—American Broadcasting Company

Exhibits open until 4:00 p.m.

www.americanradiohistory.com

THE AUDIO FAIR

Directory of Exhibitors

ALTEC-LANSING CORP. 625
(Peerless Electrical Products Division)
161 Sixth Avenue, New York 13, N. Y.
Power transformers, filter chokes, input, interstage, output, modulation, and replacement transformers. "A transformer for every audio application."
IN ATTENDANCE:
H. S. Morris — Dave Sonkin
Mel Sprinkle — Marty Wolf

AUDIO & VIDEO PRODUCTS CORP. 614-615
1650 Broadway, New York 19, N. Y.
Ampex Tape Recorders; Minnesota Mining & Mfg. "Scotch" Tape; Altec-Lansing equipment.
IN ATTENDANCE:
Charles E. Rynd — Russell O. Hudson
W. O. Summerlin

AMPEX ELECTRIC CORP. 614-615
San Carlos, California.
Ampex tape recorders
IN ATTENDANCE:
Charles E. Rynd — Russell O. Hudson
W. O. Summerlin

AUDAK COMPANY, Inc. 642
500 Fifth Avenue, New York 18, N. Y.
Electronic-acoustical apparatus.
IN ATTENDANCE:
Maximilian Weil — George V. Sullivan
Alf Weberg

AUDIO DEVELOPMENT CO. 635
2833 13th Ave. So., Minneapolis 7, Minn.
Audio and power transformers, filters, amplifiers, jacks, and plugs.
IN ATTENDANCE:
Walter E. Lehnert — Eric R. Slayton


AUDIO DEVICES, Inc. 651
444 Madison Avenue, New York 22, N. Y.
Audiodiscs, Audiopoints, Audiotape.
IN ATTENDANCE:
Wm. C. Speed — C. J. LeBel
Bryce Haynes — Herman Karnbrodt

AUDIO FACILITIES CORP. 646
608 Fifth Avenue, New York 20, N. Y.
Specialized audio and electronic apparatus, theatre sound systems, artificial reverberation equipment.
IN ATTENDANCE:
John H. Beaumont — Lewis S. Goodfriend

AUDIO INSTRUMENT COMPANY 637
1947 Broadway, New York 23, N. Y.
Bridger, Logarithmic amplifier, logarithmic voltmeter, intermodulation analyzer, artificial ears, hearing aid test equipment, preamplifiers for condenser microphones, disc-noise meters, custom built audio measuring instruments.
IN ATTENDANCE:
C. J. LeBel

BALLANTINE LABORATORIES, Inc. 622
Boonton, New Jersey.
Electronic Voltmeters
IN ATTENDANCE:
Chas. L. Gawler — Walter A. Knoop
Harry C. Gawler — Allyn W. James

BURLINGAME ASSOCIATES, Ltd. 647-648
11 Park Place, New York 7, N. Y.
Manufacturers' Representatives
IN ATTENDANCE:
B. O. Burlingame — Robert Asen
G. C. Engel — Milton Lichtenstein
Charles Sargeant

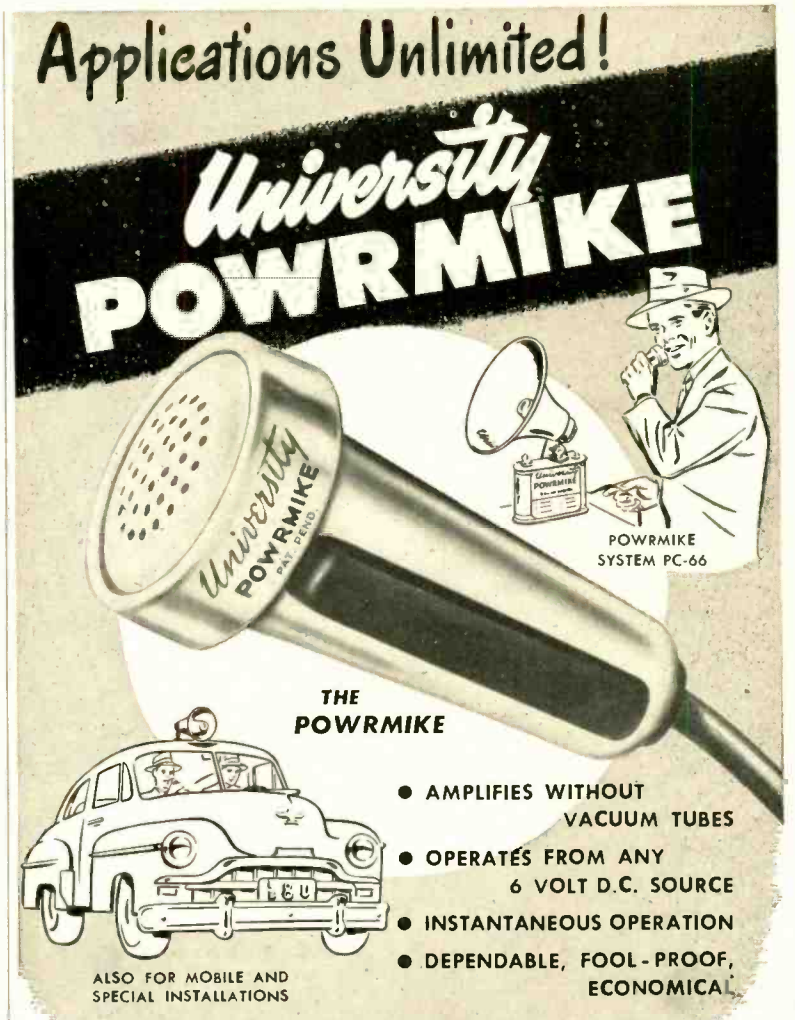

The new UNIVERSITY POWRMIKE opens a new field for sound distribution. Low in cost, requiring no amplifier, completely portable, POWRMIKE can be used in thousands of applications where power supply or high cost rule out sound amplification. POWRMIKE has a maximum output of 1.5 watts, reproduces speech with excellent fidelity and is instantaneously operated by handy press-to-talk switch. Additional speakers may be added for broader coverage and special switching arrangements.

POWRMIKE is the perfect answer for voice amplification in stores, carnivals, rallies, waiting rooms, auctions, outdoor markets, sight seeing buses and boats, school group activities, police and fire department work, etc. Get the complete story on sensational POWRMIKE, today.

MODEL PC-66 — For applications requiring portability. Includes: POWRMIKE microphone wired to loudspeaker, "Hot-Shot" type battery mounting bracket with volume control, and automobile current adapter.

MODEL PC-60 — For mobile operation and special installations. POWRMIKE microphone, loudspeaker, and automobile cigarette lighter adapter, supplied unwired.

WRITE DEPT. 8 FOR ILLUSTRATED CATALOG

University
LOUDSPEAKERS INC
80 SO. KENSICO AVE., WHITE PLAINS, N. Y.
Famous World-Wide for LOUDSPEAKERS • DRIVER UNITS • TWEETERS • PORTABLE POWRMIKES


www.americanradiohistory.com

For the first time

studio quality reproduction in an automatic record changer for all types of records: RCA Victor 7" 45 RPM, Columbia 7" LP, Columbia 10" and 12" LP 33⅓ RPM, Standard 78 RPM 10" and 12" records—all played automatically.

NEW design plug-in pick-up heads permit use for the first time of highest quality pickups as used by many broadcasters.





PICKERING MATCHED CARTRIDGES

Controls are marked for simple selection, according to type of records to be played. Records may also be played manually. Quiet jam-proof mechanism. Webster Chicago 356-27PS supplied with special matched pair type W Pickering cartridges balanced to give only 17 grams stylus pressure on standard records and 6-7 grams on LP microgroove records. Special Pickering cartridges have built-in precision sapphire styli for standard and microgroove records.

Price with cartridges, all hardware and instructions ..... **52.21** NET

Webster Chicago 356-27 PD same as above with special matched pair type W Pickering cartridges equipped with laboratory ground diamond styli for years of finest reproduction with minimum record and stylus wear ..... Price **88.21** NET

356-27 G.E., same as above, with pair of General Electric variable reluctance cartridges equipped with sapphire styli ..... Price **38.95**

Above changers operate on 105-120 volts 60 cycles AC.

Dimensions: Base plate 14" x 14". Height above main plate 5⅜", below main plate 3⅛". Note mounting size is same as older models 56, 156 and 256.

New SCOTT DYNAURAL CONVERTER



Model 111A — *A dynamic noise suppressor which effectively eliminates annoying record scratch and rumble.*

For use with any amplifier or radio-phono combination. Useful frequency range is 20 to 14,000 cycles. Remote dynaural control for adjusting degree of suppression. High impedance input and output. Convenient plug adapter fits under 6V6, 6L6, 6F6, 6K6 or similar octal based tube for power take-off. Tubes used are 1 — 6SQ7 and 2 — 6SG7. Size: 7" W x 4¾" H x 3¾" D. Complete with tubes, remote control, cables, instructions, etc.


29.50 Net

***New* High Fidelity Superhet AM Tuner Chassis**

Covers 550 — 1700 Kilocycles

Fits anyplace — measures 4 x 4 x 5 inches! Stable circuit with built-in AC power supply insures fine performance without the difficulties often encountered with AC-DC tuners. Adjustable output up to 10 volts for connection into phono or radio input of any standard amplifier. Tubes: 6BE6, 6BA6, 6AT6, 7Y4. For operation on 115 volts 60 cycles AC. Supplied tested and aligned with 2½ ft. shielded cable and instructions.

19.95 Net



TERMINAL
RADIO CORPORATION

Distributors of Radio & Electronic Equipment

85 CORTLANDT ST.—NEW YORK 7, N.Y. • Phone—WOrth 4-3311 • Cable—TERMRADIO

Audio Fair Exhibitors

BROCINER SOUND LABORATORIES 647-648
(Burlingame Associates, Ltd., 11 Park Place, New York 7, N. Y.)
Klipsch System loudspeakers
IN ATTENDANCE:
Victor Brociner — B. O. Burlingame

BRUSH DEVELOPMENT CO. 647-648
(Burlingame Associates, Ltd., 11 Park Place, New York 7, N. Y.)
"Soundmirror" magnetic tape recorders
IN ATTENDANCE:
J. H. Munchausen — B. O. Burlingame

FRANK L. CAPPS & Co., Inc. 636
244 W. 49th Street, New York 19, N. Y.
Recording and reproducing styli, advance balls, shaving knives.
IN ATTENDANCE:
Isabel M. Capps — Wally Rose
Bill Clifford — Rom Marcucci
Dick Marcucci — Sal Gualtieri

CLOUGH-BRENGLE CO. 622
(Gawler-Knoop Company, 1060 Broad St., Newark 2, N. J.)
Sweep Frequency generators.
IN ATTENDANCE:
Chas L. Gawler — Walter A. Knoop
Harry C. Gawler — Allyn W. Janes

COOK LABORATORIES 636
139 Gordon Blvd., Floral Park, N. Y.
Feedback recording heads, Q-C recording equipment, Audioid synthetic damping. Series 10—20,000-cps frequency record.
IN ATTENDANCE:
Emory Cook — Joe Kuhn

THE DAVEN COMPANY 616
191 Central Ave., Newark, N. J.
Attenuators, potentiometers, rotary selector switches, precision wire-wound fixed and variable resistors, transmission measuring sets, decade resistances, volume level indicators, and all types of test and measuring equipment.
IN ATTENDANCE:
Lewis Newman — E. L. Grayson
J. P. Smith, Jr. — R. J. Newman
C. F. Scott

ALLEN B. DuMONT LABORATORIES, Inc 622
(Gawler-Knoop Company, 1060 Broad St., Newark 4, N. J.)
Cathode-ray oscillographs, voltage and time calibrators.
IN ATTENDANCE:
Chas. L. Gawler — Walter A. Knoop
Harry C. Gawler — Allen W. Janes

ELECTRIC INDICATOR CO. 649
Parker Avenue, Stamford, Conn.
Electric motors and generators.
IN ATTENDANCE:
Ralph Kricker — Joseph Marcus
Alfred Debona

THE ELECTRONIC WORKSHOP, Inc. 634
351 Bleecker St., New York 14, N. Y.
High fidelity audio components and systems, audio amplifiers and control units, and instruments for audio or special applications.
IN ATTENDANCE:
Frank Ganci — Leonard Sherry
Howard T. Sterling — Byron St. Clair
Ben Bell — Jan Syrjala
Alan Sobel — Alice Fee

ELECTRO-VOICE, Inc. 618
Buchanan, Michigan.
Broadcast and public address microphones; crystal magnetic, and ceramic phonograph cartridges and arms; microphone stands, transformers, and accessories.
IN ATTENDANCE:
Jack E. Willson — A. R. Kahn

www.americanradiohistory.com

Audio Fair Exhibitors

FAIRCHILD RECORDING EQUIPMENT CORPORATION 653
154th St. and 7th Ave., Whitestone, L. I., New York.
Tape recorders, synchronous disk recorders synchronous transcription turntables, transcription pickup, magnetic playback cartridges, cutterhead, equalizers, amplifiers, VU panels, mixer panels, complete unitized amplifier systems. Complete recording installations built to specifications.
IN ATTENDANCE:
Jay H. Quinn — Avery Lockner
Leon A. Wortman — C. V. Kettering
Wm. Hazlett

GAWLER-KNOOP COMPANY 622
1060 Broad Street, Newark 2, N. J.
Manufacturers Representatives.
IN ATTENDANCE:
Chas. L. Gawler — Walter A. Knoop
Harry C. Gawler — Allyn W. Janes

GENERAL ELECTRIC COMPANY 619
Electronics Park, Syracuse, N. Y.
Speakers, tone arms, pickups, preamplifiers.
IN ATTENDANCE:
R. S. Fenton — J. W. Duffield
T. J. Nicholson

JAMES B. LANSING SOUND, Inc. 611-612
2439 Fletcher Drive, Los Angeles 26, California.
Loudspeakers.
IN ATTENDANCE:
C. G. Barker — John S. Boyers

H. J. LEAK & CO. LTD. 650
Brunel Road, Westway Factory Estate, Acton, London W.3, England.
"Point One" audio frequency amplifiers; Leak dynamic pickup; Leak "550" loudspeaker system
IN ATTENDANCE:
H. J. Leak, Esq., M. Brit. I.R.E.

LIVINGSTON ELECTRONIC CORP. 646
Livingston, New Jersey.
Phonograph pickup arms, "MB" Loudness controls, Stylus pressure gages.
IN ATTENDANCE:
C. O. Smiley — John Gardner

MAGNECESSORIES 609
Box 6960, Washington 20, D. C.
Carson Tape Splicer — Visi-Mag
IN ATTENDANCE:
Robert H. Carson

MAGNECORD, Inc. 611-612
360 N. Michigan Blvd., Chicago 1, Ill.
Tape recording equipment.
IN ATTENDANCE:
C. G. Barker — John S. Boyers

J. A. MAURER, Inc. 631
37-01 31st Street, Long Island City 1, N. Y.
Maurer 16-mm professional motion picture cameras, Maurer 16-mm sound-on-film recording system, Maurer 16-mm film phonograph.
IN ATTENDANCE:
L. A. Root

McINTOSH ENGINEERING LABORATORY 611-612
710 14th St., N. W., Washington 5, D. C.
Amplifiers.
IN ATTENDANCE:
Frank McIntosh

THE MIGEL DISTRIBUTING CORP. 601
118 East 25th Street, New York 10, N. Y.
The Bolsey Portable Microfilmer and Reader.
IN ATTENDANCE:
Morton R. Shapley — John Migel
Ralph DeSola — William Nichols

PICKERING ANNOUNCES TWO BRAND NEW AUDIO DEVICES

A NEW... PREAMPLIFIER

A NEW RECORD COMPENSATOR

for magnetic phonograph pickups and for all makes of records.

The PICKERING model 130H PREAMPLIFIER . . . engineered to properly equalize the bass response of records and transcriptions and to provide the necessary gain for high quality magnetic pickups . . . represents the most advanced design ever achieved in phonograph preamplifiers . . . it is unique and superior in its accuracy of equalization . . . its intermodulation and harmonic distortion is extremely low, better than most professional equipment . . . it will operate with any high quality amplifier having a high impedance input . . . is self-powered, operates from the 115 volt AC line and is installed by simply plugging in.



TECHNICAL SPECIFICATIONS

FREQUENCY RESPONSE: Within 2 db from 40—20,000 cps. Compensates for 6 db per octave loss below 500 cps. • OUTPUT: High impedance, 2 volts average from phonograph records. (For 500/600 ohm output at —10 dbm use Pickering 600G transformer, available as accessory equipment.) • DISTORTION: Not more than 0.2% intermodulation at normal output level. Not more than 0.4% intermodulation at +10 db over normal level. Not more than 1.7% intermodulation at +20db over normal level • HUM LEVEL: —56 db below maximum signal. • INSTALLATION: Unit furnished with 6 ft. approved cord which can be connected to wall socket or amplifier. Input socket—standard type; matching plug furnished with unit. Output—terminal strip. Rubber shock mounts provided. • DIMENSION, TUBES AND WEIGHT: Size of preamplifier: 8½ inches long. 5¼ inches deep and 4½ inches high. Tubes: 6SJ7, 6J5, 6X5 (any good, standard brand). Weight 2 lbs. 10 oz.



THE PICKERING model 132E RECORD COMPENSATOR . . . developed to provide the flexibility required to properly equalize for the different recording characteristics used by various record manufacturers . . . is a most important addition to any record playing system using magnetic cartridges and an amplifier having a high gain preamplifier with 6 db per octave rise below 500 cycles per second . . . it permits proper compensation of the amplifier system for optimum record reproduction . . . it permits getting the maximum out of each individual record, scratched and worn ones included . . . its six positions correctly equalize for all of the established recording characteristics including microgroove and standard records, domestic and foreign. Because all linear circuit elements are used it has no inherent distortion.

SWITCH POSITIONS

1. EUROPEAN RECORDS—This group covers HMV, DECCA FFRR, TELEFUNKEN, etc., and American pressings of European recordings. 2. VICTOR 45—For all 45 RPM records. 3. VICTOR 78—For 78 RPM records, 500 cycle turnover. 4. COLUMBIA-CAPITOL —This position is for most domestic records, including Decca, MGM, etc. 5. MICROGROOVE LP—For all makes of 33⅓ RPM microgroove recordings. 6. NOISY RECORDS —This position permits playing of old, noisy records with objectionable hiss removed.



Pickering & Company, Inc.

PICKERING CARTRIDGES AND AUDIO EQUIPMENT ARE AVAILABLE THROUGH LEADING JOBBERS AND DISTRIBUTORS EVERYWHERE.

Oceanside, Long Island, N. Y.

www.americanradiohistory.com

Recording and Transcription Amplifiers by
REK-O-KUT

Compare for Quality



Compare for Value

Illustrated: R-8A in case

R-8A SPECIFICATIONS
(Powers Rek-O-Kut "Challenger" Deluxe)

Frequency Response: ±1 db from 30 to 20,000 cycles at normal setting of equalizer controls.
Power Output: 13.5 watts at less than 3% total distortion.
Input Channels: Four: 2 high impedance microphones, phono channel compensated for G.E. or Pickering pick-up, radio.
Gain: Microphones: 120 db; Phono: 90 db; Radio: 80 db.
Output Impedance: 4, 8, 15 or 500 ohms.
Hum and Noise: 64 db below 13.5 watts with all controls turned for maximum hum and noise output.
Tubes: (2) 6SJ7; (2) 6SL7; (1) 6SC7; (2) 6V6; (1) 5Y3.

RACK MOUNT PRICE, $129.95 net
(Including tubes)

R-5A SPECIFICATIONS
(Powers Rek-O-Kut "Challenger" Standard)

Frequency Response: ±1 db from 50 to 15,000 cycles at normal setting of equalizer controls
Power Output: 12 watts at less than 3% total distortion.
Input Channels: Three: high impedance microphone, high impedance phono pick-up and radio.
Gain: Microphone: 125 db; Phono: 76 db; Radio: 76 db.
Output Impedance: 4, 8, 15 or 500 ohms.
Hum and Noise: 64 db below recording level.
Tubes: (1) 6SJ7; (2) 6SL7; (2) 6V6GT; (1) 5Y3GT.

RACK MOUNT PRICE, $89.95 net
(Including tubes)

CASE OPTIONAL $17.95
SEE US AT THE AUDIO FAIR, ROOM 652.

REK-O-KUT COMPANY, INC.
38-01 QUEENS BLVD., LONG ISLAND CITY, N. Y.

"Wow-Meter"



Newly developed direct-reading instrument simplifies measurements of wow and flutter in speed of phonograph turntables, wire recorders, motion picture projectors and similar recording or reproducing mechanisms. It is the only meter in existence giving direct steady indication of meter pointer on scale.

The Furst Model 115-R "Wow-Meter" is suitable for both laboratory and production application and eliminates complex test set-ups.
A switch on the front of the panel permits selection of low frequency cut-off and corresponding meter damping for use on slow speed turntables.

Frequency Response: ½ to 120 cycles or 10 to 120 cycles
Inquiries Invited on our line of
Regulated Power Supplies

FURST ELECTRONICS
16 S. Jefferson St., Chicago 6, Ill.

Audio Fair Exhibitors

THE MINNESOTA ELECTRONICS CORP. 622
(Gawler-Knoop Company, 1060 Broad St. Newark 2, N. J.)
Amplifiers, filters, Noiseraser.
IN ATTENDANCE:
J. H. Munchausen

NEWARK ELECTRIC CO., Inc. 602
242 W. 55th St., New York 19, N. Y.
Wharfdale speakers, Du Mont scopes for audio measurements. Audiodiscs, Audiotape, Altec-Lansing sound equipment. Daven attenuator pads.
IN ATTENDANCE:
Herman Holstein Samuel Weisbroth

PANORAMIC RADIO PRODUCTS Inc. 626
10 South Second Ave., Mount Vernon, N. Y.
Panadaptor, Panalyzor, Panoramic Sonic Analyzer, Panoramic Ultrasonic Analyzer.
IN ATTENDANCE:
Bernard Schlessel Joseph F. McClean
Ben H. Tongue Ralph Segel

PEERLESS ELECTRICAL PRODUCTS DIVISION 625
(Altec-Lansing Corporation)
161 Sixth Avenue, New York 13, N. Y.
Power transformers, filter chokes, input, interstage, output, modulation, and replacement transformers. "A transformer for every audio application."
IN ATTENDANCE:
H. S. Morris Dave Sonkin
Mel Sprinkle Marty Wolf

PERMOFLUX CORPORATION 641
4900 West Grand Ave., Chicago 39, Ill.
Speakers, baffles, headphones, microphones, tape recorders and amplifiers.
IN ATTENDANCE:
L. M. Heineman T. Trzyna
C. C. Fisher

PICKERING AND COMPANY, Inc. 624
309 Woods Avenue, Oceanside, N. Y.
Phonograph pickups; pre-amplifiers; equalizers; amplifiers; audio equipment; solenoids; transformers; magnetic devices; I-M distortion measuring instruments.
IN ATTENDANCE:
Walter O. Stanton Norman C. Pickering

PRESTO RECORDING CORP. 623
(Mail) P.O. Box 500, Hackensack, N. J.
(Plant) Paramus, New Jersey.
Recording and transcription turntables, studio and portable tape recorders, recording amplifiers.
IN ATTENDANCE:
Thomas B. Aldrich Irving Rosenblatt
Fred Jorysz John Strampfer

PRESTOSEAL MANUFACTURING CO. 647-648
(Burlingame Associates, Ltd., 11 Park Place New York 7, N. Y.
Magnetic tape (plastic) splicers, film splicers.
IN ATTENDANCE:
Leonard Herzig

PROCTOR SOUNDEX CORP. 639
133 N. Sixth St., Mt. Vernon, New York.
Turntables and pickup arms; audio sound equipment.
IN ATTENDANCE:
B. A. Proctor J. J. McCann
B. A. Proctor, Jr. Emil B. Kurkowski
M. A. Peckham

RACON ELECTRIC CO., Inc. 617
52 E. 19th St., New York 3, N. Y.
Loudspeakers for public address systems, re-entrant trumpets, driver units, paging speakers, marine speakers, tweeters.
IN ATTENDANCE:
A. I. Abrahams
Edward Maged

www.americanradiohistory.com

Audio Fair Exhibitors

RADIO CORPORATION OF AMERICA 632-633
Camden and Harrison, New Jersey.
Tubes, Sound Products and Broadcast Audio Equipment as follows: Rack-Mounted Tape Recorders, 70-D turntable with 45 rpm modification, LC1A speakers, and microphones.
IN ATTENDANCE:
W. O. Hadlock, Harold Becker, C. M. Lewis, J. E. Hill, W. T. Babcock, A. K. Ward, H. C. Elwes, R. von de Linde, Lawrence Le Kashman, Julius Haber, A. R. Hopkins, E. Miller, M. A. Trainer, H. W. Rhodes, A. Lof, H. C. Somerville, Kenneth Shaffer, Nick Carter

RANGERTONE, Inc. 621
73 Winthrop St., Newark 4, N. J.
Magnetic tape recorders and magnetic recording.
IN ATTENDANCE:
R. H. Ranger, S. L. Ackerman, A. Colabella, F. Whitehouse, P. Brubaker

RECOGRAM RECORDERS CO. 610
11338 Burbank Blvd., North Hollywood, Calif.
Magnagram magnetic film recorder; Centogrip splicers.
IN ATTENDANCE:
D. J. White, Wm. H. Stutz

REK-O-KUT COMPANY, Inc. 652
38-01 Queens Blvd., Long Island City 1, N. Y.
Cutting units, transcription turntables, recording mechanisms, playback units, recording amplifiers.
IN ATTENDANCE:
George Silber, Sydney Simonson, Frank Scannell

SOMERSET LABORATORIES, Inc. 628
1701 Palisade Ave., Union City, New Jersey.
Amplifier, dynamic noise suppressor pre-amplifier.
IN ATTENDANCE:
Carl E. Ring, John T. Loomis, James Evans, Besse Auerbach


SONAR RADIO CORPORATION 644
59 Myrtle Ave., Brooklyn, N. Y.
Tape recorders; amateur equipment.
IN ATTENDANCE:
Jack Babkes, Edward A. Babkes, John Yinaga, Ray Morehouse, Adolph Schwartz, Jos. Abrams

STANCIL-HOFFMAN CORP. 645
1016 N. Highland Ave., Hollywood 38, Calif.
Stancil-Hoffman magnetic transcription recorders and reproducers, magnetic communications recorders, the "Minitape" miniature magnetic recorder, the Elken automatic tape splicer.
IN ATTENDANCE:
Henry J. Geist and Associates

STEPHENS MANUFACTURING CORPORATION 620
8538 Warner Drive, Culver City, California.
Loudspeakers and Microphones.
IN ATTENDANCE:
Robert Lee Stephens, Henry Hold, Art Cerf, Dick Mittl

SUN RADIO & ELECTRONICS CO., Inc. 640
122 Duane St., New York 7, N. Y.
Distributor of sound products.
IN ATTENDANCE:
Samuel N. Gerard, Sy Bosworth, Burt Zimit, Walt Zuckerman, Sanford Herman, Irving Green, Joseph Greenfield, Al Goldberg, Lionel Phillips, Bob Smith

SEND NOW FOR HELPFUL NEW Industrial & General Purpose Stock Relay Catalog D-20A

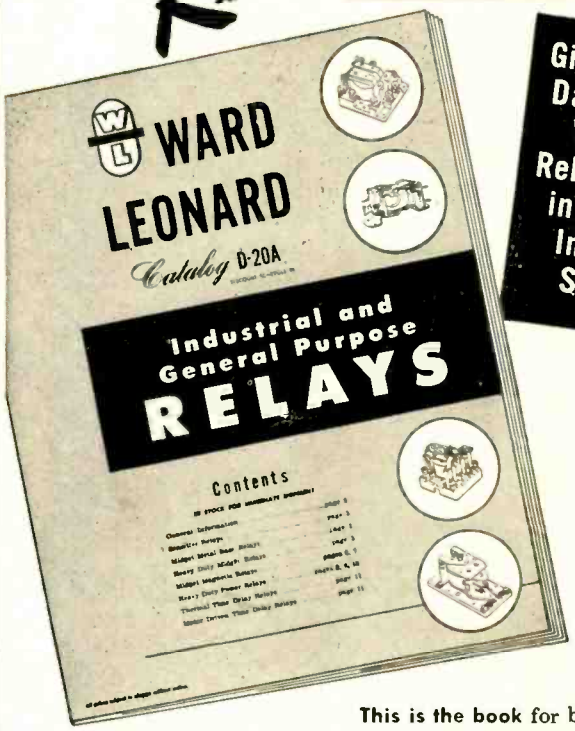

Gives Valuable Data on Wide Variety of Relays Carried in Stock for Immediate Shipment

This is the book for busy men!

This is the book with hundreds of economical answers to quick relay needs! This is the book you'll turn to when time means money! It's your handy guide to WL light-duty and heavy-duty stock relays for control of radio and electronic devices, electrical equipment and appliances. Puts factual data and useful information at your finger-tips.

WRITE TODAY FOR YOUR CATALOG D-20A

Electronic Distributor Division

Ward Leonard Electric Co., 53 R West Jackson Blvd., Chicago 4, U. S. A.

WARD LEONARD

RELAYS · RESISTORS · RHEOSTATS · CONTROL DEVICES

WHERE BASIC DESIGNS ARE RESULT-ENGINEERED FOR YOU

www.americanradiohistory.com

For the First Time . . .

"ON STAGE" REALISM OF BOTH HIGHS AND LOWS

Speakers by


BOZAK

New tone values, never before available to the critical listener, are now distributed over the entire area of music's most useful frequency range. From robust basses to clear, non-piercing highs, *richness* is the keynote of loudspeakers by Bozak—the gratifying result of over 10 years' skilled development.



WOOFER:
Model B-199

Twelve-inch unit specially developed for low resonance. Not only are low frequency tones distinctly audible, but they have the rich fullness of true orchestral bass. Unique Bozak cone eliminates "drumhead" characteristic common to many woofers. Response: 40-3500 cycles; Rating: 12 watts; 22 oz. Alnico V permanent magnet using special low carbon cast pole pieces. $52.50 list.



DUAL TWEETER:
Model B-200

High tones, brought out with new degree of realism, now made acceptable to the ear by Bozak system of rubber damping. Direct radiated highs dispersed over wide angle. Clean, smooth response makes high frequency listening a pleasure. No distorted, piercing tones. Response: 1500—beyond 13,000; Cones: 2½" dia. with aluminum alloy apex; Coverage: 120 deg. at 10 kc., 100 deg. at 13 kc; Rating 5 watts; 7 oz. Alnico V permanent magnets. $27.50 list. (Patents pending).

These speakers require only 4 mfd. capacitor for crossover.

See your distributor or write

R. T. BOZAK
DESIGNER & MANUFACTURER
90 Montrose Ave. Buffalo 14, N. Y.

Audio Fair Exhibitors

TECH LABORATORIES, Inc. 638
Bergen & Edsall Blvd, Palisades Park, N. J.

Attenuators, potentiometers, tap switches, fixed pads, matching pads, gain sets, viscosity meters, resistance measuring equipment.

IN ATTENDANCE:
M. Bjorndal A. L. Budd
G. Van Baaren

UNIVERSITY LOUDSPEAKERS, Inc. 643
80 S. Kensico Ave., White Plains, N. Y.

Commercial and industrial loudspeakers, driver units, tweeters and accessory equipment, Powrmike systems.

IN ATTENDANCE:
Seymour Blumenfeld Irving Golin
Saul White Lawrence Epstein
Haskell Blair

U. S. RECORDING CO. 611-612
1121 Vermont Ave., N.W., Washington 5, D.C.

Consolette.

IN ATTENDANCE:
H. P. Meisinger

RECORD REVUE


[*from page 26*]

most every engineer uses magnetics as a matter of course for this reason. But how about the many LP's that don't come through well via the magnetic treatment? Well, they do come through via the crystal.

Which leads on to a bit more. It is at once evident to me in listening to Dr. Goldmark's office machine that there is a decided difference in tonal balance between what he is getting and what I am accustomed to as the average sound from engineers' equipment. The highs seem far less pronounced —so much so that at first my impression was the "tone control" effect of severe roll-off, until, after a bit, I begin to hear the triangles and what-not that indicate the presence of high highs. I am sure that most engineers, reacting earwise, would be struck at once, as I am, by this seeming lack of highs. Aha! Of course you don't hear any distortion; you can kill any distortion if you roll down those highs enough, you are saying. Just a moment. *Who said they were rolled off?* To the best of my knowledge the CBS player and the RCA amplifier are equalized to match the LP record's curve. There is no *extra* roll-off.

Then what. . . .? Well, one conclusion I am forced to, in the face of this, is that most engineers are *not* equalizing their equipment to match the LP curve. Tin ears —we all have 'em. I begin to suspect that most engineers have been listening to hi-fi equipment for so long that the stuff has crept up on 'em. Equalize correctly and it sounds dull, so quick boost up those highs and get some *real* hi-fi! We all know the notorious love of J. Q. Public for the exaggerated juke-box type of bass: hadn't we better look at that beam in our own little eye and check up on our highs?

If you don't agree, then you explain it. Because I have one final argument that may clinch this last, and that is an ingenious new crystal soon to be put out by Columbia and Astatic, of which I have an early sample. It embodies a new slant to the

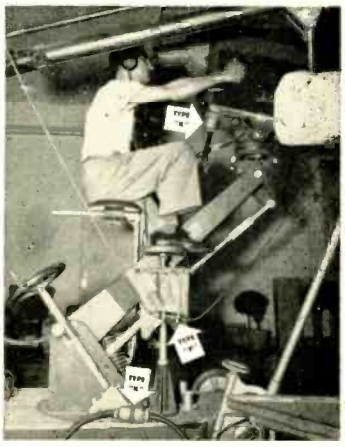


PLUG-IN

WITH

Cannon Plugs

. . . be assured of "good connections." That's why television stations, for instance, use Cannon Electric Type K, P, and other series for cameras, microphones and transmission equipment that *must not fail.* Shown above is a camera at KTLA—*Hollywood.*

Cannon Plugs are available through a network of radio parts dealers all over the U. S. A. Buy them from Seattle Radio Supply in *Seattle;* Cooper Sound Equipment in *Cincinnati;* Radio Inc., in *Oklahoma City;* Van Sickle Radio in *St. Louis;* Offenbach-Reimus in *San Francisco;* and over 400 other distributors.



DESK SIZE CHARTS—FREE

Two desk charts of Type "AN" and "K" insert arrangements shown half scale are available on request. Address Catalog Dept. K-109 at factory.

Cannon Electric Development Company, Division of Cannon Manufacturing Corporation, 3209 Humboldt St., Los Angeles 31, California. Canadian factory: Toronto. World Export: Frazar & Hansen. San Francisco. New York, Los Angeles.

SINCE 1915
CANNON ELECTRIC

www.americanradiohistory.com

problem of equalization, for this is a "pre-equalized" crystal which has been doctored up *to match in itself the curve of the Columbia LP record almost exactly*, and that to beyond 10,000. (It is housed in the same case as the just-available model CQ-J, now being used in the new Columbia player, but differs internally and will go by another code name, C-AC.)

Now here is a crystal pickup that is a natural for experiment. No equalization at all; it is designed to be fed directly into a flat amplifier. When so fed, it gives automatically the curve required to reproduce the LP record. And this on the authority of the designer of both.

What happens when it is put to work? (1) The music comes out sounding like the sound I have heard in Dr. Goldmark's office. A bit "rolled off" on the high end. You may point your own moral for that. My own conclusion, again, is that a lot of us have been overindulging in highs. What sounded to me on the dull side sounded to others quite natural and brilliant. (2) The records that have been buzzing away merrily these many months on my magnetic pickups again come out definitely minus the buzz, or whatever other name the unpleasantness can be given. This crystal, automatically equalized, acts as does the original LP crystal, the LP-33. In some unexplained manner it "matches" the LP record better than existing magnetics. Records that sound distorted on the magnetic come clean on this. What have these crystals got that avoids the trouble which crops up in the magnetics? It is possible that the difference is not electrical. Keep in mind that this new crystal is equalized definitely to the LP curve up to 10,000 and continues on out "to 12,000."


Could there be some subtle mechanical factor or factors that have been overlooked in the designing of the magnetic LP cartridges and in the setting up of arm-and-cartridge combinations? It is notable that whereas engineers using magnetic LP cartridges invariably use the long and bulky professional-type arms, CBS crystal LP-playing equipment just as invariably employs smaller and shorter arms. The demands of home players could not, I'd say, entirely account for this. It is already obvious enough to me that there is a lot more tracking trouble with the fancy long-arm set-ups than with the very short and light arms used for crystals. Passages that will not track on an expensive long arm (blame the record!) will track with no trouble at all on the Astatic FL short arm. These are factors. What else? I leave that to you to suggest, since I am fast getting out of my depth in this area.

* * *

So there you have it—as fine an example of inconclusive writing as this magazine has so far sported. My conclusion is mainly that there are things that need explaining, and my intention is to stir up comment and perhaps argument so that in the end they will be explained to everyone's satisfaction. I want to know what causes the unpleasant distortions I have heard from magnetic LP pickups. I want to know why a few LP's are astonishingly free from them, played on identical equipment—especially since CBS

WHY CHOOSE FAIRCHILD FOR TOP PERFORMANCE

Each month you read equipment specifications in the advertising pages of your favorite magazines. Specifications are fine things, but often difficult to interpret in terms of *what the equipment will do for you.* For example, suppose we say that **Fairchild Disk Recorders and Transcription Turntables** have a time accuracy of 1 part in 4.6×10^6 at 33⅓ rpm; an instantaneous speed deviation of .075%; a noise level of such and such decibels below some stylus velocity at so many cps. Impressive? Sure. And factual, too. But what you want to know is . . . what effect do these specs have on your operations. What is the performance, after the specifications are paid for? Here are the data on Fairchild Recording and Playback equipment, in facts and effects.



Precision Turntable Drive.
Used in all Fairchild Disk Equipment.


FEATURE	FAIRCHILD EQUIPMENT	OTHER DESIGNS
Type of Drive and Resultant Speed Regulation	Direct to center—gear. Absolute synchronism for use with sound-on-film and on the nose programming. Accurate within .00026 seconds in 20 minute play period at 33⅓ rpm.	Rim drive—puck or pulley. Usual accuracy—6 seconds in 20 minute play period (.5% speed regulation). Does not permit rigid synchronization nor on the nose programming.
Possible time error—record and playback (20 minute disk)	± .00052 seconds	± 12 seconds (based on above)
Instantaneous speed deviation and Effect on audible signal	less than .075% None	approximately .125% *Wow* usually evident at this figure
Noise and Rumble	Experienced users of Fairchild Equipment claim dynamic range of 62 db.	Dynamic range limited by noise and rumble when wide tolerances are permitted in machining.
Control of cutting pitch (lines per inch)	Studio model: turn knob for *continuous* and *instantaneous* pitch change from 80 to over 500 lines per inch. Can be varied at will during the recording. Portable model: insert small gear—no disassembly required—only one feed screw for all pitches.	Portable and Studio models: disassemble lathe mechanism—change feed screw—reassemble lathe mechanism. Or, change pulley ratios.
Overhead cutter assembly	Secured as integral part of turntable deck. Always in positive alignment.	Lift or swing into position. Possibility of cutter misalignment—causing varying depth of cut and incorrect groove shape.
Portable model	Actually a console model in a portable case. Same performance on location as in the studio.	Sacrifices in mechanical design to gain portability further exaggerate inferior performance.
Maintenance	Periodic lubrication of drive mechanism. Always at peak performance—no headache for the owner and operator.	Lubrication, and frequent replacement of puck and pulleys. Continued adjustment necessary to keep speed of turntable up to specifications.

Fairchild specializes in LIP SYNCHRONOUS recording and playback equipment for SOUND-ON-FILM, TV PRODUCTIONS, and all such installations requiring laboratory standard performance. Write for full details.

Fairchild
RECORDING EQUIPMENT CORPORATION
154TH ST. AND 7TH AVE. WHITESTONE, L. I., N. Y.

www.americanradiohistory.com

FEEDBACK CUTTERS

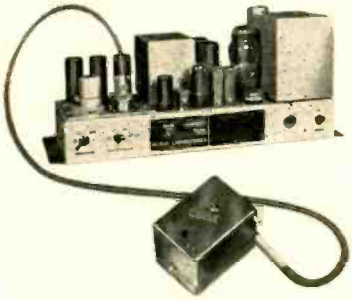

The 5-B

- Competitively priced but without a competitor in its field.
- The 5-B uses the full feedback circuit of the larger model.
- It is capable of tremendous output level.
- Completely stable
- Maintenance free

only $465.00 net

Complete with cutter

The 3-B

For the highest possible quality regardless of price — with response through 20,000 cycles. Cross-modulation under 1% all the way to 20,000 cycles. For those who can't afford to fool around with quality.

Write or wire for detailed information

$1150.00 net

COMPLETE




COOK LABORATORIES • • • 139 Gordon Blvd. • • • Floral Park, N. Y.

Model S-20

- 20 watts
- 20 - 20,000 cycles
- 1% distortion
- Loudness control
- Individual bass and treble controls
- Variable treble cutoff for phonograph noise reduction

$99.95 net

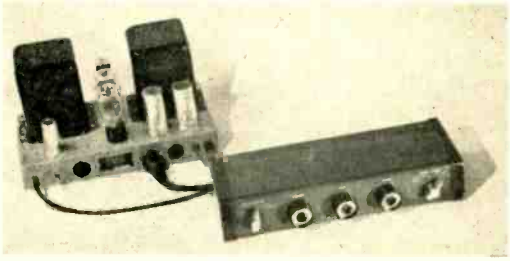

See them at the Audio Fair, Room 635, or ask your local dealer.



Model P-3 Preamplifier

40 db gain
Supplied for flat response or phono equalization

$14.95 net

Model C-3 Control Unit



- 20 db bass & treble controls
- Loudness control
- Insertion Loss 20 db

$14.95 net

THE ELECTRONIC WORKSHOP, Inc.

351 Bleeker Street WA 4-6530 New York 14, N. Y.

Address Changes . . .

Subscribers to AUDIO ENGINEERING should notify our Circulation Dept. at least 5 weeks in advance regarding any change in address. The Post Office Dept. does not forward magazines sent to a wrong address unless you pay additional postage. We can not duplicate copies sent to your old address. Old and new addresses MUST be given.

AUDIO ENGINEERING
342 Madison Ave. New York 17, N. Y.

is not admitting any difference between those that sound good to me and those that don't. I want to know why the CBS-designed crystal LP cartridges do not show up this distortion, why the LP records seem so much less temperamental as played thus crystal-wise. Just what has CBS got there, and why can't the magnetics do the same?

Comments of any sort are invited from interested parties, especially accounts of your experiences with LP's and your explanation of same, all in the interest of good, clean fun. We all, naturally, beg the indulgence of Columbia Records, Inc., as the largest producer of the LP type of disc and hence automatically the butt of our inquiry. Since in these matters Columbia, advocating crystal, seems to stand against many professionals who advocate magnetic, I suggest you experiment with the new crystals yourself. Approved cartridges to date are the LP-33, now being withdrawn, and its successor the model U-J; the small standard-mounting CQ-J, just now becoming available; the C-AC, to come later, all designed under CBS supervision. Other crystals may or may not give comparable results.

LP records that are strikingly free of the buzzy-style distortion—at least as I hear 'em on magnetic cartridges—are:

Beethoven, Symphony #1 (Bruno Walter)
Rimsky-Korsakov, "Scheherezade."
Enesco, Roumanian Rhapsody #1.
Hindemith, Metamorphoses on Themes of Weber.
Saint-Saens, Symphony #3, with Organ.
Walton-Sitwell, "Facade."

As for me—I'm playing my LP's on magnetics, at home. But my FM-AM New York broadcast of LP's weekly will be done exclusively via crystals. Fair test.

Schubert, "Trout" Quintet in A, opus 114
Franz Rupp, piano; Stross Quartet.
Capitol EDL 8019 (4)

• This recording, on 78 and 45 but not so far scheduled for LP, is not only one of the most delightful of all Schubert's instrumental works, but it happens to be an excellent test recording for the bass range, since the quintet of instruments is one of the very few in all classical literature (maybe it's the only one?) that includes a string bass or "double-bass." The instrumentation is for piano, violin, viola, cello and bass. The bass here serves just as it does in a small jazz ensemble, to put body and depth into the music, to hit off the rhythm and the harmony, almost drum-wise. It is beautifully recorded, close-to and loud but never too loud. On a table phonograph it is completely inaudible (the overtone that ordinarily give us a sense of bass are here rather weak, and the notes are mostly too short for very much to register, anyway) but play these records with an extended range outfit and presto—the double-bass practically stands right up in front of you. A very nice check on low-frequency resonances, since this massive instrument plays its way all over the lower tonal range and with considerable power, at that.

Schubert has a very special piano technique that he used when that instrument was playing "ensemble"—that is, playing along with other instruments: he writes high octaves near the extreme top end of the

www.americanradiohistory.com

keyboard, and the sound is almost like a xylophone or marimba, a sort of bell-like melodic line. In the "Trout" Quintet this highly ornamental piano writing is set off particularly nicely by the fat and tubby sound of the double bass at the other frequency extreme.

The title is explained by the 4th movement, a set of variations on the melody of one of Schubert's best known songs, "the Trout."

Stravinsky, Concerto for Two Pianos
Vronsky and Babin, duo-pianists.
Columbia MM 837 (3)
LP: ML 157

Stravinsky, Suite Italienne ("Pulcinella")
Raya Garbousova, cello; Erich Itor Kahn, piano.
Concert Hall C5 (2)

• Two interesting Stravinsky items. The concerto is a major work and a difficult one for two pianos alone minus orchestra. It was issued last year in a Vox recording by Appelton and Field (with "program notes" by Canby); now it gets its second trial, on LP as well as 78, with another team (and Columbia has done me the honor of "borrowing" the substance of the Vox program notes for its description. Both versions are miracles of piano teamwork, for this is an incredibly difficult work, written as though the two instruments were one, the players a single four-handed superman. Both are flawless in the performance and convincingly tremendous in massive effect. But I like the Appleton-Field version better. It seems to me warmer, more musical, better phrased, and I think the music comes through in more easily digestible form, too. The advantages of LP, however, weigh on the other side. Both recordings are models of what two-piano recording can be, the Vox version a bit erratic but fundamentally excellent, the Columbia sharper and more "pingy" in the percussive passages, smoother in the over-all. If you like big, dissonant, brilliant piano noises and you have a big outfit that will take all you can feed it, maybe this concerto wouldn't be such a bad bet. Worth a try. It's potent music.

The "Pulcinella" suite is a strange and interesting hybrid. The original was for orchestra (1920), music for a ballet. The stuff has not one but two composers, nor do I mean one composer and one arranger. The ballet music was written by Stravinsky "after" Pergolesi (the brilliant young Italian composer of the early 1700's who wrote the famed Stabat Mater and the operetta "La Serva Padrone"), by which Stravinsky means that he wrote new and original music of his own that incorporated actual thematic material of Pergolesi and, even more, the "feeling" of the older music. It may be hard to figure this one out, but I can only suggest that, for an engineer, this is equivalent perhaps to the creation of a new electronic circuit in which certain basic and characteristic elements from an older one are made use of and given due credit. Engineers of course do it all the time, and so do musicians, but most musicians aren't as definite about it as Stravinsky, who has also written a ballet "after" Tchaikowsky. In such cases, as might be expected, one hears some of each composer—and if you think the mix-

Microphones BY TURNER



THE New
TURNER
MODEL 25X—25D
CRYSTAL OR DYNAMIC

PRACTICAL FOR ALL SOUND APPLICATIONS

If you need a microphone for studio or recording work, call system, public address, or amateur communications—you want a Turner Model 25X—25D. It's an all around unit for all around performance. You'll praise its smooth, wide range response and high output level. And you'll like the full 90 degree tilting head and convenient removable cable set. Finished in two tone umber gray with chrome plated grill or bright chrome at slight additional cost. Turner Engineers went all out in designing the 25X—25D. See it at your dealer.

Write for Complete Microphone Literature

THE TURNER COMPANY
929 17th Street N.E. Cedar Rapids, Iowa

IN CANADA
Canadian Marconi Co., Ltd.
Montreal, P. Q., and branches

EXPORT
Ad. Auriema, Inc.
89 Broad St., New York 4, N. Y.

25X CRYSTAL
52 db below 1 volt/dyne/sq.cm.
Flat from 50—9,000 c.p.s.
List price $27.50

25D DYNAMIC
54 db below 1 volt/dyne/sq.cm. at high impedance
Flat from 50—10,000 c.p.s.
30, 200, 500 ohms—wired for balanced line
List price $40.00
High impedance—wired single ended
List price $40.00

All models in bright chrome finish at $2.50 List additional.
Push-to-talk switch, $2.50 List additional.

TURNER

Licensed under U. S. patents of the American Telephone and Telegraph Company, and Western Electric Company, Incorporated. Crystals licensed under patents of the Brush Development Company.

www.americanradiohistory.com

AUDIO ENGINEERING

The Perfect Christmas Gift

All surveys prove that AUDIO ENGINEERING is preferred over all other technical magazines read by the best informed in the audio field, the broadcast, sound and reproducing engineers. Each issue brings you outstanding articles on five or more of the following subjects:

- Broadcasting
- Public Address
- Sound on Film
- Industrial sound equipment and applications
- Recording
- Acoustic treatment of studios, rooms, auditoriums, etc.
- Phono Reproduction

In addition, each month, AUDIO ENGINEERING presents latest improvements in sound reproducing equipment design, test methods, and technical news from here and abroad. The Editorial Staff includes top authorities in the sound field.

AUDIO ENGINEERING, the one and only publication devoted exclusively to the SOUND FIELD, has, since its inception in 1947, been acclaimed by its thousands of readers as well as the entire Audio Industry for its constantly superior editorial content. The standard of excellence set for feature articles and all departments will be more than maintained for 1950.

AUDIO ENGINEERING

Published by RADIO MAGAZINES, INC.
342 MADISON AVENUE
NEW YORK 17, N. Y.

www.americanradiohistory.com

ture of Stravinsky and Tchaikowsky sounds incredible (or S—Pergolesi), just listen to it. It works! (P.S.—See last month's review of Hindemith's 'Metamorphosis on Themes of Carl Maria von Weber"—same kind of thing—and note the unexpected results of the mixture of Hindemith and the early 19th century Weber.)

Brahms, Serenade #1 in D, opus 11
Concert Hall Society Orchestra, Swoboda.
Concert Hall C4 (4)

• If it didn't make good reading there wouldn't be much point in reviewing this for engineers, since it is available only to subscribers for the Limited Edition. Still, it's well for all of us to know what's going on, if only second-hand. This recording is for me the answer to a fifteen years' wish. For that long I've had a single record of two short movements from this rarely heard work and have wished all that time, some day, to hear the rest of it. This is its first complete recording as far as I know, and why it isn't played more often I cannot say, for if you like Brahms at all, this is bound to please. It's a very early work, and, as such, a product of genius, without question. The rich combination here of horns, woodwinds and strings is orchestra-like, yet with the fullness and nearness of a smaller group of virtuoso soloists; the music is equally rich, harmonically and melodically. Recording is excellent and on good vinylite. Concert Hall's usual (apparent) high turnover, big pre-emphasis in the highs. If you ever have access to it, try the third movement or the last.

Haydn, Symphony #94 ("Surprise")
Berlin Philharmonic, Schmidt-Isserfeldt.
Capitol ECL 8021 (3)
LP: P 8038

• This is perhaps the most familiar of all Haydn symphonies, but there has never been a performance like this one on records. Haydn is the so-called "father of the symphony"—by which is meant that this benign and wonderful man, one of the simplest and yet most profound minds in all of music, developed a type of music for a considerable ensemble of players from earlier styles that involved music for solo players with an occasional background framework for larger groups. "Considerable," however, indicates not the huge 100-piece symphony orchestra of later days, but a group of about 30 or 40 players at the most—plenty to make a big noise in a small hall for selected audiences. Most performances of Haydn today are done with a much larger orchestra and in a heavy-weight style, borrowed from later music, that only succeeds in making Haydn sound cute and silly. Especially on records, where as any engineer knows the bigger an orchestra is, the muddier the general effect, without of course the slightest gain in volume, since volume nowadays is a function of electrical "level," not of instrument power.

Moreover, because of the physical characteristics of musical instruments, a large orchestra has an utterly different balance from a small one. Strings can play together in large groups, hence your big orchestra has many more strings than your small one. But woodwinds, flutes, oboes, etc., do not blend well and must remain pretty much solo instruments. Hence, in the larger orchestra they are far weaker in proportion

AMPERITE
Studio Microphones at P.A. Prices



Ideal for BROADCASTING
• RECORDING
• PUBLIC ADDRESS

"The ultimate in microphone quality," says Evan Rushing, sound engineer of the Hotel New Yorker.

• Shout right into the new Amperite Microphone—or stand 2 feet away—reproduction is always perfect.
• The only type microphone that is not affected by any climatic conditions.
• Guaranteed to withstand more "knocking around" than any other type mike.

Special Offer: Write for Special Introductory Offer, and 4-page illustrated folder.


Models
RBLG—200 ohms
RBHG—Hi-imp.
List $42.00



"Kontak" Mikes
Model SKH, list $12.00
Model KKH, list $18.00

AMPERITE Company, Inc.
561 BROADWAY · NEW YORK 12, N. Y.
In Canada: Atlas Radio Corp., Ltd., 560 King St. W., Toronto

FM SIGNAL GENERATOR
MODEL 202-B
FREQUENCY RANGE
54 to 216 MEGACYCLES

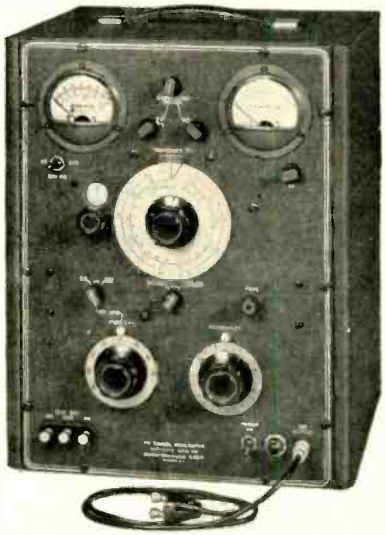

The model 202-B is specifically designed to meet the needs of television and FM engineers working in the frequency range from 54-216 mc. Following are some of the outstanding features of this instrument:

RF RANGES — 54-108, 108-216 mc. ±0.5% accuracy. Also covers 0.1 mc. to 25 mc. with accessory 203-B Univerter.
VERNIER DIAL — 24:1 gear ratio with main frequency dial.
FREQUENCY DEVIATION RANGES—0-24 kc., 0-80 kc., 0-240 kc.
AMPLITUDE MODULATION — Continuously variable 0-50%; calibrated at 30% and 50% points.
MODULATING OSCILLATOR—Eight internal modulating frequencies from 50 cycles to 15 kc. Available for FM or AM.
RF OUTPUT VOLTAGE — 0.2 volt to 0.1 microvolt. Output impedance 26.5 ohms.
FM DISTORTION—Less than 2% at 75 kc deviation.
SPURIOUS RF OUTPUT—All spurious RF voltages 30 db or more below fundamental.

Write for Catalog G-2

BOONTON RADIO Corporation
BOONTON · N·J · U·S·A ·
DESIGNERS AND MANUFACTURERS OF THE Q METER · QX CHECKER FREQUENCY MODULATED SIGNAL GENERATOR BEAT FREQUENCY GENERATOR AND OTHER DIRECT READING INSTRUMENTS

www.americanradiohistory.com

ELINCO OFFERS
Specially-Designed

MOTORS FOR AUDIO EQUIPMENT

Featuring

- SINGLE, DUAL, & THREE-SPEED HYSTERESIS SYNCHRONOUS MOTORS

DUAL SPEED IN FRAME SIZES FROM 2-1/4" TO 4-3/8" DIAMETER

RATINGS FROM 1/1200 to 1/20 H.P.

- TAKE-UP AND REWIND MOTORS FOR USE ON ALL TYPES OF REELS

AVAILABLE IN A WIDE VARIETY OF FRAME TYPES, SIZES, AND MOUNTINGS

SEE US AT ROOM 649 FOR ANNOUNCEMENT AND DEMONSTRATION OF THE *Newest Developments* IN HYSTERESIS MOTORS

Write for Bulletin No. 49A

ELECTRIC INDICATOR CO.
50 PARKER AVENUE
STAMFORD, CONNECTICUT

to the strings. Later writers, taking this into account, fix their music to match. But when Haydn (and Mozart) are played as written but with an over-sized orchestra, the woodwinds are lost in a huge mass of string tone, the balance thrown off. The larger mass of strings, too, simply cannot play the rapid, clean-cut notes originally designed for a small, close-working group of string players.

The Berlin Philharmonic recording of the "Surprise" is done with a small orchestra, and the players are almost soloists, as it should be. Nor is there any striving for "big" effects, no cuteness; the music is played accurately and seriously, and you'll find it a lot more powerful in effect than the numerous recordings made with "modern" orchestras.


Enesco, Roumanian Rhapsody #1
Liszt, Mephisto Waltz
New York Philharmonic. Rodzinski.
Columbia LP: ML 2057

• Here are two reissue jobs, one of which rates as the best LP of the month—the Roumanian Rhapsody. This (see article above) is one of those LP's that on my magnetic pickups comes through crystal-clean and without a buzz. As already stated, I am in a state of infinite confusion right now as to what this indicates. But whether all LP's or few sound good on your machine, I'm sure that this recording of a rather silly show piece will delight you with a top-ranking sound. Put it next to "Scheherezade" on your LP shelf. The Liszt (also inexplicably) is not as clean, not as clear, even though it involves the same orchestra, same conductor. It's OK, but not super.

Britten, Young Person's Guide to the Orchestra
Handel, Royal Fireworks Music (arr. Harty)
Columbia LP: ML 4197

• Aha! Here's that super test record that most engineers have long since discovered in its 78 version, complete on LP, and my report is that it's good on LP, too. You can have that famous pistol shot to your heart's content. I'd say that, somehow or other, the low-turnover, heavy-bottomed characteristic of the English records has been preserved in the LP. (Does Columbia try to equalize for the known difference between English and U.S. recordings?) The highs here are fairly modest in strength as compared to some domestic Columbia LP's, but the stuff is there all right. There is some noticeable change in quality (so I detect, at least) between beginnings and ends of the 78 rpm sides, especially when a side ends loud.

The Handel "Fireworks" supersedes the famous album played with Harty himself conducting (Columbia X 51). That album still is tops musically, but this is a fair approximation in the playing. As an LP this is fairly clean, but the loud strings are just a bit mealy. (A kind of unclarity that might, I'd hazard a guess, be a matter of resonances in the cutting assembly, or intermodulation of some sort; it's a sound that's very familiar on older records, as some would put it, a "phonograph" sound as distinguished from the clean sound of natural strings. Very slight here.)

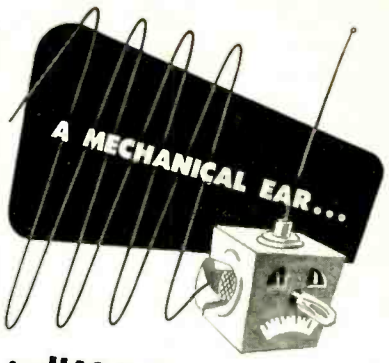

...HAS NO APPRECIATION OF TONE...

It is possible to produce amplifiers that measure up to the most rigid requirements and tolerances of a "mechanical ear"... amplifiers that show perfect laboratory measurements, BUT may, despite their mechanical and technical perfection fall short of providing enjoyable "listening-quality."

When you buy a phonograph amplifier you buy one thing . . . listening quality. That elusive characteristic which, after all, is any amplifier's prime reason for being.

Newcomb amplifiers must not only measure up to the highest standards electrically . . . but in addition are subjected to critical "listening quality" tests by trained experts. That is why Newcomb amplifiers provide more real listening pleasure.



Insist upon hearing a Newcomb. Compare the listening quality of Model KXLP30 from the standpoint of *enjoyment* with that of any other amplifier. Your ear will readily hear the pure natural quality and true character of each deep bass note. Now, listen to the clear, undistorted, brilliant, high tones with their remarkable freedom from surface noise made possible by Newcomb's exclusive MAGIC RED KNOB. A comparison will convince you that Newcomb Sound is without question the closest you can get to "Live Music" quality.

Newcomb Phonograph Amplifiers from $59.50




Newcomb

AUDIO PRODUCTS CO.
6824 Lexington Avenue, Hollywood 38, Calif.


www.americanradiohistory.com

NEW PRODUCTS

• **The Polyphase Reproducer**—a high-quality magnetic unit that solves the problem of playing the various types of discs now in use—has just been an-

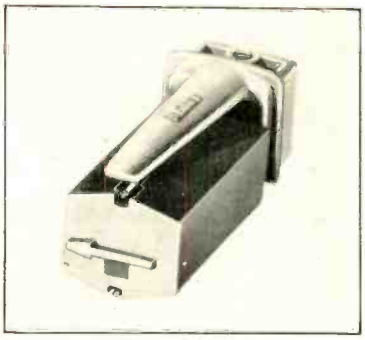

nounced by Audak Company, 500 Fifth Avenue, New York 18. It permits ten different combinations of removable styli, is easily mounted on most arms, and has excellent "ear-quality." The Polyphase provides wide-range performance at exceptionally low cost.

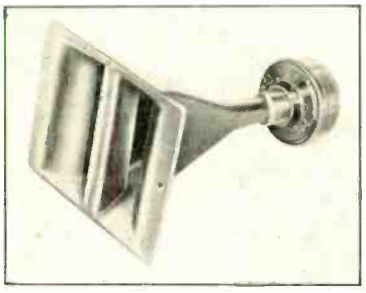

• **A new tweeter,** of aluminum, has been introduced by University Loudspeakers, Inc., 80 S. Kensico Ave., White Plains, N. Y. This model is designed for 600-cps crossover, and may be had for either 20- or 40- watt systems. The coverage extends to 80 deg. horizontally, and makes possible the economical assembly of a two-way speaker system. Further information may be obtained from the manufacturer.



• **Audiotape**—heretofore available only with paper base—may now be had with plastic base, thus making the line complete with all types of magnetic recording tape. Two coatings are being offered, both the high-coercive black oxide and the medium-coercive red oxide, and both may be had on either paper or plastic. New low prices on the entire line of Audiotape will be furnished by Audio Devices, Inc., 444 Madison Ave., New York 22, N. Y.

An EASY and ACCURATE Way to Measure Audio Frequency Voltages



Ballantine Model 300
SENSITIVE ELECTRONIC VOLTMETER
Featuring a Logarithmic Voltage Scale and Uniform Decibel Scale

● Designed for the measurement of AC Voltages from .001 Volt to 100 Volts over a frequency range of 10 to 150,000 cycles. ● Accuracy of readings is ±2% at any point on the scale. ● Very stable calibration—unaffected by changes in line voltage, tubes or circuit constants. ● Range switching in decade steps—easy to use—only ONE scale to read. ● Output jack and output control provided so that Voltmeter can be used as a high-gain (70 DB) high-fidelity amplifier. ● Accessories available to extend readings up to 10,000 Volts and down to 10 microvolts. ● Precision Shunt Resistors convert Model 300 Voltmeter to very sensitive direct-reading milliammeter. ● Write for complete data.

PRICE $200.00

BALLANTINE LABORATORIES, INC.
BOONTON N. J. · U. S. A.

In addition to the Model 300 Voltmeter, Ballantine Laboratories also manufacture Battery Operated Electronic Voltmeters, R. F. Electronic Voltmeters, Peak to Peak Electronic Voltmeters, and the following accessories—Decade Amplifiers, Multipliers, Precision Shunt Resistors, etc.

www.americanradiohistory.com


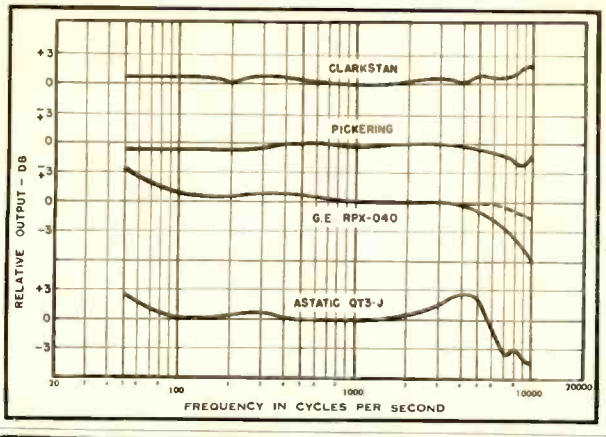


Fig. 7. Equalized response characteristic of popular pickups.

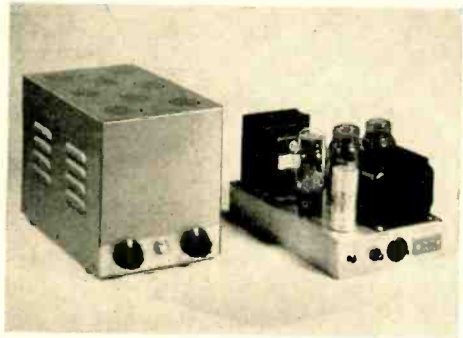

FULL POWER ALL the way with the new MODEL 2 AMPLIFIER

7 x 11 x 8 hi WT. 17½ LBS.

SPECIFICATIONS:

POWER: Rated 20 watts actual power measured 19.6 watts @ ½% total harmonic distortion from 30 cycles thru 15 kc.
FEEDBACK: over 20 db
RESPONSE: Flat within one db 15 cycles to 100 kc.
INPUT: 1 volt level
OUTPUT: 8 to 20 ohms

$60 professional NET

audio pacific co.


30 w. colorado st.
pasadena 1, calif.

The DUAL-HORN Corner Reproducer

by Brociner

"Generally recognized by speaker critics as the STANDARD by which other . . . . speakers . . . . are judged," says a leading consumer organization.

Utilizing the corner of the room as an integral part of the acoustic system, the Dual-Horn Corner Reproducer uses a horn for the bass tones in addition to one for the upper register. True fundamentals down to 30 cycles are reproduced in their original beauty, without distortion or "boominess."



NEW Attractive, more compact, cabinets
Improved driver units.
Lower Prices.

30 to 15,000 CYCLES
with negligible distortion.

Consultation Service and Complete Custom Installations.

BROCINER ELECTRONICS LABORATORY
1546 SECOND AVENUE • NEW YORK 28, N. Y.

PREAMPLIFIER DESIGN

[from page 17]

ful selection and handling would be necessary with standard resistors in this position, so special low-noise English resistors now being made available in this country are used instead.

Pickup Response

This design has led to some related research on the matter of pickup response and comparison, which seems to be of considerable interest. Since both the Pickering and Clarkstan cartridges are guaranteed to be flat within 2 db (once the roll-off resistor is removed from the Clarkstan) it was considered safe to assume the mean between the two as essentially flat response.

On this basis the curve of *Fig.* 6 was determined for the Columbia 10003-M test record. This indicates a significant drop in the high frequencies over the published characteristic, and this drop is confirmed by the light pattern of the record.

The comparative curves of *Fig.* . were plotted for the Clarkstan, G.E. RPX-040, and the Pickering, as well as the Astatic QT-3J.

Performance of the G. E. is very critical with respect to loading, both resistive and capacitive. The curve of *Fig.* 7 was run with a load of 0.5 megohm and 500 $\mu\mu$f. Loading of the order of 0.1 megohm may cause the response to be down 3 db at about 7500 cps. Where the plug-in preamp. is to be used with G. E. cartridges, the input resistor should be raised to 0.5 a megohm.

The QT-3J, although a crystal, shows relatively little distortion, and is comparable to the magnetic cartridges in this respect, although, as might be expected from the curve, its transient performance is not as good. It has not received the attention it deserves,

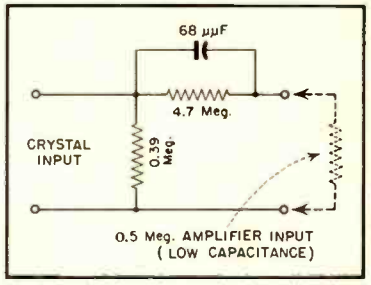


Fig. 8. Equalizer for QT3-J cartridge to give response of *Fig.* 7

www.americanradiohistory.com

however, largely because few people have taken the trouble to equalize it properly. *Figure* 8 shows the equalizer used to obtain the curve for the QT-3J in *Fig.* 7. This may be built into an octal base and substituted for the plug-in preamplifier when desired.

BIOGRAPHY

1 "Versatile Phonograph Preamplifier," Paul W. St. George and Benjamin B. Drisko, AUDIO ENGINEERING, March, 1949.
2 "Flexible Dual Control System," Howard T. Sterling. AUDIO ENGINEERING, Feb. 1949.
3 "Feedback Preamplifier For Magnetic Pickups," Richard S. Burwen, AUDIO ENGINEERING, February, 1948.

TRANSFORMER APPLICATIONS

[*from page 21*]

der how to determine the impedance values between taps, and the impedance of unequal windings in series. This would be a simple matter were the actual number of turns known, but this is usually not the case.

There are two methods by which the impedances that are available from a given transformer may be determined. If an audio oscillator and a vacuum-tube voltmeter are available, the turns ratio may be measured directly. Apply a known voltage from the oscillator to one winding and measure the voltage with the high-impedance vacuum-tube voltmeter at the desired terminals, as in *Fig.* 2. The impedance ratio is then the square of the voltage ratio.


By measuring and recording the values at various taps, a convenient set of data on that particular unit may be obtained.

With output transformers, a rough check may even be made using only a multirange rectifier-type meter with 1000-ohm-per-volt sensitivity and the regular 117-volt 60-cps line, as shown in *Fig.* 3. This method is not recommended for input transformers because of the load presented by the voltmeter.

If the impedance values are known at several taps or of separate windings, a simple calculation may give the desired answer more quickly. A few formulas have been derived which are fairly easy to remember, and values are obtained without reference to the primary impedance. To illustrate this, the following simplified derivation is presented. Note that the primary im-

CLARKSTAN CORPORATION
MANUFACTURERS OF FINE ELECTRONICS & INDUSTRIAL EQUIP.

THE ARM WITH A HAND

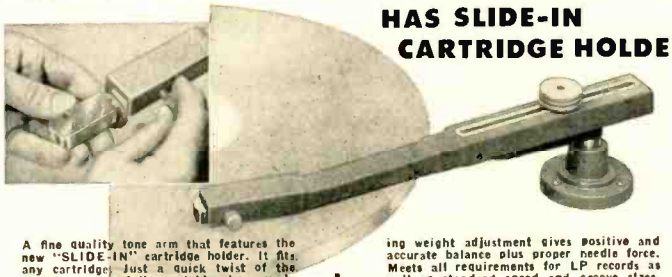


HAS SLIDE-IN CARTRIDGE HOLDER

A fine quality tone arm that features the new "SLIDE-IN" cartridge holder. It fits any cartridge. Just a quick twist of the thumb screw and the cartridge is securely held in place. No need for soldering. Silver plated spring loaded plungers maintain positive electrical contact. The quick acting weight adjustment gives positive and accurate balance plus proper needle force. Meets all requirements for LP records as well as standard speed and groove sizes. Arm made in two sizes, for records up to 12" and also up to 17". See your jobber or write for Bulletin No. 122.

STEADY STATE FREQUENCY RECORDS




Clarkstan now offers three new test records which for the first time conform to exact specifications, permitting the user to work in known quantities. The reproduction of these fine test records involves no polishing and employs the very latest techniques which insures exact duplication of the original recordings in each pressing. Complete specifications of the original recordings are furnished. See your jobber or write for Bulletin No. 181D.



CLARKSTAN RV WIDE RANGE PICKUP WITH EASILY REMOVABLE STYLUS

This wide range variable reluctance pickup meets the requirements of discerning users and FM specifications. Removable and interchangeable styli available with various tip radii for all types records. LP microgroove, etc. See your jobber or write for Bulletin No. 141D.



RECORDING MICROSCOPE

Groove analyzer microscope for inspecting surface qualities of all types of disc recordings and pressings. Built-in light source is optimum for observing groove walls, width, depth of cut, etc. Has magnification of either 20x or 40X plus excellent resolving power and light efficiency. Reticle assists in making direct comparison measurements. Valuable for record manufacture, Recording studios, technicians. Moderately priced at $22.50. See your jobber or write for Bulletin No. 231E.



CLARKSTAN EQUALIZER

Designed to work with the Clarkstan RV Pickup and other high impedance variable reluctance cartridges, this low cost equalizer includes the four most useful curves for broadcasters and owners of fine high-quality equipment. It offers playback equalization for all modern records including LP microgroove. Has a four position selector switch for standard curves. Mounts on panel with a 3/4" diameter center hole, for a neat installation. See your jobber or write for Bulletin 165D.

SEE YOUR JOBBER TODAY

CLARKSTAN CORPORATION
11927 W. Pico Blvd.
Los Angeles 34, Cal.

SEE YOUR JOBBER TODAY

www.americanradiohistory.com

pedance is used as a common factor, and subsequently drops out.

Assume a transformer having three windings, p, a, and b, corresponding voltages E_p, E_a, and E_b, and impedances Z_p, Z_a, and Z_b, with the arrangement shown in *Fig.* 4. It is desired to derive an equation for Z_c representing Z_a and Z_b wired in series, observing "aiding" polarities.

$$E_a/E_p = \sqrt{Z_a/Z_p}$$

$$E_a = Z_p\sqrt{Z_a/Z_p}$$

$$= E_p\sqrt{Z_a} \,/\, \sqrt{Z_p}$$

Similarly

$$E_b = E_p\sqrt{Z_b} \,/\, \sqrt{Z_p}$$

and

$$E_c = E_p\sqrt{Z_c} \,/\, \sqrt{Z_p}$$

$$E_c^2 = E_p^2\, Z_c \,/\, Z_p$$

$$Z_c = E_c^2\, Z_p \,/\, E_p^2$$

Now

$$E_c = E_a + E_b$$

$$= E_p\,(\sqrt{Z_a} + \sqrt{Z_b}) \,/\, Z_p$$

From above

$$Z_c = E_c^2 + Z_p \,/\, E_p^2$$

Substituting and solving

$$Z_c = (\sqrt{Z_a} + \sqrt{Z_b})^2$$

$$Z_c = Z_a + Z_b + 2\sqrt{Z_a\, Z_b} \qquad (1)$$

Similar derivation for the value between taps of a winding as shown in the diagram of *Fig.* 5 yields the following formula:

$$Z_c = Z_a + Z_b - 2\sqrt{Z_a\, Z_b} \qquad (2)$$

These formulas have been of great use to the writer and it is hoped that they may serve the reader equally well.

The following examples are given to illustrate their application:

1. An amplifier has to be matched to a 600-ohm load. The output transformer has a 500-ohm winding and a winding tapped at 2, 4, 6 and 8 ohms. The 500-ohm winding in series with the 4-ohm section will give, using formula (*1*):

$$Z_c = 500 + 4 + 2\sqrt{500 \times 4}$$

$$= 504 + 2\sqrt{2000}$$

$$= 504 + 89.44 = 593.44 \text{ ohms}$$

The 6-ohm section together with the 500-ohm winding will yield:

$$Z_c = 500 + 6 + 2\sqrt{500 \times 6}$$

$$= 506 + 2\sqrt{3000}$$

$$= 506 + 109.6 = 615.6 \text{ ohms}$$

The 4-ohm section apparently would be the better choice.

2. The 20-ohm dynamic microphone has to be matched to an amplifier while the input transformer has two tapped windings as shown in *Fig.* 6. The known values would result in considerable mismatch and the value of the unknown section is investigated:

$$Z_c = 125 + 50 - 2\sqrt{50 \times 125}$$

$$= 175 - 2\sqrt{6250}$$

$$= 175 - 158 = 17 \text{ ohms}$$

This match is obviously closer than would be possible using only the known values and best results are obtained by using both Z_c sections in parallel.


In closing, the writer wishes to call attention to the fact that two equal impedances in series will give a value four times that of the single winding and that one half of a winding presents an impedance of one-fourth of the total winding.

PROCTOR SOUNDEX

FLOATING DISC DRIVE
Multi-Speed Turntable
33-1/3 - 45 - 78
or any other speed from
30-110 RPM.



THE MUCH TALKED ABOUT
SOUNDEX STUDIO ARM
WITH NEW
AUDAX POLYPHASE
or any other cartridge
of your choice

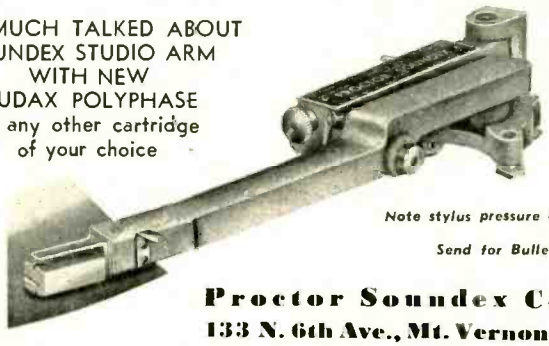

Note stylus pressure control.

Send for Bulletin

Proctor Soundex Corp.
133 N. 6th Ave., Mt. Vernon, N.Y.

STATEMENT OF THE OWNERSHIP, MANAGEMENT, CIRCULATION, ETC., REQUIRED BY THE ACT OF CONGRESS OF AUGUST 24, 1912, AS AMENDED BY THE ACTS OF MARCH 3, 1933, AND JULY 2, 1946.

of AUDIO ENGINEERING, published monthly at New York, N. Y., for October 1, 1949.

State of New York ss.:
County of New York

Before me, a Notary Public in and for the State and county aforesaid, personally appeared Dorothy S. Potts, who, having been duly sworn according to law, deposes and says that she is the publisher of AUDIO ENGINEERING, and that the following is, to the best of her knowledge and belief, a true statement of the ownership, management, etc., of the aforesaid publication for the date shown in the above caption, required by the Act of August 24, 1912, as amended by the Act of March 3, 1933 and July 2, 1946 embodied in section 537, Postal Laws and Regulations, to wit:

1. That the names and addresses of the publisher, editor, managing editor and business manager are: Publisher: Dorothy S. Potts, 1737 York Avenue, New York 28, N. Y.; Editor: Charles G. McProud, 7 Peter Cooper Road, New York 10, N. Y.: Managing Editor: None: Business Manager: Sanford L. Cahn, Westmoreland Gardens, Little Neck, N. Y.

2. That the owners are: Radio Magazines, Inc., 342 Madison Ave., New York 17, N. Y.; Dorothy S. Potts, 1737 York Avenue, New York 28, N. Y.

3. That the known bondholders, mortgagees, and other security holders owning or holding 1 per cent or more of total amount of bonds, mortgages, or other securities, are: None.

4. That the two paragraphs next above, giving the names of the owners, stockholders and security holders, if any, contain not only the list of stockholders or security holders as they appear upon the books of the company, but also, in cases where the stockholder or security holder appears upon the books of the company as trustee or in any other fiduciary relation, the name of the person or corporation for whom such trustee is acting, is given; also that the said two paragraphs contain statements embracing affiant's full knowledge and belief as to the circumstances and conditions under which stockholders and security holders who do not appear upon the books of the company as trustees, hold stock, and securities in a capacity other than that of a bona fide owner; and this affiant has no reason to believe that any other person, association, or corporation has any interest direct or indirect in the said stock, bonds, or other securities than as so stated by him.

(Signed) DOROTHY S. POTTS, Publisher.

Sworn to and subscribed before me, this 7th day of september, 1949.

(Seal). HARRY N. REIZES. Notary Public.

State of New York. No. 24-3249550, Qualified in Kings County. Certs filed with Kings & N. Y. Co. Clk. Off. & Kings Co. Reg. Off. Commission expires March 30, 1951.

www.americanradiohistory.com

Techni-Briefs

Tweeter Amplifier

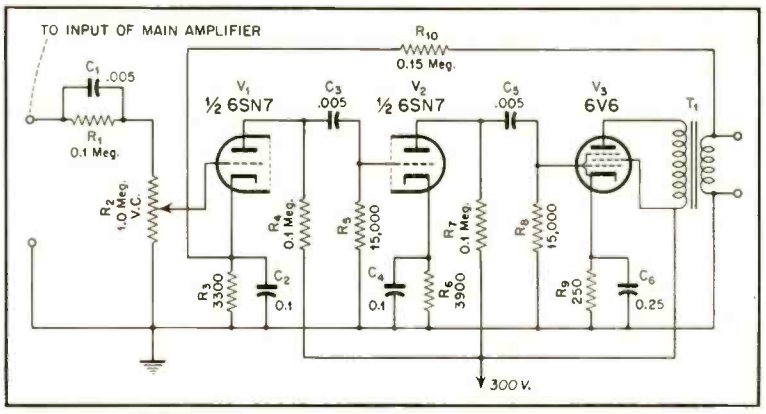


Fig. 1

At first consideration, the idea of building a separate amplifier to operate a tweeter may seem like a lot of trouble to achieve results that can be attained adequately by the use of cross-over networks. However, there are several advantages to the use of this system that may be worth taking advantage of. One, strangely enough, is its economy. The parts that are required for this amplifier can be purchased for less than ten dollars, whereas a coaxial speaker will cost from two to fifteen times that amount.

The amplifier, *Fig.* 1, is straightforward and easy to construct. The *RC* coupling is designed to filter frequencies below 10,000 cps, and although some lower harmonics are present, they are not noticeable except at a much higher gain than would ever be necessary in operation. Practically any output transformer designed for single-ended 6V6 operation will serve, the secondary impedance being uncritical at the frequencies amplified. With a nylon or multicellular tweeter it will be found that the amplifier is highly efficient, since the rigid tweeter diaphragm is not loaded down with unwanted lows. Another advantage of this system is that the cross-over is at the input stage rather than at the power output, and few of the usual problems of cross-over networks are present.

The subjective effect is quite interesting. When a live FM program is being amplified, a turn of five or ten degrees on the tweeter-amplifier gain control will give an edge and a clarity to the sound which may not have been missed previously, but that is appreciated when it is heard. If the main amplifier is then turned off, it will be found that the output from the tweeter that caused a marked change in timbre is scarcely audible by itself.

David Hancock
510 Lexington Ave.
New York

Amplifier designed by
Peter Hancock,
Federal Telephone and Radio.

For the High Fidelity Enthusiast!
The Full Range SUPER COSPIRAL

Model 102FR—Full 20 watts of power handling capacity. Seamless, molded, curvilinear cone of advanced design with the **unusually low resonance of 45 cps.** Two acoustic sections, one for reproducing low fundamental bass tones, and one for the most extended high tones. The reproducing range is 30 to 14,000 cycles, flat ±5 db from 50 to 9500 cps; utilizes 4.2 lbs. of the new super powerful Alnico V **orange streak** magnet material, which is 10% more efficient than regular Alnico V. This new production has a more extended range and greater electro-acoustic transfer efficiency than its famous predecessor, the Model P-52FR TRU-SONIC Cospiral unit. The unique Silver Spiral differential diffuser, is employed with over 90° of high frequency dispersion. This unit is designed for outputs of from 8 to 16 ohms nominal impedance. Depth behind mounting panel, 8½"; Overall diameter, 15⅛"; Net weight, 25 lbs.



YOUR COST
$54.00
Order From Your Distributor

SPECIAL } **800-Cycle 2-way System**
(Available only on direct order from the factory)


LF DRIVER


HF DRIVER


2 x 4 HORN

PLUS FIELD SUPPLY AND CROSSOVER NETWORK

The 2 x 4, 8-cell 800-cycle cutoff horn and electro-dynamic High Frequency Driver Unit, shown above, were originally manufactured by STEPHENS for the Magnavox Company. A small excess of these items on hand is offered at a tremendous saving! Combined with the electro-dynamic Low Frequency Driver shown above, and with the STEPHENS Model FS-3 Power Supply and special 800-cycle full m derived ½ section crossover network, these components represent the buy of a lifetime for the high fidelity enthusiast.

ALL FOR $89.50

High Frequency Driver and Horn ..... **ONLY $29.50**
(150 ohm field, 250 ma, 16 ohm voice coil)

—with #50161M crossover **$47.50**

GUARANTEE

All items carry STEPHENS Serial numbers, and the standard factory guarantee when purchased as a complete package. No warranty applies on the horn and high frequency driver unless purchased with the cross-over unit described above, insuring proper crossover point and low frequency attenuation.

Order these special units direct from the factory by sending 50% deposit with your order. Balance will be shipped to you C.O.D., F.O.B., Los Angeles.

STEPHENS
Manufacturing Corporation TRU SONIC **8538 Warner Dr., Culver City, Calif.**

www.americanradiohistory.com

for service
with the speed
of sound...

NEWARK

for everything in sound, electronics,
radio and television equipment
at DEALER LOW PRICES!

WHAT DO YOU NEED?

The most complete stock of equipment . . . from the most minute part to the largest installation . . . ready for instant delivery from our THREE HUGE STORES AND WAREHOUSES!

EXCLUSIVE

First Time in America!

See the Famous English

WHARFEDALE SPEAKERS

With Cloth Suspension Cone

at the New York

AUDIO FAIR

Room 602



FREE!

A 1c POSTCARD WITH YOUR NAME & ADDRESS to Dept. AE will bring you NEWARK'S great new 1950 SOUND CATALOG supplement!

MAIL, WIRE & PHONE ORDERS FILLED AT ONCE! NEW LOW CREDIT TERMS: 10% DOWN...UP TO A YEAR TO PAY

. . . only 6% carrying charge — no more!

3 GREAT STORES! Uptown at 115 W. 45th St. Downtown at 212 Fulton St. in NEW YORK 323 W. Madison St. in the heart of CHICAGO

NEWARK RADIO & TELEVISION

NEWARK ELECTRIC CO., INC.

MAIL NOW!

Dept. AE

NEWARK ELEC. CO., 242 W. 55th St., N. Y. C.
Please send FREE 1950 Newark Catalog to:

Name_____

Address_____

City_____ State_____

AUDIO FREQUENCY MEASUREMENTS

[from page 19]

sults of acoustical measurements with such a meter would of necessity require supplementary data for coordination with previous results of flat resonse measurements of the electrical noise in amplifiers intended as components of an electro-acoustical system. However, generally available data correlated with weighted electrical measurements made on amplifying systems do not appear to exist in sufficient volume to warrant abandonment at the present time of the existing use of flat weighting for electrical noise measurements on the audio systems under discussion. This decision is an expedient and is subject to review in the light of more adequate information which may become available later.

As noted above, the Committee on Audio Facilities has specified that the noise measuring device have the ballistic characteristics of a standard VU meter but that it read the rms value of a steady complex wave. Since the standard VU meter does not read this rms value, it is of interest to inquire what discrepancies would arise if a standard VU meter (with suitable gain) were used as the noise measuring device. This meter has a characteristic

$i = Ke^x$, where

i = numerical magnitude of instantaneous value of current fed to indicating instrument.

e = numerical magnitude of instantaneous value of input voltage.

$x = 1.2 \pm 0.2$

K = a constant

For an rms device, x = 2. With an rms device, if two equal-amplitude sine-waves of frequencies, not harmonically related, are fed to it, the output indication is 3 db greater than that for either sine-wave component alone. For the VU meter, tests indicate that the increase in this case is about 2.1 instead of 3 db. From the above formula it is seen that the VU meter rectifier does not differ greatly from a full-wave linear rectifier. Computations on the linear rectifier indicate that on a wave consisting of fundamental and 50 per cent third harmonic it would differ from the rms device by from —2 to +0.3 db, depending on the relative phase of the fundamental and harmonic, and that on a wave consisting of fundamental and 50 per cent high harmonics the linear device would read

PROFESSIONAL DIRECTORY

C. J. LeBel
AUDIO CONSULTANT
Sound Recording • Instrumentation
370 RIVERSIDE DRIVE
NEW YORK 25, N. Y.

Winston Wells
Designer and Consultant
Acoustical, Electronic and Nuclear Research
307 East 44th St. MU 4-3487
New York 17, N. Y.

Custom-Built Equipment
U. S. Recording Co.
1121 Vermont Ave., Washington 5, D. C.
STerling 3626

Consultation • Design • Fabrication
Audio Facilities Corporation
608 Fifth Avenue
New York 20, N. Y.

RATES FOR
PROFESSIONAL CARDS
IN THIS DIRECTORY
$10 Per Month.
Orders Are Accepted
for 12 Insertions Only

HERMAN LEWIS GORDON
Registered Patent Attorney
Patent Investigations and Opinions
Warner Building, Washington 4, D. C., NAtional 2497
100 Normandy Drive, Silver Spring, Md., SHepherd 2433

www.americanradiohistory.com

about 0.3 db below the rms device.[8] It seems likely that on ordinary steady noises found in audio systems the difference between a VU meter reading and an rms reading would not exceed about 1 db. For noises of markedly peaked wave shapes, the difference would be greater; but these are not ordinarily originated in audio facilities.

The Committee on Audio Facilities has not specified the frequency response of the noise measuring equipment above 15,000 cps. It would seem desirable that this response cut off frequencies above 15,000 cps, since the broadcast receiver and listener would ordinarily be insensitive to them. If measuring instruments of differing frequency response above 15,000 cps are used to measure a noise having components above 15,000 cps, different readings will be obtained, particularly if the equipment under test has a substantial frequency response above 15,000 cps. However, the difference between the readings of a standard volume indicator and an ordinary noise and distortion meter, contributed by the differences between their frequency-response characteristics, will usually amount to only a few tenths of a db, though in particular cases (e.g. where the apparatus under test picks up the field from a long-wave radio-telegraph station) larger differences may be found.

Noise Measurement Using a Distortion and Noise Meter

To make noise measurements with the distortion and noise meter of the general type already described its calibration is first adjusted so that it indicates 0 db with a test signal at a medium frequency such as 1000 cps after the input level is established at the normal or operating level. The gain and control settings of the equipment under test should again be the same as for previous measurements. The output of the equipment under test should be terminated by resistance equal to the rated load impedance. Noise measurement is then made by removing the input to the equipment under test and substituting a resistor equal to the rated input source impedance across the terminals. The resistor should be non-inductive and of a type, such as a wire-wound resistor, which will not in itself generate appreciable noise. In high-impedance, low-level circuits it may be necessary to shield it carefully to avoid hum pickup trouble.


If the noise set is substituted directly for the output meter M_2 of *Fig.* 2, the noise and distortion meter will indicate the number of decibels which the noise is below the level indicated by M_2. To obtain adequate meter deflection under

Floating Action!

for all TV Cameras

"BALANCED" TV TRIPOD

Pat. Pending

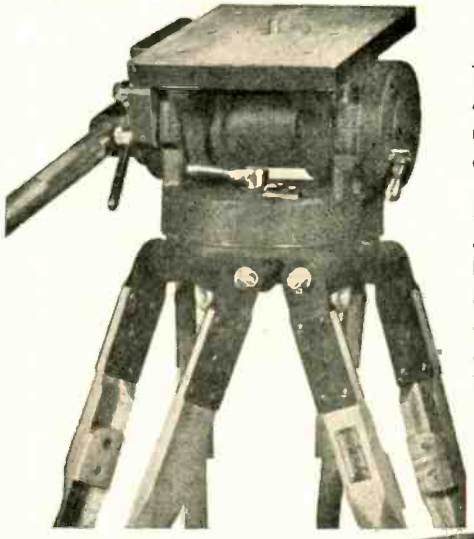

This tripod was engineered and designed expressly to meet all video camera requirements.

Previous concepts of gyro and friction type design have been discarded to achieve absolute balance, effortless operation, super-smooth tilt and pan action, dependability, ruggedness & efficiency.

Below: 3 wheel portable dolly with balanced TV Tripod mounted.

Complete 360° pan without ragged or jerky movement is accomplished with effortless control. It is impossible to get anything but perfectly smooth pan and tilt action with the "BALANCED" TV Tripod.

Quick-release pan handle adjustment locks into position desired by operator with no "play" between pan handle and tripod head. Tripod head mechanism is rustproof, completely enclosed, never requires adjustments, cleaning or lubrication. Built-in spirit level. Telescoping extension pan handle.

Write for further particulars



FRANK C. ZUCKER
CAMERA EQUIPMENT CO.
1600 BROADWAY NEW YORK CITY

NEED BACK ISSUES?

Only a few are available and the supply is limited

☐ August 1948
☐ September 1948
☐ November 1948
☐ December 1948
☐ March 1949
☐ May 1949
☐ June 1949
☐ August 1949

1948 issues **50c**
1949 issues **35c**

Payment should accompany order.

Circulation Dept., Audio Engineering, 342 Madison Ave., New York 17, N. Y.

www.americanradiohistory.com

Scientific Tests Show How To

PRESERVE YOUR RECORDS

And Get Superb Reproduction

DIAMOND STYLI

maintain a polished, rounded tip which minimizes wear on record grooves

AFTER 1000 PLAYS ON STANDARD-GROOVE RECORDS



Osmium Sapphire Diamond

AFTER ONLY 15 PLAYS ON MICRO-GROOVE RECORDS



Osmium Sapphire Diamond

The above photomicrographs (greatly enlarged) show the results of wear on stylus tips. Note the smooth, round, unchanged contours on the diamond styli. Compare them with the sharp chisel points worn on the sapphire and osmium tips. These sharp edges cut groove walls and destroy response.

Scientists find that diamond is 90 TIMES MORE RESISTANT TO WEAR AND 4-10 TIMES STRONGER than sapphire—the next-hardest material

Why subject the records you treasure to the ruinous grinding action of worn styli? You can preserve your collection—and save money too—by using a diamond stylus. It would cost at least $100 in sapphire stylus replacements to equal the durability and efficiency of one diamond stylus.

SPECIAL OFFER SAVES YOU MONEY

Remember that in many cases a stylus becomes worn—and causes damage—long before the defect is audible. It is far cheaper to replace your present stylus with a diamond than to have to replace or bear the loss of fine records. And you can now obtain a genuine diamond stylus—for standard or micro-groove records—at the LOWEST PRICE EVER OFFERED!

These are the finest styli available. The same styli are used by radio stations.

REPLACEMENTS CAN BE MADE ON NEARLY EVERY TYPE OF CARTRIDGE

ATTENTION G. E. CARTRIDGE OWNERS: Don't throw away your old model variable reluctance cartridge. The worn stylus can be replaced with diamond by our experts.

Here's how to get your diamond stylus replacement, which will pay for itself over and over. Just fill out the coupon below and mail it today. We will send you a special mailer in which you mail your cartridge or stylus assembly to us; we will replace with a new diamond stylus and return to you within a few days. If not completely satisfied after a 10 day trial, your money will be refunded.

Please Print

ANDREW'S RADIO COMPANY
441½ Warburton Ave., Yonkers 2, N. Y.

Enclosed is ☐ check ☐ money order for $14.95 for one diamond stylus replacement.
Make and model of cartridge .....
Stylus required ☐ for standard groove ☐ for micro-groove
Special radius sizes on request; no extra charge;
state size .....
Name .....
Street .....
City .....Zone...State.....

some conditions, it may be necessary to connect the distortion and noise meter directly to the output of the equipment under test. The meter will then indicate the noise level in decibels below the predetermined signal level at that point.

The frequency-response characteristic of the distortion and noise meter used may be a factor in obtaining comparative results particularly if a relatively flat response of the equipment under test is maintained appreciably beyond the audible frequency range as already mentioned.

Acknowledgments

The authors wish to ackowledge the assistance of Mr. W. F. Byers of the General Radio Company for his help in the preparation of a preliminary draft. In addition, thanks are due to those who offered constructive comments to this presentation in manuscript form and to the many persons who, over the years, have published results of their work and thus made this compilation possible. The footnote references and the appended bibliography are not intended to be all-inclusive but they do indicate some of the sources of information available which bear on the subject matter.

REFERENCES

[11] W. N. Tuttle—A Method of Measuring Directly the Distortion in Audio Frequency Amplifier Systems. *J. Soc. Mot. Pict. Eng.*, February 1932. Vol. 18, No. 2.

[12] H. H. Scott—Audible Audio Distortion. *Electronics*, January 1945.

[13] J. K. Hilliard—Distortion Tests by the Intermodulation Method. *Proc. IRE*, December 1941. Vol. 29, No. 12.

[14] J. G. Frayne and R. R. Scoville—Analysis and Measurement of Distortion in Variable Density Recording. *J. Soc. Mot. Pict. Eng.*, June 1939.

[15] American Standard Sound Level Meters for Measurement of Noise and Other Sounds. American Standards Association Z24.3, 1944.

[16] R. S. Tucker—Measurements of Noise on Program Circuits. *Bell Laboratories Record*, March 1936. Vol. 14, No. 7.

[17] J. M. Barstow—A New Noise Meter. *Bell Laboratories Record*, April 1937. Vol. 15, No. 8.

BIBLIOGRAPHY

K. S. Johnson—Transmission Circuits for Telephone Communications. D. Van Nostrand Co., 1925.

W. L. Everitt—Communication Engineering. McGraw-Hill Book Co., 1932

Electrical Engineers' Handbook—Electric Communications and Electronics. Ed. by H. Pender and McIlwain. John Wiley & Sons, 3rd edition 1936.

Radio Engineers' Handbook—F. E. Terman. McGraw-Hill Book Co. 1943.

N. B. Fowler—Measurements in Communications. *Electrical Engineering*, February 1947, Vol. 66, pp. 135-140.

H .H. Scott—The Measurement of Audio Distortion. *Communications*, April, 1946, and Engineering Handbook of National Association of Broadcasters.

"LP"

Means a lot to us — —

Living Presence

Lifetime Performance

Low Price

Library Protection

Lasting Patronage

LP should also mean a lot to YOU because these are to be found in a new line.

Livingston Products

- Transcription Arms
- Loudness Controls
- Stylus Pressure Gauges

Livingston Electronic Corp.

Livingston **New Jersey**

CAPPS*

V-Groove A. N. M.**

Recording stylus



For

Versatility
Uniformity and
Finest Recorded Quality

Cuts either 33⅓, 45 and 78 R.P.M.



micro groove and coarse groove

1.0 mil playback

2.5 mil playback

* Reg. U. S. Pat. Office
**U.S. Pat. applied for

www.americanradiohistory.com

INSTRUCTIONAL BROADCAST STUDIO

[from page 15]

Getting back to existing equipment, turntables with self-contained amplifiers are sometimes operated by the students, and it is difficult to keep the hum level down, particularly when teaching schedules conflict with maintenance schedules. It sometimes helps to ground the amplifier chassis, and the same is true of tape recorder chassis and any other instructional equipment — provided, of course, that they are not of the a.c.-d.c. type To facilitate grounding, a bare copper wire is strung around the studio under the chair rail and connected to one of the building water pipes. Fahnestock clips are spaced every ten feet along this wire, permitting the grounding of apparatus anywhere in the studio without the hazard of long wires trailing across the floor. In this connection, every effort is made to keep the floor clear, not only of grounding wires, but also of microphone and other audio cables, a.c. power cables, and so on. All these circuits are carried in separate wall conduit runs that girdle the studio, with outlets at ten-foot intervals.

Echo Device

Another audio facility is the echo device. This arrangement, which did not originate at Carlisle Barracks, consists principally of the reverberation attachment and associated preamplifier from the studio Hammond organ. The attachment is a delay-producing arrangement in which a loudspeaker driver unit is mechanically coupled to a crystal pickup through long, helical springs that slow down the signal appreciably. Since this device is in parallel with the microphone circuit between any two convenient low-level points, the main or program amplifier receives both the "on-time" and the delayed portions of the signal, and the phase difference provides the echo effect. The degree of echo can be varied by the tap switch, which is part of the reverberation preamplifier.

Then there are some electrical power items to be considered. The first is a master switch and pilot light at the door of both the studio and the control room. Students — and experienced personnel too — sometimes leave the building without turning off all equipment. The master switch permits the instructor to kill all a.c. power on the baseboard outlets as he leaves for the day. The pilot light, visible through observation windows in the door, will remind him if he forgets.

The on-the-air warning light outside

IN THE PROFESSION, AN HONORED NAME

the Altec Lansing A-256A amplifier



ALTEC LANSING CORPORATION

WILL MEET YOUR REQUIREMENTS FOR AUDIO POWER

Your need for high quality audio frequency power can be handled better, with greater dependability and with better quality by the Altec A-256A Beam Power Amplifier. Rated conservatively at 65 watts, the A-256A Amplifier will deliver 75 watts with less than 2% total harmonic distortion. At 65 watts the intermodulation is only 3%. Never before has there been a high quality amplifier which will deliver you as many watts per dollar as you receive from the A-256A Amplifier. Full power available within 1 db at 40 cycles and 15,000 cycles.

The A-256A Amplifier is assembled on a relay rack of recess pan construction, making it adaptable to either rack or cabinet mounting. Sound design and the use of conservatively rated quality components insure the user of long trouble-free life without deterioration in performance characteristics.

SPECIFICATIONS

GAIN: 50 DB, 500 ohm input.

FREQUENCY RANGE: 20-20,000 cycles within ½ DB.

NOISE LEVEL: —45 dbm (.001 watt reference).

OUTPUT IMPEDANCE: Taps for 8 & 16 ohm loads.

INPUT IMPEDANCE: 30, 250 & 500 ohms. 5,000 ohm bridging input.

For technical bulletin, write

ALTEC LANSING CORPORATION

1161 North Vine Street, Hollywood 38, California

161 Sixth Avenue, New York 13, New York

NEW... Improved Wiring Eliminates Leakage

TYPE 12AT & TYPE 12ATK (KIT)

TRANSMISSION MEASURING SET



Range: 111 db. in 0.2 steps.
Frequency resp.: 0.1 db. from 0 to 20 kc.
Accuracy: 0.1 db.
Impedance, load section: 4, 8, 16, 50, 150, 200, 500, & 600 ohms.
Impedance, transm. set.: 50, 150, 200, 500 & 600 ohms.
Reference level: 1mw. into 600 ohms.
Circuit: "T", unbalanced.
Attenuators: 10x10, 10x1 & 5x0.2 db.
Load carr. cap.: Transm. sect. 1 w. Load section 10 w.

A precision Gain Set with specially developed wiring that permits no troublesome leakage and provides improved frequency characteristics. Available completely assembled, or in kit form—which permits the sale of a high accuracy instrument at a low price.

WRITE FOR DESCRIPTIVE BULLETIN

TECH LABORATORIES, INC.

Manufacturers of Precision Electrical Resistance Instruments

PALISADES PARK, NEW JERSEY

www.americanradiohistory.com

Save Space and Weight with TRIAD "HS" Transformers



1939 Transformer
Dims: $3\frac{3}{8}$" x $3\frac{3}{8}$" x $3\frac{7}{8}$"
Weight: $2\frac{3}{4}$ lbs.

TRIAD "HS" Audio Input Transformer
Dims: $1\frac{7}{16}$" x $1\frac{3}{4}$" x $2\frac{1}{2}$"
Weight: 12 oz.

Both transformers shown above are high fidelity input transformers, frequency response from 20-20,000 cycles and 95db. shielding.

Yet the Triad transformer is only **one-seventh as large by volume**, occupies **one-fourth the space** and is **one-fourth as heavy**. In the production of today's high fidelity equipment, where space is at a premium, that's important.

Triad "HS" (hermetically sealed) transformers, built to meet JAN specifications, are providing new standards of performance for quality electronic equipment—yet they cost little more than ordinary cased types.

Triad builds a complete line of transformers for original equipment, replacement, geophysical and amateur applications.

Write for Catalog TR-49

TRIAD
TRANSFORMER MFG. CO.
2254 Sepulveda Blvd.
Los Angeles 64, Calif.

the studio door is another power item. Originally, this was a red bulb over the door frame, but no one paid much attention to the light, nor to the associated large warning sign on the door itself. A flasher button was inserted in the bulb socket to make the light blink, on the theory that a blinking light was more noticeable — but it didn't work out that way. Finally, a red lumiline tube was mounted vertically at eye level on each side of the door frame, complete with flasher, and that did the trick. The seemingly obvious solution of a bolt on the inside of the studio door would be a safety hazard, especially since the studio door opens inward.

The devices described in this article are the result of considerable experience in teaching the basic of announcing and production in a very limited number of instructional hours. They are based on the assumptions that the student knows nothing of the broadcasting field and that almost any device is legitimate as a training aid to emphasize and perhaps dramatize the points made by the instructor. The corollary to this latter principle is that the training gadget should not develop habits in the student which must be unlearned when he finally steps into an operational studio.

New Literature

- **Wire Markers:** New 12-page illustrated Western Lithograph catalog entitled "The Most Effective Wire Marker Ever Devised" shows latest methods of marking wire, pipe, cable, conduit, etc., with die-cut, self-adhesive EZ Code markers. Western Lithograph Co., 600 E. Second St., Los Angeles 54, Calif.
- **Film production and TV Equipment:** S. O. S. Cinema Supply Corp., 602 W. 52nd St., New York 19, offers an 88-page catalog listing approximately 1600 items covering 16mm and 35mm studio cameras, accessories and lenses, as well as recorders, projection equipment, and most other items required in this work. The catalog—entitled "Sturelab 8A" celebrates nearly a quarter of a century as an industry leader.
- **Radio and Television:** So comprehensive in content and clear in presentation that it is a veritable handbook, the new catalog offered by Lafayette Radio, 100 Sixth Ave., New York 13, lists a number of "packaged" high-fidelity radio-phonograph equipments in addition to the entire line carried in stock in the many Lafayette stores.
- **Relays:** Colorful New Catalog D120A illustrates and describes various types of relays, gives contact ratings, coil specifications, sizes, prices, and other helpful data. Ward Leonard Electric Co., Electronic distributor Division, 53 W. Jackson Blvd., Chicago, Ill.
- **16-mm equipment:** New catalog of post-war models provides rather detailed information about the major units of Maurer equipment. Free copy may be obtained from J. A. Maurer, Inc., 37-01 31st St., Long Island City 1, N. Y.

Laboratory Standards



SQUARE WAVE GENERATOR

Model 71. Frequency Range: Continuously variable from 5 to 100,000 cycles. Wave Shape: Rise time less than 0.2 microseconds. Output Voltage: 75, 50, 25, 15, 10, 5 peak volts fixed; 0-2.5 volts continuously variable.

MEASUREMENTS CORPORATION
BOONTON NEW JERSEY

Ready NOW
ULTRASONIC FUNDAMENTALS
By S. YOUNG WHITE

The rapid increase in the use of ultrasonics during the last few years makes it natural that the well-informed sound engineer should want to learn something of the applications and potentialities of this amazing new field. But interest in ultrasonics is not confined to the sound engineer—it is of still greater importance to the industrial engineer for he is the one who will visualize its uses in his own processes.

Elementary in character, ULTRASONIC FUNDAMENTALS was written originally as a series of magazine articles just for the purpose of acquainting the novice in this field with the enormous possibilities of a new tool for industry. It serves the double purpose of introducing ultrasonics to both sound and industrial engineers. The list of chapter headings will indicate how it can help you.

CHAPTER HEADLINES

Too Much Audio. Opportunities in Ultrasonics. Elements of Ultrasonics. Experimental Ultrasonics. Coupling Ultrasonic Energy to a Load. Ultrasonics in Liquids. Ultrasonics in Solids. Testing by Ultrasonics. High-Power Ultrasonics. Notes on Using High-Power Ultrasonics. Applications of Ultrasonics to Biology. Economics of Industrial Ultrasonics.

The applications of ultrasonics have already extended to many industries, and as its possibilities are explored they will increase a hundredfold. To keep abreast of its growth, engineers in all fields must know what they may expect from ultrasonics, how it is used, how the energy is generated, and the techniques of applying ultrasonic treatment to many processes.

ULTRASONIC FUNDAMENTALS is not a big book—it does not cover the entire field of ultrasonics with hundreds of pages of dull reading. But in the three hours it will take you to read it, you will get a down-to-earth glimpse into the far-reaching possibilities of a new art.

ULTRASONIC FUNDAMENTALS
By S. YOUNG WHITE
36 pages, 40 illustrations. 8½ x 11, paper cover. **$1.75**
Book Division, Dept. A
RADIO MAGAZINES, INC.
342 Madison Avenue
New York 17, N. Y.

www.americanradiohistory.com

RACON TWEETER

Highest Music Quality At Low Cost!



MODEL CHU-2 $37.50 List Price

Clean Output to 15,000 Cycles! Wide Distribution Pattern!

Are you looking for the rich brilliance and life-like realism of concert hall music? Then add this Racon tweeter to your present 12 or 15" cone speaker and *for the first time* enjoy a seat in 10th row center instead of the dark recesses of the balcony.

Response is clean and smooth to 12,000 cycles, with usable output to 15,000 cycles. High frequency horn logarithmically expanded as two horns for wide, uniform distribution pattern. When used with crossover network, will handle amplifiers rated to 25-30 watts. Source impedance 4-15 ohms. Dimensions 10¾" wide, 7" high, 8¾" deep.

Cast aluminum throughout. Cutout template provided for easy flush mounting. Free wiring diagram and instructions to build an economical professional type two-section crossover network.

Listen to the Racon tweeter at your nearest distributor or write for free Catalog A.

ALL RACON PRODUCTS GUARANTEED 18 MONTHS

ACOUSTICAL EXCELLENCE SINCE 1922

Racon Electric Co., Inc.

52 East 19th Street, New York 3, N. Y.



TAPE SPLICER

FOR MAGNETIC RECORDING TAPES

AMATEURS or PROFESSIONALS — The Carson Tape Splicer can do your splicing in a hurry — No tricky adjustments — Tape is held in one position for all operations. Uses a cutting edge such as a razor blade with any kind of cellulose adhesive tape although Scotch 41 splicing tape is recommended.

CARSON TAPE SPLICER — postpaid — **$2.00**

SCOTCH 41 splicing tape 1-2" x 100" roll on dispenser — **.29**

MAGNECESSORIES

Box 6960, Washington 20, D.C.

MUSICIAN'S AMPLIFIER

[from page 13]

as 20 db at 20 and 20,000 cps. The overall intermodulation distortion curve is presented in *Fig.* 7.

On the surface it may appear that 12.2 watts is rather poor output from two 807 tubes, but it must be remembered that the 807's are triode-connected and the efficiency of triodes is much less than that of tetrodes. Moreover, the power output compares very favorably with that from type 2A3 or 6-volt equivalent triodes. The power ratings given in the tube manual for these types are the power developed in a load resistor connected plate to plate, while our power measurement was of *useful* secondary power. Those who have built "10 watt amplifiers" using 2A3 or equivalent tubes might find it very enlightening to measure the undistorted power in a resistor connected in place of their speaker. We have found that the power of 12 useful watts is more than enough for home volume, even when operating with a 10 db safety factor.

The intermodulation distortion in this amplifier was checked on Altec Lansing intermodulation equipment, using frequencies of 40 and 2,000 cps. It was found to be extremely low at powers up to about 8 watts. As a matter of fact, the IM distortion for ordinary room volume powers was less than .2% which is entirely negligible. As pointed out in AUDIO ENGINEERING for September 1948, the power read on the IM equipment may be converted to equivalent single-frequency power, the usual way of rating an amplifier, by multiplying the IM meter power by the factor 1.47. This has been done in the published curve and it will be noted that the amplifier does not begin to exhibit serious distortion until sine wave power of 12.5 to 13 watts is reached. Thus the power curve for various frequencies, as reproduced in this article, is for substantially distortionless reproduction. If the reader wishes to be conservative in his amplifier performance, the power output as read from the curve should be divided by the factor 1.47 in order to get the IM *meter* power for a given amount of distortion.

When this amplifier is connected to a wide range speaker system and fed with good program material (e.g., local, live FM transmission) the resulting realism is so startling that it must be heard to be appreciated. The intermodulation distortion is so low that

'The Musician's Amplifier'



The Amplifier With Real Presence Effect

The SMA-12 is an all-triode, fixed-gain, 2-chassis power amplifier for use with tuners or other front ends containing their own volume and tone controls.
Designed by David Sarser, it uses the classic Williamson circuit.
Complete kit is sold by Sun Radio.
Can be wired in less than 3 hours.
All capacitors and resistors in the audio amplifier chassis are already mounted and wired on resistor board for simple installation. Chassis punched to accommodate all components.

SPECIFICATIONS:
Peerless transformers used exclusively throughout.
Tubes: 2- 807's tied as triodes in push-pull output, 2- 6SN7's, 5U4G rectifier.
Output: 12 watts with less than 8% intermodulation distortion.
Source impedance: 0.75 ohms.
Intermodulation distortion less than 8% at 12 W output using freq. of 40 & 2000 cps.
Frequency response: ±0.5 db, 20-80,000 cps.
Absolute gain: 70.8 db.
20 db of feedback around 4 stages & the output transformer.
Cathodyne phase inverter.
On 2 chassis, each 5" x 10" x 3", each properly punched and cadmium finished.
Kit comes complete with tubes, punched chassis, prewired resistor & capacitor board, sockets and all necessary parts.

NET PRICE $89.50

Lab wired & tested, complete with curves of tests run on that individual amplifier. Tests include 3 curves showing frequency response, power output and harmonic content. NET PRICE $119.50

Order by mail today!

Sun Radio AND ELECTRONICS COMPANY, INC.

122-124 DUANE STREET
New York 7, N. Y. BArclay 7-1840
2 BLOCKS NORTH OF CHAMBERS ST.

STORE HOURS: 9-6 Daily, 9-4 Saturday.

www.americanradiohistory.com

Lafayette RADIO ELECTRONEWS

LAFAYETTE HI-FI SELECTOR RACK

Makes It Easy To

LISTEN . . .
COMPARE . . .
CHOOSE

Laid end to end, the components we have for your comparison would stretch more than a city block. Yet we've condensed them into one rack in one soundproof room. Practically every known component is hooked up in this special Lafayette hi-fi rack. From it you make your choice of tuner, amplifier, speaker, baffle, record changers, etc. Test them in any combination. Compare them side-by-side! In this rack you'll find the makings of your radio-phono combination that has no equal in the commercial market. You'll also find single units to improve existing sound systems or receivers. And everything for LESS than you'd pay elsewhere.

AMONG THE FAMOUS MAKES FEATURED ARE:

Altec-Lansing, Bell, Bogen, Browning, Cinaudagraph, Collins, Espey, Fisher, Garrard, General Electric, Goodall, Hallicrafters, Howard, Jensen, Lafayette, Meissner, National, Pickering, Radio Craftsmen, Scott, Stephens, Stromberg-Carlson, Thordarson, University, UTC, Webster, and many other nationally-known makes.



Send for NEW FREE CATALOG

LAFAYETTE RADIO Dept. AK-9

New York or Chicago address

COME IN FOR A DEMONSTRATION

NEW YORK: 100 6th Ave. & 542 E. Fordham Rd.
CHICAGO: 901 West Jackson Boulevard
BOSTON: 110 Federal Street
NEWARK: 24 Central Avenue
ATLANTA: 265 Peachtree Street

when a full symphony orchestra is playing, the various instruments are easily detected. The thud of the bass drum and the tinkle of the triangle are reproduced naturally at low levels, together with other sounds, even the squeaking of chairs and shuffling of feet. One very prominent musician, who is a composer, arranger and conductor and in whose home one of these amplifiers has been installed, said: "You not only can hear the difference between the flute and clarinet, but you can also separate the first and second clarinets when they play together".

Controls

It will be noted that the circuit diagram does not show any gain control. It is the authors' contention that an ideal amplifier should be one which can be tucked in some corner and forgotten while gain control and equalization should be accomplished in a separate control unit. The equalization and gain controls together with a phonograph preamplifier may well be a part of an FM tuner. If it is desired, however, to incorporate a gain control, the 0.5 meg grid resistor of the input stage may be replaced with a 0.5 meg left hand taper volume control. No equalization (tone controls) should be added to this amplifier, as the feedback loop goes from the output transformer to the first stage, and the large amount of feedback will negate any equalization introduced within the feedback loop. If equalization is desired it must be incorporated before the volume control. There is such power available at both the bass and treble end so that when the bass and/or treble boost is used, the results are positive and free from distortion at all comfortable levels. When bass boost is added the foundation music is solid and free from thuds.

To a couple of fiddlers—one who fiddles all day on a Stradivarius, the other who fiddles all day with amplifiers, *this* amplifier is the best that we have yet heard. We suggest that you build one and judge for yourself.

PARTS LIST

C_1, C_7—0.25 μf. 400 v. paper.
C_2, C_3—.05 μf, 600 v. paper.
C_4, C_5—10 μf, 450 v. electrolytic.
C_6—30 μf, 500 v. electrolytic.
J_1, J_2—Closed circuit jack, Mallory A-2 (*Must* be insulated from chassis).
J_3—Input connector. Amphenol 75-PCIM (R_1 is mounted inside this connector).
J_4—Power cable connector, Amphenol 86-RCP4 (4-pin male chassis plug).
P_1—100 ohm, 2W. wire wound potentiometer.
R_1, R_6, R_7—0.47 meg, ½ W.
R_2—47,000 ohms.
R_3—470 ohms, ½ W. 10%.
R_4, R_5—22,000 ohms, 10%, (matched).
R_8—390 ohms, ½ W. 10%.
R_9, R_{10}—47,000 ohms, 2 W. 10% (matched)
R_{11}, R_{12}—0.1 meg, ½ W.
R_{13}, $_{14}$, R_{22}, R_{23}—100 ohms.

STILL THE LEADER!

The famous ACA-100 Amplifier — a self-balancing, drift-correcting, direct-coupled amplifier — the most satisfying musical amplifier ever designed. Based on early Loftin-White circuits, perfected by A. C. Shaney in 1936, and now brought to a standard of quality far above that of any corresponding amplifier. Exclusive features include:

- Push-Pull Triode Expander.
- Non frequency-discriminating noise suppressor.
- Push-pull hi and lo freq. variable equalizers.

If you are satisfied with nothing less than the best, write today for free technical literature.

Special models for all magnetic cartridges.



AMPLIFIER CORP. OF AMERICA
398-4 Broadway New York 13, N. Y.

NEED RECORDING TAPE IN A HURRY?

For emergency use, we will rush-ship (by Air if outside N. Y. area) up to 20 reels from our New York stock at prices listed for such quantities.

CALL OR WRITE

today for complete Recording Tape price list and a Free supply of Program Identification Labels.

AUDIO & VIDEO PRODUCTS CORP.
1650 BROADWAY, N.Y.19, N.Y.

AUDIO ENGINEERING SCHOOL

A practical AUDIO engineering course in Sound fundamentals; DISC, FILM, and MAGNETIC recording; Monitoring and Mixing; AUDIO Frequency measurements. Studios assimilating Broadcast, Motion Picture, Television and Commercial Recording. Approved for Veterans

HOLLYWOOD SOUND INSTITUTE, Inc.
1040-A North Kenmore, Hollywood 27, Calif.
Correspondence courses available

FOR SALE

Audio Consultant disposing of large stock of high fidelity audio equipment including amplifiers, speaker systems, tweeters, woofers, mixers, test equipment, etc. Manufactured by ALTEC LANSING, BROOK, BOGEN, RCA, DAVEN. MOSTLY NEW EQUIPMENT. SOME USED. ALL AT FRACTION OF ORIGINAL COST!! SEND STAMPED, ADDRESSED ENVELOPE for list. Box 311, c/o Audio Engineering, 342 Madison Ave., New York 17, N. Y.

www.americanradiohistory.com

R_{15}—250 ohms, 10 W. wire wound.
R_{16}, $_{17}$—1000 ohms, ½ W.
R_{18}—27,000 ohms.
R_{19}—22,000 ohms.
R_{20}—150 ohms, 10 W. wire wound.
R_{21}—5000 ohms. 10%.
T_1—Peerless S-265-Q.

Power Supply

C_8, C_9—0.1 μf, 600 v. paper.
C_{10}, C_{11}, C_{12}—8 μf, 600 v. oil filled.
F_1—Littelfuse 342001 fuse extractor post with 3AG fuse, 2 amps.
J_5—Power cord socket, Amphenol 77MIP4 (4-hole socket).
L_1, L_2—Peerless C-325-A. 10 H, 120 ma. d.c. resistance 240 ohms.
T_2—Peerless R-560-A. 800 v. CT at 200 ma; 5 v at 3 a; 6.3 v at 6 a.

Power Cable

1—Female connector, Amphenol 78-PF4.
1—Male connector. Amphenol 86-PM4. 4-wire cable, of required length.

All resistors are 1-watt, 20% tolerance, unless otherwise specified.

Additional Test Records

In order to complete the catalog of test records which appeared in the September issue, the following types are described — having been released after the original list was prepared.

CLARKSTAN

102M 12-inch, 33-1/3 rpm. Vinylite. SF. Microgroove audio sweep-frequency record, similar to 1000A but for long-playing microgroove records, covering range from 70 to 10,000 cps and recorded with NAB characteristic. Sweep repetition rate. 20 per second.

2000S 12-inch, 78.26 rpm. Vinylite, SF. Steady-state frequency record; recorded CV above 500 cps, constant amplitude below. Frequencies: 500 cps, 10, 9, 8, 7, 6, break, 5, 4, 3, 2, and 1 kc; 700, break, 500, 300, 200, break, 100, 70, and 50 cps, followed by 1000 and 500 cps.

2001S/2002S 12-inch, 33-1/3 rpm. Vinylite, DF. Microgroove steady-state frequency record. Frequencies: 1 kc: 10, 9, 8, 7, 6, break, 5, 4, 3, 2, 1.5, and 1 kc; 700, break, 500, 400, 300, 200, 150, break, 100, 70, 50, and 1000 cps. One side recorded with NAB modified characteristic; other side recorded CV above 500 cps, constant amplitude below.


101 12-inch, 33-1/3 rpm. Vinylite, SF. Intermodulation test record, 1:4 ratio, 7 kc and 100 cps recorded with NAB characteristic.

Clarkstan frequency records may be obtained from most radio jobbers, or from the Clarkstan Corporation, 11927 West Pico Blvd., Los Angeles 34, Calif.

BRIDGER

MODEL 100

Using a cathode follower of advanced design, the BRIDGER makes it possible to measure the characteristics of high-impedance electronic circuits without affecting the performance by the addition of either the capacitance or the loading effect of the measuring instruments, and without introducing hum into the circuits being measured.

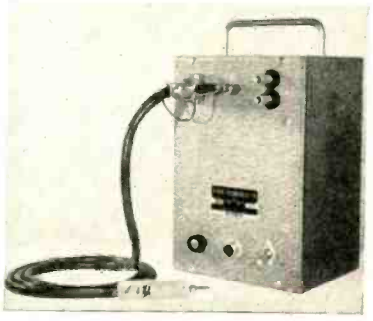

SPECIFICATIONS

Model 100 Bridger

Input Impedance: Approximately 100 megohms in parallel with 6 mmf at end of three-foot cable.
Output Impedance: 200 ohms, one side grounded.
Voltage Ratio: Output voltage/input voltage = 0.98, or —0.2 db up to limit of undistorted output.
Undistorted Output: 30 volts, when feeding a low-capacitance cable and typical high-impedance load. Output/input ratio will not change over 2 per cent up to 30 volts and 10,000 cps, nor up to 35 volts and 5000 cps. Undistorted output limit drops at higher frequencies, reaching 6 volts at 200 kcs.
Noise: Output noise equivalent to 60 microvolts input, when fed by a high-impedance circuit. This low value has been achieved by using d.c. on the heater circuit of the cathode-follower tube.
Dimensions: 5¼ x 6 x 11 inches. **Weight:** 9 lbs.

AUDIO INSTRUMENT CO.
1947 Broadway New York 23, N. Y.

THE AUDIO INSTRUMENT LINE

Miniature Preamplifiers for 640AA Condenser Microphones

•

LOGGER—VTVM and logarithmic recording-meter amplifier with 50-db range

•

DISC-NOISE METER

AUDIO ENGINEERING SUPPLIES • KEYS
PANELS • PLUGS • POWER SUPPLIES
GAIN SETS • TRANSFORMERS
EQUALIZERS • KNOBS • DIALS
• VU METERS
• DB METERS
TRANSMISSION LINE • TERMINAL BLOCKS
AMPLIFIERS • PATCH CORDS • FILTERS



WRITE FOR FREE 1950 CATALOG

CINEMA ENGINEERING COMPANY
1510 WEST VERDUGO AVENUE, BURBANK, CALIFORNIA

Export Agents: Frazar & Hansen, Ltd. • 301 Clay Street • San Francisco, Calif., U. S. A.

www.americanradiohistory.com

The IMPOSSIBLE took 3 years!

McIntosh amplifier performance didn't just happen nor is it just another amplifier. It is the result of many thousands of hours of painstaking research and development resulting in a radically different, complete and patented solution to the problem both electrically and mechanically. This McIntosh circuit has better than a 16 to 1 advantage over conventional circuits.

It is the result that counts. Look over these performance characteristics which are fully met —



50W-1 McINTOSH AMPLIFIER

1. 50 watts from two 6L6's without overload — 20 cycles to 20 kilocycles.
2. 1% or less intermodulation distortion up to 100 watts peak.
3. 1% or less harmonic distortion at 50 watts on any frequency - 20 cycles to 20 kilocycles.
4. Small size mounts on 7" x 19" relay rack.
5. Adequate design margin for safety.
6. High plate efficiency 60% at 50 watts; 70% at 60 watts.
7. Low power consumption 90 watts no signal; 190 watts at 50 watts output.
8. Low internal generator impedance. 1/10 normal; eliminates distortion due to load impedance change and reduces "hang over" effects in load device.
9. Simplified servicing - all plug-in elements.
10. ±2 db 10 cycles to 200,000 cycles.
11. Negligible impulse distortion.
12. Negligible phase shift (less than 2°) - 20 cycles to 35 kilocycles.

The McIntosh 15W-1 Amplifier has similar characteristics except for maximum power output.

The McIntosh Engineering Laboratory is dedicated to produce only one line — THE BEST!

Ask your dealer for the McIntosh story or write to us.

McIntosh Engineering Lab., Inc.
910 King Street Silver Spring, Maryland
Telephone: Junifer 7-9200

NO DEVALUATION OF HARTLEY-TURNER QUALITY

The 215 speaker has been selling steadily at $50 because its performance-cost figure is exceptionally high. We did not need the help (?) of the British Chancellor to boost our sales in the U.S.A. They gained by honest endeavor allied to good design and the position so far as we were concerned was O. K.

Our first instinct is to let the price stay where it was, but we might be thought of pulling a fast one if we didn't reduce. In this business we don't pull fast ones and for the moment the price comes down to $40, which is virtually where it was before we had to raise it because of increased cost of production.

But devaluation is not a wizard's trick of shifting unsaleable commodities. It is a realization of what the £ is really worth. The inevitable result is a rise in the cost of living and of raw materials in Britain. This has already taken place. So our new price is based on what the speaker costs to make, allowing a reasonable profit for ourselves.

Hartley-Turner products will never be available in the "bargain basement." We have made our U.S. customers because we can offer something you can't get anywhere else. The 215 speaker at $40 is coupled with a 20% reduction in prices quoted in literature already sent out, and this discount applies until our new price list has been sent out (and it may cost you more then).

In a world of financial chaos we are sticking fast to performance that matters and the sooner you switch to Hartley-Turner the sooner will you realise that there is at least one company which will never sacrifice quality to expediency. We don't mass-produce and we don't want to because we pin our faith to craftsmen's hand-made quality.

Read up our past advertisements and get in touch today

H. A. HARTLEY CO., Ltd.
152 HAMMERSMITH ROAD
LONDON W. 6, ENGLAND


ADVERTISING INDEX

Allied Radio Corp.	56
Altec-Lansing Corp.	3, 51
Amperite Co., Inc.	41
Ampex Electric Corp.	2
Amplifier Corp. of America	54
Andrew's Radio Company	50
Arnold Engineering Co.	7
Audak Company	29
Audio Devices, Inc.	Cover 2
Audio Facilities Corp.	48
Audio Instrument Co.	55
Audio Pacific Co.	44
Audio & Video Products Corp.	54
Ballantine Laboratories, Inc.	43
Boonton Radio Corp.	41
Bozak, R. T.	36
Brociner Electronics Lab	44
Camera Equipment Company	49
Cannon Elec. Dev. Co.	35
Capps, Frank L. & Co.	50
Cinema Engineering Co.	55
Clarkstan Corp.	45
Cook Laboratories	38
Daven Co., The	Cover 3
Electric Indicator Co.	42
Electronic Workshop, Inc., The	38
Electro-Voice, Inc.	25
Fairchild Recording Equip. Corp.	37
Furst Electronics	34
Gordon, Herman Lewis	48
Hartley, H. A. Co., Ltd.	56
Harvey Radio Company, Inc.	27
Hollywood Sound Institute	54
Jensen Mfg. Company	9
Lafayette Radio	54
LeBel, C. J.	48
Livingston Electronic Corp.	50
Magnecessories	53
Magnecord, Inc.	30
McIntosh Engineering Lab. Inc.	56
Measurements Corp.	52
Newark Electric Co., Inc.	48
Newcomb Audio Products	42
Par-Metal Products Corp.	56
Peerless Elec. Products	30
Pickering & Co., Inc.	33
Presto Recording Corp.	8
Proctor Soundex Corp.	46
Professional Directory	48
Racon Electric Co., Inc.	53
Rek-O-Kut Company, Inc.	34
Somerset Laboratories, Inc.	5
Standard Transformer Corp.	4
Stephens Manufacturing Co.	47
Sun Radio & Electronics Co., Inc.	53
Sylvania Electric Products, Inc.	1
Tech Laboratories	51
Terminal Radio Corp.	32
Triad Transformer Mfg. Co.	52
Turner Company, The	39
United Transformer Corp.	Cover 4
U. S. Recording Co.	48
University Loudspeakers, Inc.	31
Ward Leonard Electric Co.	35
Wells, Winston	48
Western Electric Company	10

BUILD BETTER ELECTRONIC EQUIPMENT with STANDARDIZED

PAR-METAL ELECTRONIC HOUSINGS

READY-TO-USE CABINETS • CHASSIS • PANELS • RACKS

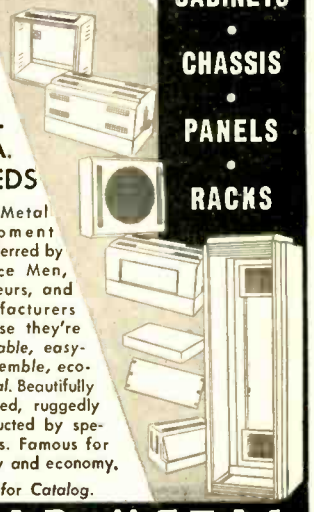

for ALL P. A. NEEDS

Par-Metal Equipment is preferred by Service Men, Amateurs, and Manufacturers because they're *adaptable, easy-to-assemble, economical.* Beautifully designed, ruggedly constructed by specialists. Famous for quality and economy.

Write for Catalog.

PAR-METAL PRODUCTS CORPORATION
32-62—49th ST., LONG ISLAND CITY 3, N.Y.
Export Dept.: Rocke International Corp.
13 East 40 Street, New York 16

FREE! Send for it NOW!

ALLIED'S NEW 1950 CATALOG!



196 PAGES— *Everything in Radio and Electronics*

GET RADIO'S LEADING BUYING GUIDE

Service Technicians and Engineers: ALLIED's 1950 Buying Guide brings you all the new releases and money-saving values—from the world's largest stocks of test instruments, amplifiers, P.A. systems and equipment, tubes, parts, tools, books and accessories—ready for instant expert shipment. Send today for your FREE new 196-page ALLIED Catalog.

ALLIED RADIO CORP., DEPT. 17-L-9
833 W. Jackson Blvd., Chicago 7, Ill.
☐ Send FREE New ALLIED Catalog. FREE

Name.....

Address.....

ALLIED RADIO

www.americanradiohistory.com

Choose . . .

From Daven's Complete Line of Volume Level Indicators

Daven Volume Level Indicators are designed to indicate audio levels in broadcasting, sound recording and allied fields where visual indication of volume is desired. Extremely sensitive, they are sturdily constructed and correctly damped for precise monitoring. Preferred by leading sound and electronic engineers throughout the world, these units incorporate all the latest DAVEN mechanical & electrical features.



Type 920
Rack model, low-level bridging type. Meter multiplier range: —20 VU to +20 VU. Power supply, 100—130 V, 60 cycle AC, with voltage regulator for normal variations. Reference level: 1 mv into 600 ohms. Special ranges on request.

GENERAL SPECIFICATIONS:

Imput Impedance Type 910 and 911 — 7500 ohms. Type 915 — 7500 ohms bridging and 600 ohms terminating. Type 920 — 12,500 ohms.

Frequency Range Less than 0.2 db variation from 30 to 17,000 cycles.

Meter Scale —20 VU to +3 VU and 0 to 100%. Type A has VU reading on upper scale. Type B has percentage reading on upper scale. Scale is large, clearly marked and carefully designed to minimize eye fatigue.

Indicating Meter NAB Standard; 4 inch square, rectifier type possessing ideal characteristics for monitoring purposes.

Mounting Rack models 19" long for standard relay rack; portable models available in walnut cabinets.

Finish Standard, black alumilite panel. Other colors available upon request.



Type 915
Rack model, terminating and bridging type. Meter multiplier ranges: Terminating, —6 VU to +32 VU; bridging +4 VU to +42 VU; or terminating, —6 VU to +16 VU; bridging, +4 VU to +26 VU. 2 VU steps. Reference level; 1 mv into 600 ohms



Type 910
Rack model has same characteristics as Type 911. Available with illuminated scale, if desired.



Type 911
Portable model, bridging type. Meter multiplier is a constant impedance "T" network which extends the range of the instrument in steps of 2 VU from +4 VU to +42 VU or +4 VU to +26 VU. Reference level: 1 mv into 600 ohms.

Write to Dept. A-6 for additional information.

The best equipment deserves
the finest attenuators
. . . *Always Specify DAVEN!*

THE DAVEN CO.

191 CENTRAL AVENUE NEWARK 4, NEW JERSEY


www.americanradiohistory.com

FILTER SPECIALISTS


PRODUCERS OF PERMALLOY DUST TOROID COILS AND FILTERS FOR OVER A DECADE



FOR FILTERS



BROAD BAND SHARP CUTOFF FILTER



NARROW BAND SHARP CUTOFF FILTER



ATTENUATES 10KC TO 30 MEGACYCLES



LOW FREQUENCY LOW PASS FILTER



HQA, C, D TOROID COILS

1 1/16" Dia. x 1 3/16" High.



HQB TOROID COIL

2 5/8" L. x 1 1/8" W. x 2 1/2" H.




UNCASED TOROIDS



VIC VARIABLE INDUCTOR


1 3/8" L. x 1 1/8" W. x 1 1/2" H.





SUB-OUNCER TOROID FILTERS


Filters employing SUB-OUNCER toroids and special condensers represent the optimum in miniaturized filter performance. The band pass filter shown weighs 6 ounces.


FOR HIGH Q COILS

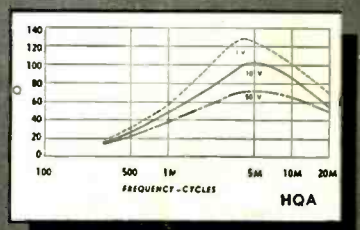

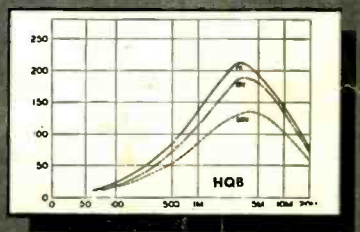

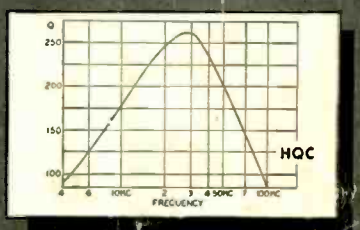

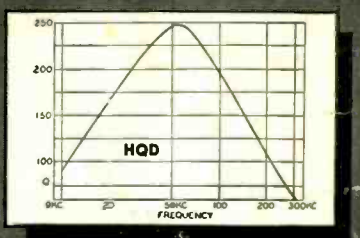

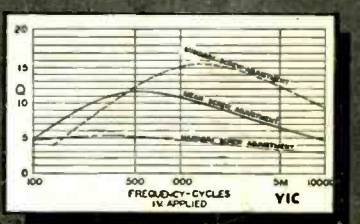

write for catalog PS-409

United Transformer Co.

150 VARICK STREET NEW YORK 13, N. Y.

EXPORT DIVISION: 13 EAST 40th STREET, NEW YORK 16, N. Y., CABLES: "ARLAB"

www.americanradiohistory.com