

ACORN USER

DECEMBER 1985

GUIDE TO BUSINESS:

- Setting up your system
- Z80 upgrade from Acorn
- How to pick a printer
- Three-in-one from Gemini

FIRST BYTE:

Memory options on a BBC/Electron

FANCY FONTS:

Super script for your screen

GRAPHICS CRUNCHER:

Fewer bytes per picture file

SHUGGY'S GARDEN

Monster chase for Electron or BBC users

COMPETITION

5 Opus Challengers to be won



ICON MASTER — Icon Control System


GIVE YOUR PROGRAMS THAT PROFESSIONAL TOUCH

This pack automates the creation of an icon-driven user interface. It is supplied on a 16K Rom and allows you to design a screen containing icons and then use it in your own programs, in place of a normal menu.

It is easy to use and may optionally be controlled with the AMX mouse. Icons (sample sets provided) are designed on a special Icon screen editor and are compatible with AMX icons.

Having designed the icons, the next step is to select the Menu editor and design your final screen. You may position your icons and text wherever you choose on the screen. Icon Master then generates the code to append to your Basic program which will reproduce your icon screen and handle user input.

Your own icon-driven programs may be used with or without the Icon Master Rom in your machine.

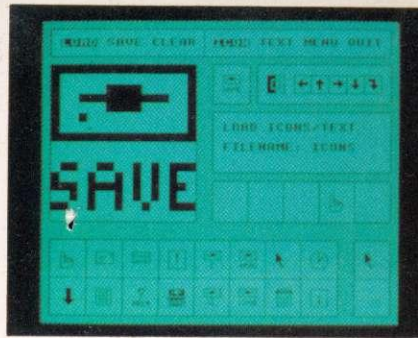

ROMIT — Put your own Basic programs into Rom

CREATE YOUR OWN SILICON DISC

RomIt is a 16K Rom which adds a new feature to your BBC Micro — A Ram Filing System. This provides over 20 new commands which enable you to:

1. Create a silicon disc with its own filing system commands. Type ***RAM**, then you can catalogue the "disc", save and load files to it, storing as many files as memory will allow. You will need sideways Ram to use this facility.
2. Put your own Basic or assembler programs (or any file) into Ram and then make them into Eproms. Whether it's your favourite game, your function key definitions or any program that you use frequently, you can now put it into Eprom so that it's always instantly available.



Your Eproms will work with or without the RomIt chip in your machine, and so you may pass on copies of your programs to other people.

Getting your own Basic program into Rom couldn't be simpler. Just load your program into memory and type: ***RAM *TRANSFER "prog" *DOWNLOAD** and either connect it to a blower, or send the disc (or tape) to us, together with your RomIt registration number, and we will Rom it for you. (There is a small charge for this service).

3. Use your sideways Ram as a printer buffer so that you can continue to use your computer for other work at the same time as printing long documents.

Over 20 new *****commands are provided by RomIt

To get the most from RomIt you will need sideways Ram fitted to your computer, eg just a single Ram chip plugged into your ATPL (or other) Rom board.


ICONMASTER £34.00 ROMIT £34.00 inc. VAT

Available from your local dealer. Supplied on 16K Rom.

For further information: Tel St. Albans (0727) 40303

24 hour Access & Barclaycard hotline
Tel Penn (049481) 6666

Mail order to
Beebugsoft, P.O. Box 109, St. Johns Road,
High Wycombe, Bucks, HP10 8NP

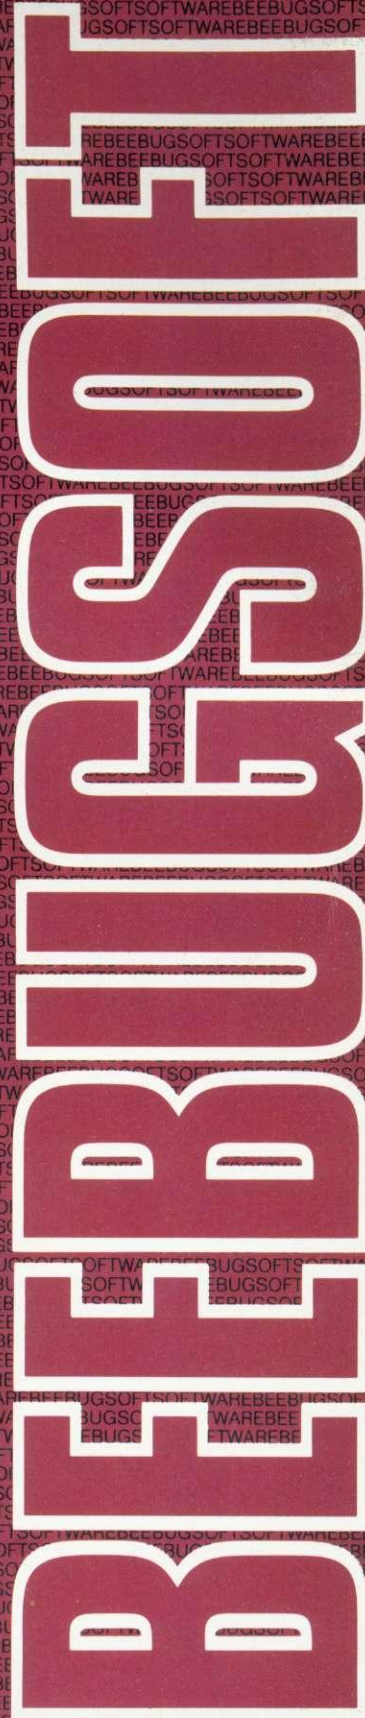

TOOLKIT PLUS

BASIC PROGRAMMING AID IN 16K ROM A VERY SPECIAL PROGRAM

- Now in 16K
- Full screen Basic editor — Wordwise-like operation
- A host of new commands
- Unique syntax checker
- "★command" or menu driven
- Toolkit upgrades available

In the two years since its launch Beebugsoft's Toolkit has been chosen by many thousands of BBC users and established a reputation second to none. The launch of our new second-generation Toolkit is therefore something rather special.



Toolkit Plus is a 16K Rom which has been written from scratch making use of the latest programming techniques. It offers over 40 commands (grouped for ease of use) and some new and very exciting features, all of which may be called directly or from a menu.

TWO SPECIAL FEATURES

- 1 Syntax Checker** The first of its kind on the BBC. As you key in your program, Toolkit will draw your attention to syntax errors that may otherwise come to light only after many program runs. You may also pass complete programs through the checker.
- 2 Basic Editor** A fully integrated full screen editor, comparable with Acorn's stand-alone Basic Editor, using "single key" commands for Move, Delete, Search etc all from within the on-screen editor.

OTHER COMMANDS

Autosave	Save programs at the press of a key	Check	Compare memory with disc/tape
Psave	Partsave any program section	Function	Function key editor
Xref	Powerful cross referencer to display values of variables, arrays, fns, procs, etc and their line numbers	Envelope	Envelope display
Format	Flexible disc formatter	Clear	Clear all variables
SloMo	Program speed controller	Free	Memory status info.
Roms	Display & enable/disable Roms	Duplicate	Copy program lines
Crunch	Amazing Basic program packer. Beats the rest. (Removed 4,500 bytes from original Masterfile II)	Erase	Delete program lines
Search	Flexible search & replace with 4 wildcards & special options (eg ignore spaces, Roms, case etc). Integrated with editor	Move	Move program lines
Trace	Output to window with single step options	Look	List file directly from disc/tape
Error	Auto error detection	Renumber	Flexible renumber
		Memory	Hex and Ascii memory display
		Merge	Combine 2 programs
		Relocate	Move program in memory
		Recover	Recover "Bad Program"
		Report	Extended error reporting
		Screen	Screen save
		Verify	Disc verify
		Tools	Command summary
		Menu	Toolkit menu

UPGRADE

Existing Toolkit owners may return their Rom and manual (mail order only) for a discount of £13.50

PRICE £39.00 inc.VAT. Available from your local dealer.

For further information: Tel St.Albans (0727) 40303
24 hour Access & Barclaycard hotline
Tel Penn (049481) 6666

Mail order to
**Beebugsoft, P.O.Box 109, St.Johns Road,
High Wycombe, Bucks. HP10 8NP**



**BEEBUG
SOFT**

TOOLKIT PLUS

ACORNUSER

EDITOR
Tony Quinn

TECHNICAL EDITOR
Bruce Smith

SUB-EDITOR
Julie Carman

PRODUCTION ASSISTANT
Kitty Milne

EDITORIAL SECRETARY
Isobel Macdonald

TECHNICAL ASSISTANT
David Acton

ART DIRECTOR
Mike Lackersteen

ART EDITOR
Liz Thompson

ART ASSISTANT
Paul Holmes

ADVERTISEMENT MANAGER
Simon Goode

SUBSCRIPTIONS MANAGER
Kate Evans

PUBLISHING DIRECTOR
Michael Potter

EDITORIAL DIRECTOR
Christopher Ward

NEW USERS

FIRST BYTE	53
Tessie Revivis rounds up the different types of memory expansion available for the BBC micro and Electron	
HINTS AND TIPS	48
More advice for the not so expert Beeb and Electron user from Martin Phillips	

YELLOW PAGES

PROGRAM LISTINGS	105
The listings for you to type in for programs presented in this issue plus details of what micros and second processors they work on	

BUSINESS

ACORN USER GUIDE TO BUSINESS	127
Ten pages of news and features for users of Acorn computers in businesses	
BUSINESS NEWS	131
MINDING YOUR OWN BUSINESS	135
Roger Carus presents the first in a three-part series on how to set up a business computer system	
PACKAGE PROBLEMS	139
Your queries on the software available for the Z80 second processor are answered by Edward Brown	
CP/M CORNER	141
Our regular forum for CP/M users hosted by Edward Brown and Richard Clement	

EDUCATION

EDUCATION NEWS	147
CONTROL IN THE CLASSROOM	150
Chris Drage and Nick Evans' topic is robotics and control in schools	

REVIEWS

GAMES AND SOFTWARE	171
GRAPHICS ROM	181
Acornsoft's latest offering comes under scrutiny	
DDD BUSINESS SUITE	183
BOOKS FOR ELECTRON OWNERS	185
ROMS	187
The latest on the firmware front, plus books to help you make the most of the goods	
JOE'S JOTTINGS ON PLOTTING	195
Joe Telford turns his attention to two plotters	
PRINTERS	201
How to choose the best printer for your needs, and a look at some books on the subject	
RAM BOARDS	209
Chris Drage tests four expansion boards	

REGULARS


News	7	Bar code reader offer	99	Beeb Forum	123
Noticeboard	18	Cassette subscriptions	100	Atom Forum	124
Letters	56	Graphics cassette offer	101	Software Charts	169
Central Processing	61	UserDump offer	102	Free ads	237
Dear Kitty	61	Listings cassette and disc	103	Small ads	239
Competition	93	UserRAM offer	121	Acorn Abuser's Diary	240

FEATURES

SHUGGY'S GARDEN

73


Play this exciting action game by Hugh Darby and add a little extra fun to your Christmas

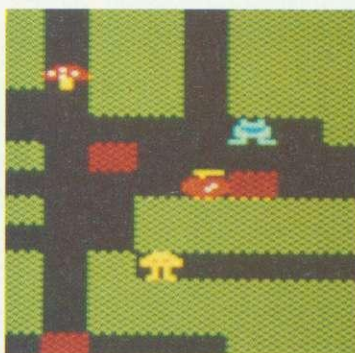

RECURSION EXCURSION

82

Jim McGregor and Alan Watt show you what you can do with fractal curves in your graphics

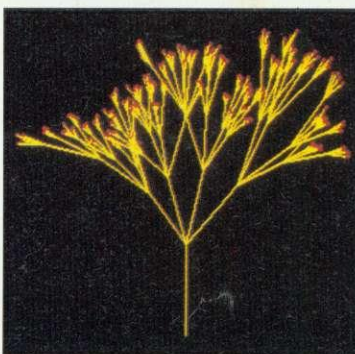

SCREEN COMPRESSION

89


Save high resolution text or graphics screens to tape or disc in the minimum of space with David Pilling's program



GENERATION GAME

94

You can generate lots of fancy typefaces on screen for the Beeb and Electron using Matthew Cook's listing

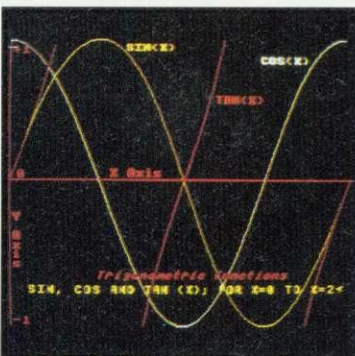

COVER



Cover illustration by Ken Laidlaw

NEXT MONTH

SUPER PAINTER

A superb printing and colour fill package



Writing programs for the BBC B+

Logo wordprocessor

Play Spectramania

3D graphics from Jim McGregor and Alan Watt

Keypads reviewed

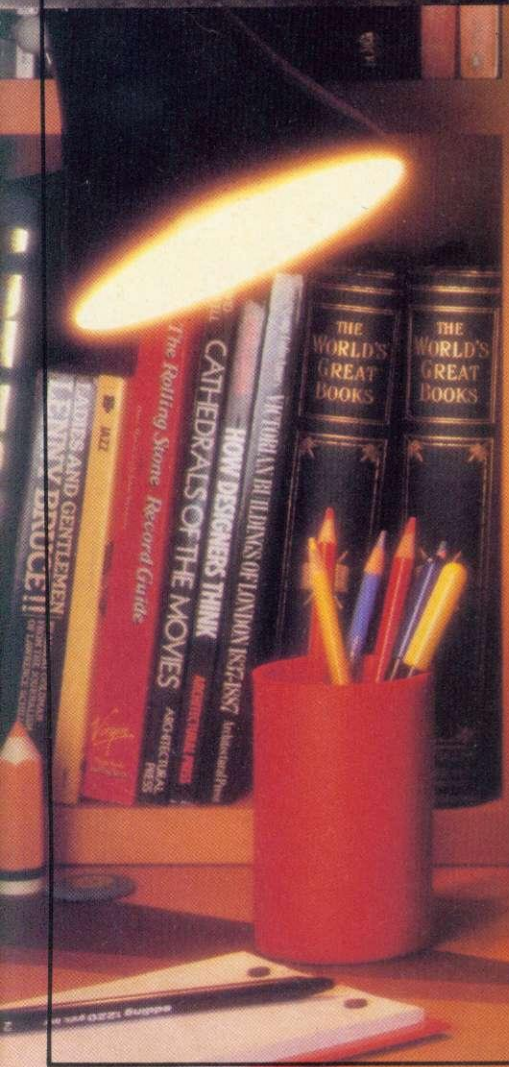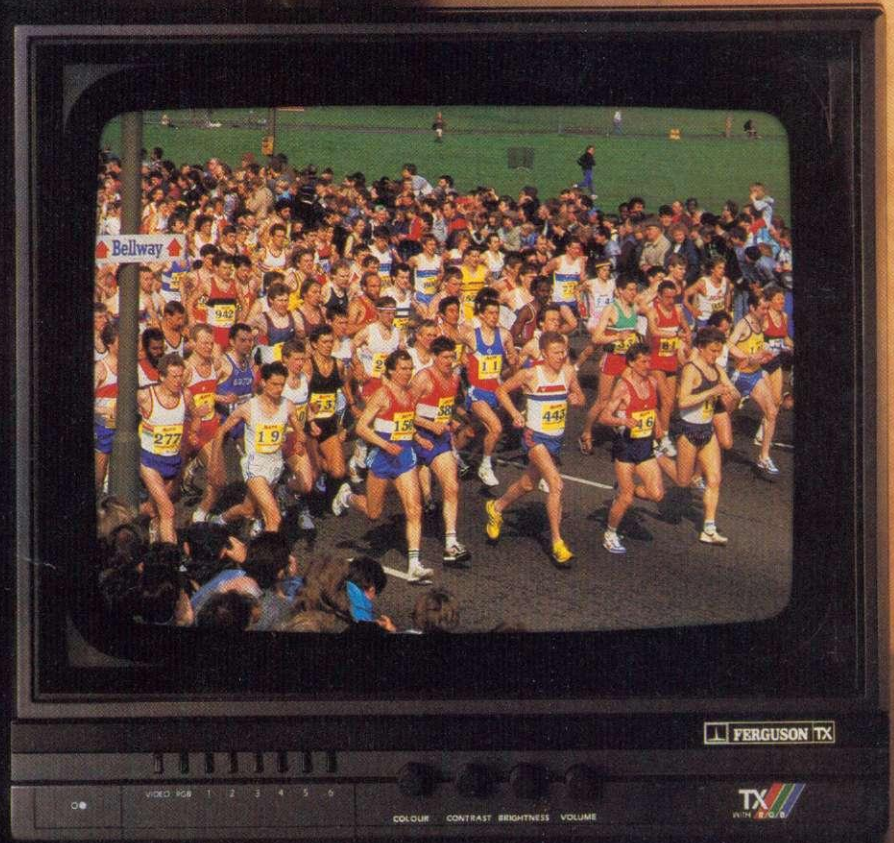

A Ferguson that gives you double vision.

Hang on, are you seeing things?

In the top picture it looks like a portable TV. In the bottom picture it looks like a computer monitor.

The truth is that the Ferguson MC05 is designed to be the best of both.

It has RGB and Composite Video sockets, providing the shortest possible route for the signal to the screen, by-passing the circuits of a conventional television.

Whichever way you look at it, the picture quality is outstanding. And you can switch automatically between computer screen and normal TV screen, without having to change connections.

So why buy two sets, when you can get one that doubles up?

FERGUSON

No-one is more switched on.

MIRRORSOFT

THE CHRISTMAS *Mr. Men* COLLECTION

NEW **MR MEN MAGIC STORYMAKER**

Enables children aged 3 to 6 to create their own delightful animated picture stories, at the same time gaining valuable reading experience in two staged words-and-pictures programs.
Amstrad • BBC B/Electron • Spectrum 48K
Cassette £9.95




THE INVISIBLE MR MEN **NEW**

Three more fun programs from our famous friends: a search-and-find adventure in Mr Men Land, shape and colour matching in Muddletown, and a dot-to-dot game to help learn the alphabet.
Amstrad • BBC B/Electron • Spectrum 48K
Cassette £9.95


FIRST STEPS WITH THE MR MEN

Everyone's favourite first software package featuring Mr Greedy's Ice Cream Hunt, Mr Silly's Hat Game, and Mr Forgetful's Wardrobe and Letter Games.
Amstrad • Atari 48K • BBC B • Commodore 64 • Electron • MSX • Spectrum 48K
Cassette £8.95

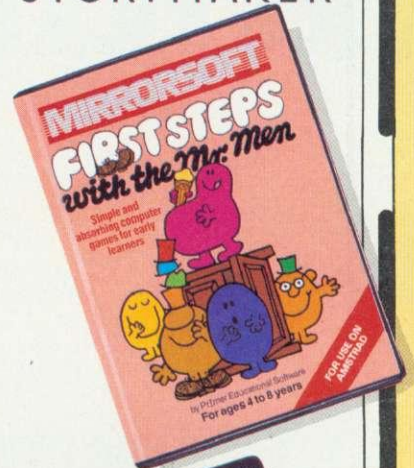


HERE & THERE WITH THE MR MEN

Mr Tickle, Mr Grumpy, and Mr Lazy join forces with four fun games to help children aged 5 and up learn about left and right, up and down, moving, and simple route planning.
Amstrad • BBC B/Electron • Commodore 64 • MSX • Spectrum 48K
Cassette £7.95

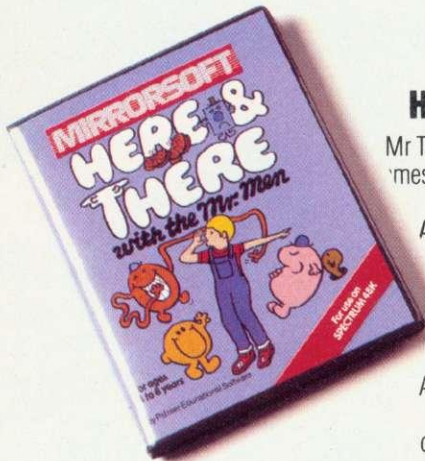

WORD GAMES WITH THE MR MEN

A bumper two-cassette pack featuring Mr Funny, Mr Silly, Mr Noisy, and Mr Bounce. Mr Noisy's Word Game introduces opposites and comparatives, and Read with Mr Bounce helps with positional words like in and out, over and under.
BBC B/Electron • Commodore 64 • Spectrum 48K
Cassette £9.95

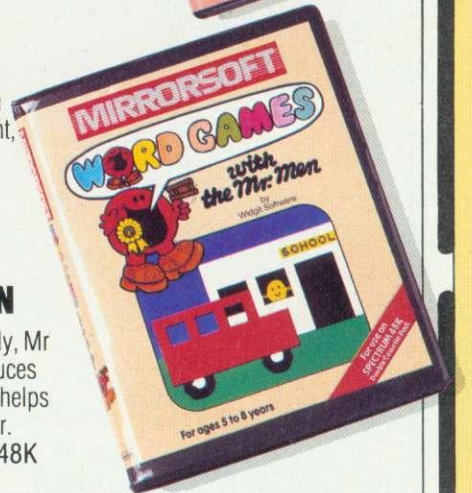

All BBC B and Commodore 64 programs are also available on disk at £3 above the cassette pack price. We also operate a disk upgrade service for the same price.

The Mirrorsoft Mr Men Christmas Collection is available through BESA and other good software stockists everywhere.

In case of difficulty or for catalogues and product information sheets on our children's software range, please contact:

MIRRORSOFT

Maxwell House, 74 Worship Street, London EC2A 2EN. Tel: 01-377 4644 (24 hours)
Trade orders: Mirrorsoft Ltd, Purnell Book Centre, Paulton, Bristol BS18 5LQ

Welcome to our new-look pages

The new-look *Acorn User* marks the launch of a whole new range of services for readers and the confirmation of our determination to maintain the magazine's position as the market leader.

The past three and a half years have seen a steady increase in the quality of material in *Acorn User*, reflecting the growing expertise of you, the readers who contribute ideas and articles. Programs presented in the magazine have put many commercial offerings to shame, and some have actually been used by software houses. We aim to see that your submissions receive the attention they deserve.

We've improved the appearance of the monthly listings cassettes, and you can now take out a subscription to receive one each month. A similar service for discs is soon to follow. Micronet users can now download listings direct - free of charge. The use of Bar Code Readers is growing and with it booklets to speed program entry and save typing.

Your replies to our Reader Survey demanded more software from *Acorn User* and that is coming to light with *UserDump*, *UserRAM* and special program compilations proving very popular. And there will be more in the New Year.

Also you'll see a new focus with articles devoted to helping you use the micro for tasks in business and the home, rather than the micro using you!

Some readers have asked why we cannot include barcode listings and checksums in each issue. The answer is simply that there isn't space. What would we leave out?

The Reader Service is well used, and next month we'll give a rundown of the sort of questions we are getting - and help you ask your questions better!

Until then we'll leave you to discover the delights of the new style. All the old favourites are still here, and, we hope, some new goodies to grab your attention.

Atari's 16-bit school bid

Atari is set to attack Acorn's education market with a 16-bit machine which promises to be compatible with the BBC micro.

The Atari 520ST was launched in the UK in September as an all-in system consisting of 68000 processor, 512k RAM, a monochrome monitor, 500k disc drive, mouse and bundled software. It normally sells at £749.

By the end of the month, 5000 STs had been sold and, according to the company, many of these went to schools. Atari hopes to build on this by releasing a BBC Basic interpreter before the end of the year, with all the Beeb's screen modes and compatibility at operating system level.

This would allow the machine to be used alongside BBC micros for teaching Basic programming in schools. Apricot adopted a similar tactic with the F1E 16-bit



Can the Atari ST (left) loosen the BBC micro's (right) educational stranglehold?

machine, but hasn't proved very successful.

There are also plans for a full 6502 emulation, which would allow the ST to run almost all BBC micro software. A Z80 emulator has already been written for the ST, allowing CP/M business software to be run.

Atari product manager Robert Katz claimed: 'The ST is taking over in schools because it scores over the BBC micro in two respects - speed and memory.'

'It also has a networking capability and by Christmas we should have over 500 software titles for the ST - mainly third party.'

Bob Coates of Acorn's education division was unimpressed.

He said: 'Unless the ST can emulate the BBC micro's VDU commands the majority of educational and other software won't work.'

'As well as graphics compatibility there's the question of media compatibility and the copy protection of BBC micro software.'

'If the ST can overcome all these problems we at Acorn might take it seriously.'

Acorn is selling 3000-4000 BBC micros per month and some 2500 schools have Econet networks of these computers. Coates thought it unlikely that schools would switch to a network based on Atari machines.

And he claimed that marketing the Atari as a 16-bit business machine for schools would not be successful, as the machines had little educational use apart from in business studies.

Eltec, a major distributor of computers to retailers and to education authorities in the north of England, said: 'Everyone wants a large slice of the education market, but Acorn sales remain as strong as ever. We won't sell the Atari directly against the BBC micro - they're really for two different markets.'



Download to the Electron

Electron users will soon be able to access Ceefax or Oracle to download telesoftware with a teletext adaptor costing about £150 from Morley Electronics.

The unit has its own power supply and plugs into the Plus 1 interface on the Electron. Software to control the system is built

into the adaptor which comes in a case similar to the BBC micro version (shown above).

The Beeb's mode 7 is simulated by the adaptor, making it possible to play long adventure games.

Details form 1 Morley Place, Earsdon Road, Shiremoor, Tyne and Wear.

A SPECTACULAR ARCADE-STYLE GAME

DeathStar



THE FIRST ZONE.



THE WARRIOR ZONE.



THE DEATHSTAR BEING BOMBED.



CRYSTALS BEING EMITTED FROM A PLANETOID.



DEATHSTAR

is a fast arcade-style space game with stunning graphics and addictive action. Your "intelligent" opponents, the Workers and Warriors, each have several different tasks to perform: mining the Crystals held deep within the Planetoids, constructing the mighty Deathstar from these Crystals, guarding the Deathstar, attacking your ship, and sacrificially intercepting the Starbombs, with some jobs having higher priorities than others. You must amass a large supply of Starbombs by shooting the Planetoids and collecting the Crystals as they splinter off the Planetoids and hurtle through space. Once the Deathstar has been completed, it comes in rapid pursuit and can only be repulsed by swift and accurate use of the Starbombs. If you successfully destroy the Deathstar, you progress on to the Worker Zone, the Warrior Zone, the Planetoid Zone and the Void Zone (in which there are very few Planetoids present), with a bonus screen between each zone. A superb game, destined to become another Superior classic.

SPEECH COMPATIBLE

If you have an Acorn Speech Synthesiser fitted, you will hear spoken phrases: such as "BEWARE, I AM COMPLETE" when the Workers have finished building the Deathstar.

CASSETTE VERSION — £9.95

BBC DISC VERSION — £11.95

Due to phenomenal demand, Deathstar is now available on disc for the BBC micro in a high quality vinyl disc wallet with colour packaging.

WE PAY UP TO 20% ROYALTIES FOR HIGH QUALITY BBC & ELECTRON PROGRAMS



SUPERIOR SOFTWARE LTD.

Dept. AU12, Regent House,
Skinner Lane, Leeds 7
Tel: 0532 459453.



OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately.



Mechanics by micro

Car owners can find and remedy faults on their vehicles with *Car Cure* from Simtron.

The software helps you diagnose the problem and suggests what action should be taken. It's database contains more than 300 symptoms and 900 faults.

Available for the BBC micro, it costs £9.95 on cassette or £11.95 on 40 or 80 track disc from Simtron, 4 Clarence Drive, East Grinstead, W Sussex RH19 4RZ.

Mailbox bargain

Secondary schools using The Times Network for Schools (TTNS) can take up extra electronic mailboxes at £34 for the current academic year instead of the same price per term, before December 1985.

TTNS members will be entitled to one reduced price mail-only box for each full-price mailbox (£69 per term). They are intended for communication between headteachers, school administrators and their local authorities, as well as other TTNS members.

MEP units scabble for cash

The dismantling of the Microelectronics Education Programme (MEP) has left the specialist MEP development units scabbling for cash while the Government apparently has money to spare.

The Microelectronics Support Unit (MSU) will take over from the MEP in April 1986 with a reduced range of activities and a smaller budget - £2.2 million as opposed to the MEP's £4.5 million this financial year.

Several of the seven national MEP hardware and software development units seem set to lose Government funding and will have to look elsewhere for their money - perhaps to Local Education Authorities, universities, commercial companies or other

Software house abandons Beeb

by Geoff Nairn

A major software house has decided that the BBC micro has had its heyday. Computer Concepts, which specialises in serious ROM-based software, has announced it will abandon the Beeb and concentrate on the Atari 16-bit ST.

Computer Concepts made its name with the *Wordwise* wordprocessor and has a list of 15 Beeb titles. Two more are in the pipeline - *Interbase*, a sophisticated database program, and a new wordprocessor, *Interword* - but after these are released, in early 1986, there will be no new titles for the BBC micro.

Managing director Charles Moir said: 'We've stretched the BBC micro beyond the limit and we now need a more powerful machine.'

'The Atari ST, like the Beeb in its early days, suffers from a dire shortage of software so we will concentrate on this one machine.'

He stressed that the company would continue to support those already using Computer Concepts' BBC micro software.

The company specialises in serious, upmarket software as opposed to games and this sector of the market is meant to be the most secure and stable for the BBC micro.

Indeed, other publishers of ROM software were more optimistic. Nazir Jessa, of Watford Electronics, commented, 'We have the largest range of ROM software for the BBC micro and we feel that the market is good for another two years.'

Adrian Calcraft, of Beebugsoft, said, 'We have some 30 titles for the Beeb, including eight to be released at Christmas. We are launching six programs for the Amstrad, but we have no plans as yet for the Atari ST, though we obviously review the market as new machines are released.'

education bodies.

Yet the Treasury has apparently set aside £3.4 million for the MSU, even though the Department of Education and Science has only called on £2.2 million.

Mike Bostock, of the Applied Microelectronics in Education Unit at Newcastle, fears that the announced lower figure jeopardises the MEP's development role and, in particular, the very existence of his unit. He said: 'No money has been put side for development - just consolidation of existing products and software. It looks like our unit will be closing down.'

Over 40 countries have paid for MEP consultants to help set up similar computers in education

projects overseas, and John Coll, manager of the Homerton College MEP software unit, feared that if the MSU abandoned the MEP's 'leading edge' activities, this source of income would dry up.

The Chelsea Project, which receives the largest share of funding of all the MEP national development units, is looking for funding from Kings and Chelsea Colleges, and university research councils. Its director, Margaret Cox, had yet to hear whether the MSU would provide any support to the project.

No-one from the Department of Education and Science was available to comment on the MSU's activities or the extra money.



Nightingale buyers could win US trip

Fly the modem

Pace has teamed up with Micronet 800 and Virgin Atlantic Airways to run a competition with a £1600 trip to the United States as the prize.

The competition is open to anyone who buys a Nightingale modem between November 1 1985 and February 1 1986. To enter you must take part in the Pace Round Britain Race currently on Micronet 800. Everybody who plays the game will go forward to the big draw to be held on March 1 1986.

For more details contact Pace or your local Pace dealer.

Logotron extras

Logotron has announced a set of extra facilities for its Logo package, including a control version of the language.

Advanced Logo comes on a disc at £15 (excluding VAT) and provides 40 new Logo primitives including a list processing kit for database writing.

Control Logo will work with many robotic devices.

Contact Logotron, Ryman House, 53 Markham Street, London SW3 4ND.

Videotext 'oscar'

Videotext users now have their own 'Oscar' style awards run by Prestel, Micronet 800 and Tecmedia.

All you have to do is create a videotext database of 10 to 30 frames, save it to disc and mail it to the organisers, c/o Tecmedia, 5 Granby Street, Loughborough LE11 3DU. Every month winning entries will be displayed on Prestel and winners will receive cash prizes and mounted certificates.

MATCH DAY



Match Day is no ordinary soccer game. Blistering 3-D action, total animation and automatic camera scan are just some of the intricate techniques which make Match Day the league

leader of soccer games. Now follow the "Action":

Your striker traps the ball from a perfectly placed corner-kick, takes on the defender and dribbles neatly round him making space to



chip in a teasing cross-ball to his advancing team mate in the



six-yard box. There is no time to control the ball, your player must commit himself to a snap shot on goal...



his powerful half-volley rattles the cross-bar, the ball returns, floating menacingly above the penalty



area and your star striker seizes this half-chance



to head the ball decisively into the back of the net... ..GOAL!



Match Day is as compelling as soccer itself. You will marvel at the depth of play and ball control offered only in MATCH DAY... Shoot to win!



BBC MICRO
9.95

ocean

BBC MICRO
9.95

Ocean House · 6 Central Street · Manchester · M2 5NS · Telephone 061 832 6633 · Telex 669977

Ocean Software is available from selected branches of: **WOOLWORTH**, **WHSMITH**, **John Menzies**, **LASKYS**, **Rumbelows**, **Greens**, **Spectrum Shops** and all good software dealers. Trade enquiries welcome.

Demon returns from the grave

The budget-priced Demon modem is now being sold through Walkbry Consultants, after the collapse of its previous manufacturer, Rushworth Dales.

Walkbry Consultants made the Demon under contract to Rushworth Dales, and has now bought up the stock from the liquidators and will manufacture and market the modem itself.

Martin Paine of Walkbry said: 'We will be producing exactly the same product, but with more emphasis on quality control.'

Walkbry will take over support for existing customers, but will make a standard charge of £10 for sorting out problems. The price of the modem has still to be fixed but it should be around £50.

Walkbry Consultants, Alfric Square, Woodston, Peterborough. Tel: (0733) 235187.

Up to scratch

Innovative Software has released *Scratchpad*, an 'ideas processor' program for the BBC micro. It's a cross between a wordprocessor and a spreadsheet - like a wordprocessor, text is entered once only and can be easily manipulated but like a spreadsheet, the user can try out different structures for the text.

It comes on disc at £24.95. You can call Innovative Software on (0792) 205678 ext 4219.

Beebs used to fight heart disease

BBC micros are hard at work at the Brompton Hospital in London helping to fight heart disease.

Five machines are being employed for a variety of tasks concerned with analysing different types of human tissue, including looking for cancer.

One Beeb is used for ultrasonic tissue characterisation and is hooked up to a sophisticated 100MHz waveform analyser and an ultrasonic imaging system.

In the pathology department an



Acorn's Communicator is to be sold to original equipment manufacturers (OEMs) to customise for their own purposes

Communicator's wide appeal

The Communicator, Acorn's answer to ICL's One Per Desk, was due to make its first public appearance at the London Compec business show in November.

Unlike other Acorn micros, the Communicator will not be available through normal retail outlets, but will be supplied direct to OEM's (original equipment manufacturers) who will customise the

machine hardware and software for their own business.

The Communicator should appeal to a wide variety of establishments ranging from multinationals who wish to build up a local area network of machines within buildings, down to travel and estate agents who could be linked together to form a huge database of holidays or homes.

The Communicator which takes up only 43 x 22cm of desk space has a full QWERTY keyboard incorporating separate number and function keypads. A matching telephone is also supplied. The calculator-type LCD (shown in *AU* October) will not be supplied as standard.

At the heart of this new machine is the 16 bit 65SC816 microprocessor which runs a specially developed multi-tasking operating system held in one of the four available 128k ROM sockets. A limited amount of software is offered including the *View* range, some demonstration packages and software development tools. It contains communications software plus an auto answer/auto dial modem.

Memory is expandable internally from 128k to 512k and may be expanded off-board via the expansion bus. Battery-backed memory is also present for the storage of vital data such as phone and account numbers.

Disc storage is offered as a separate unit holding two 3.5in floppy discs giving 1.2 Mbytes. The disc drive unit can also act as a file server for Econet.

OEM's can fit their own ROM-based software into the four internal ROM sockets. The onus will be on OEM's to write or commission for their needs but Acorn will provide support and assistance.

Morley spins 1Mbyte disc

Morley Electronics has produced a 1Mbyte RAM disc for the BBC micro which offers unlimited file names and rapid access. The memory is addressed as if it is disc drive number 4.

The unit comes in the same case as the Morley teletext adaptor and plugs into the 1MHz bus. A

ROM-based operating system contains numerous utilities, including one to back up all the files to floppy discs.

Price should be less than £200. For further details contact Morley Electronics, 1 Morley Place, Earsdon Road, Shiremoor, Tynes & Wear.

ABS graphics tablet and a BBC micro together measuring point-to-point distances and areas of



Histology slide showing fibrosis in tissue, produced by system using BBC micro and graphics tablet

tissues slices on histological slides.


Another Beeb with a video camera detects scarred tissue within a slice, by means of photographic filters and grey-scale techniques.

Most of the software has been written in-house. Ron Logan-Sinclair, of the medical electronics department, said: 'In many instances it's far easier and quicker to develop an application on a BBC micro than on other more sophisticated computers.'



COMPUTER GROUP DISK DRIVES


affordable computer solutions

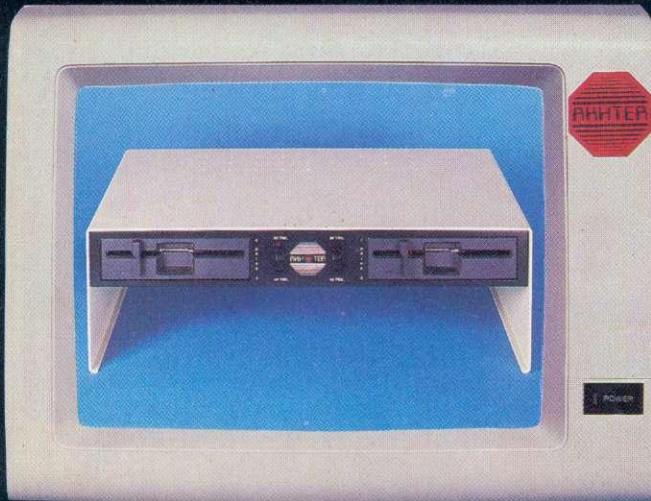

Dual 5 1/4" drives, with integral power supply. Horizontally cased in a metal stand. The ideal partner for your BBC & monitor. (Code suffix 'D' see opposite page).




Single 5 1/4" drive, with integral power supply, in a metal case. (Code suffix 'B' see opposite page).

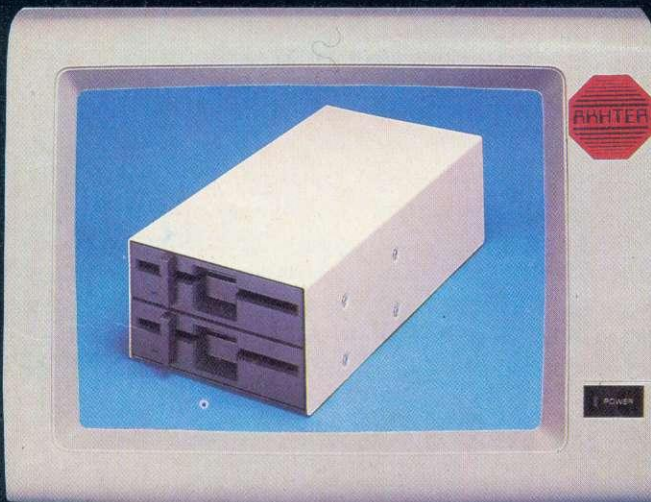

Dual 5 1/4" drives with integral power supply in a metal case. (Code suffix 'E' see opposite page).



Either a single or dual 3 1/2" drive, without power supply, in a metal case. Single version is fully equipped with cables for later expansion to dual drives. (Code suffix 'F' see opposite page).

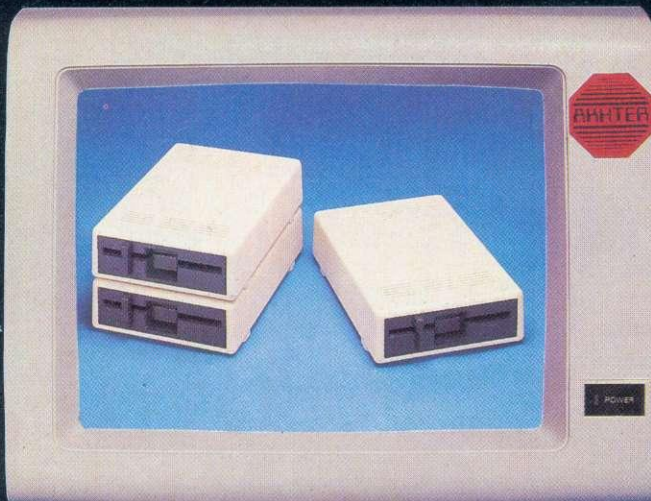

Single 5 1/4" drive, without power supply, in a plastic case. (Code suffix 'A' see opposite page). Dual 5 1/4" drives, without power supply, in a plastic case. (Code suffix 'C' see opposite page).



Either a single or dual 3 1/2" drive, with integral power supply, in a metal case. Single version is fully equipped with cables for later expansion to dual drives. (Code suffix 'G' see opposite page).



AKHTER INSTRUMENTS LTD 7/A

COMPUTER GROUP

AKHTER HOUSE, PERRY ROAD, STAPLE TYE,
HARLOW, ESSEX, CM18 7PN UK
Tel: HARLOW (0279) 443521. Telex: 818894 AKHTER G

For affordable computer solutions



COMPUTER
SOLUTIONS from
COMPUTER GROUP



For the complete range of:

ACORN

Computer Systems & Peripherals



For the complete range of:

DISK DRIVES

For the complete range of:

TORCH

Computer Systems & Peripherals

DISK DRIVES

100% BBC Compatible High Quality, Disk Drives

All these drives are supplied ready cased and equipped with all necessary cables, formatting disc and User Guide.

5 1/4" DUAL DRIVES, HORIZONTALLY MOUNTED (Monitor Stand Metal Case, with PSU)

MD802D

Double-sided 800K (2 x 400K) 40/80 track switchable
£260 + VAT £299

5 1/4" DUAL DRIVES, VERTICALLY STACKED (Housed in Metal Case, with PSU)

MD802E

Double-sided 800K (2 x 400K) 40/80 track switchable
£234 + VAT £269

5 1/4" DUAL DRIVES, VERTICALLY STACKED (Housed in Plastic Case)

MD802C

Double-sided 800K (2 x 400K) 40/80 track switchable
£186 + VAT £214

5 1/4" SINGLE DRIVE (Housed in Metal Case, with PSU)

MD400B

Double-sided 400K 40/80 track switchable
£120 + VAT £138

5 1/4" SINGLE DRIVE (Housed in Plastic Case)

MD400A

Double-sided 400K 40/80 track switchable
£99 + VAT £114

5 1/4" NEW LOW COST DRIVE WITH 1 YEAR WARRANTY (Housed in Metal Case)

SD400A

Double-sided 400K
40/80 track switchable
without PSU
£86 + VAT £99

SD400B

Double-sided 400K
40/80 track switchable
with PSU
£104 + VAT £119

SD802E

Double-sided 800K
(2x400K)
40/80 track switchable
Vertically stacked dual
drives
£191 + VAT £219

3 1/2" VERTICALLY STACKED DRIVES AT LOW, LOW COST WITH 1 YEAR WARRANTY

MD400F

Double-sided 400K
(single density)
800K (double-density),
80 track switchable.
Single drive, with provision for
second drive to be added to the
same case.
£99 + VAT £114
MD400G
As 400F with power supply
£121 + VAT £139 inc.

MD 802F

Double-drive 800K
(single density)
1600K (double density)
80 track
Dual drives ready fitted in the
vertically stacked casing
£173 + VAT £199
MD802G
As 802F with power supply
£199 + VAT £299 inc.

ACORN PRODUCTS

BBC MODEL B Plus with DFS	384	442
BBC MODEL B Plus with Econet	373	429
BBC MODEL B Plus with DFS and Econet	428	492
BBC MODEL B Plus, 128K version	418	481
6502 Second Processor	173	199
Z80 Second Processor	346	399
Winchester Disk Drive — 10 Mbytes	1304	1499
Winchester Disk Drive — 30 Mbytes	1999	2299
BBC Prestel Receiver	121	139
BBC Teletext Receiver	196	225
MODEL A to B Upgrade (incl. fitting)	90	103
Econet Interface (incl. fitting)	60	69
Disk Interface (incl. fitting)	103	118
New 1770 DFS kit	43	50
64K RAM Upgrade for Bplus	34	39
ADFS ROM	26	30
IEE Interface	284	327
Music 500	170	196
Speech Upgrade	48	55
EPROMER for the BBC (with software available on Cassette, Disk or ROM — please specify)	99	114
Acorn Bitstick	328	377
Acorn Bitstick, Multi-plotter Driver	69	79
AMX Mouse	75	87
Traker Ball	52	60
Grafpad	120	138
Games Paddles	13	15
BBC Software		
ISO-Pascal	50	58
Wordwise	35	41
Wordwise Plus	49	56
View	52	60
Viewsheet	52	60
Viewstore	52	60

AKHTEA	PRICES
Ex. VAT	Inc. VAT
£	£

ECONET ACCESSORIES

File server level one	209	240
Econet Starter Kit	85	98
Printer server ROM	42	49
10 Station lead set	26	30
Econet interface kit (incl. fitting)	60	69

TORCH COMPUTERS

Torch Z80 Disk Pack	564	649
Torch Z80 Drive Only	266	306
Torch ZEP 100 Second Processor	299	344

3M PRODUCTS

3M 5 1/4" DISKETTES		
Single-sided, double-density, 40 track	16	18
Double-sided, double-density, 40 track	23	26
Double-sided, double-density, 80 track	27	30
Head Cleaning Kit	12	14
3M 3 1/2" DISKETTES		
Single-sided, double density, 40 track	28	33
Double-sided, double-density, 40 track	39	45
DISKETTE STORAGE BOXES		
3M FLIP N File (15 diskettes)	6	7
3M Locking diskette file (capacity 50)	18	21
Lockable storage file (capacity 100)	20	23

SPECIAL ADVICE GIVEN
ON ALL ASPECTS OF
EDUCATIONAL
SOFTWARE &
HARDWARE PRODUCTSEDUCATIONAL COMPUTER
SOLUTIONS from
COMPUTER GROUPSPECIAL
EDUCATIONAL
DISCOUNTS &
BULK ENQUIRIES
WELCOME.



PRINTERS

For quality brand names



MONITORS

For quality brand names



PERIPHERALS

For quality brand names

DOT MATRIX PRINTERS

	AKHTER Ex. VAT £	PRICES Inc. VAT £
EPSON FX80 160 CPS, 10" wide friction and pin feed. NLQ Option	324	373
EPSON FX100 160 CPS, 15" wide friction and pin feed. NLQ Option	455	524
EPSON RX100 F/T 100 CPS, 15" wide friction and tractor feed	359	413
EPSON LX80 NEW printer with NLQ, 100 CPS, 10" wide, friction feed	229	264
EPSON LQ 1500, 200 CPS draft, 67 CPS NLQ, 15" wide friction feed	995	1145
EPSON SQ2000, ink-jet 176 CPS draft, 105 CPS letter quality, very quiet, 15" wide friction feed	1695	1949
CANON PW1080A, 160CPS, 10" wide friction and tractor feed, NLQ	255	294
CANON PW1156A, 160 CPS, 15" wide, friction and tractor feed, NLQ	359	413
SHINWA CPA80, 100 CPS, 10" wide, friction and tractor feed	173	199
MP165, 165 CPS, 10" wide, friction and tractor feed. NLQ, Epson compatible	239	275
SEIKOSHA BP-5420, this is a business dot matrix printer. Ideal for Networks. 420 CPS, friction and tractor feed	1395	1605
JUKI 5510, 180 CPS, 10" wide, NLQ, friction and tractor feed	269	309

DAISYWHEEL PRINTERS

JUKI 6000 10 CPS. Bi-directional, logic seeking, 10, 12, 15 CPI and P.S.	199	229
JUKI 6100 20 CPS. Bi-directional, logic seeking, 10, 12, 15 CPI and P.S.	324	373
JUKI 6200 30 CPS. Bi-directional, logic seeking, 3K buffer	499	574
JUKI 6300 40 CPS. Bi-directional, logic seeking, 3K buffer, 10, 12, 15 CPI and P.S.	699	804
JUKI 2200 Portable electronic typewriter and R/O printer. 12" wide. 10 CPS. 10, 12, 15 CPI and P.S. Bi-directional printing. 2K buffer	249	286
QUENDATA DWP1120 20 CPS. Bi-directional, logic seeking, Centronics Interface (optional RS232).	219	252

COLOUR PRINTERS

EPSON JX80, seven colour, 160 CPS	499	574
EPSON Hi 80, printer/plotter, 4 pen A4	349	401
JUKI 5520, seven colour, 180 CPS, NLQ, friction and tractor feed	399	459
CANON PJ1080A, seven colour, ink jet printer, 37 CPS, bi-directional	399	459

LASER PRINTER

CANON LBP-801 Landscape and portrait printing. 10, 12, 15 CPI and P.S.	2695	3058
--	------	------

MODEMS

Limited offer: free registration to microlink with every modem purchased

ANSWER CALL MINI MODEM MD101, V21	75	87
MIRACLE TECHNOLOGY WS2000 V21, V23	129	149
TELEMOD 3 V21, V23 Autoanswer	129	149
ONE-TO-ONE REGISTRATION	50	58

PRINTER ACCESSORIES

TRACTOR ADAPTORS		
FX80.	33	38
LX80.	20	23
JUKI 6300.	129	148
JUKI 6100.	129	148
QUENDATA DWP1120.	114	132

PRINTER ACCESSORIES

	AKHTER Ex. VAT £	PRICES Inc. VAT £
SHEET FEEDERS		
JUKI 6300	199	229
JUKI 6100	199	229
QUENDATA DWP1120	199	229
RIBBONS		
EPSON FX80	5	6
EPSON LX80	6	7
EPSON FX100	7	8
CANON/KAGA	7	8
SEIKOSHA BP-5420	18	21
SHINWA CPA80	6	7
JUKI 6100: Single Strike	2	3
JUKI 6100: Multistrike	4	5
DAISYWHEELS		
JUKI: Various T/A.	12	14
QUENDATA	10	12
RS232 INTERFACES		
EPSON 8143	39	45
EPSON 8148 (with 2K buffer, Xoff/Xon)	69	79
JUKI (for all Juki printers)	50	58
CANON	79	91
PRINTER BUFFERS/SHARERS		
32K PRINTER BUFFER, for Epson	75	87
BAL 100 INTELLIGENT, 64K buffer/sharer (3 computers to one printer)	199	229
COMPUTER SHARER, 1 computer to two printers	19	22
PRINTER SHARER, 4 computers to one printer	85	98
FANFOLD PAPER		
Draft quality paper (9 1/2" x 111" - 2") box 2000 sheets	14	16
Letter quality paper (A4) box 1000 sheets	16	18

MONITORS

PHILIPS MONOCHROME		
BM7502 A hi-res green screen monitor	74	85
BM7522 A hi-res amber screen monitor	78	89
BM7513 IBM compatible (green) with cable	86	99
BM7542 Dark glass, white screen	79	91
PHILLIPS COLOUR		
CM8500, 14" Std Res, composite video plus audio input	189	218
CM8501, 14" Std Res, RGB linear, RGB-TTL and audio inputs	199	229
CM8524, 14" Std Res, Composite video, RGB linear, RGB-TTL and audio input	229	264
CM8533, Medium Res (640x200) Composite RGB linear (for Atari S20St) RGB-TTL, RGBI-TTL (for IBM and compatibles)	260	299
<i>New product compatible with almost all computers</i>		
PHILLIPS COLOUR TV/MONITOR		
CT2007 14" Colour TV with RGB-TTL and composite video input	179	206
MITSUBISHI COLOUR MONITOR		
1404 Medium res (640x200) RGBI, Supplied with IBM & BBC leads		
<i>New product BBC & IBM compatible</i>		
Special introductory price	249	287
IBM COLOUR MONITOR		
Standard Res, 14". Supplied with IBM & BBC leads		
<i>New product BBC & IBM compatible</i>	149	172
MICROVITEC CUB COLOUR		
1431 MS 14" RGB standard res. colour.	199	229
1451 DS 14" RGB medium res. colour.	240	276
1441 MS 14" RGB high res. colour.	399	459

ACCESSORIES

Monitor stand for BBC	10	12
Swivel monitor stand for Phillips BM75 range of monitors	10	12

CALLERS WELCOME, AMPLE PARKING

Opening Hours:

Mon - Fri 9a.m. - 6.30p.m.
Sat 10a.m. - 5p.m.

DELIVERY:

Securicor Express Delivery £8.00 + VAT per parcel
Securicor Delivery 2-3 days £5.00 + VAT per parcel
Postal Service, small items £1.50 + VAT per parcel

Prices apply to U.K. Mainland only



AKHTER INSTRUMENTS LTD T/A

COMPUTER GROUP

AKHTER HOUSE, PERRY ROAD, STAPLE TYE,
HARLOW, ESSEX, CM18 7PN UK
Tel: HARLOW (0279) 443521. Telex: 818894 AKHTER G

For affordable computer solutions

Watford's Delta second processor fits inside Beeb

The expanding Watford Electronics is releasing four new products this month – a 4MHz processor board to speed up a standard BBC micro; a 128k RAM/ROM board; a *Wordwise Plus* utilities ROM; and a double density filing system for the BBC B+.

The 4MHz Delta board is a second processor with a difference – the board fits inside a standard BBC B micro, plugging into the existing 6502 microprocessor socket. A single fly lead needs to be fitted and the power leads from the power supply unit must be redirected via the Delta board.

Once installed the Delta processor, which is based on the 65C02 chip, will run your Basic and machine code programs at more than twice their normal speed.

The Delta board has its own 64k of RAM which works in parallel with the existing memory

in the micro. The price of the Delta board is £113.85 inclusive of VAT and software is provided in a sideways ROM.

The Watford ROM/RAM board provides up to 128k of sideways RAM. The board plugs into the 6502 socket and has five ROM sockets on board in addition to those normally available on the BBC micro. There are eight 16k bank RAM. With the addition of a suitable Ni-Cad battery RAM may be battery backed.

A plethora of software is provided on disc, designed to make using the board as simple as possible. The software includes a RAM Filing System which has all the facilities of a standard DFS.


Three ROM/RAM boards are available, with various amounts of RAM fitted priced as follows: 32k £51.75; 64k £79.35; 128k £125.35; 128k plus battery backup

£143.73. All prices include VAT.

Word-Aid is a ROM-based suite of menu driven utilities for use with *Wordwise Plus*. It provides 11 areas of operation, including an alphabetical sorter, text transfer, chapter marker, printer codes, search and display, embedded command removal, multiple copies, continuous processing, mail merger, and utilities for use when writing Basic programs in *Wordwise Plus*. *Word-Aid* costs £13.80 including VAT.

Watford Electronics has also launched a 16k Double Density Filing System (DDFS) for the BBC B+. The most appealing of its many features are single or double density operation with automatic density detection; 31 or 62 file catalogue; and 8271 emulation for loading commercial software. The B+ DDFS costs £40.25 including VAT.

THE MAN FROM



Another Acorn machine sneaks onto the market in a blaze of reticence – the 128k 'Big Job' has been launched, despite rumours to the contrary. Ace marketing technique, eh? The review 'machine' delivered to *Acorn User* was a bare board which had to be soldered into an existing machine, impressive you must admit. They really know how to mould the opinions of the opinion moulders.

Still, they have announced the Risc chip and claim it is better than anything else in the known world. On past performance, the next step in the ladder is to forget all about it then go and invent something else.

Take heart though. I've just written (on the BBC micro of course) a machine code 're-number' program for a poor soul who has the misfortune to own a Commodore 64. It's probably the feeblest machine I've seen, and makes me very grateful to both Acorn and the BBC, though it may not always sound like that.

Incidentally, rumour has it that Commodore may not be oppressing the masses for much longer. Even the very exciting Amiga, not working yet, may not save it and could actually be bought off it lock, stock and barrel by Somebody Else.

Speaking of Atari, its founder and ex-chief wizard, whose name escapes me for the moment, is having a second go at flogging robots. He has abandoned humanoids and is betting on metal moggies. It's true – you clap your hands and the ferrous feline will seek you out, purring as it goes. Clap again and it retreats into its hangar. Thank the lord Acorn didn't employ him. The Acorn Aardvaark could play havoc with the three-piece.

BBC micros star in design display



The Design Centre in London is using BBC micros at the heart of a dramatic entrance exhibition for its new innovation section. Each one of the 10 Beebs controls a monitor on which changing graphics are shown. This exciting display was created by the One Point Five design group and will become a permanent feature.

The BBC micro has already won a Design Centre award, and Acorn has submitted the Communicator for consideration for a similar accolade.

First birthday for Tubelink

Tubelink, the specialist database section of Prestel for second processor owners, is celebrating its first birthday.

Tubelink has more than 800 users registered and in excess of 700 pages – all due to its 15-year-old editor, Benjamin Rietti.

Tubelink is on page 258216 of Prestel and is free to Prestel Microcomputing subscribers.

£400 prize for software

Cash prizes are being offered in a software competition for schools organised by the University of Kent. Individual or group entries are allowed in junior and senior categories – the task is to write a piece of software with a practical use in industry or commerce.

The first prize for the writer is £400, with hardware worth £1000 going to his/her school. Three other hardware prizes totalling

£1000 will be offered to the runners-up, as well as merit prizes ranging from £10 to £200.

Acorn User's technical editor Bruce Smith will be among the judges – others will come from the university, the sponsors Barclays Bank and industry.

Details from Kent Software Trophies, Computing Laboratory, The University, Canterbury, Kent CT2 7NF.

**THE
ACORN
USER
Christmas
Show**

As we went to press the following companies had booked space at the show.


AB Designs, Acorn User, ACP Ltd, Advanced Memory Systems, Alien Software, Alphadisk, AVP Computing, BBC Publications, Blue Ribbon Software, Bowthorpe EMP Ltd, British Micro, Cambridge Micro Centre, Care Electronics Ltd, Careers & Info Centre, Carswell Computers Ltd, Central Trade Exchange, CJE Micros Ltd, Colisoft, Commotion, Communitel, Comsoft, Datac, Direct Disk Supplies, Disco Tech UK Ltd, Dudleys Deals, F Soft, GP Peripherals, Griffen Computers, Gultronics Ltd, HCR Electronic Services, Highlight Software, Hilditch Software, IDS Computer Supplies, Intergalactic Robots, John Wiley & Sons Ltd, Kansas City Systems, LCL Educational Software, Limbic Systems, Logic Sales Ltd, Logotron, London Rock Shop Ltd, Lothlorien, Marconi, Medstat Ltd, Mical Data Ltd, Microaid, Microdeal Ltd, Micro Media Computer Supplies, Microworld Computer Systems Ltd, Midwich Computer Company Ltd, Mineria, Miniature Tool Company, Modem House, Musitek, Network Group, Norwich Computer Systems, Opus Supplies Ltd, Paul Cocker PC Software, PB Computer Supplies, Private Tutor, Ramamp Computers, Ramco, Scriven & Rudge, Shards Software, Slogger Ltd, Solidisk Technology Ltd, Sunshine Publications, System Ltd, Viglen Computer Supplies, Walkbury Consultants, Watford Electronics, We Serve, Wigmore House, Willow Software.

Bargains galore on offer at Acorn User Xmas Show

Bargain hunters look set to make a killing at the Acorn User Christmas Show, where companies will be competing to give the best prices and secure a large slice of the Christmas market. The show will be held at the Central Hall, Westminster, November 22-23.

Despite the problems at Acorn and a lack of direction in the company's marketing, sales of expensive peripherals such as mice, disc drives, monitors and printers are running at an all-time high.

'There will be plenty of special offers to celebrate our 13th birthday this November', said Nazir Jessa of Watford Electronics. 'We'll almost be giving our disc



UMI from the London Rock Shop on show at Central Hall

drives away. For example you'll be able to buy the latest Mitsubishi twin 40/80 track drive with power supply and cables for £175 plus VAT.'

Vig Boyd of Viglen - which was selling 800k switchable drives for £199 including VAT at the AU Exhibition at the Barbican this summer - was unwilling to be

drawn on what the item would be selling for in November: 'It depends. They might go up, they might go down. Let's wait and see!' he commented.

However, Viglen will be showing its new casing for the BBC micro. It replaces the present lid and has space for disc drives and a metal platform to carry a monitor. It includes a remote keyboard casing, and will cost £39.

The show also features some of the smaller specialist suppliers, including the London Rock Shop which will be featuring the UMI digital recording system as used by pop stars Ultravox, Blancmange, Paul Hardcastle and Depeche Mode. Priced at £495, the UMI created much interest at the Barbican earlier this year.

Certified by disc

The City and Guilds, in conjunction with BBC Education, has introduced a self-assessment test on disc, leading to the 444 Inside Information certificate.

The scheme is designed to provide an introduction to information technology (IT) and is based around hands-on experience with the BBC micro and the BBC's *Inside Information* package.

There is no time limit to the test, where 24 questions are selected from a large database, ensuring each test is different. The comput-

er marks the paper and successful candidates can send the disc containing their results to the City and Guilds which will issue the certificate.

A pamphlet detailing the syllabus costs £1.50 and a list of centres registered for the scheme is available. The *Inside Information* pack costs £26.95 from BBC Publications, 35 Marylebone High Street, London W1M 4AA. City and Guilds of London Institute can be contacted at Section 18, 46 Britannia Street, London WC1.

Atomic filing

Bear Hardware has released the Atom 1770 DFS designed to work with the company's AFDC hardware to control up to four drives. A utilities disc is available for users with single drive systems. An advanced systems disc is planned for early 1986. Details from Bear Hardware, 68 Harmondsworth Lane, Harmondsworth, Middlesex UB7 0AA.

Write a story

Draw a picture

Make a page

Print a newspaper

MIRRORSOFT

Mirrorsoft Ltd. Tel: 01-377 4837/4645

**FLEET
STREET**

CITY OF LONDON EC4

Editor
Publication January 1986



Voltmace battery back-up with 16k of RAM fitted (left); Caretaker ROM in cartridge; 4k ROM in uncased cartridge; buffer box with two assembled cartridges in place.

Sideways cartridges slip in

Voltmace has released a cartridge system for sideways RAM and ROMs which sits outside the BBC micro. Batteries can be added so that programs saved in memory are not lost when the computer is switched off.

Chips are inserted into cartridges in a similar way to Acorn's Plus 1 system for the Electron. These then fit into one of two slots in the external box. Connec-

tion is made to the Beeb by a ribbon cable to the socket of the analogue chip.

The buffer box with cable and one ROM cartridge costs £29.95. Extra ROM cartridges cost £3.50, with the RAM version priced at £9.95. Battery back-up adds £10 to the price of a RAM cartridge (prices do not include chips).

Details from Voltmace at Park Drive, Baldock, Herts SG7 6EW.

Christian aid

The Christian Micro Users Association aims to promote the use of micros.

The group produces a newsletter with listings and features on relevant topics and advertisements promoting products such as Christian teaching programs.

Articles include a progress report on keying in an Old Testament translation. CMUA is at 138 Bramwell Gardens, Sheffield.

Hams tune in to software

A father and son have got together to produce software for radio hams using BBC micros.

The first program is designed to control the YEASU 757GX transceiver and allows up to 300 station frequencies to be checked.

Details from G3LIV and G8UEE, or from J Melvin at 2 Salters Court, Gosforth, Newcastle.

Icon ROM from Beebugsoft

Macintosh-style menus can be created by *Icon Master* from Beebugsoft, which automatically generates the code to link screens you have designed to standard BBC micro software.

The icon symbols are designed by a special editor and are compatible with the AMX mouse and the rest of the software. The ROM costs £34.

Two other releases are *Romit*, a collection of sideways RAM utili-

ties and *Studio 8*, which converts the Beeb into a 'four voice synthesiser with an eight track recorder and rhythm and drum machine'.

The *Romit* ROM costs £34 and *Studio* disc £22.

A third version of *Spellcheck* is now out on a 16k ROM for £36, while *Toolkit* has been upgraded with Basic syntax checker and editor, to become *Toolkit Plus* priced at £39.

Acorn User Reader Services

AS a result of pressure from readers, *Acorn User* has decided to launch a guaranteed fast reply service for enquiries. Your answer will be returned within five working days for just £2 (includes VAT), or your money back.

The idea is simple. Just write out your problem, fill in the coupon below, and send both off to *Acorn User* with a stamped addressed envelope and cheque or postal order for £2. (If you want recorded delivery, add the cost of this on. The same goes for overseas readers.) Make sure you include as much detail as possible and a disc or cassette if a program is involved - with enough space to record any corrected listing.

We will then answer the problem and return all material received - within a guaranteed *five working days* from receipt - in the sae. If we fail to match this promise your cheque or postal order will be returned with the answered question.

If we cannot answer the problem, the cheque will be sent back to you.

This service has been set up because so many readers want a fast answer, which we do not have the staff to provide. Under this new system, special technical staff will be available who can give the fast, guaranteed turnaround required.

NB. Please give details of machine, Basic, DFS, operating system, any extra internal hardware, etc, if known.

Whether you want a listing debugged, advice on hardware or software, or a list of addresses, send your problems to Reader Services, *Acorn User*, 68 Long Acre, London WC2E 9JH.

ACORN USER READER SERVICE
68 Long Acre, London WC2E 9JH

Name

Address

.....

.....

..... Postcode

Daytime phone number.....

I enclose a cheque/postal order for £2 and an sae with my problem.

OFFICE USE ONLY Date in:

Date out:

Answered by:

NOTICE BOARD



AU contributor astronomer Heather Couper's TV series *Planets* goes out on Saturdays on Channel Four

ON TELEVISION

● AU contributor Heather Couper gets her own astronomy series, *Planets*, on Channel Four starting this month. The series uses sophisticated computer graphics to create a solar system and simulate the experience of travelling through space.

Information acquired from recent space probes is used to explain the Earth's immediate neighbours in space to a wider audience.

Planets consists of seven programmes and goes out on Saturdays at 7.30 pm, starting 9 November. Heather Couper devised the series and will also present it.

Micro Live continues its run of live weekly computer shows on BBC2, culminating in a Christmas special which will go out on 13 December, featuring a special report from the US on computers and fractal geometry, plus a buyers' guide to suitable presents for micro enthusiasts.

Other programmes of interest this month include items on IBM's dominance of the PC market, a computer museum in Boston, USA, and how to write a commercial games program.

Micro Live goes out on Fridays on BBC2 at 7.30 pm.

ON RADIO

● *Inside Information*, Radio 4 VHF, Sundays 4.30 pm. A series of 10 weekly broadcasts which

form part of a self-learning package about information technology. An audio tape of edited radio programmes is also available.

Further details given from BBC Publications at the address given below.

TO CONTACT

- Acorn (0223) 245200.
- Acorn's own bulletin board service is Prestel-compatible (1200/75) and runs on (0223) 243642.
- BBC TV's *Micro Live* bulletin board is on 01-579 2288 (type INFO BBC on Telecom Gold electronic mail system).
- BBC Publications has launched a public viewdata service, OwlTel, offering information on the BBC computer literacy project and its range of software and computer books. Credit card orders can be made on-line and messages can be sent to OwlTel. The phone number for the service is 01-927 5820. Write to: BBC Publications, 35 Marylebone High Street, London W1A 4AA.
- BBC Computer Literacy Project, Broadcasting Support Services, PO Box 7, London W3 6XJ. Send sae.
- British Telecom's Home Computer Line offers a short bulletin of hardware, software and general news. At present it's only available in Bradford, on (0272) 722622, and Belfast, on (0232) 8085.
- Bulletin Boards: CABB 01-631

3076; CBBS London 01-399 2136; Distel 01-679 1888; Forum 80 Hull (0482) 859169; Forum 80 London 01-399 2136; HAM-NET (0482) 497150; Liverpool Mailbox 051-428 8924; Mailbox 80 (0384) 635336; Technomatic 01-452 1500; TBBS London 01-348 9400; TBBS Nottingham (0602) 289783; TBBS Southampton (0703) 437200.

● MEP (Microelectronics Education Programme), Cheviot House, Coach Lane Campus, Newcastle-upon-Tyne NE7 7XA. Hardware and software support for schools. Please send sae.

● MAPE (Micros and Primary Education), c/o Barry Holmes, St Helen's Primary School, Bluntisham, Cambs. User group for primary teachers. Send sae.

● MUSE (Micro Users in Schools and Education), Freepost, Bromsgrove, Worcs B62 7BR. User group for teachers and parents. Please send sae.

● National Extension College, 18 Brooklands Avenue, Cambridge CB2 2HN. Educational and training courses on the BBC micro. Please send sae.

● CET (Council for Education Technology), 3 Devonshire Street, London W1N 2BA. Government body which overseas MEP. Please send sae.

ON SHOW

● 14-17 November, Electron & BBC Micro User Show, Royal Horticultural Hall, London. Details 061-456 8383.

● 19-21 November, Tor Business Computer Centre Exhibition, South Devon College of Arts & Technology, Torquay, Devon. A welcome chance to mention an exhibition which, for once, is not being held in a large city. Covers small business applications of computers. Details on (0803) 217519.

● 22-23 November, Acorn User Christmas Show, Central Hall, Westminster, London. Enjoy Christmas a month before everyone else. Details 01-346 6566.

● 14-17 January 1986, Which Computer? Show, National Exhi-

bition Centre, Birmingham. Details on 01-891 5051.

● 22-25 January, High Technology and Computers in Education Exhibition, Barbican, London. 01-349 4667.

FOR HELP

● To contact Acorn User authors, write c/o the editorial address given on page 2.

● Monitor choice: Photocopies of the review of four monitors, plus a set of nine test programs from the June 1984 issue cost 72p (including postage). A copy of the issue costs £1.25.

● Bulletin boards: Information on 26 free-access boards was given in the October 1984 issue. Send 54p for photocopy.

THE ESCAPE ROUTE

Almost all dot-matrix printers use escape codes to select printing style, whether it's the character set, underlining or NLQ print. Converting the ESC code given in the manual to a useable form is straightforward.

For example, the Epson manual states that to select italics we use ESC 4. The ESC character is always 27 (this is its ASCII code). The next step is to take the ASCII code of the number that follows – in this instance for the number 4 it is 53. Therefore we need to send ASCII characters 27 and 53 to the printer in that order. In Basic this is done using a VDU 1 before each character, thus we send:

VDU 1,27,1,53

The printer should have been enabled first though with CTRL-B or VDU 2, and then disabled with CTRL-C or VDU 3. Some ESC codes take three values. For example the pica sized print mode is selected with ESC B 1. In this case we proceed as described for the first two characters and then use the third as it is. ESC becomes 27, B becomes 66, 1 remains as 1. So the VDU sequence is:

VDU 1,27,1,66,1,1

The back of the user guide contains the ASCII code values for each character.

If you're closing in on Hunt at Silverstone, look what's coming round the corner.



Compared with the tension and realism of REVS, other motor racing programs are left at the starting grid.

The press heaped winner's laurels upon it.

Devotees are clamouring for further challenges, having progressed from Novice to Professional class to

The Original REVS at Silverstone.

New REVS 4 TRACKS adds challenging new circuits.

come within sniffing distance of the 1 minute 24.6 secs lap time at Silverstone of co-author and Formula 3 racer David Hunt.

To: Acornsoft, c/o Vector Marketing, London Road, Wellingborough, Northants, NN8 2RL

Please send me REVS 4 TRACKS for the BBC Micro-computer. (Remember, you need original REVS.)

No. of discs at £12.95 inc VAT _____

No. of cassettes at £9.95 inc VAT _____

Please send me REVS for the BBC Microcomputer.

No. of discs at £17.65 inc VAT _____

No. of cassettes at £14.95 inc VAT _____

I enclose PO/Cheque payable to Acornsoft Ltd.

Please debit my Access/Barclaycard No. _____

Name _____

Address _____

Postcode _____

ACORNSOFT

To be sure of delivery in time for Christmas, your order must be with us by Monday 16th December.

So we've gone four times better. We've brought you Donington Park, Brands Hatch, Oulton Park and Snetterton in the new REVS 4 TRACKS pack, for use in combination with the original program.

Every bend and brow of these renowned tracks is faithfully recreated, with the ever-present threat of your race rivals looming in the rear view mirror. And don't think for a minute that mastery of one track is mastery of all. Each of the

four circuits presents a whole new set of problems to conquer.

If any reader is contemplating these four plus original REVS as a bumper Christmas package, be warned. The experience and the turkey might not agree.

For the address of your nearest Acornsoft dealer, or to order REVS on credit card, call 0933 79300 during office hours. Or send the coupon below to Acornsoft, c/o Vector Marketing, London Road, Wellingborough, Northants NN8 2RL, allowing 28 days for delivery.

ACORNSOFT

REVS

for the BBC Microcomputer

Brands Hatch **Oulton Park**

4 tracks for the BBC Microcomputer

THE ACORN USER Christmas Show

**Central Hall,
Westminster,
22nd-23rd
November, 1985.**

**Today's the day to get your
Christmas shopping
started!**

Because today's the day we're announcing a new Christmas computer event — the Acorn User Christmas Show. And the coupon below brings you straight-past-the-queue advance tickets ... saves you

£1 or more on the entrance money ... and *automatically* enters you into the draw for Acorn products worth £500! It's the only way we know to make Christmas shopping fun.
When? And where? And who?

The Acorn User Christmas Show is on Friday and Saturday, 22nd and 23rd November, at The Central Hall, Westminster.

The Central Hall is near the Houses of Parliament. It's easy to get to, and it's big to make a really busy show comfortable. (Who needs another West End crush?) There'll be the most comprehensive range of hardware and software — for business, education, scientific and home use. The list of exhibitors is growing daily. Like visitors, they had a great time in July, and they're looking forward to launch their latest products.

GIVE YOUR ACORN A CHRISTMAS PRESENT (And yourself while you're at it!)

TICKET APPLICATION FORM

To: Edition Scheme Ltd,
HR House, 447 High Rd,
Finchley, London N12 0AF.
Tel: 01-346 6566

Please supply _____ (qty) adult
tickets at £2 (if total bookings
are less than 10) or £1 (if total
bookings are more than 10)
_____ (qty) under-sixteen
tickets at £1.

I enclose cheque/P.O. for £_____

Signature _____

Name _____

Address _____

Postcode _____

**What you save by posting
the ticket application
coupon today.**

For everybody ... cut out the
queueing! Ticket holders
walk straight to the door
and into the Show.

For individuals ... you save
£1 per head on entry.

Admission at the door will
be £3 per head for adults,
£2 per head for under-
sixteens.

For groups ... of ten or more
people, you save an extra
£1 per adult. Post the
application form today!

Edition Scheme Ltd,
HR House, 447 High Road,
Finchley, London N12 0AF.
Tel: 01-346 6566

ACORN USER CHRISTMAS SHOW EXHIBITOR LIST


AB DESIGNS
ACP LTD
ACORN SOFT
ACORN USER
ADVANCED MEMORY SYSTEMS
ALIEN SOFTWARE
ALPHADISK
AVP COMPUTING
BBC PUBLICATIONS
BLUE RIBBON SOFTWARE
BOWTHORPE EMP LTD
BRITISH MICRO
CARE ELECTRONICS LTD
CARSWELL COMPUTERS LTD
CENTRAL TRADE EXCHANGE
CJE MICROS LTD
COLISOFT
COMMOTION
COMMUNITEL
DIRECT DISK SUPPLIERS
GP PERIPHERALS LTD
GRIFFEN COMPUTERS
GULTRONICS LTD
HIGHLIGHT SOFTWARE
HILDITCH SOFTWARE
HCR ELECTRONIC SERVICES
IDS COMPUTER SUPPLIES
INTERGALACTIC ROBOTS
JOHN WILEY & SONS LTD
KANSAS CITY SYSTEMS
LCL EDUCATIONAL SOFTWARE
LOGIC SALES LTD
LOGOTRON
LONDON ROCKSHOP LTD
LOTHLORIAN
MEDSTAT LTD
MICAL DATA LTD
MICROAID
MICRO MEDIA COMPUTER SUPPLIES
MICROWORLD COMPUTER SYSTEMS
LTD
MINERVA
MICRODEAL LTD
MODEM HOUSE
MINIATURE TOOL COMPANY
NETWORK GROUP
NORWICH COMPUTER SYSTEMS
MIDWICH COMPUTER COMPANY LTD
OPUS SUPPLIES LTD
PRIVATE TUTOR
HSV COMPUTER SUPPLIES
RAMAMP COMPUTERS
SOLIDISK TECHNOLOGY LTD
SUNSHINE PUBLICATIONS
SYSTEM LTD
SLOGGER LTD
SHARDS SOFTWARE
SCRIVEN & RUDGE
VIGLEN COMPUTER SUPPLIES
WILLOW SOFTWARE
WE SERVE
WIGMORE HOUSE

STOP PRESS

DATA C
DUDLEYS DEALS
F. SOFT
WALKBURY CONSULTANTS
COMSOFT
VENTURE INTERNATIONAL
WATFORD ELECTRONICS
RAMCO
LIMBIC SYSTEMS
CAMBRIDGE MICRO CENTRE
CAREERS & INFO CENTRE
PACE
PINEAPPLE SOFTWARE
PAUL COKER SOFTWARE
CHAMELEON
RICKET EDUCATIONAL MEDIA
CARLTON TRADING COMPANY
REFLEX MAGNETICS
MICRONET



**GREAT GAMES TO BRING
OUT THE BEST IN YOU. NOW
FOR YOUR BBC MICRO-19-95**

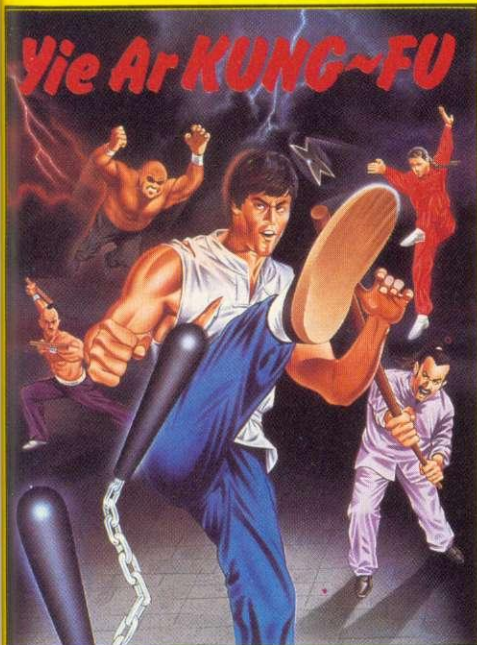

FOR YOUR

**THE OFFICIALLY ENDORSED VERSION
OF THE ARCADE CLASSIC BY
'KONAMI'.
FANTASTIC GRAPHICS.
PLAY HEAD TO HEAD OR FIGHT
AGAINST THE COMPUTER IN
THIS BREATHTAKING MARTIAL
ARTS GAME.**

**COMPETE
WITH THE
STARS!**


**SIX DIFFERENT EVENTS TO
TEST YOUR SKILL AND STAMINA**

- ☆ SWIMMING
- ☆ TRIPLE JUMP
- ☆ SKEET SHOOTING
- ☆ WEIGHT LIFTING
- ☆ LONG HORSE
- ☆ ARCHERY



**The name
of the game**


**GREAT
VALUE!**

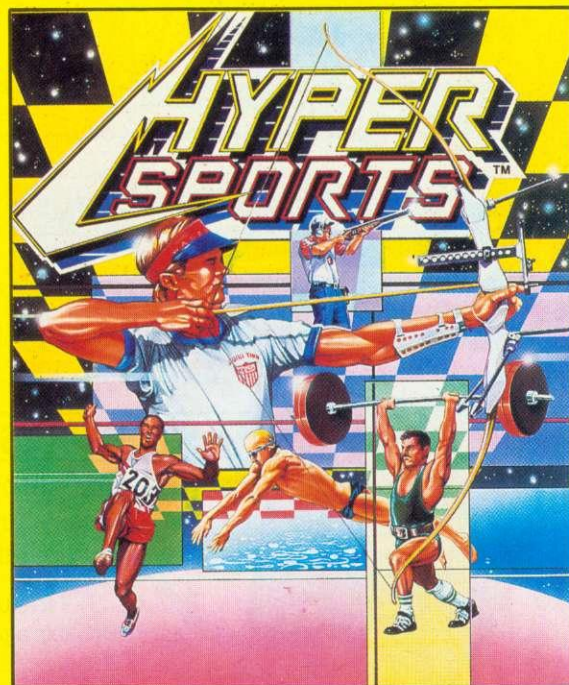

IMAGINE SOFTWARE (1984) LIMITED
6 CENTRAL STREET, MANCHESTER M2 5NS
TELEPHONE: 061-834 3939

GEM

The Definitive Random Access, 24K ROM based Database Management System for the BBC B and BBC B+.

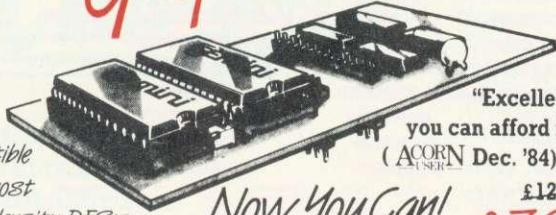

Now compatible with most double density DFS's

"Excellent if you can afford it..."
(ACORN User Dec. '84)

Now You Can! £129.95
£79.95

DATAGEM

Long hailed as the most comprehensive and powerful database for the BBC, and now becoming a legend in its own right, DataGem has been significantly reduced in price now that development costs have been recovered by Gemini. Whether you have a single 40 track drive or a Winchester hard disk, this system will make use of ALL your disk space, treating up to 4 drive surfaces as ONE CONTINUOUS FILE. Much has been made and exploited of DataGem's superb selective searching capability, and together with its unmatched mathematical powers, the system provides a really professional database for use in the home, office or school that will harness the full power and potential of the BBC micro.

AMATEURS & PROFESSIONALS

For newcomers to databases as well as seasoned users, DataGem represents an ideal starting point. Structuring your file and layout couldn't be simpler using DataGem's on-screen 'painting' format. You can have up to 62 fields or data items wherever you want them on a scrolling 120 x 120 card. Colours are all definable, and field data and field titles may be separated if required. Data entered may be stored in up to 8 tiers or 'levels', as well as within the whole database file. Scan one level or the whole database for records that match your search parameters, and place them in another data level for later manipulation. DataGem also boasts limited facilities for producing data merged letters, and may be configured as a 62 cell spreadsheet.

TECHNICALLY SPEAKING

The System Comprises:-

- 2 EPROMs mounted on carrier board containing 24K of 6502 optimised machine language. Carrier board may be inserted in either of two positions under keyboard or in sideways ROM board.
- Demonstration applications disk in both 80 and 40 track format with documented examples of DataGem files. Disk contains no DataGem program code.
- Full colour packaging consisting of A5 ring binder with professional documentation, user registration card and quick reference card.
- Utility program named 'Trans' also supplied to allow transference of data files from all other Gemini databases.

The System Features:-

- Permits just ONE file to exist over FOUR floppy disk drive surfaces with a maximum file size of at least 10 Megabytes.
- Allows up to 5100 User Definable Records.
- Maximum number of 62 fields per record, which may be any combination of the following types:-
STRING - Up to 120 characters long
DATE - Either two or four digit year dates may be selected.
TEXT - A field with no data, allowing background text to be placed anywhere on the record. This may then be altered/moved/deleted, even after the database is in use. Up to 3000 characters of background text may be placed on the record in this way, enough for limited word processing and mail-merge.
NUMERIC
- Allows searches on any field or COMBINATION of fields to ANY depth.
- Up to 9 subsets of data INSTANTLY available and saved to disk automatically.
- Sorts alphabetical or numeric on any field, ascending or descending with NO LIMIT on the depth of sort.
- Interfaces with 'VIEW' and 'WORDWISE'.
- Includes a free format report generator for a completely flexible printing format.
- Allows the user to extend the file or add fields after having started to enter data.
- Offers a free format painted screen which scrolls 120 x 120, and supports extensive mathematics.
- Provides User defined field relational variables and multiple and single character wildcards.
- Exists self contained on ROM, and does not require additional utilities on disk.
- Finds the occurrence of a string or partial string in ANY field in the database with just one command.
- Mathematical Operators
+, -, *, /, multilevel parentheses (up to 50 levels), unary negation.
- Logical Operators
>, <, >=, <=, <>, =, *(AND), +(OR).

WHAT OTHERS SAY

DataGem provides many of the Spreadsheet facilities of an item like Lotus 1-2-3... Combined with a Word Processor, it forms the basis of a very competent small business system.
Personal Computer News - July 1984.

DataGem stands out in terms of both price and performance. Excellent if you can afford it.
Acorn User - December 1984.

NEW DATAGEM GUIDE

Available separately to existing owners of DataGem (see below), this new and comprehensive manual has just been completely re-written by Simon Williams, a veteran press reviewer and writer. The new guide takes you step by step through all the facilities of the program with worked examples, and without any requirement for a previous knowledge of databases. It contains over 40,000 words and is fully indexed.

MONEY-BACK GUARANTEE

The power and facilities of DataGem are just too great to detail in this advertisement. As the product is protected against unauthorised copying, we are able to offer our no-quibble money-back guarantee to customers purchasing DataGem direct from Gemini. If you don't agree that it's worth the price, send it back to us undamaged within 7 days of purchase for ANY reason and we'll refund your money - immediately.





STOP PRESS!!

New DataGem owner's manual (see above) available separately at **£12.95** inclusive
Price refundable against purchase!

L.B.O. LIFE & BUSINESS ORGANISER

- the ULTIMATE BBC utility!

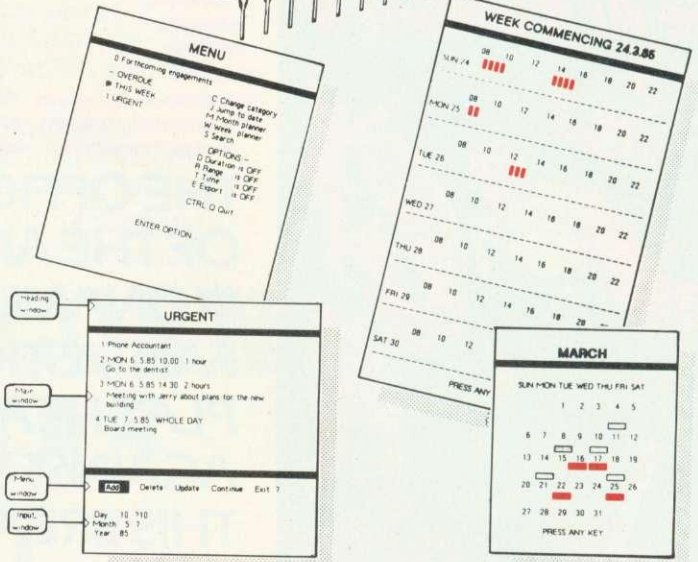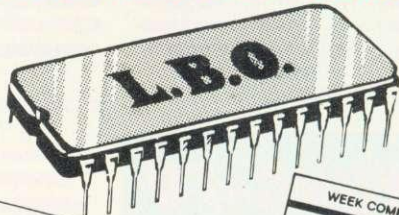

A NEW & EXCITING ROM RELEASE FROM GEMINI

This is a comprehensive life and business organiser package in 100% machine code which has been very carefully designed to provide a wide range of useful facilities for the busy person at home or in the office, and is simplicity itself to use. Once you start using LBO, you'll ALWAYS use it - not like one of those ROMs you only occasionally call on. LBO will put an end to forgetfulness and ensure that your time is organised, you know what you have to do and when, you don't forget bills or birthdays, and you are reminded constantly of urgent matters. LBO was written by two graduates in Computer Science from Exeter University in consultation with a lecturer in Cognitive Psychology. It has been very cleverly researched and programmed and is confidently recommended by Gemini as a very superior program for the very superior BBC micro.

- Features include:-
- Automatic reminder of entries overdue for attention
 - One week's advance notice of forthcoming events
 - Urgent notice board
 - Creation of categories of entries; e.g. bills, birthdays, letters to be written, notepad etc.
 - Sorting of appointments by date and time of day
 - Month AND week's summary at a glance, indicating time booked and free
 - Single entry of a RANGE of events and updating of regular happenings
 - Super search facility to call any event by any related word or part word
 - Month by month preview of all forthcoming events
 - Built-in intelligent calendar
 - All data saved to disk
 - Full printer support
 - Easy to follow documentation

Use LBO to organise your life from today until 1999! It can handle literally hundreds of multi-line messages, as many as you are very likely to need. Despite the very wide range of facilities offered, this professional program is VERY easy to use and requires absolutely NO knowledge of computers. A vital aid to your everyday life, LBO is GREAT FUN TO USE!



L.B.O. only **£19.95**
Also available on DISK for those with a cluttered ROM board - £19.95.
QL version also available now, MS-DOS version early 1986.



Suite

THE REVOLUTIONARY 'TRIPLE-D' BBC DISK INTEGRATED SOFTWARE SYSTEM

Of great significance to businessmen, educationalists and hobbyists alike, these programs are certainly the most powerful and sophisticated of their breed, and may be used 'stand-alone' or together as a suite. Gemini have probably the most experience in writing serious software for the BBC micro, with classics such as BEEBCALC and BEEBLOT achieving sales of tens of thousands of units. We have drawn on almost four years of experience and user feedback to produce what we are confident will be hailed as the ultimate in functional software for the BBC micro: the 'TRIPLE-D' Integrated Suite. We've also brought it in at a price that should make it accessible to more of you, and most importantly, we're giving you REAL value for money.

The modules, which are formatted for both 40 and 80 track systems, are available separately, or as an economical combination pack. Each module is clearly documented with a comprehensive, indexed manual, with training sections that refer to demonstration applications provided with each disk. Remember, 'TRIPLE-D' uses proper random-access files that will take advantage of your true disk capacity, even over TWO drive surfaces. Have you ever heard of a true disk-based spreadsheet before? Well it's here now in the form of the 'TRIPLE-D' suite and can handle up to 52,000 FILLED cells! If you already have our 'DataGem' ROM database, you'll be pleased to know we've even included some special utilities for you!

I confidently recommend the 'TRIPLE-D' suite to you. If you purchase the product from us and don't share my enthusiasm, return it to us in new condition within seven days of purchase and we'll refund your money - immediately and without quibble.

Dale Hubbard
Chairman & Managing Director
Gemini Marketing Limited



-BASE £29.95

- Up to 2000 records, 1 search level subset, 26 fields/record, 2 drives, 79 chars/field
- Scrolling screen, 79 x 26. Interrupt driven real-time clock
- Layout painted on-screen to your design, including background text/graphics
- Fully menu driven, with powerful line editor and access to 'OS' commands
- Default entry capability, no need for tedious re-typing of repetitive data
- Lightning search using advanced 'hashing' techniques
- Powerful maths, allowing all BASIC functions, on any field
- 10 user-defined variables to simplify complex calculations
- Multiple level 'intelligent' sort - program only sorts 'out-of-order' data
- Printed reports in record or summary format. Data pool option for transfer to other files
- FULL DATA COMPATIBILITY WITH 'DDD-CALC' AND 'DDD-PLOT'



-CALC £29.95

- True disk-based spreadsheet, 2000 rows, 26 columns, 52000 cells. Powerful line editor
- Fast, smooth machine code screen scroll with pop-down menu
- Individually adjustable column widths with text overflow
- Full relative and absolute replication
- Find and move to a row by name
- User defined variables, delete/insert rows, SORT rows with 'DDD-Base'
- Send data from all or part of sheet to printer, or just print cell formulae
- Data over 1 or 2 drive surfaces
- Fast recalculation, even over large files
- All BASIC functions allowed, plus 'SUM', 'MAX', and 'MIN'. 'OS' calls, and real time clock
- Data pool option for merging with other files
- FULL DATA COMPATIBILITY WITH 'DDD-BASE' AND 'DDD-PLOT'



-PLOT £29.95

- Stunning menu driven colour graphics using the BBC's capability to the full
- Pie charts, histograms, scatter graphs, line graphs and function plotting
- Disk save of screen for instant recall within your own programs
- Superb data entry editor with up to 255 plottable data entries for text and x/y coordinates
- Automatic scaling with user override
- Screen customisation allowable after plotting for background text etc., with up to 64 columns in Mode 1
- Disk save of ALL data
- Statistics facilities include mean, max, min, standard deviation, line of best fit, correlation coefficient etc.
- Colours re-definable for any plot
- Epson m/c fully SHADED screen dump with interface for other dumps on request
- FULL DATA COMPATIBILITY WITH 'DDD-BASE' AND 'DDD-CALC'

Combo Pack - All 3 modules £69.95

NEW!

MONEY MANAGEMENT



This program is designed for disk users. It allows individual transactions to be stored and retrieved in respect of up to 5 separate Bank/Building Society/Investment accounts AND up to 5 Credit card/loan/Mortgage accounts.

The transactions are also analysed - and may be (screen) listed - under 3 separate Income and 15 separate Expenditure headings.

Each transaction consists of:

- (1) Date
- (2) Description - up to 16 characters
- (3) Amount
- (4) Last 4 digits of cheque no. or a credit card transaction reference. (Payments only)

Account and income/expenditure headings may be personalised.

Budget amounts can be stored for each of the 15 expenditure heads and a report shows how expenditure to date compares with the budget. It also shows the balance remaining. This report is also produced in percentage terms and a third report forecasts annual expenditure based on expenditure to date at any particular time.

A further report gives balances for each Bank/Loan account at the beginning of the year, balances for each income/expenditure account to date and the resultant Bank/loan account balances. This report represents, therefore, the changes in liquid assets and liabilities over the period, both in terms of totals and of distribution between accounts.

The main menu contains a print option for this report.

Lists of outstanding cheques or credit transactions may be produced for each account and when statements are received, input of the cheque reference no. (last 4 digits) and the amount causes verification to occur (on screen), whereafter these cheques are removed from the cheque no. file, the remaining list of unrepresented cheques allowing simple reconciliation of each Bank a/c. Similar reconciliation of credit card a/c/s can be achieved.

The program caters for transfers between accounts (e.g. from Bank to Building Society a/c or from Bank to Credit card a/c etc) the relevant details being input only once.

The program also allows for standing orders to be set up on any single account or between any two accounts. These are paid simply by inputting a date up to which the payment of all orders should be recorded. The necessary debits and credits are then created and the date of each order is reset. Orders can be for any multiple of calendar months.

The program is fully menu driven and all areas of input are 'range protected'. As much guidance as possible is included in all screen displays and the user is always given the opportunity to abort a transaction.

Full amendment and deletion routines are provided, for individual transactions, for Standing orders and for budgets.

The main file can hold between 800 (all full length descriptions) and 1800 (no descriptions) transactions. The former should be sufficient for most people for at least one year and the index file size is set on this basis. A warning is flashed on the main menu when the main file reaches 750 transactions. Account balances may be carried forward to a new set of accounts.

All you will ever need in a home finance package and beautifully presented.

**ONLY
£12.95**
Highly
Recommended

With over four years experience of providing practical software solutions for business and home applications, Gemini have put together a selected range of famous titles for the BBC and BBC Plus in TWO special packs, at VERY SPECIAL prices. These super value packs contain all the serious application software you're ever likely to need for your BBC, from spreadsheet and database management to a complete professional business accounting system. Gemini's 'OFFICE MATE' and 'OFFICE MASTER' packs are here - put that computer to WORK!

OFFICE MATE

- DATABASE • BEEBCALC SPREADSHEET
- BEEBLOT GRAPHICS • WORD PROCESSOR • FULL DOCUMENTATION

DATABASE

Use this program for storing all types of information just the way YOU want to store it. You set up a computerised 'card index' system and add records and data to the file in the format that you choose.

Advanced features include sorting and searching for specific records, mathematical calculations, printer routines, data summaries etc. If you don't have a database, you certainly should!

BEEBCALC SPREADSHEET

Perhaps the most commercially successful item of business software yet written, the Gemini Spread Sheet processor offers a very wide range of invaluable calculation and editing features.

Consider, for example, a Cash Flow forecast containing rows and columns of figures, combined with text and numbers. If say, the cash receipts for January need to be changed, it would normally be necessary to delete and recalculate several figures for each successive month.

With BEEBCALC, however, an 'on screen' amendment to the January figure is made, and the corrected figures for each successive month automatically appear upon touching the 're-calculate' key.

Formulae cells in the table may be specified which relate to each other and then copied RELATIVELY or ABSOLUTELY to other parts of the program, which in itself is modular, and directly linkable to other Gemini programs. BEEBCALC has a complete range of inbuilt data entry and formatting techniques, and the structure of the table may be amended at any stage. Of course, full printer facilities are included which allow for either the table to be printed or just the data and formulae relating to the table. Another important feature, any valid BBC BASIC formula is acceptable as data entry making the system immensely powerful and versatile. BEEBCALC's sister program, BEEBLOT will take data from disk or tape files created by BEEBCALC to provide data portrayal in graph, histogram or pie chart format.

BEEBLOT Graphics

Written specially for use with the BBC micro, this program makes full use of the high resolution colour graphics to provide an easily assimilated visual representation of numerical data.

For example monthly sales statistics comparing two year's results may be instantly converted into two side by side pie charts, histograms or graphs ... for easier visual comparison and assimilation.

BEEBLOT also incorporates a built-in machine code screen dump, enabling a high resolution printed image to be produced using an Epson or similar bit image compatible printer. It also interfaces with other Gemini programs such as Beebcalc and Cash Book and is particularly recommended where any kind of mathematical plotting facility is required.

WORD PROCESSOR

This program provides many routines found in large and more expensive packages. With a typical word length of 5-6 letters it allows for up to 1000 words in memory at one time and is ideal for the user who wishes to write any kind of business letter on a home computer.

Features include: block delete, block insert, search and replace, edit text, display text, and many more.

Step up to Office Mate and save money!
(Price if purchased individually - £79.80 - save £67.80 with this pack)

Electron version available,
pack contains Database, Beebplot,
Beebcalc, Home Accounts,
Cassette only.

OFFICE MATE
£12
Cassette
or Disk

OFFICE MASTER

- CASH BOOK • FINAL ACCOUNTS • MAILIST
- EASILEDGER • INVOICES & STATEMENTS • STOCK CONTROL
- FULL DOCUMENTATION

CASH BOOK

Gemini's CASHBOOK is a complete 'stand-alone' accounting software package for the cash based sole trader/partnership business. It is designed to replace your existing cash book system and will provide you with a computerised system complete to trial balance.

Simple to use, this program will replace your manual cash and bank records and provide vital management information at any time. It will take you from sheaves of invoices and cheque book stubs to trial balance, and may, if desired, be used in conjunction with the Final Account program.

Typical information from CASHBOOK is as follows: 1. Summary of VAT information to enable completion of VAT returns. 2. Cumulative receipts and payments report analysed over the standard profit and loss and balance sheet headings. 3. Option for departmental analysis of sales and purchases. 4. Printout of all transactions, nominal account balances etc. 5. Journal routine for entering transfers between accounts and year end adjustment for debtors, creditors, etc. 6. Trial balance. 7. Full audit trail facility.

This program is recommended not only for businessmen, but also for practising Accountants for use in the preparation of Accounts from incomplete records; a printer is essential.

FINAL ACCOUNTS

Requires Gemini 'CASHBOOK' module (except Commodore 64 version)

This program will take data prepared by your Gemini Cashbook module and produce a complete set of accounts for you in the following format: 1. Trial Balance with inbuilt rounding routine. 2. Notes to the Accounts. 3. VAT summary. 4. Profit and Loss Account with comparatives facility. 5. Balance Sheet with comparatives.

All reports may be produced at any time interval comparing actual to budget if required.

MAIL LIST

Gemini's Mailist program will enable you to keep a record of names and addresses and then print, examine, sort and find them, all with special selection techniques. All our mailists contain our exclusive 'SEARCHKEY' system, giving you the option of creating your own dedicated coding system for each name on file. For example, on most mailing list systems, you are only given the standard heading such as name, street, town, country, postcode etc. With the Gemini searchkey system, you could find, say, all names on the file that are companies having a turnover in excess of '50,000' or all names that are subscribers who are behind in their subscriptions or all names that are eligible for a Christmas card this year!

A full and useful range of routines is included in the menu, and the program allows you to set up your own format for printing labels, i.e. the tab settings you require and spaces between labels, etc. Multiple copies can also be printed.

EASILEDGER

Contains routines to enable the small business man to keep a record of one of the most important aspects of his business - cash flow.

EASILEDGER is essentially a debit/credit ledger system which can handle sales, purchase and nominal ledger routines to provide instant management information. Its flexibility lies in its ability to produce account balances instantly for debtors and creditors, together with a record of all transactions, dates and references. A year-to-date summary of sales, purchases, receipts and payments over the twelve month period is also provided, as is a complete INTERACTIVE bank account database.

EASILEDGER is a management aid software tool and is designed to run alongside an existing accounting system. If you operate a cash based business and require a complete accounting package to produce the accounts to trial balance and beyond then we recommend you consider using both Easiledger and Cashbook programs together.

INVOICES & STATEMENTS

The Gemini INVSTAT program greatly reduces the time and cost of preparing Invoices and Statements by storing essential information such as customer names, addresses and account numbers, VAT routines and footer messages such as 'Please remit by return', 'Overdue and outstanding', etc.

Not only are Invoices and Statements produced more quickly and accurately, but pre-printed forms for them are eliminated since the INVSTAT program produces professionally formatted documents using your own printer.

STOCK CONTROL

You have a stock of products. With the Gemini program you may enter details of each product on to a record card on the computer with details of your own existing part number (if any), a description of the product, the unit quantity (i.e. one, a gross, a pair, etc.), the cost price per unit, the selling price per unit, a specified minimum satisfactory stock level, units in stock ordering quantity and supplier details.

The program will allow you to enter stock received, stock out, and will also give you a summary of stock items and current holding, together with details of total cost of stock, total sales value of stock, current gross margin on stock, cost of bringing stock up to minimum level, understocked items, etc.

Each stock item has its own computerised record and you may browse through the file as a whole, or just a specified number of records. An extremely powerful program, highly recommended for inventory control in small and medium sized businesses.

OFFICE MASTER
£25
Cassette
or Disk

WHY INTEGRATED ACCOUNTING?

Because it will retrieve information stored in one program for use by another, and store data in one program which has been generated by another.

This means that the scope for human transcription error is virtually eliminated ... for example, when typing an invoice manually, the typist could type £14.25 instead of £41.25, and undercharge the customer. Such an error cannot occur with integrated, computerised invoice generation, since only the part number needs to be entered and the price (and product description), are taken AUTOMATICALLY from the Stock Control program, and printed AUTOMATICALLY onto the invoice.

Likewise a Stock Controller, operating a manual system, could transpose the quantity sold, when posting from a copy invoice, and deduct 93 pcs from the Stock card, instead of 39. This would understate the book stock by 54 pcs, and possibly cause the product to be re-ordered, and consequently overstocked. Again, this could not happen with an integrated system, since the quantity invoiced is AUTOMATICALLY deducted from stock, due to integration of the Invoicing and Stock Control programs.

WHY THE BBC MICRO?

Because, although originally designed as an educational computer, it has the facilities needed for serious business use. In particular, speed of operation ... although only an 8 bit machine, it has a faster operating speed than many 16 bit micros. By gearing a suite of Integrated Accounting programs to the BBC Micro, Gemini have produced a combination of excellence which will eclipse any other computerised business system in its price bracket ... and many other systems in much higher price ranges.

WHY GEMINI?

Because our business software for the BBC Micro is based upon the solid foundation of experience. We have successfully written business software for the BBC Micro since it was first launched. Your choice of software for a computerised business system is critical ... badly written programs could bring your business near to ruin, more quickly than almost any other investment. The fine reputation of Gemini, evidenced by the Independent Press comments listed below, are your guarantee of confidence in the professional experience which back this major investment in the efficiency of your business.

INDEPENDENT PRESS COMMENTS

John Vogler reporting in December 1984 edition of 'A & B Computing' said of Gemini Integrated Accounting when comparing to Peartree, Micro Aid, Software for All, Acornsoft Mirle and Sage:—
"This is the newest and most exciting. To have achieved a substantial degree of integration, very rapid file access and respectably large file sizes, without the use of a second processor, is a fine achievement. As one would expect from GEMINI, the individual modules are eminently professional and for the first time present the single processor BBC as a viable small business computer ... GEMINI have produced a superb product ... superb examples of the programmer's art."

INVOICING & SALES LEDGER

The Gemini Sales Ledger and Invoicing program will produce invoices and statements for customers and enable a tight control over credit procedures to be maintained by producing aged debtors reports, and by keeping current information concerning customer accounts.

The module can be used independently or interfaced with the Gemini Nominal Ledger and Stock Control modules, and offers the following advantages: ● Maintains open-item sales ledger. ● Comprehensive customer Master File maintained in memory. ● Choice of fixed and free format invoices. ● Integrates with Gemini Nominal Ledger and Stock Control modules. ● Prints invoices, invoice copies, statements and credit notes. ● Reports include: Aged Debtors, Sales Daybook Sales analysis by user defined code, VAT analysis, Audit trail giving copy details of all transactions. ● Automatic updating of sales ledger. ● Comprehensive accounting controls including period end close down routines and full audit trail for all transactions. ● Examine customer status by file enquiry to screen or printer showing year to date activity. ● Trade and settlement discount terms definable for each customer. ● Caters for up to 5 rates of VAT. ● Can hold up to 135 customers on 40 track disk system and up to 610 customers on a 80 track disc per Sales Ledger file. ● Comprehensive analysis of invoices over unlimited, user definable sales codes. **Price £69.95.**

PURCHASE LEDGER

Used independently or interfaced with the Gemini Nominal Ledger, the program maintains a complete file for each supplier, records amounts outstanding at any time, helps to determine which invoices are payable, and payment dates for the claiming of discounts. Among this module's many features are the following: ● Automatic posting of suppliers' invoices to Purchase Ledger. ● Comprehensive analysis of invoices over unlimited, user definable expense headings. ● Comprehensive accounting controls including period end close down routines with posting reports, and full audit trail facilities at appropriate stages of processing. ● Full integration with Gemini Nominal Ledger module. ● Purchase invoices and credit notes easily processed. ● Supplier file held in memory, with full details of each supplier. ● Maintains open item purchase Ledger. ● Management of invoices due for payment within cash restraints. ● Maximum number of suppliers on 40 track disk system of 135 and maximum of 610 suppliers on 80 track disk system per Purchase Ledger file. **Price £69.96**

NOMINAL LEDGER

This is the central module of the Integrated Accounting system and may also be used independently as a Cash Book or interfaced with the Sales and Purchase Ledgers and payroll programs. It includes the following main features: ● 143 Nominal accounts all of which are user-definable. ● Posting of transactions from Sales and Purchase Ledgers and Payroll modules. ● Full Cash Book facilities. ● Print out of full Trading and Profit and Loss Account and Balance Sheet together with notes to the accounts. ● Full accounts may be produced for whatever period chosen by the user. ● Comprehensive accounting controls including period end close down routines and complete audit trail for all transactions. ● Journal feature for adjustments between accounts and correction of book-keeping errors. ● Reports include: Account Master File showing complete code listing, Cash Book entry details, Journal printouts, Trial Balance, Trading and Profit and Loss Account with notes, Balance Sheet with notes, Audit Trail Enquiry for all accounts. ● Account enquiry showing movements over the period under review including opening balance, period end adjustments and closing balance. ● Account posting masks allow conversion of analysis codes set up in other modules into selected user-defined Nominal Ledger codes. **Price £69.95**

PAYROLL

This program provides a full range of controls over the different aspects of Payroll Accounting including tax and other deductions. It can be used independently, or interfaced with the Gemini Nominal Ledger, and offers the following facilities: ● Employee file maintained in memory, containing: Name, address, sex, marital status, National Insurance Number and contribution type, date of birth, personnel number, department, date employment commenced, all applicable tax codes, whether week 1 or month 1 applicable, hourly or salaried, pay cycle, payment type (cash, cheque or direct transfer), PAYE reference number, previous name, bank details. ● Supports weekly, fortnightly, four weekly or monthly employees. ● Company master file containing: Name, address, bank account number and name, bank name and branch, PAYE reference. ● Produces cash analysis of note and coinage to suit requirements. ● Employee pay details include: Gross pay and tax paid to date both current and previous employer, National Insurance contribution for employer and employee. Five rates of overtime per employee. Up to 12 standard and 5 non-standard pay elements per employee. Basic pay, Hourly rate. ● Reports include: Payroll reconciliation, Payslips, Coinage analysis, Cheque and bank giro list, Payroll masterfile, Departmental analysis. ● Relevant data to complete Inland Revenue forms including: P11, P35, P45, P14/P60. ● Maximum 98 employees on 40 track disk system and 198 employees on 80 track system per Payroll file. **Price £69.95**

STOCK CONTROL

A program providing full control over every aspect of stockholding operations which can be interfaced with the Gemini Sales Ledger and Invoicing program, this module includes the following features and routines: ● Inventory Master File holding details of part number, selling and cost price, sales and product code, current stock, location of stock, allocated items, re-order level, quantity on order, current period activity and supplier code. ● Permits four types of transactions—sales, returns, receipts and adjustments. ● Part enquiry routines for any stock item. ● Reports include: Part catalogue, giving stock sales and cost values. Re-order report. Evaluation stocks list, giving stock sales and cost values. Dormant parts report. Delete parts report. Stock usage report. Stocktaking sheet. Stock audit report sorted into part sequence and transaction type and date. ● Screen prompt when item falls below the minimum re-order level. ● Directly interfaces with Sales Ledger to enable automatic generation of product details for invoice production and adjustment of stock records. ● Maximum 980 part numbers on 40 track disk and 1980 on 80 track disk per stock file. **Price £69.96**

Gemini Midi Maxi Offices, sole distributors to the trade—

CentreSoft Ltd

Unit 10, The Parkway Industrial Centre, Heneage Street, Birmingham, B7 4LY. Tel: 021 359 3020. (Mail order to Gemini).

INTRODUCTION

Designed for the small to medium sized business user, where speed and efficiency are vital, Gemini Integrated programs are suitable for sole traders, partnerships, or limited companies. All require a BBC B 32K microcomputer, and an 80 column printer. A double disk drive with an Acorn compatible DFS is required for integrated accounting purposes. A single disk drive may be sufficient where modules are used independently, although this is not recommended for the Sales Ledger and Invoicing module. The manuals indicate the system capacities for various disk drive combinations.

The programs have been devised by H.C.S. Ltd in the light of substantial mainframe computing experience, and share many of the features normally found only in very large installations. Used in a typical business environment where invoicing, sales ledger posting, stock control adjustment and nominal ledger posting is simultaneously made, the software will convert the BBC micro into a business computer of enormous power, directly comparable with hardware/software combinations costing many times its price.

Each program is supported by a comprehensive, easily followed manual, and 'user friendly' screen prompts with error trapping routines, which make a specialised knowledge of accountancy unnecessary for the average user. All the programs, however, have many sophisticated features which make the programs revolutionary for the home micro market.

Gemini Marketing Limited confidently recommend the programs to serious commercial owners of the BBC B micro as software capable of making an enormous contribution to business efficiency and profitability at minimal cost, since it requires no expensive second processor in order to achieve the advantages of integrated accounting.

**NEW
LOW
PRICE**

Price
£69.95
per Module



Includes 1 year software support

Special Hardware/Software OFFERS

Having arranged bulk hardware purchasing discounts, Gemini is now able to offer complete systems of hardware and software offering unequalled value for money. We offer a choice of hardware only or hardware with software as follows:—

DEAL 1

- BBC SYSTEM comprising:—
- BBC 32K with DFS
 - 40/80 switchable 800K double disk drive
 - 80 column printer
 - 12" screen monitor (for colour add £150 to system price)
 - All connecting cables
- OUR PRICE INC. VAT £999.95**

**MS-DOS
version
soon.**

DEAL 2

- DEAL 1 with the addition of the following:—
- 'DDD' integrated database, spreadsheet and graphics
 - DataGem database ROM
 - Integrated Accounts — ALL 5 MODULES
 - Mail Merge utility for Integrated Accounts
 - 'Video Classroom' programming educational video (VHS only)
 - 'Life & Business Organiser' ROM
 - 'Maxi Office' software pack
 - 1 pack each pre-printed stationery; payslips, statements, remittance advice, invoices for use with integrated suite, plus one box 2000 sheets listing paper.
- UNUSUAL PRICE £1650 — OUR PRICE INC. VAT £1395**

✦ Please enquire by telephone for prices of individual hardware items.

If not ordering by telephone, please use this order form to order any item on this page, or three preceding pages. Please state your requirements clearly, and whether you require 40 or 80 track format when ordering disks. Please allow 7 days for delivery.

24 hour **CREDIT CARD HOTLINE** — AMEX/ACCESS only — **0395-265165**

All stated prices include VAT and post/packing.

To: Gemini Marketing Ltd., Gemini House, EXMOUTH EX8 4RS

Please supply _____

Name _____

Address _____

Cheque/POs value £ _____ enclosed, or please debit my Access/Amex no. _____

Signature _____

Export/Trade enquiries and Local Authority POs welcome.



Nightingale The Modem

The facts speak for themselves, **Nightingale** is without equal in its field. It is undoubtedly the most popular multi baud rate modem available today. Whatever your communication requirements, the simplicity of use and the versatility of **Nightingale** will enable you to provide a solution whether the need is to extract information from Prestel, send telex's via Telecom Gold, download telesoftware or exchange files, **Nightingale** will do the job and a whole lot more besides.

Nightingale operates at the two most popular baud rates 1200/75 as used by both private and public viewdata systems and 300/300 baud for communication with remote mainframe, mini or micro systems. Also available in 'reverse viewdata mode' 75/1200.

Nightingale has passed the very rigorous tests required by the BABT and is fully approved for use in the UK. This not only means that you can rely upon the safety of the product because of the stringent manufacturing constraints, but also means that because it is a BABT approved product, you can be assured that your application to Telecom Gold, Prestel etc., will not be refused.



FREE
ENTRY COMPETITION
6 NIGHTS IN NEW YORK

APPROVED for use with telecommunication systems run by British Telecommunications in accordance with the conditions in the instructions for use.
S/2592/3/E/500065

Commstar The Software

A fitting partner for the Nightingale modem, **Commstar** was nominated for the 1985 British Microcomputing awards, a remarkable achievement considering the very recent awareness of the true versatility of communications via the computer. With its powerful combination of Viewdata and ASCII terminal capabilities contained in one 8K Eprom, **Commstar** is probably the only communications Software you will ever need, as its many thousands of users will testify. Although it is unusually versatile, it is extremely easy to use as full advantage is made of the BBC's function keys and a comprehensive manual describes each of **Commstar's** features in simple terms. In addition to preprogrammed functions, items such as logon strings and passwords can be placed under the function keys to facilitate automatic access to the vast range of services which are now available.

The Competition



Pace have linked with the premier computer information provider on Prestel, MICRONET and Virgin Atlantic Airlines, all pioneers in their own fields, to offer you a challenge. A chance to try out your skills using your modem and play the 'Pace round Britain Quiz' on Micronet, and in so doing, an opportunity to win a fabulous holiday for two in New York.

This competition will be open to you between November 1st and February 1st if you buy one of our modems before the end of January. In addition, you will be given, free of charge, a full quarters subscription to MICRONET worth £10, and free registration to Microlink on Telecom Gold.

The prize includes a return flight to New York, 6 nights accommodation in a high quality New York Hotel, and spending money to the total value of £400.

Full details are contained with each modem.

micronet 800



Nightingale Modem £119 plus VAT; Commstar Software £29.57 plus VAT; combination package £139 plus VAT





The products and information are available from good quality dealers throughout the country or direct from Pace. Payment accepted by cheque, Access or Visa.

Pace Micro Technology Ltd.,
Juniper View, Allerton Road, Bradford BD15 7AG.
Tel. 0274 488211 Telex 51564
Telecom Gold mailbox No. PCE 001 Prestel Mailbox No. 274729306



Can YOU avoid the fangs of a deadly spider?

► Addictive launch BOFFIN ◀
 — A Mad Professor on the Loose —

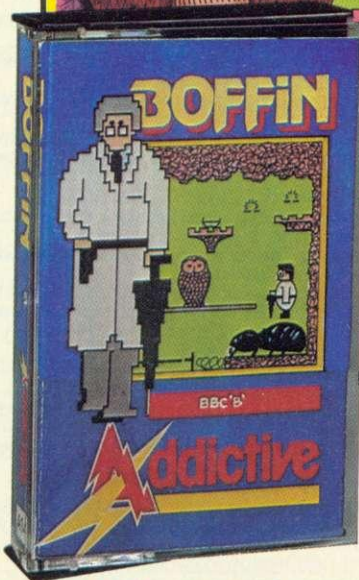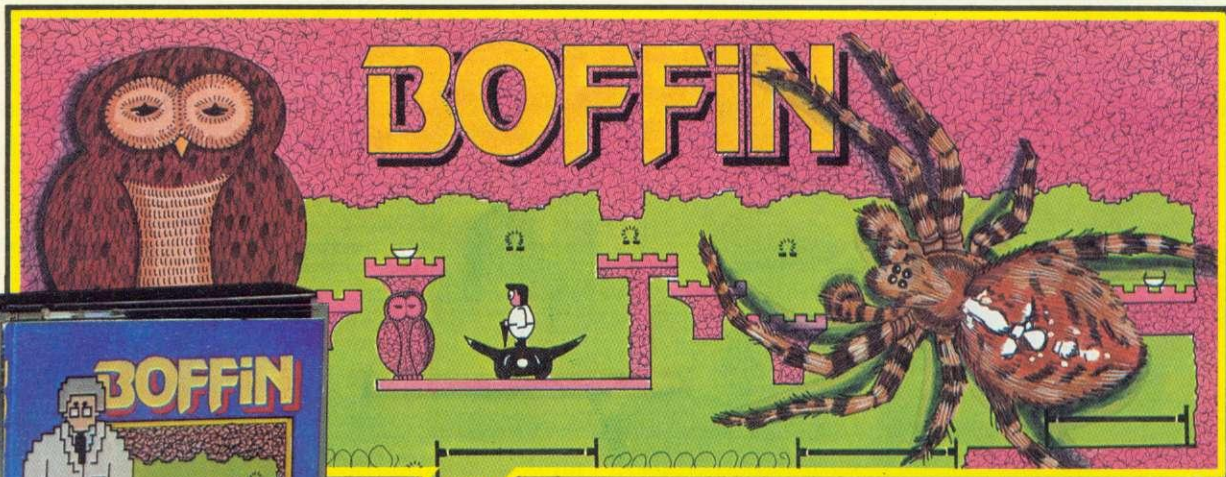

In this action-packed, superbly animated arcade game you have to make crucial decisions to determine the fate of Professor Boffin as he journeys through hazardous caverns – one slip and a horrible doom may await him! Boffin is armed with an umbrella which he can put up to break a fall or a leap from a great height, and trampolines are to be found in certain of the caverns which help him to "bounce" his way to safety. However, there is added danger as hideous creatures are lurking waiting for Boffin to stray too close to their fateful grasp!

Boffin is available for BBC 'B' and Electron priced £9.95.

ALSO AVAILABLE



STRINGER
 Stringer is an arcade adventure game in which you are a press photographer set the task of snatching a shot of a Film Star in an hotel. The game is tantalisingly playable, graphically excellent and, of course – Addictive!
 Available . . . Commodore 64 £8.95



FOOTBALL MANAGER
The All Time Classic
 Available . . . Spectrum 48k £8.95
 . . . Commodore 64 £8.95
 Amstrad CPC 64 £8.95 . . . BBC 'B' £8.95 . . . Electron £8.95 . . . Dragon £7.95 . . . Vic 20 £7.95 . . . ZX81 £7.95

When you open an Addictive Game, there's a new world of discovery waiting for you.



To: Addictive Games Ltd, 7a Richmond Hill, Bournemouth, Dorset BH2 6HE

Please send me:

- cassette(s) for Boffin for (computer)
- cassette(s) for Stringer for (computer)
- cassette(s) of Football Manager for (computer)

I enclose cheque/postal order for* £

Please debit my Access card No.

*Delete as applicable

Name

Address

Postcode Tel:

Access orders can be telephoned through on (0202) 296404

For overseas orders, please add £1.50.



Now you can stretch your imagination, without stretching your budget.



AMX PAGEMAKER
£49.95 INC VAT, 2 ROMS + DISC



From Advanced Memory Systems comes an irresistible selection of Icon driven software that AMX Mouse, ROM and AMX Super ROM owners can really get their teeth into!

Seven incredible programs, so comprehensive, they will more than satisfy even the most demanding BBC Micro user and when coupled with the AMX Mouse will broaden the horizons of the BBC Micro to new, undreamed of standards of sophistication.

AMX PAGEMAKER

A fantastic high resolution A4 typesetting and Artwork system.

Comprising 2 ROMs (8K and 16K) 'Pagemaker' features a fast scrolling A4 page.

There is a wide selection of typefaces and user definable fonts.

You can load in Wordwise and View files or type directly onto screen.

An incredible 'Cut and Paste' facility includes copying, rotating, stretching and zooming.

For the professional touch there is N L Q high quality dump, and you can dump any part of, or full A4 page.

AMX 3D ZICON

Now, with a 3D ZICON you can transform three dimensional vector data and translate them into on-screen graphics.

You can Print or Plot graphics to suitable peripherals and produce output suitable for other AMX programs such as ART - UTILITIES and Paintpot.

There is even the facility to sketch in two dimensions and convert to three dimensions and auto swaps generator.

Some interesting example objects on file include - helicopter - jet plane and dodecahedron.

AMX DATABASE

Database is a brand new super filing program featuring 1000 records and unlimited fields per record.

It has a powerful search and sort facility and user friendly edit and display.

In fact it is probably the most advanced user friendly database available today.

Special features include: User definable screen format for record display - random access files - super fast sort - flexible printer dump and screen display.

AMX XAM

A brand new and exciting educational program with maximum flexibility, allowing a multitude of options and variations.

With XAM you can create a multiple choice exam which would not be alterable by the examinee.

And you can incorporate within the questions, your own pictures, created on AMX ART, building the finished picture into the quiz and providing an extra and fascinating aspect to the examination.

AMX DESK

The complete home or office acquisition.

You will wonder how you ever managed without AMX Desk.

Just point your Mouse and select the following additional aids:

- MEMO-PAD for up to three pages of text
- TELEPHONE/ADDRESS BOOK with 200 or 400 scrolling entries
- DIARY with three months calendar
- ALARM to remind you about appointments
- CALCULATOR - Yes! A full function calculator that cannot be lost or suffer flat batteries, and any window can be dumped to your printer at the touch of a button.

THE ORIGINAL AMX ART PLUS UTILITIES

Now available as a single package - two of AMX's most popular programs.

AMX ART is a superb mode 4 graphics program, making full use of windows, icons, menus and pointers, it allows you to create your own pictures and the host of graphic features in AMX UTILITIES including a fantastic zoom facility for accurate amendments to your ART pictures - one dot becomes a character.

You can also move, copy, rotate, reflect, enhance circles, draw ellipses and arcs, even print icons.

Border can be added and pictures stripped and centred for saving and printing. All pictures can be loaded into AMX PAGEMAKER, AMX 3D ZICON, AMX XAM, AMX PAINT POT, and AMX SUPER ART.


AMX PAINT POT

The pictures you have created with AMX ART and enhanced with AMX Utilities can now be coloured in, using PAINT POT.


They will burst into life with rich, vibrant colours, and with a palette of 256 different shades you should not be short of inspiration.

You can even store up to 20 illustrations in Picture Show mode, then display them in sequence.


To start you off we have included eight exciting pictures in the program.

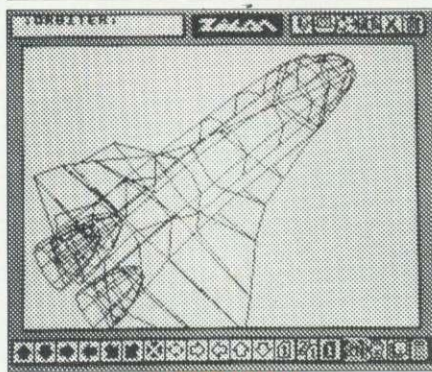


AMX 3D ZICON
£24.95 INC VAT, DISC

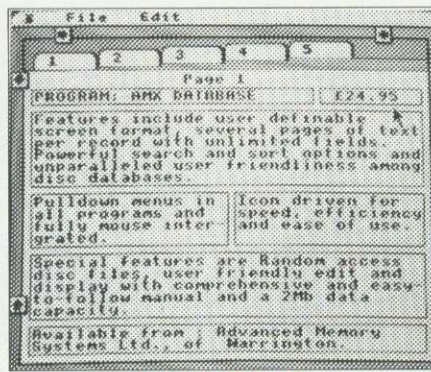


AMX DATABASE
£24.95 INC VAT, DISC

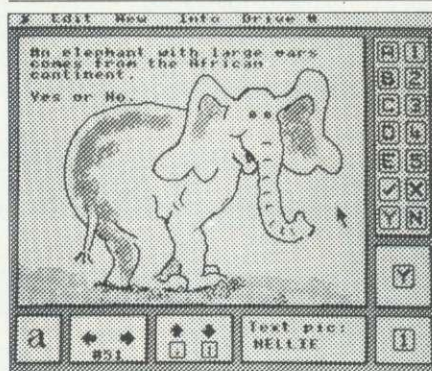


AMX XAM
£24.95 INC VAT, DISC

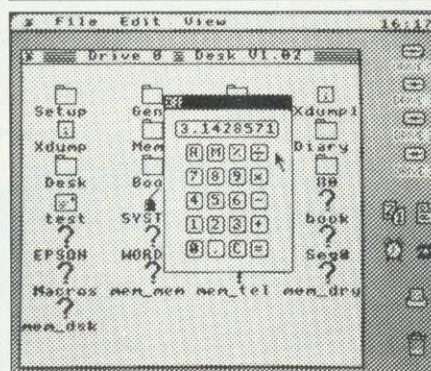

AMX DESK
£24.95 INC VAT, DISC

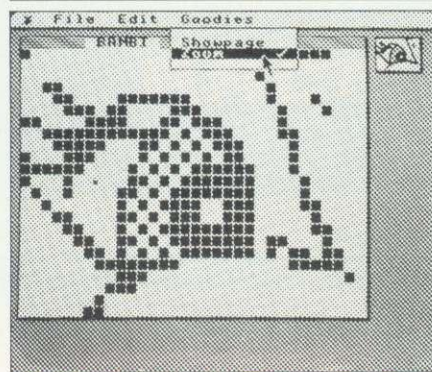

THE ORIGINAL AMX ART PLUS UTILITIES
£14.95 INC VAT, DISC

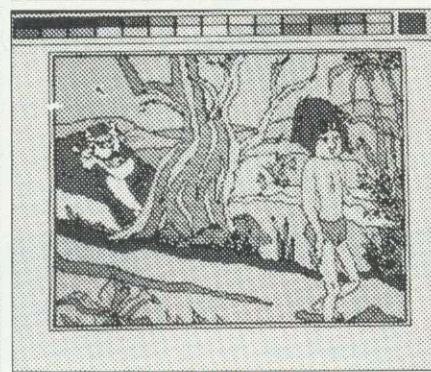

AMX PAINT POT
£14.95 INC VAT, DISC

AMX SOFTWARE

IMAGINATION AT YOUR FINGERTIPS.

ALL THESE EXCITING AMX ROM AND AMX SUPER ROM COMPATIBLE SOFTWARE PACKAGES ARE AVAILABLE FROM GOOD COMPUTER DEALERS OR BY SENDING CHEQUE TO PO TO FREEPOST ADVANCED MEMORY SYSTEMS LTD, GREEN LANE, APPLETON, WARRINGTON WA4 5NG.
FOR INSTANT ACCESS OR VISA ORDERS TELEPHONE (0925) 602959/602690.

We thought it was about time we put you in the picture.

When we introduced our AMX Mouse to BBC Micro users, the response was phenomenal.

And no wonder!

It was regarded as 'pushing the BBC to its limits' and hailed by the press as 'probably the best input device that has appeared recently'. The AMX Mouse brought to BBC Micro users the same sophisticated, positive control that had, until then, been the province of the more expensive computers, like the Macintosh.

Now we announce a new enhanced software package which, can be used with a traditional keyboard or joystick but truly comes into its own when used with the AMX Mouse.

AMX Super ROM and Super Art adds colour to the features of the original AMX ROM, on a new 16K ROM.

It dramatically extends the original AMX ROM facilities to include Pull Down Menus, overlapping colour windows, colour patterns and an extended Icon set in all graphic modes.


Specially written to be usable with the vast majority of BBC Systems including 2nd processors, the Aries RAM Board, the BBC + Shadow mode, tape, DFS and ADFS.

The kernel of the Super Art program is included in the 16K ROM, providing tape and disc users with a Mode 1 colour drawing program.

But Super Art really comes into its own when used on a disc based system; a host of additional facilities can be selected direct from the screen.

Colour pictures can be created in dot resolution up to A4 size by scrolling the screen window, over the picture.

Other facilities include colour pattern editing – use of icons, additional text styles, various copy facilities and a superb colour Zoom.

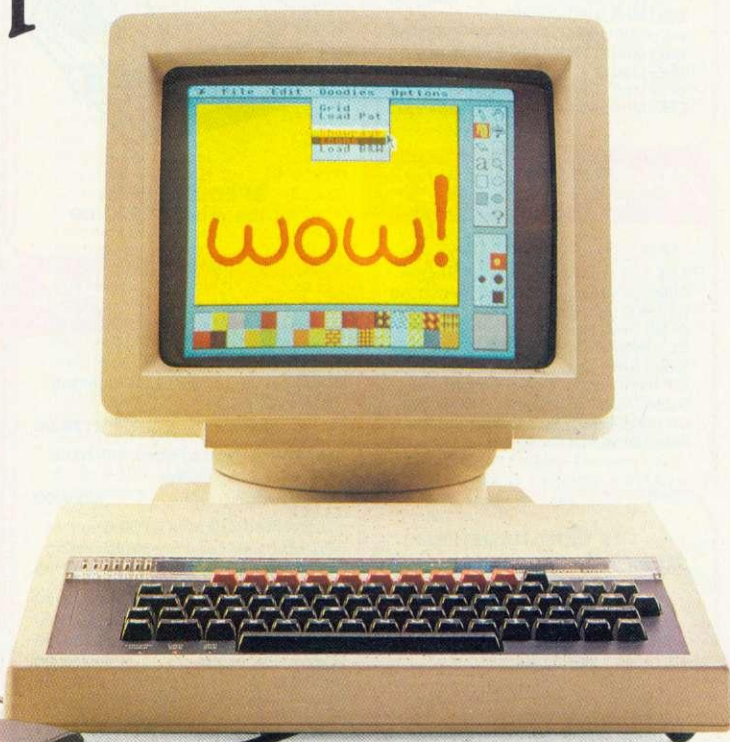

Pictures can be printed out in colour (Integrex) or shades of black and grey on Epson compatible printers.

The results can be astonishing! – you can even store your finished 'masterpieces'.

The AMX Icon Designer facility gives you further freedom to design and store your own custom icons for use in your own programs.

This fabulous new package costs only £89.95 – a price as remarkable as the package itself – and includes a fully illustrated operating manual.

If, however, you are afraid of mice, you can purchase just the software package plus the 16K Super ROM for just £49.95.

You will still achieve some pretty remarkable results using your keyboard or joystick – not nearly as good as with the Mouse of course – but you can always add one later on for just £40.

Then you'll really be 'in the picture'.

AMX MOUSE

IMAGINATION AT YOUR FINGERTIPS.

BOTH THESE EXCITING PACKAGES ALONG WITH OUR SUPERB RANGE OF AMX ROM AND SUPER ROM COMPATIBLE SOFTWARE ARE AVAILABLE FROM ALL GOOD COMPUTER DEALERS OR BY SENDING CHEQUE OR P.O. TO FREEPOST ADVANCED MEMORY SYSTEMS LTD., GREEN LANE, APPLETON, WARRINGTON, WA4 5NG.
FOR INSTANT ACCESS OR VISA ORDERS, RING (0925) 602959/602690.

BRING Twillstar

COMPUTERS


BBC Mod B Plus - 64K	£410.00
BBC Mod Plus with Econet	£410.00
BBC Mod B Plus with DFS and Econet	£465.00
BBC Mod B Plus - 64K with 64K Upgrade Kit	£449.00
BBC Mod B Plus - 128K	£449.00
BBC Mod B	£299.00
BBC Mod B with DFS	£349.00
BBC Mod B with Econet	£349.00

DISC DRIVES

CSX 100 (100K) 1 x 40 Track Single Sided Drive Excluding PSU	£95.00
CSX 400 (400K) 1 x 80 Track Double Sided Drive Excl. PSU	£110.00
CDX 800S (800K) 2 x 80 Track Double Sided Drive Excl. PSU	£185.00
CS 400 (400K) 1 x 80 Track Double Sided Drive Incl. PSU	£130.00
CD 800S (800K) 2 x 80 Track Double Sided Drive Incl. PSU	£229.00

THE BEST NAME IN MEMORY - SPECIAL PRICES


"CUMANA"



TCL SPECIAL PACKAGES

BBC1 BBC Mod. B, View or Wordwise, High Res. Monitor, Queen Data daisywheel printer, Cassette recorder with 10 cassettes and all the necessary cables and printer paper.	£665.00
BBC2 BBC Mod. B + DFS, View or Wordwise, 100K BBC drive, High Res. Monitor, Quendata daisywheel printer, 10 diskettes and all the necessary cables and paper.	£780.00
BBC3 Same as BBC2 but with 400K drive.	£805.00
BBC4 BBC Mod. B + DFS, View or Wordwise, 800K Dual Disc Drive, High Res. Monitor, Juki 6100 daisywheel printer, 10 of 80 track Diskettes and all the necessary cables and printer paper.	£879.00
If you require a BBC MOD B Plus add £60.00 to the above prices.	

EPSON LX80 + NLQ for WORD PROCESSING



SPECIAL OFFER of the month £229.00

PRINTERS

DOT MATRIX PRINTERS

The New Centronics GLP Printer with NLQ, 50 CPS.	
Centronics GLP	£129.00
The New Seikosha Printer with NLQ, 100 CPS Special Offer.	
Seikosha SP 1000A	£229.00
Just arrived Seikosha GP50 Graphics Printer Parallel and Spectrum version	
Seikosha GP50	£69.00
Kaga KP 810 (NLQ)	£269.00
Kaga KP 910 (NLQ)	£379.00
Canon PW 1080A (NLQ)	£269.00
Canon PW 1156A	£379.00
Star SG 10	£249.00
Star SG 15	£389.00
Epson LX 80	£229.00
Epson FX 80	£365.00
Epson FX 100 F/T	£495.00
Brother EP44	£228.00
Brother M1009	£195.00
Shinwa CP 80A	£189.00
MP 165	£240.00

DAISYWHEEL PRINTERS

Brother HR15	£378.00
Quendata DWP 1120	£229.00
Juki 6100	£340.00
Juki 2200	£275.00
Juki 6300	£799.00

COLOUR PRINTERS

Okimate 20	£287.00
Canon PJ1080A	£440.00
Seikosha GP700A	£399.00
Epson JX80	£570.00

PLOTTERS

Penman Plotter (complete with utilities & cables)	£275.00
Pixy Plotter MT	£399.00
Epson Hi-80	£445.00

We would like to take this opportunity to wish all our customers a "MERRY CHRISTMAS and a HAPPY NEW YEAR"

BBC UPGRADES

A-B Upgrade	£110.00
Acorn DFS Interface	£89.00
Econet Interface	£49.00
Speech Interface (Special Offer)	£25.00
64K Upgrade Kit	£39.95
17/70 Upgrade Kit	£49.95
ADFS ROM	£29.95

MONITORS

MONOCHROME MONITORS

Phillips BM7502 Green Screen	£79.00
Phillips BM7522 Amber Screen	£95.00
Kaga KX1201G Hi-Res Green	£103.00
Kaga KX1203A Ultra Hi-Res Amber	£120.00

SPECIAL OFFER

Nordmende 12" Hi-Res Green Monitor only **£59.95** (While stocks last)

COLOUR MONITORS

Microvitec 1431 Std Res	£212.00
Microvitec 1451 Med Res	£275.00
Microvitec 1441 High Res	£420.00
Microvitec 2030 CS20 Std Res	£435.00
Microvitec 1431AP Std Res	£228.75
Microvitec 1451 AP Med Res	£320.00
Kaga RGB Vision II 12" High Res	£258.00
Kaga RGB Vision III 12" Ultra High Res	£365.00

TV MONITORS

NEW Ferguson RX MC01	£228.00
Phillips CT2007	£219.00
Nordmende (Remote Control)	£229.00

No more Messy Wires



TCL SPECIAL WORKSTATIONS

Once again TCL has answered a special need of all BBC Computer users with the new mushroom workstation - no more untidy wiring or pulled plugs. Transforms your system into a handsome console unit.

Features include:

- ★ Advanced Cable Management
- ★ Twin 400K Mitsubishi Slimline Drives switchable from 40 to 80 Track with Status Indicator LED's
- ★ On board regulated 4 Amp power supply with overload protection
- ★ Mains Input Filter for clean power supply.
- ★ Filtered power to the 3 Take-off sockets at rear for Micro, Monitor and Printer.

MUSHROOM WORKSTATION

At a Special Price of **£349.00** inc. VAT

Those people already owning disc drives can have them fitted into the Workstation. Prices on request.

EXPANSION BOARDS

RAMAMP RA20+44

The RA20+44 board has 20K of RAM addressed from &3000 to &7FFF when switched on with *VIDEO. This will in effect give you back 20K of RAM if you are using say MODE O. There is also 2 slots of sideways RAM from &8000 to &BFFF which can be used for ROM based software. There is a further 12K of RAM from &8000 to &AFFF which can not be used as sideways RAM. This is the situation in the BBC+ and it means in effect that this board will turn your BBC into a BBC+ as far as the VIDEO and the extra 12K RAM is concerned. One can read and write to this 12K RAM in the same way as the BBC+ does. We offer this RAM as a printer buffer.

RA20+44 **£79.00**
Write protect kit **£5.00**

RAMAMP RA32N

The RAM/ROM board has 6 slots of ROM and 2*16K of sideways RAM that is addressed from &8000 to &BFFF. THIS EXTRA RAM IS NOT AN EXTENSION OF MEMORY FOR BASIC.

RA32N **£59.00**
WPK/N **£5.00**

RAMAMP RAM16

The 16K RAM BOARD (RAM16) is a sideways RAM board which plugs into any spare ROM slot. It is addressed from &8000 to &BFFF. THIS EXTRA RAM IS NOT AN EXTENSION OF MEMORY FOR BASIC. A write protect switch can be fitted. Any utility can be "LOADed into the RAM directly from Disc with the command *LOAD "FILENAME" 8000 RETURN. This can be done wherever the board is fitted, the slot need not be specified.

RAM16 **£32.00**
WPK/RAM16 **£2.50**

RAMAMP ROM6S

The ROM board has 6 slots of ROM (ROM6). Each slot can accommodate any 8K or 16K ROM. One can NOT fit RAM at a later date.

The board is fully buffered. The board is compatible with all D.D.D. Controllers, RAVEN 20 and indeed our own RA20+44. It is compatible with the SOLIDISC 16/32K or 64K sideways ram board.

ROM6S **£32.00**

RAMAMP RA32+

The RAM/ROM board has 4 slots of ROM and 2*16K of sideways RAM that is addressed from &8000 to &BFFF. THIS EXTRA RAM IS NOT AN EXTENSION OF MEMORY FOR BASIC.

RA32+ **£58.00**
WPS+ **£5.00**

The RAMAMP boards come complete with RAM inclusive in the price and are fully buffered. Fitting takes only a few minutes. No soldering required. No bits of the I/O port are used. All bits of the I/O port are yours. Free software is available. Write protect switch can be fitted if required.

RAVEN 20

The RAVEN 20 is a 20K RAM Expansion board for the BBC Micro Model B fitted with O.S. 1.2. The RAVEN Board provides the user with an extra 20K of usable RAM in screen modes 0-3. This together with the aid of software makes the system completely transparent to both the user and the computer.

£49.00

INTO YOUR HOME

ACCESSORIES

COMPUTER	
BBC Dust Cover Vinyl	£3.50
BBC Dust Cover Plastic	£6.95
Quickshot II Joystick + I/F	£19.90
Data Recorder complete with BBC Lead	£24.95
DISC STORAGE	
10 x 5 1/4 Library Case	£2.00
15 x 5 1/4 Flip-N-File	£5.95
40 x 5 1/4 Lockable	£12.50
80 x 5 1/4 Lockable	£14.00
PRINTER ACCESSORIES	
TRACTOR ADAPTORS	
FX80	£33.00
LX80	£23.00
Juki 6300	£129.00
Juki 6100	£129.00
Quendata DWP 1120	£114.00
Brother HR15	£95.00

SHEET FEEDERS	
Juki 6300	£183.00
Juki 6100	£183.00
Quendata DWP 1120	£165.00
Brother HR15	£212.00
Printer Leads from	£8.00

RIBBONS	
MX100/FX100	£11.50
MX/FX80	£5.50
GP80	£5.00
GP100	£5.70
GP250	£6.00
KAGA KP870	£8.50
Canon PW1080	£8.50
Brother HR15 M/S	£5.50
Brother HR15 Carbon	£4.30
Juki 6100	£4.20
Oki 80/82	£2.35
Riteman	£6.50

SERIAL INTERFACES	
Epson 8143	£34.00
Juki	£58.00
Canon	£91.00
Kaga	£85.00
Epson 8148 + 2K Buffer	£65.00

LISTING PAPER	
11" x 9 1/2" 2000	£14.00
Epson 81118	£65.00
Teleprinter Roll	£4.50
Teleprinter Roll Holder	£14.00

PRINTER LABELS	
1000 90x36mm 1 across	£5.70
1000 90x36mm 2 across	£6.70
1000 90x36mm 3 across	£7.70

MONITOR ACCESSORIES	
Anti Glare Safety Screen	£17.50
Dust Covers from	£4.50
Monitor Stands Wooden plynth	£11.50
Monitor Stands Tilt and Swivel	£14.00

BBC BOOKS	
The Advanced User Guide	£12.95
The Advanced BASIC ROM User Guide	£7.95
The BBC Micro ROM Book	£9.95
Guide To The BBC ROM	£9.95
Basic ROM User Guide	£9.95
Disk Drive Projects for Micros	£5.95
The Advanced Disk User Guide	£14.95
For The BBC Micro	£14.95
Get More From Your Epson Printer	£7.95
The Hackers Handbook	£4.95
The Epson FX/KACA Printer Commands Revealed	£5.95

EPROMS	
2764	£2.75
27128	£4.95
RAMS	
62 64 LP15	£4.50



DISC
Double Sided Double Density
96 T.P.1. Uses 3m media.
Guaranteed for life. Free Library Box included **£20.00**

SERVICES

Fast Repair Service for the BBC
Computer average charge from **£23.00**
Printer Repairs from **£20.00**
Disc Drive repairs from **£15.00**

BBC COMPUTER SPARE PARTS AND COMPONENTS	
PSU	£59.00
Keyswitch	£2.00
Complete Keyboard	£59.00
Keyboard Connector	£5.18
UHF Modulator	£5.18
Video ULA	£20.00
Serial ULA	£16.00
6522 VIA	£4.10
6502A 2 MHZ CPU	£7.50
UPD7002	£17.25
6845SP Crt Con	£7.50
SAA5050 Teletext	£10.35
LM324	£0.50
6522A 2 MHZ VIA	£6.33
8271	£52.00
74LS123	£0.46
74LS00	£0.28
74LS04	£0.28
74LS10	£0.28
7438	£0.46
74LS163	£0.86
74LS244	£0.92
74LS245	£1.27
74LS375	£1.04

DISC UTILITIES

View Index	£14.95
View Printer Driver Generator	£11.50
Hi-View	£59.00
Acornsoft Database	£15.00
Clares Betabase	£23.00
40/80 Track	£12.95
Clares Graph Disc	£12.95
40/80 Track	£11.95
Clares Replica II Disc	£12.95
Copier 40/80 Track	£12.95
Clares The Key	£59.85
40/80 Track	£19.00
Microtext Disc	£19.00
Beebugsoft Design	£19.00
Beebugsoft Masterfile II	£12.00
Beebugsoft Teletext Disc	£12.00
Beebugsoft Sprites Disc	£19.00
Beebugsoft Discmaster	£19.00
Beebug Billboard Disc	£15.00
Beebug Quickcalc Disc	£15.00
Beebug "Hershey"	£15.00
Font Disc	£12.00
Beebug Paintbox II Disc	£28.00
Gemini DDD Base	£28.00
Gemini DDD Calc	£28.00
Gemini DDD Plot	£28.00

BBC FIRMWARE

FIRMWARE	
Acorn View Word Processor	£55.00
Acorn View Sheet	£55.00
Acorn Logo ROM	£69.00
Acorn ISO Pascal	£69.00
Acorn BCPL	£99.00
Comconcept:	
Wordwise Word Processor	£36.00
Wordwise Plus	£47.00
Intersheet	£56.00
Disc Doctor	£28.00
Printmaster (Epson)	£28.00
Printmaster (Star)	£28.00
Caretaker	£28.00
Graphics ROM	£28.00
Communicator	£60.00
Accelerator	£55.00
Gremlin Debug ROM	£28.00
Interchart	£34.00
Beebug:	
Toolkit ROM	£27.00
Sleuth ROM	£29.00
Help ROM	£25.00
Exmom II	£29.00
Spellcheck II	£31.00
Spellcheck Worldwide	£31.00
Spellcheck View	£31.00
Altra:	
Enigma Disc Imager	£45.00
Tube Editor	£45.00
Probe I	£35.00
Basic Editor 2	£35.00
Basic Editor I	£25.00
First Aid II	£19.00
Gemini:	
Datagem Database	£115.00
Pace:	
Toolstar	£33.00
Commstar	£33.00
System ADE ROM	£60.00
System Spy ROM	£30.00
Edward User Pack	£44.00
Edward Teacher Pack	£25.00
BBC Ultracalc	£69.00
BBC Toolbox	£20.00
Clares B ROM	£32.00

AMX MOUSE and Software	
AMX Mouse	£79.00
AMX Pagemaker	£49.95
AMX 3D Zicon	£24.95
AMX Database	£24.95
AMX XAM	£24.95
The Original AMX Art plus Utilities	£14.95
AMX Paintpot	£14.95
AMX Desk	£24.95

OPEN
9AM - 6PM
MONDAY TO SATURDAY



TELEPHONE ORDERS
(01) 574 5271

Telex Number 25247 atn TIL

Twillstar Computers Limited

17 Regina Road, Southall, MIDDLESEX, UB2 5PL.

MODEMS

NIGHTINGALE MODEM
Special Offer £130.00
Price includes Commstar ROM and comprehensive manual.
Auto Dial/Auto Answer Board

Auto Dial Utilities Disc	£55.00
Auto answer	£11.00
OBBS Bulletin Software	£23.00

MINOR MIRACLE WS2000
BT approved, Optional Computer Control, Auto Dial Auto Answer. Options available.

WS 2000	£148.00
Lead (BBC-modem)	£7.50
Auto answer	£34.00
Auto dial	£34.00
Data beeb	£28.75

Communications ROM includes Full Prestel Facility and control of WS 200 Autodial Auto Answer 30 ARDS.

DEMON
With its devilishly clever features. Auto Dial, Auto Redial Auto Answer Full and Half Duplex European and USA standards complete with Power Supply Leads and Manuals Full Baud Rates

DEMON with BBC ROM	£81.00
DIAL DISC	£4.95

HOW TO ORDER

You may purchase any of the items listed by cheque made payable to TWILLSTAR COMPUTERS LIMITED.

All you have to do is to list your requirements on a sheet of paper, post it to us quoting ref 2001 and we will despatch your goods within 24 hours. Please add the following amounts for Postage and Packing:

Items below £10.00	add £1.50
Items Below £50.00	add £2.50
Items below £100.00	add £3.50
Items over £100.00	add £8.00

All prices include VAT at 15% 'No Hidden Extras'

Access/Visa Card Holders:
Call us on our new Special Line
01-571 5938

"Products worth shouting about from Cumana!"



CUMANA
DISK DRIVE GUIDE

DISK DRIVES

Cumana, Europe's leading supplier of floppy disk drives and the only manufacturer to date to win BEAB approval to BS415 for electrical safety, now have an even wider product range than ever before - whether for the BBC, Spectrum, QL, Amstrad, Apple, Enterprise, Dragon, Tandy, Electron, Oric Atmos, Cumana have the best quality drives available.

UPGRADE

But Cumana's range now covers much more than just disk drives; there's a growing range of exciting new

computer products designed to uprate and extend the uses of the most popular micros. Products like the Cumana Upgrade - a major expansion to the BBC and QL micros, enabling real-time minicomputer performance with .5Mb of RAM and high level applications software. 10Mb and 20Mb Winchester systems are available for both the QL and BBC using Upgrade.

TOUCH PAD

There's the new, improved Touch Pad graphic input device with powerful Screen Artist software - an infinite variety of graphic design or artistic

uses for the home, business or education, taking you another step towards the professional league. Ask us about the new Touch Pad library!

SOFTWARE

Also new and exclusive to Cumana is Pocket Wordstar - a full implementation of Wordstar & Mailmerge, the industry standard word processing package. Thanks to Cumana, it's now available to you, at a price within every users pocket.

Cumana the very best name in memory.

"And so are the prices!"

CUMANA COMPUTER PERIPHERALS – THE VERY BEST QUALITY AT THE MOST COMPETITIVE PRICES.



3", 3½" + 5¼" disk drives for the BBC, Spectrum, QL, Dragon, Apple, Amstrad, Enterprise, Electron, Tandy, Oric Atmos prices from £89.95 to £255.95 inc VAT.



Cumana Upgrade including software suite for the BBC + QL from £795.95.



QFS (double density disk interface for BBC-B) £79.95.



Cumana Touch Pad £69.95 inc. VAT.

Additional Touch Pad Software from £4.95.

Pocket Wordstar £119.00.

5¼" double sided double density diskettes (10) £24.95.

3½" double sided double density diskettes (10) £39.95.

Cumana disk interface for the Electron (double density) £74.95.

All prices are inclusive of VAT.

CUMANA DISTRIBUTORS

CEM Micro Computer Services (Belfast) 0232 24411,
Silicon Express (Leicester) 0533 374917
Thompson Cook (Birmingham) 0527 25000,
J.S. Simnett (Kingston-upon-Thames) 01-541-1495,
Microworld (Edinburgh) 031-557-4196,
Hugh Symonds (Bournemouth) 0202 26535,
Eltec (Bradford) 0274 722512.



CUMANA LTD., PINES TRADING ESTATE, BROAD STREET, GUILDFORD, SURREY, GU3 3BH. TEL: (0483) 503121

A NEW WAY OF MAKING MUSIC MIDITRACK

WITH HOME COMPUTERS AND MIDI INSTRUMENTS

Europe's leading MIDI interface specialists put hi-tech computing into music making.
NOW AVAILABLE FOR THE BBC B: PERFORMER £49.95
Advanced multitrack digital realtime recorder.
COMPOSER £44.95
Easy step input of notes and events on 6 tracks.
MUSIC EDITOR £39.95
Full editing and linking for Performer & Composer plus free **MUSIC PLAYER** program.
VU-MUSIC £24.95
Unique graphics from MIDI music in performance.
BBC B MIDI INTERFACE £79.90
Required for use with the above software.
ALL PRICES INCLUDE VAT AND P&P.
EMR MIDITRACK software is widely used in education and in music studios worldwide.
Works with all current MIDI-equipped portable home keyboards, synthesizers, samplers and rhythm units, etc.
ALSO AVAILABLE FOR OTHER COMPUTERS including SPECTRUM, COMMODORE, RM480Z & AMSTRAD
Please write or phone for free detailed brochure.



electromusic research

14 Mount Close, Wickford, Essex SS11 8HG
Tel: 03744 67221 & 0702 335747.

AA23

MARBRY PLANNING LTD

STATISTICS AND OPERATIONAL RESEARCH PROGRAMS FOR THE BBC AND BBC + MICROCOMPUTERS.

1) STATISTICS PACK Disc £19.95

Features: Keyboard/Disc or Tape data input. Arithmetic mean, standard deviation and variance for one or two sets of data, range and frequency tables. Optional worksheet display. Optional data display. Data sort. Bivariate regression: standard error of coefficients, r, F and Durbin-Watson statistics. Graph and Histogram. Data editor.

2) REGRESSION PACK Disc £19.95

Features: Multiple Regression program. Optional constant/noconstant regression. Estimated coefficients. Standard errors of coefficients and t-ratios. F statistics. Durbin-Watson and Wallis statistics. Correlogram. Natural Logarithmic transforms.

3) TIME SERIES PACK Disc £49.95

A suite of programs offering: multiplicative and additive moving averages, simple-, adaptive-, and double exponential smoothing, and Holt-Winters procedures. Graphs of Actual versus Smoothed data. Forecasts. Data editor.

Other titles include: Linear Programming, Analysis of Variance, and Data Manager (a data file creator linking packs (1), (2) and (3)).

Orders to: MARBRY PLANNING LTD
88 Berrylands,
Surbiton,
Surrey KT5 8JY.

Telephone enquiries
01-399 5917
Please state 40/80 track when ordering.
Please add 50p p&p for each order.


AA7

BCSSP –

the dynamic system simulation language
for BBC computers

- describe systems by block diagrams and simulate their operations interactively
- applicable to differential and difference equations
- high resolution graphical/numerical output
- suitable for engineering, physics, economics, applied mathematics, electronics etc.
- use in education to bring differential equations alive

Example response: Van der Pol Oscillator:

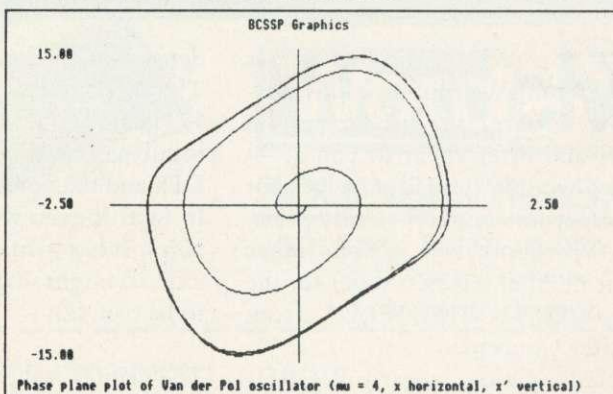

Write or phone for detailed brochure.
Demonstration system available at £20 inc. manual and tutorial.

MICROPACS

Engineering Applications Software

Centre for Advanced Technology, Chilworth, Southampton, Hampshire SO9 1XB
Telephone (0703) 768956

SOLIDISK AND ME



We pick up the best names in Wordprocessing software, in disc drives, in printers and offer them to you at — well, we wouldn't say it ourselves but our competitors might — a silly price.

The Wordprocessor is none other than the number one best seller for the BBC: WORD-WISE PLUS from Computer Concepts.

Respected opinions regard WORD-WISE PLUS as very user friendly, flexible, straightforward or simply excellent (1).

The Disk Drive is Mitsubishi's one Megabyte (unformatted) and can store up to 640 kilobytes of text on a double

density single diskette.

The disk interface electronics are our 1770 based double density filing system totally compatible with the Acorn 1770 DFS and the newer ADFS.


In fact, it even works with the Acorn chips. It has so many features that even experts might suspect that it's too good to be true (2).

The printer is the Solidisk PR165, has a speed of 160 cps in normal mode, is very fast in NLQ (near letter quality) mode and is Dot Matrix, bit graphic capable and Epson compatible (3).

For the icing on the cake, you also get a free Spelling Checker, Electronic Spreadsheet, Database and lots of games.

With around a quarter of the disc storage, a much slower printer, no colour and a membrane keyboard, with generally more expensive software, the AMSTRAD PCW8256 (at £399.00 + VAT) looks unconvincing.

By the way, the BBC already has more memory space than the AMSTRAD

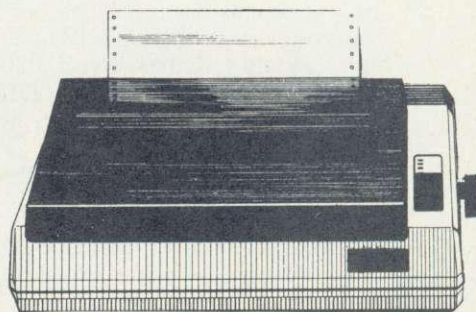


(1) See reviews in E & CM, CEEFAX, Acorn User.

(2) See reviews in Acorn User, BBC Micro User and A&B Computing.

(3) Solidisk own direct imports from Japan, subject to change without notice for improvements.

ME — AN ALL IN ONE

Wordprocessing
system for the BBC
to make the AMSTRAD
PCW8256 look greener
than just green . . .

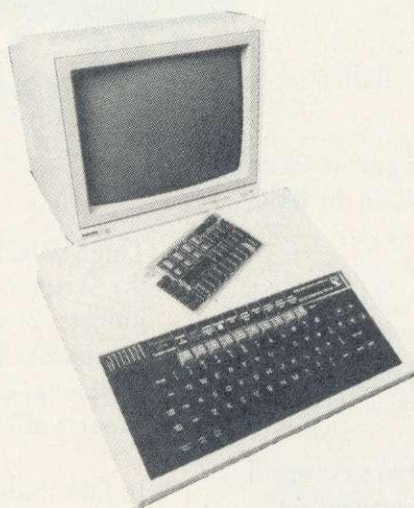

PCW8256, but if you still need more, turn over the page and look at the new Solidisk baby: up to 500K of ROMs and a cool 4Megabytes of RAMs, enough to knock down any challenger.

The Solidisk package contains:
One 160 CPS PRINTER,
One 1 MEGABYTE DISC DRIVE,
One DOUBLE DENSITY DFS,
WORDWISE PLUS ROM,
KEYSTRIP, 4 MANUALS
5 SOFTWARE DISKETTES
1 BLANK DISKETTE.
100 SHEETS OF FANFOLD PAPER.

AVAILABLE FROM SOLIDISK
BY DIRECT TELEPHONE OR
MAIL ORDER AND FROM
SELECTED BBC SPECIALISTS
FOR JUST £299.00 + VAT

PLUS CARRIAGE
Wouldn't you like to order
one now?
Just ring this number:
SOUTHEND (0702) 354 674
(Access/Visa)

Wordchic

SOLIDISK Office System

SOLIDISK TECHNOLOGY LTD
17 Sweyne Avenue
Southend Essex

To: Solidisk Technology Ltd, 17 Sweyne Avenue, Southend, Essex.
Please rush me the following:
Solidisk Office System at £355 incl. VAT + courier carr.

I enclose a cheque/postal orders for £..... or please debit my credit card account:

Mr Access Barclaycard no. is

NAME

ADDRESS

..... TEL NO:

Prices and specifications may change without notice. Delivery subject to availability. Please ring for details.

The new SOLIDISK BABY up to 500K of ROMS and 4 Megabytes of RAMS



The Baby From Solidisk is setting new challenges to software writers.

It takes up to 256K of ROMs, anything from 8k to 64K chips and can control another 256K on the BBC board.

It has 256K of RAM built-in, expandable to a whacking 4 Megabytes.

It runs at full 2Mhz, at the same speed (and timing) as the BBC board RAM.

It already comes with lots of software to put some of its potential to good use, but it is still waiting for the new generation of fully integrated software to come. Like the INTER suite from Computer Concepts.

To start with: the famous Wordwise Plus ROM from Computer Concepts and Solidisk 32K superb Toolkit ROM are included in the deal.

The additional 256k RAM are divided into 8 banks of 32k bytes. They can be independently used as Shadow or Sideways RAM or BOTH. i.e. the top of each bank can be used as Shadow while the bottom is Sideways RAM.

The Size of the paged memory is programmable, up to 31K for Sideways RAM/ROM and up to 30K for Shadows. That's 61K bytes out of 64K memory space.

The SWR256 board plugs into the 6502 socket and the latter is placed back into the on board 40 pin socket. 2 wires are hooked to IC legs on the computer board. The installation requires no soldering and can be carried out by novices or experts alike.

In fact, Solidisk engineers can open your computer and install the board in around 100 seconds.

Prices:

The SWR256, 2 ROMs and manuals costs £175.00 inclusive of VAT.


Upgrades: (incl. VAT)

From SWR32 to SWR256£129.00
From SWR64 to SWR256£89.00
From SWR128 to SWR256£75.00

These prices include the two ROMs.

INTEGRATED SOFTWARE?

That will do nicely
Solidisk introduces the
SWR256

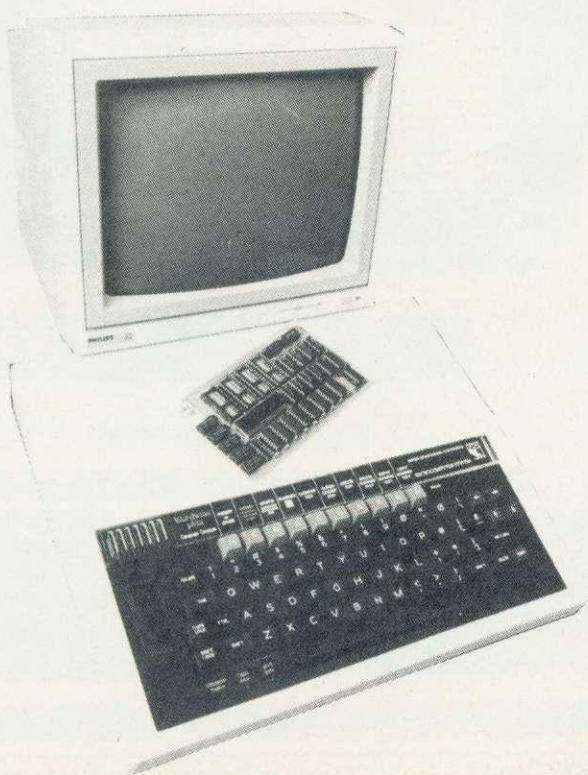

SPECIAL FEATURES:

The SWR256 system has a Programmable Memory Management Unit on board, totally compatible with all well known software.

It consists of a ROM register (&FE30), a Shadow register (&FE34), an Access register (&FE32), and a Size register (&FE36).

The ROM register duplicates the one built into the BBC board. It selects one of the 16 possible ROMs.

The Shadow register is new and similar to the BBC PLUS implementation. It selects one of the 128 possible Shadows or moves a Sideways RAM into the Shadow area.

The Size register is new and not implemented anywhere else. It specifies how big you want your Shadows and your ROMs.

The normal setting is 16K for Sideways ROM/RAM and 20K for Shadows.

If bit 0 is set, your Sideways ROM or RAM is 31K (useful for Hi-language, from &8000 to &FC00).

If bit 1 is set, your Shadow is 30k (useful for language, from &800 to &8000).

Bits 2 and 3 are reserved for possible Shadow modes 3 and 7.

The built-in software in the Solidisk Super Toolkit (a 32K ROM) runs with all well known ROMs and will handle all MOS calls.

By programming the Size register, it is possible for a ROM to have 61K of continuous memory, more than you can get with the 6502 Second Processor and you will still retain the paging facility.

By programming the Shadow register, one ROM can move another ROM into the Shadow area and call routines directly there.

There is also a 16 pin expansion socket on the board for direct access to the RAM array.

In a word, the Solidisk SWR256 is the perfect partner for any serious integrated software.

The new SWR256 is available by direct telephone or mail order from Solidisk and selected BBC Specialists.

SOLIDISK Office System

To: Solidisk Technology Ltd 17 Sweeney Avenue Southend Essex SS2
Please rush me the following:

..... SWR256K Ram at £175 incl. VAT and carr.

I enclose a cheque/postal orders for £..... or please debit my credit card account:

My Access Barclaycard no. is

NAME

ADDRESS

..... TEL NO:

Prices and specifications may change without notice. Delivery subject to availability. Please ring for details.

SOLIDISK MITSUBISHI DISC OFFER

A Complete Disc System containing everything you need, including 1 Blank Diskette, at a new low price of only £200.00 inclusive.

The Mitsubishi Offer Comprises:

- One Mitsubishi MF4853, Double Sided, 80 Track Disc Drive. Cased in beige with all leads.
- One Solidisk DDFS complete Disc Upgrade with 2.0 ROM.
- One Verbatim MD525 Blank Diskette.
- One Software Pack and User Manuals.
- Full one year guarantee.

HARDWARE:

As described earlier as shown opposite.

THE SOFTWARE:

The software comprises 5 diskettes, formatted in 80 tracks.

Volume 1:

Solidisk Word Processor and Spelling checker with English dictionary. Easier than View, Wordwise or Scribe, you enter the WP by *WP filename, then start typing. What you see on the screen will be exactly printed on paper.

Most useful commands are all displayed on the top part of the screen.

It features 80 column screen throughout with direct on screen justification, automatic margins, page numbering, Wordstar like

editing commands for block move, block delete, block copy, print, save, load text to cursor, insert and overwrite, search and replace, total word count, word frequency count, free space, *commands etc. Solidisk WP loads and saves texts in under 1 second flat and also you may save the edited version as many times and under any filename you like.

It has the unusual ability to spellcheck your document without leaving it, simply by typing in Control-U.

It has self dictionary generating capability too. You may create any dictionary you like by just simply entering the words.

IMPORTANT:

If you upgrade to a twin Mitsubishi disc system, Solidisk will offer you, subject to stock availability, a completely free set of CPU and keyboard case as shown earlier.

You should return your disc drive with payment for another Mitsubishi MF4853 (£160.00) or alternatively, save by ordering right now a Fantastic Offer at only £340.00.

The keyboard is 12 mm lower than the normal BBC case, 2-3 degrees more angled, weighs only 5lbs, does not skid about on the desk while enjoying 2 feet of freedom from the computer unit — and makes a lot of difference to typists (even 2 fingered ones!)

The CPU accommodates 2 disk drives and withstands any heavy weight monitor while providing easy attachment for the whole system, CPU and disk drives, to the desk if need be. Good ventilation to the power supply too and hides all untidy cables away.

PRICE

The complete CPU and keyboard case costs £30.00 inclusive + £3.00 post and packing. The system could be yours free as part of the Mitsubishi twin discs offer.

Volume 2:

Volume 2 contains Solidisk Database. It is a random access system, completely menu driven and easily customised to suit any particular filing need.

It features unlimited filesize and number of records, supports all maths functions and 80 column screen throughout.

It is simple to understand and to use. You take one of the 15 different options to start. Each option will then lead to a new menu and so on. Mostly you only have to enter an appropriate data or hit the RETURN key.

You can design new databases, list all records, edit them, merge them, split them, making mailshot with Solidisk WP etc. . . We use it to process all your orders.

Volume 3:

Volume 3 contains Solidisk Spreadsheet. Menu driven with standard options to create, edit, recalculate, print, search, sort, report generator and mailmerge.


Unlimited number of rows and columns. Each column can be as small as 2 or as big as 70 characters. All math functions are supported. Complete with home banking and simple portfolio management.

Volume 4:

Volume 4 contains the Solidisk tape to disc program and a selection of computer games.

Volume 5:

Volume 5 contains MBASIC, SIGEN and other disc utilities.

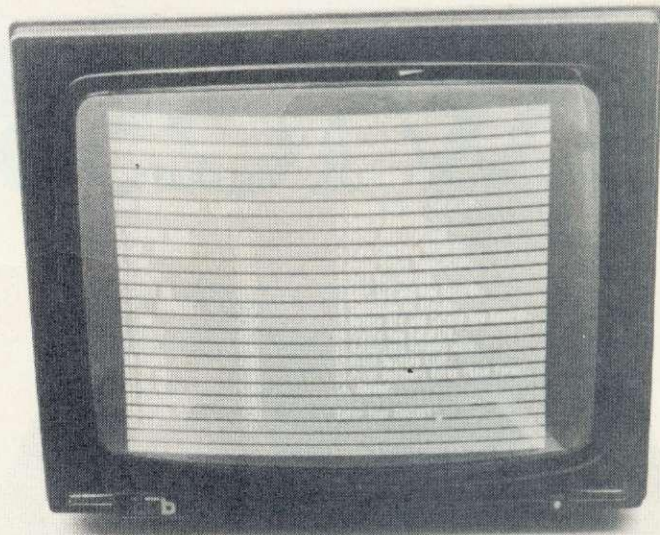

ADVANCED FILING

SOLIDISK 1770 DISC INTERFACE For the BBC Computer

The Solidisk Double Density 1770 Disc Interface enables the standard BBC B computer to use most current types of disk drive. Only 4 components need to be fitted into existing sockets on the computer and this can be done in a few minutes by novice and expert alike. It now can run all Acornsoft games (such as Elite, Aviator, Revs, Magic Mushroom etc. . . .) and most other protected discs (Castles Quest, Island's Music System etc. . . .)

The Disk filing System provides every facility that you would expect such as built-in disc formatter and verifier, automatic 40/80 track switching, programmable disc speed and is upgradable to the Solidisk ADFS.

It also has some significant advantages over the Acorn 1770 system, mainly:

- 1) 60% more storage capacity in double density DFS, giving you up to 640k on a double sided 80 track diskette as opposed to only 400k bytes with the Acorn 1770.
- 2) Better emulation of the 8271: some protected discs (such as the early Acornsoft's Elite game) would not run on the Acorn 1770.
- 3) Built-in useful disk utilities such as TAPEDISC, MZAP, DZAP (disc sector editor), RECOVER, RESTORE etc. . . . which would add to cost if bought separately.

PRICE:

The 1770 Double Density Disc Interface costs £45.00 inclusive of VAT, DFS 2.0 ROM, manual and 1 year guarantee. If you wish, you can also order it with the ADFS ROM and the total cost is £55.00 inclusive.



SOLIDISK TECHNOLOGY LIMITED
COMPUTERS PERIPHERALS MICROPROCESSOR DEDICATED SYSTEMS
Tel: (0760) 354674 Trade Name: SOLIDISK COMPUTERS
17 Sweyne Avenue, Southend-on-Sea, Essex SS2 6JQ

SOLIDISK DISK FILING SYSTEM



15,000 SOLD

SOLIDISK ADVANCED DISC FILING SYSTEM for the BBC Computer

The Advanced Disc filing System (ADFS) is now officially endorsed by Acorn and is certainly going to revolutionise software for the BBC Micro.

The Solidisk ADFS, reviewed in A&B Computing 85, whilst comparable to Acorn's ADFS, is very much designed with floppy disk and DFS software compatibility in mind.

The Solidisk ADFS will run most software available for the BBC computer, including all Acorn languages and the View family, Computer Concepts Wordwise and the INTER family, Gemini's Datagem etc. . . .

It also has PAGE at the lowest value, eg &1900 with one channel. It can realistically support up to 10 opened channels without slowing down the program as it does not swap buffer pages to disc. It also has utilities such as *FORM, *VERIFY, *BACKUP etc not found in the Acorn ADFS ROM.

It is also very responsive and double safe, with automatic head settling and read after write automatic error correction.

It runs with all Acorn second processors including the latest 32016 mainframe machine (only Z80 CP/M requires new MFM BIOS) and it is fully supported by the Solidisk Toolkit ROM. The Solidisk ADFS is available for the BBC B or PLUS fitted with the Solidisk 1770 Disc Interface or the Acorn 1770 as a TWO ROM chip set, consisting of the DFS 2.1 and the ADFS 2.1. A 32k ROM may be supplied in lieu of the 2 ROMs on request. It costs £20.00 when purchased separately like this.

SOLIDISK 1770 + 8271 Disc Interface For the BBC Computer

As Acorn are now backing the Advanced Disc Filing System, many of you, having got the 8271 Disc Interface, wonder what you are going to do next.

If you get the Acorn 1770 upgrade, you will have to part with your 8271 and possibly a few expensive pieces of software such as the old Elite or Replica II which won't run without the 8271. It is still only a single density DFS.


The alternative is to get the Solidisk 1770 + 8271 Disc Interface (known as the DFDC, acronym for Dual Floppy Disc Controller) which will let you keep the 8271 which you already have and add 1770 Double Density capability.

It is low cost, today and easy to fit.

At a flick of a switch, you can select either the 8271 or the 1770 Floppy Disc Controller.

You will have the best of both worlds: compatibility with the 8271 and fascination with the 1770 ADFS.

It is probably the fastest, more powerful and versatile Disc System for the BBC. The DFDC costs £60.00 including VAT, manual, DFS 2.0 ROM and ADFS 2.1 ROM.

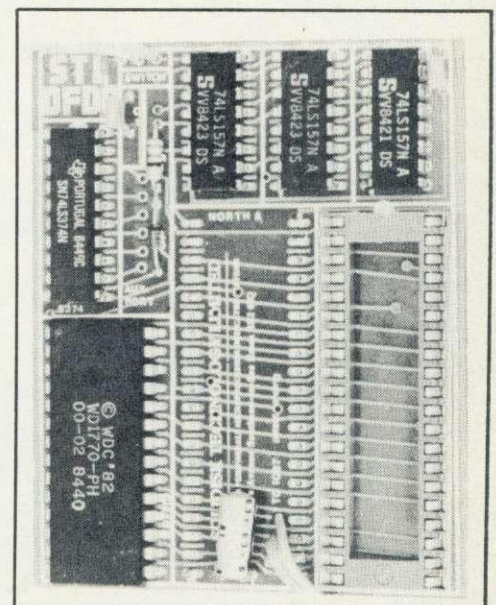

WIN THE MAZE GAME...

Investing in extra equipment for your BBC Micro really needs thinking about; bear in mind, for instance, that for the last five years, all efforts have been put into more memory and faster disks.

The problem is that you may end up with a hotch potch of add-ons from different suppliers, and some may be reluctant to give advice on the whole ensemble.

We should know — here at Solidisk, we see it every day.

So how can you, too, keep pace with the latest technology?

The easy answer is buy important pieces of hardware from Solidisk.

Solidisk design rules adhere strictly to 2 principles:

- 'Minimum Disruption' to the standard machine.
- 'Do it in software' if at all possible.

We have Double Density Disc Interface, Winchester, Advanced DFS, Sideways RAM, Shadow/MOS RAM and MODEM and more than 50,000 happy users.

They are happy because their computers have more facilities, run faster, look tidy and usually cost them less money.

For many, it's the support that they receive that they are most happy about.

With over 90 Local Experts covering England, Scotland and Wales, with presence in Holland, France and Australia, Solidisk can offer many users free fitting and advice.

We also make available an ever increasing catalogue of free software to all Solidisk users, except media and carriage.

Solidisk Software Support Service can give you the sort of service only matched by the largest companies.

It's up to you to decide. Although they are happy now, many have made the journey twice and they are not ready to do it again.

SOLIDISK LOCAL EXPERTS

Solidisk has a nationwide network of more than 90 local experts and a growing number of experts overseas.


They do not sell our equipment, but they can generally fit it for you absolutely free of charge. If you would like to take advantage of this unparalleled service, ring us once you have our equipment for the name and telephone number of your nearest one. All areas are currently covered, but we still intend to expand the network; if you are interested, please call us for details.

PRICELIST: (all prices include VAT unless otherwise indicated. We export world wide — contact us for details on prices and delivery).

	Prices	P&P
BBC SIDEWAYS RAM:		
SWR32	£53.00	£2.00
SWR64	£80.00	£2.00
SWR128	£125.00	£2.00
SWR256	£175.00	£2.00
Software pack 2	£10.00	£2.00
NB: all versions of the Sideways Ram come supplied with Software Pack 1 free of charge. Please specify 40 or 80 tracks when ordering. Pack 1 is available without the Sideways Ram at a cost of £10 + £2 P + P.		
1770 DISC INTERFACE:		
1770 Double Density with DFS 2.0 ROM	£45.00	£1.00
1770 Double Density with ADFS	£55.00	£1.00
1770 + 8271 DFDC with ADFS	£60.00	£1.00
DISC OFFERS:		
640k with ADFS Disc Offer	£200.00	£3.00
(£10.00 Datapost)		
1.3MB with ADFS, CPU and keyboard case	£340.00	£5.00
(£10.00 Datapost)		
WINCHESTER DISC DRIVES:		
XD-10 without PSU 10MB (Minimum config)	£399.00	+ VAT
XD-10 10MB (with additional PSU)	£460.00	+ VAT
The following prices include keyboard and CPU case:		
XD-20/40 20 MB	£699.00	+ VAT
XD-20/40 TWIN (40 MB)	£1100.00	+ VAT
XD-30/60 30 MB	£900.00	+ VAT
XD-30/60 TWIN (60MB)	£1300.00	+ VAT
All Winchester systems are despatched by Datapost within the UK, included in the prices above. (Please remember that if you also need to use floppy disks in conjunction with these, it is advisable to also purchase our 1770 DFS interface or 1770 + 8271 DFDC interface — see previous pages.)		
EPROMS:		
2764 x 5	£24.00	£1.00
27128 x 3	£25.00	£1.00
27256 (to be used on UVIPROM32)	£10.00	£1.00
UVIPROM Eprom programmer, suitable for 2764, 27128	£19.00	£2.00
UVIPROM32 Eprom programmer, special for AMD27256	£20.00	£2.00
UVIPAC Eprom Eraser	£21.00	£2.00
DISKETTES:		
Datalife MD525 SS/DD	£17.00	£1.00
Datalife MD557 2S/4D	£28.00	£1.00
MISC.		
CPU and KEYBOARD case	£30.00	£4.00
Solidisk TOOLKIT a must for ADFS	£10.00	£1.00
DFS + ADFS if purchased separately	£20.00	£1.00
EFS for the Electron	£59.00	£1.00
Special 3.5" Electron disc offer	£197.00	£3.00
Please circle: BBC Model B/B PLUS/40 tracks/80 tracks.		

Name: _____
Address: _____

BARCLAY/ACCESS : : : : : :
We reserve the right to change prices and specifications without notice and delivery is subject to availability. Please call our office for confirmation. Callers are welcome Monday to Friday 9.30 to 5.30. Please note that we are closed on Saturdays. Callers requiring fittings or installation checks: it is now essential to ring for an appointment.
SOLIDISK TECHNOLOGY LTD 17 SWEYNE AVENUE SOUTHEND ESSEX SS2 6JQ
TEL: (0702) 354674 (16 LINES)

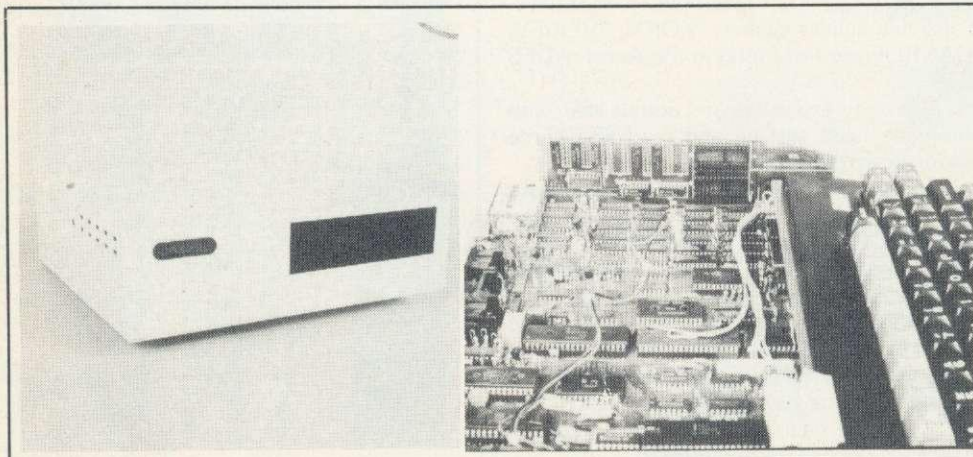

SOLIDISK TECHNOLOGY

Tel. SOUTHEND
(0702) 354674

(16 lines)

TECHNOMATIC

ACORN COMPUTER SYSTEMS

BBC Model B + DFS.....	£360 (a)
BBC Model B + Econet.....	£335 (a)
BBC Model B + Econet + DFS.....	£399 (a)
BBC B PLUS.....	£409 (a)
BBC B PLUS with 128K Kit.....	£434 (a)
BBC Dust Cover.....	£4.50 (d)

UPGRADE KITS

Acorn DFS Kit.....	£80 (d)	1.2 OS ROM.....	£7.50 (d)
Econet Kit.....	£55 (d)	DNFS ROM.....	£17.50 (d)
BASIC II ROM with User Guide.....	£22.50 (d)		
1770 Upgrade Kit for BBC B to B plus.....	£42.60 (d)		

ADFS is Acorn's long awaited double density disc interface system. The hierarchical filing system on the ADFS allows almost unlimited number of files. Treating a double sided disc drive as one drive allows storage of much larger files and greatly enhances the storage efficiency. Will read 40T discs on 80T drives.

ADFS ROM (for upgraded B's and all B plus)..... £25.20 (d)

ECONET ACCESSORIES

Econet Starter Kit.....	£85 (b)	Printer Server Rom.....	£41 (d)
File Server Level I.....	£75 (d)	10 Station Lead set.....	£26 (c)
File Server Level II.....	£210 (d)	Adv. Econet User Guide.....	£10 (d)

ACORN BITSTICK

The renowned 'BITSTICK' graphic CAD package. Using the on-screen menu and colour palette, it can draw freehand as well as lines and shapes with great accuracy. Any part of a drawing may be magnified many times, and up to 48 drawings may be saved on a disc. In total, a friendly yet sophisticated CAD system offering tremendous value.

BITSTICK I	£310 (a)
ROBOCOM BITSTICK II: This bitstick comes with Bitstick I software upgraded to allow for auto dimensioning, scaling	£795 (a)
ACORN's multiplotter driver for Bitstick graphics (All popular plotters included)	£79 (c)
Epson FX80 screen dump routine for Bit Stick	£35 (d)

ACORN WINCHESTER DRIVES

Acorn Hard Discs are now available in 10 and 30 Mbyte versions. The drive plugs into the 1 MHz bus. The ADFS filing system with its hierarchical filing structure provides excellent file management facilities. Data transfer rate of 1Mbit/sec and average seek time of 85 ms provides the user very fast access to very large amounts of data. File Server Level III can be installed on the Hard Disc before delivery.

10 Mbyte Winchester Drive	£1299 (a)
30 Mbyte Winchester Drive	£1999 (a)

Add £200 to the cost if File Server Level III is to be installed.

ACORN 2nd PROCESSORS

The **Z80 2nd Processor** converts your BBC into a CP/M business computer. Complete with comprehensive free software. £340 (a)

The **6502 2nd Processor** provides both an increase in speed and memory. £175 (a)

ACORN P-SYSTEM

Intended for use with the 6502 Second processor, this portable operating system is a complete implementation and comes complete with a Filer, Editor, and compilers for two languages, USCD PASCAL and FORTRAN-77. Widely used in universities and colleges, as well as being popular with business software authors, P-System is user-friendly, offering ease of program development as well as portability. **P-System £263 (b)**

TECHNOLINE

TECHNO-LINE IS NOW ON-LINE 24 HOURS
Tel: 01-450 9764

TECHNOLINE offers you 24 hour, 7 days a week ordering/information

- *New Products
- *Comment Box
- *Technical Pages
- *Comments on Stock and availability of Products
- *Placing of Orders and many others....

Techno-Line 01-450 9764
24 hour, 7 days a week.

Technical Information:
1200/75 Baud. Standard Viewdata/Prestel Protocols.
Please note that a 'Prestel' type terminal must be used.



EPROMs/RAMS

2764-25.....	£2.20	27128-25.....	£3.00 (d)
6264LP-15.....	£4.00 (d)		

TORCH PRODUCTS

GRADUATE: The ultimate upgrade — converts your BBC into a powerful 16 Bit business computer and makes it disc and hardware compatible with the IBM PC. With 256K RAM and dual drives, it simply connects through the 1 MHz bus. (The disc drives can be used in both BBC and IBM mode, without requiring a disc interface.) The top-of-the-range Model G800/2 comes complete with the free Xchange range of software, and includes a full feature word processor, a spreadsheet, a database and a business graphics all linkable.



Graduate G800/2..... £699 (a)
(Offer valid for limited period only).

Z80 Card ZEP100 with PERFECT Software Packages + Z80 Basic.....	£275 (a)
Z80 Disc Pack ZDP240 with software as above.....	£550 (a)
20Mb Hard Disc + 1 x 400K Floppy Drive.....	£1,950 (a)
Unicorn 68000, Unix OS/Z80B/512K, 20MB Hard Disc, 400K Floppy.....	£3495 (a)

MULTI-FORM Z80 2nd PROCESSOR

This is a unique Z80 2nd processor running CP/M and allowing use of the massive range of CP/M software. What makes this unit rather special, is that it can be used with software from other CP/M computers, without the user needing specially configured software for the BBC. As supplied, the unit will read many formats and it is possible to configure the unit for virtually any other CP/M machine. Please contact us for further information.

Multi-form Z80 2nd Processor £299 (a)

META-ASSEMBLER

Both an editor and Macro-Assembler. Meta can assemble most 65xx, 68xx, 6804, 6805/6305, 6809, 8048, 8080/8085, Z80, 1802 and more. (Free updates due very soon — 68000 series, 8088/8086, Z8000 etc.) Many advanced features including Macros, conditional assembly, Global/selective search etc etc. Includes 16K Eprom, disc, function key card, and comprehensive manual. Please phone for comprehensive leaflet.. **Meta-Assembler £126 (c)**

MUSIC 500/SYMPHONY

Acorn's MUSIC 500 is a sophisticated music composition aid and sound effects generator. Phone for leaflet. **Music 500 SYMPHONY KEYBOARD** from ATPL is a professional 4 Octave keyboard with sophisticated software.

Symphony Keyboard £108 (a)
Synth-500 disc allows its use with Music-500 **Synth-500 Disc £10(d)**

01-208 1177

BBC Computer & Econet Referral Centre

MAIL ORDER
17 Burnley Road
London NW10 1ED

RETAIL SHOPS
15 Burnley Road
London NW10 1ED

Tel: 01-208 1177
(close to Dollis Hill)

West End Branch
305 Edgware Road
London W2
Tel: 01-723 0233
(near Edgware Road)

TECHNOLINE
24 hour Viewdata
Service 01-450 9764

Orders welcome from government depts & educational establishments.

All prices ex VAT
Prices are subject to change without notice

Please add carriage
(a) £8 (Datapost)
(b) £2.50
(c) £1.50
(d) £1.00.

PRINTERS

**SPECIAL
XMAS OFFER
EPSON FX80
£265 (a)
+ VAT**

ALL PRINTERS HAVE A 12 MONTH GUARANTEE

EPSON DOT MATRIX PRINTERS: EPSON — the high quality range of dot-matrix printers that set the standard in the industry. A wide range of interfaces ensure that these top-of-the-range printers can be used with most computers.

**RX 80T + £210 (a) RX 100 + £345 (a)
FX80 + £315 (a) FX100 + £430 (a)**

Epson LX-80 NLQ: A new low-cost high performance dot matrix printer from Epson. Its many features include Near Letter Quality, Draft mode, programmable characters, a variety of print styles, graphics etc. Supplied with friction feed.

LX-80 £219 (a) Optional Tractor Feed £20 (c)

Epson JX80 Colour: A full colour dot matrix printer with colour text and graphics as well as many advanced printer features.

JX80 Colour £475 (a)

KAGA NLQ PRINTERS

A top quality yet very competitively priced printer with a Near Letter Quality mode. Includes all the features of Epson FX and uses the same control codes. Extra socket provided on the pcb for installing either 8K RAM or 8K EPROM for custom made font.

KP810 (80 col) £235 (a) KP910 (156 col) £339 (a)

SEIKOSHA SP-10000

A low cost attractively packaged printer includes many novel features including NEAR LETTER QUALITY mode and automatic single sheet loading. Variety of fonts, 100 cps, both friction and tractor as standard.

Seikosha SP-1000 £189 (b)

BUFFALO 32K Buffer for EPSON PRINTERS

This compact 32K buffer can be fitted internally on any EPSON printer within a few minutes. It does not require external power or any modification to the printer. It will hold about 15 A4 pages of text freeing your computer for other jobs in a fraction of the time it would normally have to wait for the printer to finish all that printing. Supplied with full fitting instructions.

Buffalo 32K Buffer £75 (d)

DAISY WHEEL

BROTHER HR15: * 14 cps * 3K Buffer * Two colour printing * Proportional spacing * Underline * Bold * Shadow print * Super/Sub script + many other features.

BROTHER HR15 £310 (a)

JUKI 6100: * 15 cps * 2K Buffer * Switchable 10/12/15 cpi * Proportional printing * Linear Motor for max reliability.

JUKI 6100 £299 (a)

PERIPHERAL & COMPUTER SHARERS

We now offer an extended range of peripheral sharers to allow the user to switch between computers, printers and modems. High quality switching mechanisms housed in fully shielded metal cases ensure reliability. No external power input required.

All lines on the sharers are fully switched (36 on parallel and 25 on serial)

	Parallel	Serial
3 Computers to a Printer	36V36-3 £69 (c)	25V25-3 £64 (c)
4 Computers to a Printer	36V36-4 £85 (c)	25V25-4 £74 (c)
2 Computers/2 Printers x-over	36V36-X £69 (c)	25V25-X £69 (c)
BBC Cable Set 3 to 1 (1m ea.)	£32 (c)	£34 (c)
BBC Cable Set 4 to 1 (1m ea.)	£39 (c)	£41 (c)
Computer Sharer:		
1 computer to 2 printers fitted with Cable for BBC TCS26		£19.50 (c)

GRAPHICS PLOTTER

Basic 3 colour flat bed plotter £270 (a)
Opto Sensor £78 (d) Drill Router £79 (c)

Basic Plotter can be powered from BBC psu
External 12V psu £41 (c) External 12V psu (for drill router) £78 (c)

BREAK-LOCK

A two-position key switch, fitting into the 'Ash-tray', that prevents accidental/unauthorised use of the Break key. £8.50 (c)

PRINTER ACCESSORIES

EPSON

FX80 plus sheet feeder £129 (b); LX80 sheet feeder £49 (b)
Paper Roll Holder £17 (d) FX80 Tractor Attachment £37 (c)
Interfaces: 8143 RS232 £28 (c); 8148 RS232 + 2K £57 (c);
8132 Apple II £60 (c); 8165 IEEE + Cable £65 (c).
Serial & Parallel Interfaces with larger buffers available.

Ribbons: RX/FX/MX80 £5.00 (d);

RX/FX/MX 100 £10 (d); LX80 £6 (d)

Spare pens for HI80 £7.50/set (d)

KAGA TAXAN: RS 232 Interface + 2K buffer £78 (c);

Ribbon KP810/910 £6 (d)

JUKI: RS232 Interface £65 (c); Spare Daisy Wheel £14 (d);

Ribbon £2.50 (d);

Sheet Feeder £182 (a) Tractor Feed Attach £129 (a)

BROTHER HR15: Sheet Feeder £189 (a) Tractor Feed £99 (a)

Ribbons Carbon or Nylon £4.50 (d); Red Correction Ribbon £2 (d)

BBC Printer Lead: Parallel (42") £7 (d); Serial £7 (d)

Printer Leads can be supplied to any other length.

Plain Fanfold Paper with extra fine perforation (Clean Edge):

2000 Sheets 9.5" x 11" £13 (b) 2000 sheets 14.5" x 11" £18.50 (b)

Labels per 1000s: Single Row 3 1/4" x 1 17/16" £5.25 (d)

Triple Row 2-7/16" x 1 7/16" £5.00 (d)

Dust Covers: FX80 £5.50 (d), FX100 £7.50 (d), Kaga KP810 £6 (d),

KP910 £7 (d)

EPSON HI-80 PLOTTER

EPSON technology has once again scored a first by introducing a sophisticated A4 size plotter that does not need specialised software or programming skills to operate it and yet keep the cost within the reaches of all computer users. Features include 4 pens at a time — upto 10 colours to choose from, a variety of pen nibs, high speed plotting. Powerful software command codes include single commands to plot circles, ellipses or triangles. Line or bar graphs and pie charts can be plotted in a variety of exciting styles very simply by keying in the data into the computer. Detailed leaflet on request.


Epson Hi-80 Plotter £345 (a)



PRINTER SHARER/BUFFER

A unique sharer/buffer that provides a simple solution to improve system utilisation. It can be connected to up to three computers and it will automatically switch between the computers to scan for data — no manual switching required. High speed data input rate to the buffer cuts down the normal waiting time for the computers for the printing operation to complete and thus allowing the computers to be used for other uses. The 64K buffer would hold over 30 A4 pages of text.

Facilities include: COPY, PAUSE AND RESET, LED indication for percentage of memory available and data source. Mains powered. Send for detailed specification.

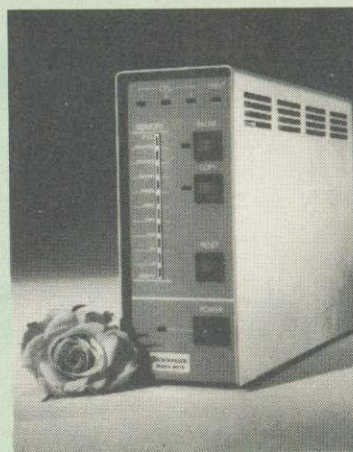

**TSB 64 Buffer/Sharer £199 (a)
BBC Cable Set £30**

MONITORS

All monitors supplied with BBC lead

MICROVITEC

All 14" monitors now available in plastic or metal cases, please specify your requirement.

14" RGB		14" RGB with PAL & Audio	
1431 Std Res	£185 (a)	1431 AP Std Res	£205 (a)
1451 Med Res	£240 (a)	1451 AP Med Res	£280 (a)
1441 Hi Res	£385 (a)	These monitors can receive TV programs thru a Video Recorder	

Swivel Base for Plastic 14" Microvitecs £20 (c)

20" RGB with PAL & Audio	
2030CS Std Res	£380 (a)
2040CS Hi Res	£685 (a)

KAGA TAXAN 12" RGB

VISION II Hi Res	£240 (a)	VISION III Plus	£330 (a)
------------------	----------	-----------------	----------

SUPERVISION III Plus £360 (a)

MITSUBISHI 14" RGB Med RES IBM & BBC Compatible £229 (a)

SANYO CD3125NB 14" RGB Std Res £159 (a)

MONOCHROME MONITORS:

SANYO DM8112CX Hi Res 12" Green Screen	£90 (a)
KAGA KX1201G Hi Res 12" Etched Green Screen	£95 (a)
KAGA KX1203A Hi Res 12" Etched Amber screen	£105 (a)
PHILIPS BM7502 12" Hi Res Green Screen	£75 (a)
PHILIPS BM7522 12" Hi Res Amber Screen	£79 (a)

Swivel Base for Kaga Monochrome fitted with Digital Clock £21 (c)

Monitor Plinth for the BBC £13.50 (b)

Double Tier Plinth for BBC and flat pack dual drive £19.50 (b)

BBC Leads Kaga RGB £5(d) Microvitec £3.50 (d)

Monochrome £3.50 (d)

Multi Output Video Adaptor: Allows up to 4 RGB Monitors to be connected to the BBC. Fully buffered £48 (d)


TOUCHTEC-501

Designed for use with Microvitec metal cased monitors, and using the RS-423 socket, this unit brings genuine touch-screen operation to your BBC. Ideal for the educational market. Supplied with a users handbook and utilities disc containing starter programs and development software.

Touchtec 501 £260 (b)

DISC DRIVE MULTIPLEXER

The cost-effective alternative to networking! A self-contained unit that enables up to four computers to be connected to one single or dual disc drive. No hardware modifications — simply plugs into the computers disc interface connectors. No ROMs or other software needed. All DFS commands work as normal. The switching of drives between computers is totally automatic and completely invisible to the user. This unit is ideal for installing in classrooms and other situations, where networking is not planned or necessary, or where costs must be kept low. In many cases software needs to be shared, although full networking complexity and cost is not needed. Several of these units can be connected in series to allow more computers to access the same discs, i.e. two quads connected together will allow 7 computers to share 1 drive. Units are supplied with 5' of cable per outlet as standard. Mains powered.

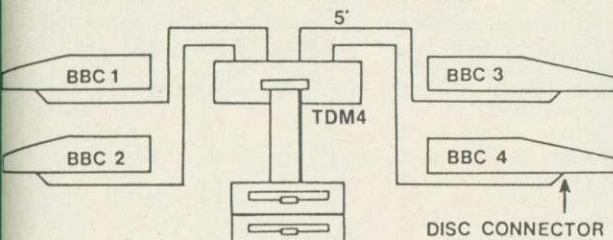

TDM4 Quad Unit (up to 4 computers) £135 (a)
TDM2 Dual Unit (2 computers) £75 (b)

DISC ACCESSORIES

Single Disc Cable £6 (d) Dual Disc Cable £8.50 (d)

DISC STORAGE CASES

10 Disc Library Case £1.80 (d) 30 Disc Case £6.00 (c)

LOCKABLE CASES

40 Discs £14 (c) 70 Discs £15 (c) f13710 Discs £16 (c)

DISC DRIVES


TECHNOMATIC drives are fitted with high quality slimline Japanese mechanisms and represent the state of the art in drive technology. The drives are built to the highest standards and are tested to their full performance capability before packaging.

Single drives are available with or without integral mains power supply. The dual drive power supplies are switch mode type and are generously rated to ensure minimum heat generation over long periods of operation. All drives with integral power supply are fitted with a mains indicator.

The drives are housed in attractively designed metal casings painted in hard wearing BBC matching paint. The dual drives can be supplied in stacked version or with built-in plinths. The plinth version cases are of sturdy construction to carry any monitor and provide a simple method of having a compact computer installation.

The 80T drives are supplied with the 40/80 track switching modules at no extra charge. The 40/80 track switches are conveniently positioned in the front on dual drives to enable easy switching between the tracks.

All drives are supplied with all the necessary cables, manual and a formatting disc. The mains powered drives are also fitted with a 13A mains plug suitably fused. The drives are ready to be fitted to the computer. All drives are capable of operating in single or double density modes.



Single Drives:

1 x 100K 40T SS : TS100 £79(b)

1 x 400K 80/40T DS : TS400 £99(b)

Dual Drives: (with integral psu)

Stacked Versions:
PD800 2 x 400K 80/40T DS £209(b)

With integral psu:

PS100 £99 (b)

PS400 £120 (b)

Plinth Versions:

PD800P £245 (a)

3.5" Drives:

These compact drives, used with most of the new 16 bit micros offer fast access times and high performance with minimum of power consumption. The mechanisms are 80 track double sided and are capable of both single and double density operation. The single drive is offered in a dual case with a blanking plate for future upgrading. The drives come complete with cables, manual and formatting disc.

TS35 1 x 400K 80T DS £99 (b) TD35 2 x 400K 80T DS £172 (b)

Separate cased power supply £20 (c)

3M FLOPPY DISCS

Authorised Distributor
Data Recording Products



Industry standard high quality discs with guaranteed error free performance for life. Discs in packs of 10:

5 1/4" DISCS

40 T SS DD £13 (d) 40 T DS DD £18 (d)

80 T SS DD £22 (d) 80 T DS DD £24 (d)

3 1/2" DISCS

80 T SS DD £30 (d)

80 T DS DD £38 (d)

Egon Ronay's JUST A BITE Guide
FREE with two special 10-boxes
of 3M diskettes. Limited Offer

DRIVEHEAD CLEANING KIT

The FLOPPICLENE drive head cleaning kit is an ideal way to ensure the optimum performance of your drives. The use of disposable cleaning discs eliminates the risk of contamination and abrasion of sensitive driveheads. These risks are normally inherent in the reusable drivehead cleaning kits.

Floppiclene with 20 disposable cleaning kits. £14.50 (b)

TECHNOMATIC

01-208 1177

BBC Computer
& Econet
Referral Centre

MAIL ORDER

17 Burnley Road
London NW10 1ED

RETAIL SHOPS

15 Burnley Road
London NW10 1ED

Tel: 01-208 1177

(close to Dollis

Hill)

West End Branch

305 Edgware Road
London W2

Tel: 01-723 0233

(near Edgware

Road)

TECHNOLINE

24 hour Viewdata

Service 01-450 9764

Orders welcome from
government depts &
educational
establishments.

All prices ex VAT
Prices are subject to
change without notice

Please add carriage

(a) £8 (Datapost)

(b) £2.50

(c) £1.50

(d) £1.00.

COMMUNICATIONS

MINOR MIRACLES WS2000 A world standard modem, having BT approval, covering V21, V23, (BELL 103/113/108 outside the UK) and including 75,300,600, 1200 Baud ratings. What possibly gives this modem its biggest advantage is its option of computer control. A 25Way RS232 input as well as possible computer controlled auto/dial/auto-answer makes this modem unique. **WS2000 £129 (c)** BBC Serial Cable **£7**.

WS2000 Auto-Dial card: includes an integral loudspeaker for monitoring of the phone line
BBC User Port cable (for modem control) **£4**.

SKI KIT (Allowing total control of the modem by your computer) **£10**.

DS1 Disc (for Commstar): When used with the Auto-dial card, SK1 Kit, and a user port cable, this software will dial out to Prestel, enter your password etc. and leave you in Commstar. Will also store many bulletin board telephone numbers and protocols for autodialling **£10**.

WS2000 Auto-Answer Card £30(d).
(Please note that the A/D & A/A Cards are still awaiting BABT Approval.)

DATA-BEEB An advanced communication ROM from Miracle Technology. Its many features include both Viewdata (Prestel) and Terminal modes, Auto-Answer and Auto-dial for fully expanded WS 2000's etc. Macro facilities allow flexible use of its many facilities e.g. automatic dialling, log-on, going to a specific page, printing it, and going off-line, all in one operation. **£25 (d)**


NEW WS-3000 RANGE — the new professional series. All are intelligent and 'Hayes' compatible, allowing simply 'English' commands to control its many features. All models feature Auto-Dial with 10 number memory, Auto-Answer, Speed Buffering, printer port, data security option etc. All models are factory upgradeable.

WS3000 V2123 (V21 & V23 + Bell) **£295 (a)**

WS3000 V22 (as above plus 1200 baud full duplex) **£495 (a)**

WS3000 V22bis (as above plus 2400 baud full duplex) **£650 (a)**

The WS3000 range all have BT approval.

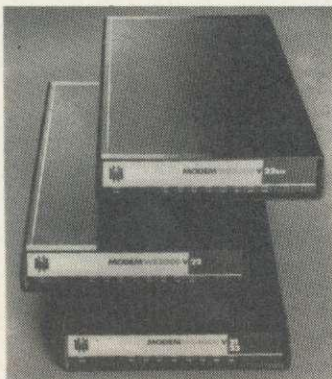

BUZZ BOX This pocket sized BT approved modem complies with V21 300/300 baud and provides an ideal solution for communications between users, with mainframe computers and bulletin boards. Suitable for use with Open University computer. Battery/mains powered.

Buzz Box £60 (c) Mains Adaptor **£10 (d)** BBC Data Lead **£8 (d)**

COMMSTAR An ideal communications Rom. Extremely easy to use, yet very versatile. It features both a Prestel mode as well as a Terminal mode, thus offering very good value for money. In Prestel mode, all normal Prestel features are available including, downloading of software, saving and retrieving of pages on disc, page tag, revealing of hidden text etc. Its terminal mode is ideal for bulletin boards etc. Any type of file, (not just ASCII) may be sent using XModem protocols. Even includes an elapsed time clock. **£27 (d)**

TERMULATOR An advanced terminal emulator on a 16K Rom. Emulations include VT52/100, Tektronix 4010 etc. Allows a BBC to be used as a terminal for almost any mainframe computer or computer network. **£30 (d)**

COMMUNICATOR This is a full 80 col VT100 terminal emulation program on 16K eeprom. It is a more advanced program than TERMI and features easy to follow screen menus. The rate at which data is sent or received is easily set up with rates up to 19200 Baud with 80 column text. Allows files to be transmitted from disc, or a copy of incoming data to be sent to a file or to a printer. (Communicator is not suitable for PRESTEL). **£57 (d)**

REAL-TIME CLOCK CALENDER

A low cost unit, allowing the facilities of units costing far more. Built to professional standards, it opens up the total spectrum of Real-Time applications. Possibilities include desk diary/planner, calendar, continuous display of on-screen time and date information, automatic document dating, precise timing and control in scientific applications — its uses are endless. Simply plugs into the user port — battery backup is supplied as standard. A full manual as well as extensive software including a simple demonstration diary/planner application program on disc. **£29 (c)**



EPROMER II



A sophisticated eeprom programmer that handles the full range of popular single rail eeproms (incl 27256) and allows the user full control of the programming process.

Its powerful menu driven software makes the programming of eeproms simple, efficient and eliminates the need to have fiddly switches for selecting eeprom types, programming voltage or method. The features include:

- * Integral power supply ensures no power drain from the computer.
- * Interfaces through 1 MHz bus, fully buffered.
- * Clear and simple instructions displayed on the screen make the programming easy for both the first time user and the advanced user.
- * Eeproms upto 16K (27128) programmed in single pass.
- * Selectable programming voltage 25/21/12.5V
- * Selectable programming method — normal or high speed algorithmic. High speed programming enables 27128 to be programmed in just over 2 mins. Normal programming skips addresses with FF data to increase programming speed. Automatic verification on completion of programming.
- * User can select any section of the eeprom from a single byte to its full address range to Blank Check/Read/Program/Verify enabling program development/changes very simple.
- * Full screen editor with HEX/ASCII input.
- * Full tape/disc filing facility. Data input from keyboard/Tape/Disc/Eeprom.
- * Constant display of all options selected.
- * Several BBC BASIC programs can be entered on a single eeprom.
- * Checksum facility allows for easy identification of programmed roms.
- * Enter OS Commands from within the eeprom program.

EPROMER II with Manual & Software on disc **£99 (b)**
ROM based software **£10**

UV ERASERS

UVIT Eraser with built-in timer and mains indicator. Built-in safety interlock to avoid accidental exposure to the harmful UV rays. It can handle up to 5 eeproms at a time with an average erasing time of about 20 mins. **£59 (b)**

UVIB as above but without the timer. **£47 (b)**

ROM/RAM EXPANSION SYSTEMS

ARIES B-32 BOARD: Features 32K of RAM and a 16K ROM socket. RAM can be configured as 20K or 16K as shadow RAM and 12K or 16K or 32K sideways RAM. New commands include comprehensive sideways ROM/RAM management system, simplified direct access to screen RAM and the ability to move/swap the contents of any area of memory. ROM/RAM management system allows RAM allocation, list ROMs, load sideways RAM, disable ROMs, and extend any buffer including printer buffer.

AIRES B32 RAM BOARD **£80 (d)**

ARIES B12 RAM BOARD **£40 (d)**

ARIES B12C Adaptor Board for B12 **£7.50 (d)**


ATPL SIDeways ROM EXPANSION BOARD A well constructed expansion board, simple to instal and requires no soldering. All buses are buffered. It allows full sideways rom expansion to 16 ROMs. One socket has been split into two 8K sockets to allow the use of 8K CMOS RAM. Battery backup option allows data retention in the RAM when the computer is switched off. Several link selectable options including write protect for the RAM. **ATPL Board £39 (d)** Battery Backup Kit **£18 (d)**.

COMPUTER VILLAGE CV-16 Rom Board **£42 (d)**

RAMROM-15 The advanced sideways ROM/RAM expansion system. This is an external unit, using high quality construction, attractively packaged in a BBC coloured metal case, allowing easy access to all the sockets. No soldering is required. Allows 11/12 additional sideways ROMs to be fitted with an option of up to 16K sideways RAM. All commonly available RAM can be used i.e. 4801/6116/6264 or xx128. Battery back-up fitted as standard. For development work and further expansion, most of the 6502 processor signals are available. Supplied with utility disc and full instruction manual. **£86 (b)**

AMX MOUSE with SUPERART

The mouse will now be available with enhanced software, the 'SUPER ART' which is compatible with 6502 2nd processor, the ARIES RAM board, BBC+ shadow mode, tape and ACORN DFS and ADFS. Allows full use of colour in mode 1. Disc users can create colour pictures in A4 size with dot resolution by scrolling the screen window. Other facilities include, colour pattern editing, use of icons, additional text styles, superb zoom in colour.

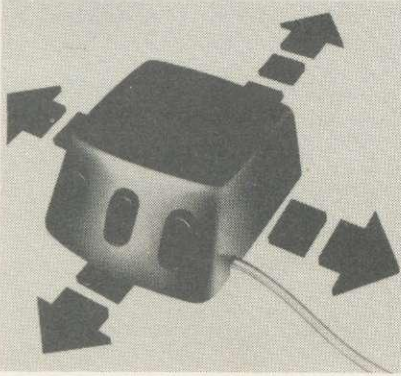

There is a variety of optional software to make the mouse one of the most versatile peripherals that can be added to the BBC micro.

AMX PAGEMAKER provides a high resolution A4 Typesetting and Artwork system.

AMX 3D ZICON will let you transform three dimensional vector data and translate them into 3D on screen graphics.

AMX DATABASE is a new filing system with 1000 records per file and unlimited number of fields per record.

AMXXAM This program enables you to create multiple choice exam papers which can include pictures created on ART, building the finished pictures into quiz etc.

AMX DESK and UTILITIES have already proved to be highly successful.

AMX Mouse with Super Art	£69 (d)
AMX Super Art Package on its own	£43 (d)
AMX PAGE MAKER	£43 (d)
AMX 3D ZICON Disc	£21 (d)
AMX XAM	£21 (d)
AMX DATABASE	£21 (d)
AMX Original ART + Utilities package	£11.50 (d)
AMX DESK	£21 (d)

ACORN TELETEXT ADAPTOR £192 (a)

ACORN IEEE INTERFACE

This interface enables a BBC computer to control any scientific and technical equipment that conforms to the IEEE488 standard, at a lower price than other systems, but without sacrificing any aspect of the standard. The interface can link up to 14 IEEE compatible devices. Typical applications are in experimental work in academic and industrial laboratories, with the advantage of speed, accuracy and repeatability. The interface is mains powered and comes with cables, IEEEFS ROM, and user guide.

£282 (a)

DATABASE MANAGEMENT SYSTEMS

GEMINI DATAGEM features include * almost unlimited file size (max 10Mbyte) * supports up to 4 drives * Max of 5000 records per file * max 6K record size * max of 62 fields * generates form letters from records.

Please ask for leaflet.

£79 (c)

VIEWSTORE An exciting, powerful database with many features: Display can be 'spreadsheet' or 'card-layout' type. Powerful selection and sorting utilities. Any screen mode can be used. Data can be sent to View and ViewSheet. Maximum file size 4096MByte! Maximum record size 60K.

£52 (d)

STARdataBASE A fast machine code, true random access database program in a 16K Eprom. Up to 4096 records in a file, up to 69 fields in a record. The record layout is totally user defined. Entirely menu driven — thus very user friendly. Extremely fast searches are possible using the Keysearch facility. Mailmerging from View and Wordwise, and address labelling. Its printer configuration suits any BBC compatible printer.

£69 (d)

CLARES BETABASE

£21.50 (d)

MASTERFILE II The new version of the popular general purpose file management system. It allows large amounts of information to be stored and processed. It is extremely powerful yet flexible to use. It allows up to 17 fields per record, and the only limitation as to the number of records is the capacity of the disc. Typically, using 5 fields, about 2000 records may be stored on a 100K disc. This latest version features many new facilities including use with WORDWISE/VIEW £16.50 (d) Disc (80 or 40T).

CP/M SOFTWARE FOR TORCH & ACORN Z80 PROCESSORS

We can now supply almost any CP/M based software package in a format suitable for the Torch Z80 and Acorn Z80 second processors.

WORDSTAR PROFESSIONAL The advanced word processing package comprising of WordStar, MailMerge, StarIndex and SpellStar, a total combination offering substantial savings on individual prices. WordStar is the best selling word processing program on the market. Extensive operator aids include a comprehensive yet friendly manual, step-by-step training guide, command cards, on-screen menus with four levels of help messages etc. etc. SpellStar checks text files against its 20,000 word-plus dictionary. You can both add to the dictionary and create specific supplementary ones. Mailmerge is ideal for mailing applications where lists are selected on a range of criteria. It enables the fast production of personalised form letters, mailing labels, invoices, etc. StarIndex creates alphabetical indexes, tables of contents, paragraph numbering and much more.

WORDSTAR PROFESSIONAL £310 (a)

WORDSTAR £275 (a) MAILMERGE £145 (a)

DBASE-II Undoubtedly 'The Database', can be used for an almost limitless number of business applications, ranging from mailing list preparation and maintenance through to running accounting ledgers and payrolls. In addition to standard database features it provides much more. An on-disc tutorial takes you from setting up a simple file all the way through to setting up custom screens and reports. Automatic calculations may be performed on data, and fields or entire databases may be modified or replaced with single, English-like basic commands; Dbase-II can therefore be used by general personnel having no programming knowledge. It can be tailored to suit a variety of professions and individual needs, with files such as accounting, payroll, time billing, job costing, scheduling and mailing lists. It can access several files at a time. It is fast, flexible and powerful.

£335 (a)

SuperCalc-2 A powerful decision making tool which helps to solve complex 'What if...' financial modelling and forecasting questions. With a working area of 63 columns and 255 rows, Supercalc 2 takes full advantage of colour and full memory. It allows consideration of different spreadsheet files, sorting, a wide choice of formats. Full documentation with easy to follow lessons and single key commands make the use of Supercalc2 very easy. Separate windows provide for display of results and formulae simultaneously. Calendar and date calculations simplify calculations on loan repayment and periods.

£180 (a)

Pro-Pascal A full implementation of the International Standard for Pascal (ISO 7185) apart from the optional conformant parameters feature. In addition to the standard features of Pascal, Pro Pascal includes: dynamic strings for character and string manipulation, 9 digit integers and random access file handling for data processing applications, single and double precision floating point arithmetic, an assembler level interface for systems programmers, and separate compilation of program segments for building libraries of commonly used procedures and enabling very large object programs to be constructed. Pro Pascal is a 3 pass compiler, converting a source program into efficient Z80 machine code. The package includes a compiler, run-time library, link editor, library manager and cross referencing utility.

£220 (a)

BSTAM A telecommunication facility used for transmitting any size CP/M file.

£165 (b)

Other packages available include CIS-COBOL, INFOSTAR, DMS +, FMS, SAGE, ATITUTORIALS, MACRO-80 etc. Please telephone with your requirements.

PROFESSIONAL SOFTWARE PUBLICATIONS

Wordstar Made Easy

£13.95 (d)

Understanding DBASE II

£17.95 (d)

Multi-plan Made Easy

£18.95 (d)

TORCH GRADUATE IBM SOFTWARE

We are able to supply most popular software packages including: WORDSTAR, WORD, EASY-WRITER, DBase-II & III, LOTUS-123, VISICALC, SAGE etc. Please telephone with your requirements.

TECHNOMATIC

01-208 1177

BBC Computer & Econet Referral Centre

MAIL ORDER

17 Burnley Road London NW10 1ED

RETAIL SHOPS

15 Burnley Road London NW10 1ED

Tel: 01-208 1177

(close to Dollis Hill)

West End Branch

305 Edgware Road London W2

Tel: 01-723 0233

(near Edgware Road)

TECHNOLINE

24 hour Viewdata Service 01-450 9764

Orders welcome from government depts & educational establishments.

All prices ex VAT Prices are subject to change without notice

Please add carriage (a) £8 (Datapost) (b) £2.50 (c) £1.50 (d) £1.00.

ROMs/SOFTWARE

WORD-PROCESSORS

- VIEW** Acorn's version V2.1 word processor rom. £48 (c)
- VIEW VERSION V3.0** Also compatible with BBC + Complete with Printer Driver Generator. £78 (c)
- HI VIEW** Disc based version of VIEW word processor for use with the 6502 2nd processor. Allows 47K of user memory. £52 (c)
- VIEW INDEX** Disc based program to create an index from VIEW text files. Ideal for anyone concerned with writing extensive reports or books. £13 (d)
- WORDWISE** £34 (d)
- WORDWISE PLUS** The new advanced Wordwise on a 16K eprom, for the more specialised users who require added features and flexibility. Four new programs are also supplied allowing mail-merging, index generating, two-column text printout and continuous processing. £49 (d)
- SPELLCHECK-I** £15 (d)
- SPELLCHECK II** A ROM based fast machine code program that works with both VIEW and WORDWISE. Vocabulary disc supplied with 6000 words can be expanded to well over 17,000 words on 100K drive. Fully compatible with 6502 second processor. £24.50 (d)

SPREADSHEETS

- VIEWSHEET** Acorn's spreadsheet provides 255 columns and 255 rows and will operate in any mode. Windows can be created which can then be rearranged to provide any print format required. Function keys provide for easy entry of commands. Printer control codes can be used using the printer driver. Fully compatible with VIEW and the 6502 2nd Processor. £48 (d)
- ULTRACALC 2** This enhanced version of the original BBC Publications popular spreadsheet ROM includes many new features including full compatibility with the 6502 2nd processor running as HiCalc allowing 44K of user memory, operate in any mode, greater flexibility in printer control, spooling as ASCII file etc. All these features are in addition to the existing powerful features such as handling of labels and numbers as values. Column width control and features normally found in well designed spreadsheets. £52 (d)
- INTERSHEET** The new spreadsheet from Computer Concepts. Many advanced facilities including 105 character display, several spreadsheets may be used at once, may be used with View & Wordwise etc. £49 (c)
- INTERCHART** Graphics Package for the Intersheet. £32 (d)

LANGUAGES

- META-ASSEMBLER (full details on page 1)** £126 (c)
- 6502 DEVELOPMENT PACKAGE A** Macro-Assembler with utilities for use with the 6402 2nd Processor. Enables the serious programmer to develop large programs in assembly language. £43.35 (d)
- ISO-PASCAL** Acorn's full implementation of International Standard Pascal on two 16K ROMs. Disc Version for use on 6502 2nd Processor also supplied. Comprehensive manual. £60 (c)
- ACORN LOGO** A full implementation of the Logo language from Acornsoft. Supplied as two ROMs with a tutorial course and technical manual. £60 (b)
- LOGOTRON** logo £57 (c)
- BCPL** A full implementation of the BCPL compiler language consisting of the language of ROM, disc containing the BCPL compiler, a screen editor, a 6502 assembler, other utilities and programming aids and examples of BCPL code and a 450 page manual. £52 (b)
- BCPL CALCULATIONS PACKAGE** Supplied on disc, it supports floating point, fixed point and fast integer calculations. It includes the BCPL calculation files, example files and a comprehensive user guide. £17.30 (b)
- BCPL STAND ALONE GENERATOR** Utilities in this package enable the programs developed using the BCPL ROM to be converted so that they can be run on any BBC micro whether it has a BCPL ROM or not. Stand alone programs for other 6502 based systems can also be developed. £43 (d)
- ACORN LISP Rom** £43 (d);
- FORTH** £43 (d);
- COMAL** £43 (d)
- MICROTEXT** The authorising system from the National Physical Laboratory. Disc £53 (b) Cassette £43 (b)
- G:FORTH** An advanced implementation of FORTH which follows the 79-Standard specification on a 16K ROM and has a full double number extension set. It incorporates an editor, 6502 assembler, very fast turtle graphics and supports extensive string and file handling. It contains 540 predefined words including those for reading joystick ports, produce sounds, set and read the time and produce random numbers. Fully compatible with disc or tape filing systems and works in any mode. Package comes complete with a USER GUIDE, Introduction to FORTH and 16K GFORTH ROM. £41 (d)
- OXFORD PASCAL** A fast, compact P-Code compiler, that fully utilises BBC Graphics and sound, contains a powerful editor, and produces 'standalone' software. £43 (c)

UTILITIES

- ACCELERATOR** From Computer Concepts — Finally, a comprehensive compiler that will compile existing BBC Basic programs, simply, and in most cases, without alteration. Compiles to either intermediate code or machine code. Supplied with two Roms, manual, utility disc etc. £56 (d)
- SPEECH ROM** From Computer Concepts — allows infinite speech with the Acorn speech system using simple * commands. Pitch and emphasis can be altered — even singing is possible! £29 (c)
- SPEECH PROCESSOR ROM** £12 (d)
- DISC DOCTOR** Computer Concept's popular disc utility ROM which adds 20 commands to the DFS system. £26 (d)
- GRAPHICS ROM** £24 (d)
- PRINTMASTER** The ROM that features the most versatile screen dumps for the Epson MX/RX/FX80 and KAGA PRINTERS. Includes mode 7, magnification, character definition, enlarged text, etc. — in short — this ROM does it all! £27 (d)
- BROM** The new utility ROM from Clares — a Toolkit ROM that gives you full screen editing. Many extra functions are included. £28 (d)
- REPLICA II 40 & 80 Track Versions available.** £9.75 (d)
- EXMON-II** Advanced M/C Monitor. £22 (d)
- TOOLKIT** Adds 27 new commands to BBC Basic. £21 (d)
- SLEUTH** Basic Debugger £21 (d)
- HELP ROM** based comprehensive on screen HELP facility to aid and speed up programming. £19 (d)
- DUMPMASER** Disc based dumps for many printers. £9 (d)
- HERSEY CHARACTER** Font generator £11.00 (d)
- BILLBOARD A** useful program that enables your BBC to produce superlarge 'Billboard' type characters i.e. a continuous horizontal scrolling of super-large characters. £15 (d)
- DISCMASER** Disc Utility. £15 (d)
- BEEBUG SUPERPLOT** Cass £7.50 (d) **BEEBUG DESIGN** £15 (d)
- MUROM** Music Development ROM. £17 (d)

When ordering software on disc please specify track format (40/80)



BOOKS

(No VAT, p&p £1.50 per book)

- CPU/Assembly Language Books**
- 6502 Assy Lang Prog.....£19.95
- 6502 M/C for Beginners.....£ 5.95
- 6502 Advanced Programming.....£11.95
- 6502 Programming.....£13.95
- 6502 Reference Guide.....£ 9.95
- 8086 Book.....£23.95
- Z80 Applications.....£14.50
- Advanced Z80 M/C Prog.....£12.95
- 6809 Assy Lane Programming.....£ 8.95
- Programming the 8086/88.....£14.95
- CPM Handbook.....£ 9.95
- Mastering CP/M.....£ 9.95
- Programming the 6800.....£19.95
- Programming the Z80.....£16.95
- Z80 Ass./Lang Prog.....£19.95
- 8087 Applications and Programming (IBM) PC.....£22.70
- LANGUAGES**
- BBC Micro Sideways Roms B. Smith.....£ 9.95
- FORTH Cookbook.....£ 8.00
- ISO Pascal Acornsoft.....£12.50
- COMAL.....£12.50
- Interface and Robotics.....£15.95
- Understanding DBase II.....£18.95
- Wordstar Made Easy.....£16.95
- Intro CP/M on Z80 2nd Processor.....£ 9.95
- Sanyo MBC 550/555.....£13.95
- Basic Rom User Guide (Adder).....£11.95
- Introduction to PASCAL.....£16.50
- Prog the Micro with PASCAL.....£ 8.50
- The UNIX Book.....£12.50
- BBC Micro Books**
- Books for Beginners:**
- BASIC programming on the BBC — Cryer.....£ 5.00
- BBC BASIC.....£ 4.00
- BBC BASIC for Beginners.....£ 4.00
- BBC Micro for Beginners.....£ 4.75
- Century Computer Prog.....£ 9.95
- Drawing Your Own BBC Programs.....£ 6.95
- Easy Prog for the BBC Micro.....£ 5.00
- Friendly Computer Book.....£ 3.50
- Gateway to Computing BBC1.....£ 4.95
- Gateway to Computing BBC2.....£ 4.95
- Introducing the BBC Micro.....£ 4.50
- Mathematical Programs in BBC Basic.....£ 7.95
- Languages/Programming**
- 30 Hours BASIC.....£ 6.95
- Advanced User Guide.....£12.50
- Adv BASIC Rom User Guide.....£ 7.50
- Advanced Prog Tech for BBC.....£ 8.95
- Applied Ass./Lang on the BBC.....£ 7.95
- Ass./Lang Made Easy for BBC.....£ 5.95
- Assy. Lang. Prog. made easy.....£ 5.95
- Applied Assembly Lang on BBC.....£ 7.95
- Applied Ass./Lang on the BBC.....£ 9.95
- BBC Micro Advanced Programming.....£ 9.95
- BBC Micro Sideways ROM's RAM's.....£ 9.95
- BCPL User Manual Acorn.....£15.00
- Creative Assembler on BBC.....£ 5.95
- Discovering BBC M/C.....£ 6.00
- Guide to the BBC ROM.....£ 9.95
- Exploiting BBC BASIC.....£ 6.95
- FORTH Acorn.....£ 7.50
- Further Programming for BBC.....£ 4.00
- LISP Acorn.....£ 7.50
- Programming the BBC.....£ 6.50
- Structured Programming.....£ 6.50
- S-PASCAL Acorn.....£ 7.50
- Using BBC BASIC.....£10.00
- Word Processing on BBC (Wordwise + Epsom).....£ 5.25
- SOUND & GRAPHICS**
- Advanced Graphics with BBC.....£ 6.00
- BBC Graphics & Sound.....£ 7.50
- BBC Micro BASIC, Sound & Graphics.....£ 7.50
- Creative Sound on the BBC.....£ 9.95
- Graphics on the BBC Micro.....£ 6.00
- Turtle Graphics.....£ 7.50
- EDUCATIONAL**
- BBC Micro in Education.....£ 6.50
- Prog for Education (Pri.Sch).....£ 5.95
- DISC DRIVE SYSTEMS**
- Advanced Disc User Guide.....£14.95
- BBC Micro Disc Companion.....£ 7.95
- Disc-Drive Projects for Micro's.....£ 5.95
- Disc Book.....£ 3.50
- Disc Programming Techniques.....£ 7.95
- Disc Systems.....£ 6.95
- Using Floppy Discs.....£ 6.95
- APPLICATIONS**
- BBC Filing Systems & Databases.....£ 7.95
- BBC Software Projects.....£ 6.95
- Business Programming on BBC.....£ 7.95
- Business Applications on BBC.....£ 7.95
- DIY Robotics & Sensors.....£ 6.95
- Interfacing Projects for BBC.....£ 6.95
- Making Music on the BBC.....£ 5.50
- GAMES**
- 100 Programs for the BBC.....£ 6.00
- BBC User Guide Acorn.....£15.00
- MISCELLANEOUS BOOKS**
- 6522 VIA Book.....£ 4.50

NOVACAD

Computer Aided Draughting for the BBC Micro

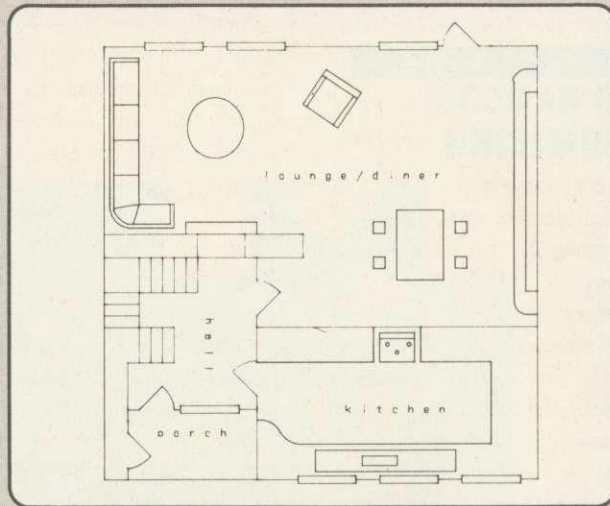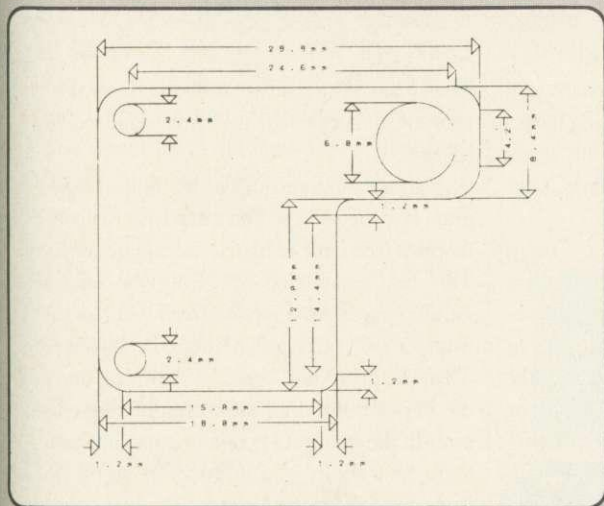

A sophisticated CAD package with unique facilities which until were confined to custom built CAD packages.

Whether you want to draw a complex electronic circuit diagram or plan your new kitchen or simply draw a cube NOVACAD will help you do it better and more easily.

All you need is a BBC micro model B fitted with Acorn DFs and a single disc drive. If you have a 6502 2nd processor and a dual disc drive then NOVACAD's capabilities are further enhanced.

- * Very user friendly with all commands and controls from the keyboard. Special windowing techniques make available to the user almost one million dots allowing a lot more detail to be put on the drawing than one would normally expect the BBC to be capable of. (Mode O screen display only 1/6 the number of dots). The drawing can be 4 windows across and 5 up.
- * Libraries of user defined ICONS such as electronic symbols can be created easily and edited even in the middle of drawing another diagram. ICON size is not limited to a number of pixels. An ICON can contain up to 500 lines, so complete drawings or sections of large drawings can be saved as ICONS for use with other drawings.
- * ICONS can be called by name from a library into any part of the diagram and can be moved, enlarged, reduced, rotated in 90° steps and have mirror images made before being finally positioned.
- * The zoom facility allows the user to magnify any section of a drawing by up to 20 times to make it easier to insert details.
- * User definable grid helps the user set his own scaling for the drawings.

- * Horizontal and vertical displacements can be measured in any user defined scale.
- * Any two colour can be used in mode 4.
- * Up to '8 levels' can be used to produce multi layer drawings, and then user can decide which levels are to be displayed. This can be particularly used in pcb drawings, architectural drawings with details of the services behind the walls displayed only when required and many other such applications.
- * Text can be added at any position vertically or horizontally.
- * Use of 2nd processor will allow use of 4 colours, higher pixel density drawings and considerably faster operation. (NOVACAD without the 2nd processor is faster than any other CAD package we have seen for the BBC).
- * Powerful delete facilities allow deletion of single lines or whole sections with minimum of key presses.
- * Printer dump for Epson compatible printers incorporated in the software which allows a full or a sectional screen dump.
- * An optional plotter utility will allow output to a range of popular plotters for high quality diagrams.

NOVACAD will prove to be an invaluable teaching aid in technical schools and colleges and for anyone involved in draughting it will be an ideal labour saving tool.

NOVACAD package with 16K ROM, Utility disc and a comprehensive manual £79 (c).

Novacad compatible with Tracker Ball £99 (c).

Upgrading of existing ROMs and DISCS £20 (d).

Plotter Utility Program £21.50 (d).

BBC COMPUTER SPARE PARTS (Carriage code (d))

Complete Keyboard	£52	6502A 2MHz CPU	£6.50	UPD7002	£5.00	74LS163	£0.75
Power Supply Unit	£52	65C02 CMOS CPU	£12.00	DS3691	£3.50	74LS244	£0.80
Keyswitch	£1.75	6522 VIA	£3.50	7438	£0.40	74LS245	£1.10
Keyboard Connector	£4.50	6522A 2MHz VIA	£5.50	74LSOO	£0.24	74LS373	£0.90
Video ULA	£18.00	LM3 24 op-amp	£0.45	74LSO4	£0.24	74LS393	£1.00
Serial ULA	£14.00	SAA050-Teletext	£9.00	74LS10	£0.24	8271	£48.00
UHF Modulator	£4.50	6845SP CRT Controller	£6.50	74LS123	£0.80	88LS120	£3.00

TECHNOMATIC

01-208 1177

**BBC Computer
& Econet
Referral Centre**

MAIL ORDER
17 Burnley Road
London NW10 1ED

RETAIL SHOPS
15 Burnley Road
London NW10 1ED
Tel: 01-208 1177
(close to Dollis
Hill ⊕)

West End Branch
305 Edgware Road
London W2
Tel: 01-723 0233
(near Edgware
Road ⊕)

TECHNOLINE
24 hour Viewdata
Service 01-450 9764

Orders welcome from
government depts &
educational
establishments.

All prices ex VAT
Prices are subject to
change without notice

Please add carriage
(a) £8 (Datapost)
(b) £2.50
(c) £1.50
(d) £1.00.

HINTS & TIPS

Martin Phillips looks this month at randomising, how to send user-defined characters to a printer, VDU statements and more

NOT SO RANDOM RANDOMISING

It is quite easy to put a routine into a program so that it has a random element – but there are sometimes good reasons for not having the element truly random.

Take, for example, a simple routine to guess the correct letter. 20 boxes could be placed on the screen – each one with a different letter, and only one unlocking the way to the rest of the program. This task might seem trivial, and a simple random choice sufficient. But if the motive for including such a task at the start of a program is to encourage some familiarity with the keyboard itself, then a simple random routine is far from ideal. It is much more effective if several keypresses have to be made before there is even a chance of the correct box being chosen. This will ensure that every user will get some keyboard practise before being able to proceed.

How can this be done? Listing 1 on the yellow pages shows the whole program. Rather than just giving the 'skeleton' of an idea, the whole routine is included, showing many other techniques.


First, to create a pretty screen display, two rows of ten boxes are drawn in random colours, and a white border is placed round each. Then each box is labelled with a letter. This procedure, PROCsetscreen, is the longest. There are several ways of placing coloured boxes on the screen, but the easiest is to define a graphics window, change the background colour, clear the screen, then clear the graphics window. Lines 170 and 180 achieve this. Notice the semi-colons in line 170. These, *not* commas, must be used as each parameter could be a two-byte number. (Each X co-ordinate can be in the range 0-1279, and such a number is two bytes long. A number in the range 0-255 can be stored in one byte.) VDU16 is the alternative way of writing CLG, and VDU26 restores the default windows. GCOL3,2 is used so that, when a key is pressed, the corresponding letter in the box will be overwritten and so disappear.

PROCrun is the not-so-random routine for picking a letter. It works by having the 20 letters stored in the string A\$. As a letter is chosen, that character in the string is changed to a tilde '~'. (It comes out as a division sign in

mode 7.)

Once ten different entries have been made, a random choice is made of the remaining letters in the string. PROCrnd carries out this selection process, and 'test' is the secret letter number.

As there are 20 numbers initially, it is set to 21 so that there is no chance of a correct guess being made. The letter input routine at lines 370 to 400 is foolproof. No wrong letters or letters already chosen can be accepted, and the routine will take entries in either lower or upper case. (This is the AND 95 part. Using

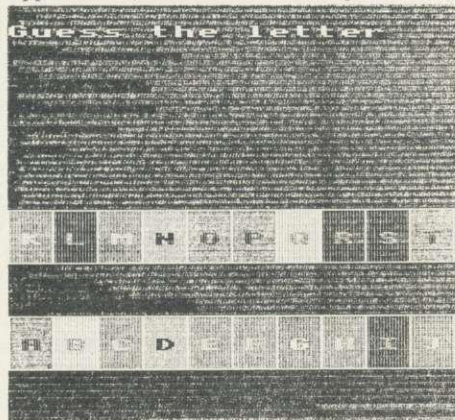

The random letter program produced by listing 1

these logical operators was covered in October 1985's Hints and Tips.) The choice of the tilde as the dummy character is so that the input routine will change it to another character which does not appear in the string being checked.

Once a letter has been accepted by this routine, the variable 'count' is incremented, and the letter is overprinted on the screen to make it disappear. Then A\$ is changed, and that letter is replaced by a tilde, so that the computer knows which keys have been pressed.

This is by no means the only possible method, but it illustrates the point simply. If the count reaches ten, then the routine jumps to PROCrnd, where 'test' is set as one of the remaining numbers. PROCrnd first randomises the random number generator so that the same sequence cannot be initiated each time the computer is switched on. Try switching the computer off, then on again, and printing the following line:

```
FOR N=1 TO 10:PRINT RND(100):  
NEXT N
```

Then make a note of the numbers. If the off-on procedure is repeated, the same sequence will be given.

Without randomising, every time the program is loaded and run on a newly switched-on machine, the same hidden letter will be chosen. This can be avoided by giving the random number generator a random seed – in this case using TIME acts as an unpredictable seed. Then the procedure keeps on choosing one of the 20 positions, until the corresponding character in the string A\$ is not an asterisk. Lastly, there is a short end routine to signal the location of the secret letter.

Once the program has been run, add the following two lines to see exactly how the routine works:

```
455 VDU4,30:PRINTA$:VDU  
625 VDU4:PRINT " " "test is letter"  
CHR$(64 + test):VDU5
```

These will display the string A\$, and show how, as a letter is chosen, the string is changed. Then, as soon as a random letter is chosen after 10 entries, it will be displayed on the screen.

PROBLEMS WITH VDU STATEMENTS

One of the more complicated Basic statements on the BBC and Electron computers is the VDU statement. There are over 30 VDU statements which control many of the screen functions. Most of these have different numbers of parameters following them, and it is all too easy to put in either too few or too many following numbers.

One of the not so obvious problems is that the VDU statements are not error trapped. That is to say, there is no check on the correct number or range of parameters. The missing or extra characters often do not affect that VDU statement, but tend to be added to or taken off the next one processed, causing it to malfunction. Most programmers have found it annoying not to be able to change mode inside a procedure. VDU22, used to select a screen mode, can also change the mode inside a procedure.

Listing 2 gives a short routine for drawing a solid polygon, in this case a pentagon. It's shape can be changed by altering the parameter

HINTS & TIPS

following the procedure name at line 80. It's position can also be altered at lines 120 and 130. It's size can be varied at line 140. The program goes into mode 4, and a blue background is set by line 70.

If Break is pressed, and the program is recovered using Old, the mode 4 statement at line 80 can be changed to VDU22,4. Then, when the program is rerun, a series of dots appear at the bottom right of the screen. Even worse things happen if lines 60 and 70 are put between lines 110 and 120. Now garbage appears at the top of the screen, too. This is all because VDU22 does not change the value of HIMEM (which gives the address of the first location Basic does not use). Therefore workspace is allocated for the program in a part of screen memory – hence the moving dots. This can be put right by entering line 55:

```
55 HIMEM = &5800
```

This moves HIMEM down out of the memory area used by the mode 4 screen. Therefore VDU22 can be used in procedures provided the correct value of HIMEM is selected very early on in a program. The best advice, though, is never to attempt to change mode inside a procedure until you are quite sure of what you are doing.

To end the catalogue of VDU horrors as mentioned earlier, no checks are made on the VDU statements, so even a missing comma can cause very odd problems. Go back to listing 1 and ensure that it is working correctly. Now add line 65 as follows:

```
65 VDU23;8202;0;0;0
```

This line will remove the flashing cursor as detailed on page 77 of the BBC User Guide. Now when the program is run, the background colour will remain black. The mistake here is a missing semi-colon at the end of line 65 – it is missing in some versions of the BBC User Guide, too. But notice that no error is reported. However, inserting a semi-colon at the end of the statement will put matters right, for it indicates that the number it follows is a two byte number. Line 30 in listing 1 could be replaced by:

```
VDU19,0,4;0;
```

To change the program to draw an outline shape only, change line 150 to read:

```
210 PLOT 5,X,Y
```

The program will draw solid or outline circles by increasing the number of sides beyond 20.

A PRINTER WITH CHARACTERS

Many of the latest dot-matrix printers can produce user-defined characters and place them in a special buffer in the printer. But some – like the Epson RX80 printers and the

Once the eight bytes of data have been determined, they are sent to the printer (lines 140 and 150). The printer will then return to the text mode and carry on printing normally. If it is expecting 8 bytes of data and only receives 7, it will hang up. If it receives more than 8, the extra will be ignored.

Dual-density hearts can also be drawn, using

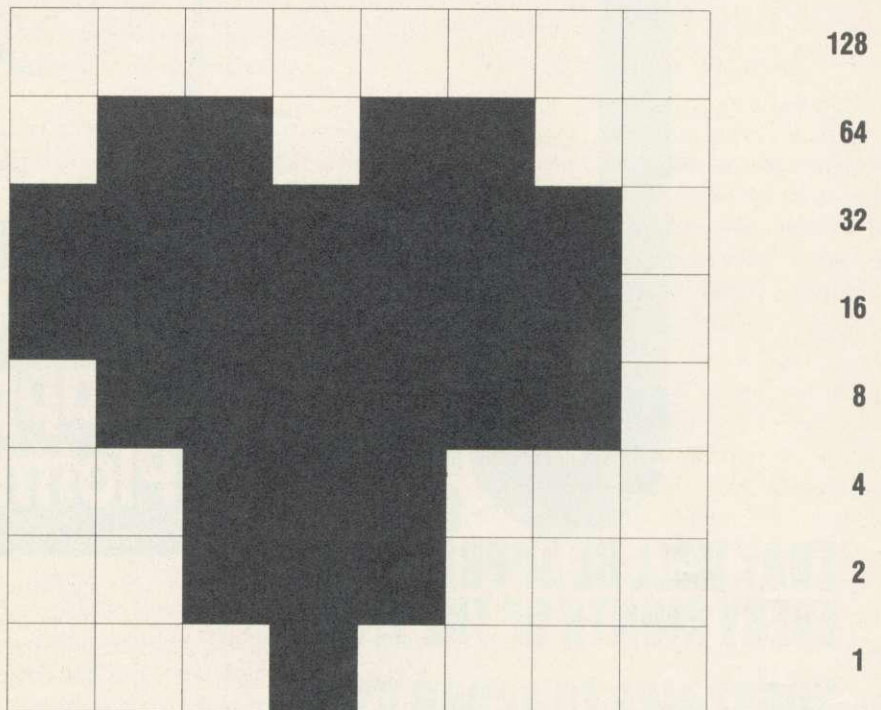


Figure 1. This shows how the heart produced by PROCheart in listing 3, is drawn

equivalent Smith-Corona D100 – do not. It is possible, though, to send one's own characters to these printers. The idea is to use the bit-image mode, which is quite easy, although one would never think so, judging by the handbook!

PROCheart, the procedure in listing 3, prints a heart. The bit image mode is set by using ESC K. This 'translates' to VDU 1,27,1,75. 27 is the ASCII code for 'ESC', and 75 the ASCII code for 'K'. The 'ones' are placed in front to ensure that the next character is sent to the printer only. This ESC K code has to be followed by two more bytes, which give the low followed by the high number of bit image data bytes. This will be set to 8 for compatibility with the Beeb's user-defined characters. The character definitions are similar to that of the user-defined characters, except that the grid is 8 high, and as long as set by the ESC K line.

Figure 1 shows how the heart is drawn. Although similar to the user-defined characters, the definitions are added up vertically (starting at the bottom) instead of horizontally. Note that the ninth dot wire of the printer cannot be used in bit image mode.

printer code 'ESC L'. Because each vertical row of dots overlaps the previous one, twice as many columns need to be sent. Listing 4 shows how this is done.

Each column is sent twice. The number of bytes sent is changed to 16 in line 130.

It should be possible to write a routine which will manipulate the BBC's user-defined character definitions so that they can be sent to the printer automatically, say from within a program or even *Wordwise*. Any offers?

DISC MENU REVISITED

In September's Hints and Tips, I published an automatic disc menu. Several readers have written in to point out a mistake I made in the program which affects the selection of drive 2. Mr A Forbes of Newcastle wins himself £5 for providing the neatest solution to the problem, and for finding a second bug which I had never considered.

The first mistake I made was to use location &1046 to find the drive number. On Acorn DFS 0.9, 1.2 and 2.0 this location should be

A

C

CHRISTMAS GIFT

THAT WILL BE APPRECIATED EVERY MONTH OF THE YEAR!

SUBSCRIBE TO ACORN USER AND WE'LL SEND YOU A

FREE CASSETTE WORTH - £3.95

Use the coupon below, to take out a subscription for a friend or relative, and we will send you our special cassette, a compilation of the best of Acorn User programs from past issues, selected by our expert editorial team, absolutely FREE.

To take advantage of this offer, fill in the form below giving the name and address of the subscriber and the recipient of the FREE cassette. This offer is only open to addresses in the UK and Eire.

Please start a year's subscription to Acorn User from the _____ issue and send it to the following address:

NAME _____

ADDRESS _____

If you would like the FREE Best of Acorn User Cassette to go to a different address to the one given above, complete the name and address details below.

NAME _____

ADDRESS _____


I enclose my cheque/postal order for £17.50 made payable to Redwood Publishing Ltd

Please debit £17.50 from my Access/Barclaycard/American Express

Account No: | | | | | | | | | | | | | | | | | | | | | |

SIGNED _____ DATE _____

SEND THIS FORM WITH YOUR REMITTANCE IN AN ENVELOPE TO SUBSCRIPTIONS MANAGER, ACORN USER, 68 LONG ACRE, LONDON WC2E 9JH.

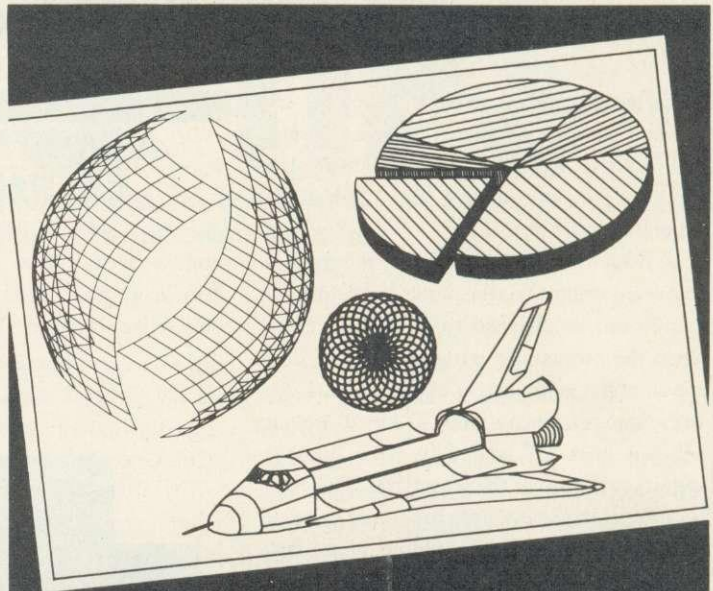

All this can happen when you Plotmate your micro

Plotmate is new. Excitingly new. It's a rugged, responsive flatbed plotter with a lot of built-in magic.

You can use it to create fantastic patterns. Some small as a postage stamp. Or big as an A2 poster.

It'll produce overhead transparencies for you. And all dimensions of graphs, diagrams and charts.


It'll also prepare maps. Then put the contours in. And that's only part of it.

You should see its repertoire of characters - a whole sci-fi population for you to manipulate.

Plotmate software accepts all the colour, vector, character and graphics commands of your BBC micro.

You just plug it in and away you go. All for less than £300.*

FREE - write or phone for P8 demo disk

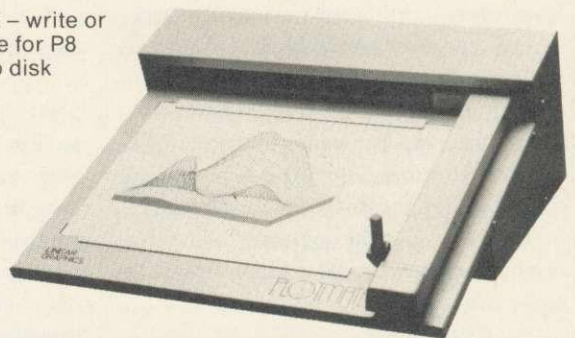

PL+MATE

LINEAR GRAPHICS LIMITED

28 Purdeys Way Purdeys Industrial Estate Rochford Essex
Telephone: 0702 541664 Telex: 995701 Ref 356

*exc VAT

HINTS & TIPS

&10CB (line 220 of the listing given on page 97 of September's issue). The first location only works for the Watford DFS. The obvious solution is to change the location to the new one – but then, of course, it won't work on a Watford DFS.

Mr Forbes has provided a more elegant solution using OSGBP which should work with all DFSs. OSGBP with A=6 will return the current directory and, although the Acorn Disc Filing System handbook doesn't say so, the drive number. Therefore line 220 should be changed to read:

```
220 drive%=FNdrive
```

and the following lines inserted at the end of the program:

```
1510 :
1520 DEFFNdrive
1530 ?&A00=0:&A01=&A10:X%=0:
Y%=&A:A%=6
1540 CALL &FFD1:=?&A11-48
```

Mr Forbes has also pointed out that the catalogue will only print out 30 entries. This is fine for side 0, but the screen formatting can be upset on side 2 where it is possible to have 31 entries as there is no !BOOT file or Automenu program.

Here the solution is easy. Change the 15 on lines 450, 460, 530 and 540 to 16 to cure this problem.

PERSONALISED WORDWISE

Mr Jackson of Conway, County Antrim, asks if there is any simpler way of personalising *Wordwise* letters than having to type the name in each time.

There are two ways. The first is to use option 5 on the menu, 'Search and Replace'. First type the letter, putting something like 'xxxx' each time the name is required, and save the letter.

Then use option 5 to replace each occurrence of 'xxxx' with the name. Note that this method will require the letter to be reloaded into memory each time, so is only really practical with disc.

The second option requires *Wordwise Plus*. It uses a segment program to look at the first line of text.

I have assumed that this will be the name, and could have been inserted from a mail merge program such as the ones supplied with *Wordwise Plus*. The name and address are stored in the main *Wordwise Plus* text area, the

first line being the name with no comma after it according to current practice. Then the letter is put into segment 0, using 'xxxx' in place of the name, as shown in the sample letter below:

Dear xxxx,

Thank you so much for your entry. I am pleased to inform you that you have been selected as one of the winners, and you will shortly be receiving your cheque for £1000 made out in the name of xxxx.

Lastly, change to segment 1 and enter the following short program to combine the two:

```
SELECT TEXT
TYPE CHR$(13)
CURSOR BOTTOM
TYPE SEGMENT 0
CURSOR TOP
A$=GLT$
REPEAT
REPLACE "xxxx", A$
UNTIL EOT
```

SELECT TEXT means select the normal text area (where the address is already stored). TYPE CHR\$(13) will insert a blank line after the address and before the 'Dear xxxx'. More of these can, of course, be inserted to leave a greater gap between the address and the letter. Then the cursor is moved to the bottom of the text, and the standard letter is transferred from segment 0.

Next, the cursor moves back to the top of the full letter, and stores the first line in string A\$. So A\$ holds the name. Then *Wordwise* searches through the text and replaces each occurrence of xxxx with the name, until it reaches the end of text (EOT).

To use this, return to the main menu and press SHIFT-f1. Nothing will appear to happen, but if all has gone well then the letter will have been compiled. The personalised copies can then be printed out and saved if that is what is required. The next letter can be personalised after using the DELETE TEXT command. Take care – this must be used *only* once the main text area has been selected or it will wipe one of the segments. The new name and address can either be typed in or loaded from a file.

This illustrates just how useful the *Wordwise Plus* segments are.

For instance, by a similar technique, headings can be added to letters.

So do take time to experiment with them – they are worth the trouble.

For Martin Phillips' listings, see yellow pages 105-106

QUICKFIRE QUESTIONS

Mr Child from Heathfield has tried to make a *View !BOOT* file that will give him a mode 3 display with green text:

```
MODE 3
VDU19, 7, 2, 0, 0, 0
*WORD
NEW
```

This appears to work, but it doesn't really. The VDU command has to be put in after the *WORD to get the green print, but *View* will not allow this. It can be done, though, by putting the VDU code directly into the keyboard buffer once in *View*:

```
MODE 3
*WORD
*FX138, 0, 19
*FX138, 0, 7
*FX138, 0, 2
*FX138, 0, 0
*FX138, 0, 0
*FX138, 0, 0
NEW
```

If you have more than one FOR...NEXT loop that end at the same point, there are three alternate ways of writing the NEXT:

```
NEXT A:NEXT B
NEXT A, B
NEXT,
```

By not specifying the variable in the NEXT statement, as in the third option, the program is significantly speeded up.

Readers who have machines fitted with Basic 1 will be pleased to hear that it does have some advantages over Basic 2. One advantage is that, although List cannot be inserted as a program line, it can be used with an On Error statement:

```
ON ERROR LIST
```

This will list the program if an error occurs, or if Escape is pressed.

If program space is at a premium (as often happens with programs that use graphics), a little memory can often be saved by using long strings of VDU commands instead of GCOLS, COLOURS, and PRINTTABs. Otherwise, use sparingly as program readability is considerably reduced.

The **XLtron** MEGA•BOX

from Disco-Tech (UK) Ltd.

The MEGA BOX is a top quality rigid plastic storage box with see-through lid and four dividers. Holds up to 60 diskettes.

All disks are 5 1/4" and feature:

- Write protect notch
- Hub rings
- Double density (D/D) suitable for single density (S/D)
- Tyvex sleeves
- Full set of labels and write protect tabs
- Meets all ANSI specifications



Measures 6 1/4" x 8 3/4" x 6 1/2"

XLtron Floppy Disk Prices

25 SS/DD disks in **MEGA•BOX** £29 plus VAT £4.35 and £2 p&p = **£35.35**

25 DS/DD disks in **MEGA•BOX** £39 plus VAT £5.85 and £2 p&p = **£46.85**

50 SS/DD disks in **MEGA•BOX** £50 plus VAT £7.50 and £2 p&p = **£59.50**

*50 DS/DD disks in **MEGA•BOX** £70 plus VAT £10.50 and £2 p&p = **£82.50***

10 SS/DD disks in **mini•box** £13 plus VAT £1.95 and £2 p&p = **£16.95**

10 DS/DD disks in **mini•box** £18 plus VAT £2.70 and £2 p&p = **£22.70**

*£5 PRICE REDUCTION

SUPERDISK

XLTRON's 96 tpi (80 track) disk
Suitable for any disk requirement or use. Individually tested and certified in our London laboratory.



10 in a **mini•box** £19 plus VAT £2.85 and £2 p&p = **£23.85**

15 in a **midl•box** £25 plus VAT £3.75 and £2 p&p = **£30.75**

25 in a **MEGA•BOX** £42 plus VAT £6.30 and £2 p&p = **£50.30**

50 in a **MEGA•BOX** £80 plus VAT £12 and £2 p&p = **£94.00**

**Disco-Tech (U.K.) Ltd.,
BJ House, 10-14
Hollybush Gdns,
London E29 QP, England.**

Disco-Tech (U.K.) LTD. are the sole distributors of XLTRON.

THE midl•box

15 DS/DD disks in our **midl•box** at a bargain price. Our new **midl•box** has some great features. It's made of high impact plastic and holds up to 30 5 1/4" disks, but is one of the neatest on the market. Measuring only 6" x 6" x 3", the rigid lid conveniently holds the disks you are working on ready to hand. And with 15 DS/DD disks its a bargain at only £20 plus £3 VAT and £2 p&p = £25.



Suitable For Most Popular Micros

XLTRON disks are recommended for BBC, IBM PC, Atari and Commodore computers. If you need advice on other micros just ring 01-729 3363.

Our Quality Promise

You can order with confidence. We buy disks from international manufacturers to our specifications, then test, retest and grade them in our London laboratories.

Fully Guaranteed

The XLTRON quality control is so stringent that we can give our famous 'two for one' guarantee. If you find a faulty disk, return it to us, and we'll send you two in exchange immediately. All part of our five year guarantee.

© TYVEX is a registered name of Du Pont
© Rhinokote is a registered name of Rhino Magnetics Ltd
© XLTRON is a registered name of XLTRON Ltd

Personal Callers Very Welcome

We're now established in our new showroom in Hollybush Gardens. You can save our £2 delivery charge by calling in - you'll be welcome weekdays from 10.00am till 5.00pm.

Help Lines 01-729 3363 (3 lines)

If you want help or information to place an order just ring our 'help' lines.

Official Orders

We accept orders from all government bodies, schools, universities, libraries, armed forces etc. We despatch on receipt of an official purchase order. If you can't raise a cheque without an invoice, just post or telephone your order and we'll send you a pro-forma by return.

To: Disco-Tech (U.K.) Ltd., BJ House, 10-14 Hollybush Gardens, London E29, England
Just fill in the coupon or send your order on a postcard or letter. Or phone your order on 01-729 3363.

Please send me the following, (tick the appropriate boxes):

_____ (QTY) SS/DD DS/DD SUPERDISK disks in a

MEGA•BOX **midl•box** **mini•box**

I enclose a cheque/p.o. for £_____ or debit my Access

card no. _____

Name: _____ Signature: _____

Address: _____

(Block Capitals Please) _____ Postcode: _____

THANKS FOR THE MEMORY

The different types of memory expansion available for the BBC micro and Electron are explained and examined

Tessie Revivis

When you look at the ads of the now numerous manufacturers of home and business micros, the one thing they all tend to shout about is the amount of memory their machines have. The Electron and BBC micros have never been over-endowed in this particular area, and a couple of rival companies have tried to use this fact in their sales promotion to steer would-be computer enthusiasts away from the versatile Acorn machines and towards their own.

But in most instances, while their claims may be true in theory, in practice they don't hold much water. There are two reasons.

First, BBC Basic is a very versatile language. Programs can be written efficiently without needing much memory.

Second, because of the popularity of these machines, independent dealers have come into the computer market offering a host of plug-in goodies that allow you to expand your computer system. One of the major areas of such expansion has been in add-on memory boards. This is especially the case with the BBC micro, more so than with the Electron; but with the latter's drastic reduction in price, several companies are re-opening their Elk files to meet the demand from Electron owners.

This month, I will look at the ways in which the memory in both machines can be expanded. This should enable you to evaluate your own needs and then refer to reviews in back issues to make the ideal choice.

Shadow RAM

The amount of memory available for a program to operate in will depend on the screen the program uses. The Operating System of both micros use the main memory to 'map' the screen. Just like a more conventional map, individual points can be referred to by a co-ordinate. In the case of the Beeb and Electron, this co-ordinate is an address. The advantage

of memory-mapping, as this is called, is that you can change what appears on the screen by altering what is in the memory location.

The amount of detail you can get onto the screen depends on how tightly you can pack the bytes of memory together. This is called the resolution of the screen.

For example, the highest resolution screen modes use 20k of memory – k being short for a kilobyte or 1024 bytes. Now 20k is about one-third of the entire memory, and about two-thirds of that actually available to you for programs. The rest is used to store Basic and the machine Operating System (MOS).

The most obvious way in which memory can be made available is by freeing the screen memory. This is done by the addition of what is termed 'Shadow RAM'.

Readers with the BBC B+ will be aware of this as it is fitted as standard on their machines. Owners of the BBC B machines can purchase a Shadow RAM board.

Once installed, the Shadow RAM board will supply all the memory for whatever screen mode you select, thus freeing for programs the memory on the computer that would otherwise be used for screen memory. For the high resolution modes, this means that you gain an extra 20k for your programs.

When using the lower resolution screen modes – say, mode 4, which only requires 10k to operate – then only 10k of the Shadow RAM is called into operation. It is not possible, though, to use the remaining 10k of the Shadow RAM for your Basic programs. Shadow RAM is only available for screen use.

There are several types of Shadow RAM board. One of the most popular is the Aries B20 board from Aries Computers. Watford Electronics and Ramamp also offer Shadow RAM boards that include extra memory.

One point to bear in mind when looking at a Shadow RAM board is compatibility. If you

use your BBC micro for wordprocessing, then Shadow RAM has an immediate effect. More free memory means the capacity to cope with longer documents, and the 80-column mode 3 is always available for use with *View* and with previewing text in *Wordwise*.

As has been said, the BBC B+ already has this extra facility, as does the BBC B+ 128k. However, this Shadow RAM is not at present compatible with existing versions of *View* and *Wordwise Plus*.

The cost of a Shadow RAM board varies slightly, but think in terms of £70 to £80.

Second Processors

Another way in which you can increase memory is to add on more program memory. These are the options . . .

BBC B owners and, shortly, Electron owners can add a 6502 second processor. This is simply a second micro with extra memory – 64k in this case – which plugs into the Tube socket on the underside of the Beeb. Advanced Computer Products are hoping to launch an Electron interface for the 6502 second processor in time for Christmas. When the 6502 second processor is plugged in, it takes control of your micro, which becomes nothing more than a rather sophisticated I/O processor (Input/Output). This means that your Beeb or Electron takes care of the traffic of data going in and out of the micro. Input includes anything you type at the keyboard, any loading of data from disc or tape, etc. Output covers screen display and unloading of data onto disc, tape or other filing system.

This does have a useful consequence. Because your main micro is handling the I/O, the second processor – into which your programs are loaded – can run them up to twice as fast, because it doesn't have to keep stopping and doing the chores already described.

The second processor comes with 64k of memory. Not all of this is available for pro-



GRIFFEN COMPUTERS

CASTLE WALK, LOWER STREET, STANSTED
ESSEX

TEL. 0279 812295



SPECIAL OFFERS

HITACHI 27128 16K EPROM £3.25a

HITACHI 2764 8K EPROM £2.30a

HITACHI 6264LP-15 RAM £3.95a

INTEL 8271 CONTROLLER £43.95a

ACORN DNFS KIT £68.95b

Unlabelled discs - box 10
80tr d/s 96tpi £11.95 (b)

ACORN 1770 DFS UPGRADE KIT

Kit comes complete with daughter board, chip set and software. Enables ADFS to be fitted. Includes many new commands e.g. *FORM *ROMS *FREE *MAP etc. £46.95 (b)

ACORN ADFS UPGRADE

A rom upgrade allowing unlimited file names and hierarchical directory structure. Treats each drive as one side increasing capacity to 1.28 Mbytes on dual 80tr d/s drives. £27.95 (a)

VIEW - Version 2.1 of Acorns wordprocessor. Allows 80 column editing, printing direct from memory etc. £47.95 (b)

VIEW PRINTER DRIVER GENERATOR - Allows you to tailor a printer driver to your own printer. Comes with drivers for FX80, Juki 6100, Olivetti JP101 and others.

Disc - £11.00 (a)
Cassette - £9.50 (a)

VIEW 3.0 - A version of View suitable for the BBC+. Comes with a cassette version of the Printer Driver Generator. £79.95 (c)

HI-VIEW - A disc based version of this popular word processor for the 6502 second processor giving 47k of user memory. £44.95 (b)

VIEWSHEET - Acorns spreadsheet rom giving 255 rows by 255 columns, multiple windows, works in any mode, wide use of function keys, fully compatible with View. £47.95 (b)

VIEWSTORE - Acorns new database rom. Works in any screen mode, many powerful sorting facilities, can be spreadsheet or user defined card layout. Max record size is 60k. Output can be sent to View and Viewsheets. Comes with comprehensive manual, utilities disc etc. £54.95 (b)

GRAPHICS ROM - Acorns new 16k graphics rom giving many new commands for extensive graphics. Circles, ellipses, arcs, rectangles, parallelograms, segments and sectors etc are all available. Comes with manual and utility cassette. State B or B+ version. £27.50 (b)

BASIC EDITOR - Acorns new editor rom allowing all the normal wordprocessor facilities to be used on basic programs. Features include block copy, block move and use of labels. £28.95 (b)

TERMULATOR - A terminal emulation rom. Emulations provided are VT100, VT52, 4010, teletype, hardcopy and a special BBC terminal. Comes with user guide and a set of function key strips. £31.95 (b)

ISO-PASCAL - A full implementation of the ISO standard supplied on two roms with two comprehensive guides. 6502 disc version also supplied. £59.95 (d)

LOGO - A full implementation of the Logo language supplied on two roms. Comes with manuals, user guide, examples disc and reference card. £59.95 (d)

COMAL - A full implementation of the International Standard for Comal. Comes with comprehensive manual. £45.00 (d)

INTERSHEET - The first of the ROM-LINK integrated rom packages from Computer Concepts. Menu driven, 40/80/105 column display, very fast, can be used with View or Wordwise, up to 16 spreadsheet in memory at one time. Supplied on two roms with reference manual, function key strip and quick reference card. £47.95 (b)

INTERCHART - The second ROM-LINK package and designed for Intersheet giving Bar, Pie and Line graphs. £31.95 (b)

ACCELERATOR - The most comprehensive compiler yet for the BBC micro. Compiles nearly all Basic, including floating point arithmetic. Compiles to intermediate G-code or to machine code. Comes on two roms with manual, disc and quick reference card. £57.95 (b)

WORDWISE - The standard BBC word processor still very popular allowing all normal features for low cost. £35.45 (b)

WORDWISE-PLUS - The new 16k version of Wordwise giving added commands for better use. Using its own language mail merging, indexing, continuous processing and multi column text can be utilised. £44.95 (c)

SPEECH ROM - Using the Phoneme system this allows infinite speech. Both pitch and emphasis can be changed and if wanted it can also sing. Requires the Acorn Speech Processor. £28.95 (b)

PRINTMASTER - This rom allows Epson or Star printers to be fully utilised easily. Includes a versatile screen dump, enlarged text, various text manipulation commands. £27.50 (b)

DISC DOCTOR - Still a very popular disc utility rom giving many extra commands to any DFS. £27.50 (b)

GRAPHICS ROM - Computer Concepts graphics rom giving many new graphics commands including Sprites and Turtle graphics. £27.50 (b)

BROM - A basic utility rom which includes one of the best basic editors available giving true screen scrolling. Extended error handling which uses the editor, rom management, many useful features. A very good toolkit rom. £29.95 (b)

BETABASE - A very useful database program allowing up to 65000 record to be held. Many features include versatile printing, powerful sorting routines, outputs can be compatible with Wordwise or View. £21.95 (b)

BETABASE UTILITIES - Adds many more features to Betabase including full disc sort, mail merging and many more. £11.00 (a)

REPLICA II - A tape to disc transfer system for locked programs. Can now be used with some double density systems. £11.00 (a)

BETA-ACCOUNTS The first of this integrated suite of programs allows Invoices and Delivery notes to be issued. 80 Column editing, sales ledger sheet automatically generated, multiple VAT rates. Can be used with Betabase. £21.95 (b)

PROFILE - A procedure library allowing up to 100 procedures on a disc, easy merging of procedures with basic programs. £11.00 (a)

WORDEASE - A utility disc for Wordwise-plus giving many new features to this best-selling wordprocessor. Includes label printing, disc menus, versatile copying routines etc. £19.95 (b)

SPELLCHECK - A disc based spelling checker for either Wordwise or View. Includes a dictionary of 6000 words. £16.20 (b)

SPELLCHECK II - A rom based spelling checker for both View and Wordwise. A dictionary of 6000 words is supplied which can be expanded to over 17000 on a 100k disc. Much faster than the original disc version. £28.60 (b)

TOOLKIT - A rom based basic toolkit rom including a screen editor, error handling routines, memory move, bad program recover and many more useful commands. B/E. £24.65 (b)

HELP - A rom based help facility giving on-screen assistance with many commands. £22.00 (b)

SLEUTH - A comprehensive basic debugging rom. It allows single stepping of basic programs, dual screen facility, breakpoints etc. £26.25 (b)

EXMON II - A very advanced machine code monitor which now includes dual screen facility and a full screen memory editor. Also includes single stepping and breakpoints. B/E. £26.25 (b)

MUROM - This music rom from Beebug allows you to create music and sound effects. Some like *ZAP are included. Editing is made easy by use of the music editor. £26.25 (b)

ADVANCED DISC TOOLKIT - Probably the most compatible toolkit rom available. It works with the Electron, BBC B, BBC B+, 6502, Z80, DFS, DNFS, 1770 DFS, ADFS. It adds more than 30 extra commands to the BBC. £33.00 (b)

A. T. P. L. ROM EXPANSION BOARD

U. D. M. ROM EXPANSION BOARD

£37.95 (b)

£55.00 (b)

ALL PRICES INCLUDE V.A.T. at 15%

Dealer enquiries welcome.

Educational orders welcome

All orders are despatched within 24 hours stock allowing. By 1st-class letter post

Postage rates - (a) 50p (b) 75p (c) £1.25 (d) £2.00

B/E = BBC/Electron

grams, however. You will have about 47k – but I would very much like to see a Basic program that long!

The screen memory is provided by the beeb; the remaining memory within the I/O processor cannot be used for normal Basic programs, but it can be used to store data or run machine code programs.

Running commercial software on the second processor will normally be possible, provided the writers have conformed to the ground rules laid down by Acorn. *View* and *Wordwise Plus* will both be OK. If a program won't run, then the second processor can always be switched off – allowing you to use the Beeb or Electron as normal. The main disadvantage of the 6502 is its cost – about £199. But if speed and amount of useable memory are important, it certainly supplies these.

Sideways RAM

Sideways RAM is another memory facility, but it is not readily available for normal Basic programs. Machine code programs written with a special header, however, can be placed into sideways RAM.

The term 'header' means that the programs have a special starting sequence that must be adhered to.

The BBC micro and Electron both come supplied with a machine Operating System (MOS) and Basic. Both of these are stored in a Read Only Memory (ROM) chip. The MOS controls all aspects of the Beeb and Electron, no matter what type of program you run – reading the keyboard, displaying text on the screen, and so on. Basic is also supplied as a ROM and is in effect a very long machine code program that can interpret and act as defined by a Basic program. Basic itself is under the control of the MOS, and the MOS is capable of controlling up to 15 further ROMs.

In the BBC B, there are three extra ROM sockets into which other ROMs can be placed; on the BBC B+, there are six ROM sockets. The Electron does not have any, but several companies manufacture add-on sockets, including Slogger and ACP.

These ROMs have to be placed somewhere in memory. While finding space for one of them is no real problem, accommodating all the possible 16 is problematic. As each ROM space can be up to 16k long, 16 ROMs could occupy a total of 160k of memory space, which is more than the total 64k memory offered by the Electron and BBC B, and more even than the 128k B+. So these ROMs have been arranged so that they all occupy the same 16k of memory space.

You see, you will only ever require one language at a time, so all you need do is switch in the ROM you require at any given moment.

This switching is performed by the MOS. Because these ROMs all occupy the same area of memory, they appear side by side – so are referred to as sideways ROMs.

The trouble with ROMs is that they are Read Only Memory. You cannot write to them and store your own machine code programs in them. To counter this, many sideways RAM boards have come onto the market. The first was the Solidisk board and one of the latest is the *Acorn User's* very own *UserRAM*. Once installed, it is possible to write your own sideways RAM programs, save them on disc and load them as required.


Of course, the 128k B+ already has its own sideways RAMs installed, and these can be used directly. Although in many cases the addition of sideways RAM does not actually

increase the overall amount of memory available to Basic programmers, once you become proficient in machine code programming it does; allow you to add new languages and commands to your own micro. Listing 1 on the yellow pages is a complete program for use in sideways RAM and adds a simple *BEEP command to your micro. The listing itself is documented, and explains what is happening.

Reviews

Once you know what type of memory you want, then consult the reviews. The Aries B20 RAM board was reviewed in April '84; sideways RAM boards were looked at in December '85; and sideways ROM boards featured in two issues – April '85 and September '85.

See *Tessie Revivis' listing on yellow pages 106-107*

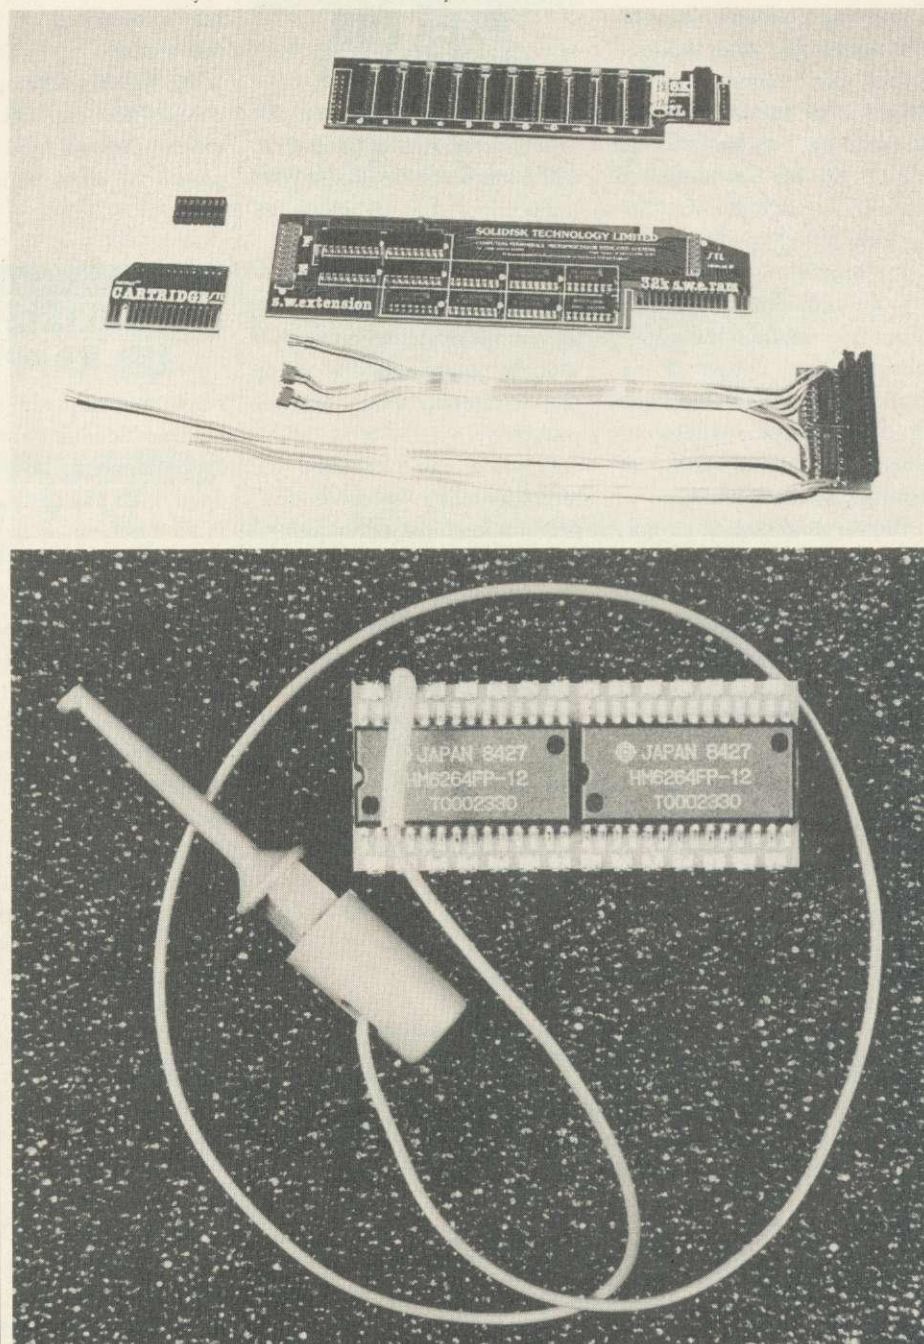

At opposite ends of the spectrum, *top*, Solidisk's sideways RAM boards and *below*, the 16k UserRAM

LETTERS

COMPATABILITY AS PROMISED

Sir, I would like to record a hearty 'hear, hear' for the sentiments expressed in the letter from A A Hatley in the September issue entitled 'Small is Beautiful', and to ask that you take up the cudgels on behalf of the small business and education users whom he speaks for very well.

As a headmaster with computer studies, computer awareness courses and considerable computer administration in my school, I do not want number crunching ability nor the extra speed of 16-bit machines. I simply want the magic 'upward compatibility' promised originally by Acorn and, I gather, already partially abandoned in the B+.

There is a great deal of excellent software for the Beeb and more is being produced. I have 12 machines and tragically the next generation would appear to be incompatible with these and my increasing software library.

Yes, we need the 256k memory suggested by Mr Hatley at a sensible price. Let the giants of industry develop machines which will do twice as much in half the time and let us in education and small business have the solid 'work-

horse' which will teach children the principles and do the tasks for which they are ideal.

How about a survey of your readers to find out what is wanted and then apply exterior pressure on Acorn to meet the actual requirements of their major customers, rather than developing new generations of machines for technical applause?

A J Bradley
Lancs

PLEA FOR PROGRAMS

Sir, I think it would be a good idea to publish the winning program as well as the correct answer to your competitions. After all, the answer itself is irrelevant.

I'm sure that it would encourage readers to develop better programming skills if they can study a winning program, and it might also increase the number of entries you receive.

Programs can be judged on several criteria - speed of solution, memory used, techniques - and I'm sure that you could decide on a fair and relevant points system. Programs that are well thought-out could be published instead of giving prizes.

Some competitions have led me

to develop programs that have become extremely useful utilities - the rapid testing of numbers for factors and the calculation of anagrams of words are just two examples.

I think this would really improve the quality of an already impressive magazine.

M Richards
Sussex

The answer to this query is the age-old Acorn User problem of space. If we spend a page printing a solution, what do we throw out?

We would encourage regular competition entrants to get in touch through the free ad pages, or even form a user group.

SOLIDISK UN-RAPPED

Sir, I was surprised to see the headline 'Solidisk Rapped' in the September issue of *Acorn User*. Solidisk Technology is a company in the forefront of computer development whose products make competitors look silly, and which actually cost less and include free disc software. The 'complaints' referred to appear to relate to customer relations and I feel that it would be less than fair if you did not also put on record the other side of the story.

My own disc drive, DFS and sideways RAM were supplied from stock and installed in my computer while I waited. Moreover, when I recently changed an IC on my double-sided computer board and damaged the tracks, Solidisk carried out the highly skilled repair work for no charge at all.

I believe this to be indicative of the high value Solidisk place on customer relations. I wonder if there is any other company in the land who would do this?

R Southgate
Essex

ELECTRON-ICALLY DRAWN 3D

Sir, I would like to congratulate you on your superb magazine. I have read several of the computer magazines available for the BBC micro and was saddened to find that the articles (and letters) were virtually all games oriented. Do the editors of these magazines think that everyone who buys a computer wants it solely to play games? Therefore, it was with great relief that I discovered *Acorn User*.

Listing 1 is a program written on my Electron to draw 3D symmetrical patterns.

I used mode 4 to get good speed but if you want a higher quality, then use mode 0.

Kevin Stowe
Somerset

ULTRA DRIVE SUPPORT

Sir, I am writing to ask (or more likely, beg!) for a utilities program to transfer programs from tape to ultra drive.

Software manufacturers have not woken up to the fact that BBC micro owners actually bought Ikon's ultra drive system and want some programs equal to, for instance, Clare's *Replica II* or Vine Micro's *TD ROM*.

I own an ultra drive and play games, so how about some support from hardware and firmware manufacturers to give us utility programs for transferring slow domestic tape games to ultra drive?

Magazine support is as important as hardware and firmware backup, so how about a special on the ultra drive, as you have done several times on discs?

Ivan Beckingham
Cheshire

Can anybody help Mr Beckingham?

```

10 REM Graphics routine
20 REM by Kevin Stowe
30 REM BBC B/B+/6502/Basic 1/OS
>1.0/Electron
40 REM (c) Acorn User December
1985
50 :
60 REPEAT
70 MODE 4
80 XO=640:YO=512:R=500:A=RND
(100):B=RND(100):C=RND(1000)
90 MOVE XO+R,YO
100 FOR I=0 TO 2.1*PI STEP PI/A
110 X=XO+R*SIN(I*B)
120 Y=YO+R*COS(I*C)
130 DRAW X,Y
140 NEXT
150 PRINTTAB(0,0)"Press space"
160 REPEAT UNTIL GET#=""
170 UNTIL FALSE

```

Listing 1. Draws 3D symmetrical patterns in mode 4

LETTERS

SOFTWARE FOR A NETWORK

Sir, Joe Arrowsmith's letter in your September issue talked of the frustration caused by an apparent lack of Econet software. It may be of interest to your readers that there is a little light on the horizon.

We at XOB have felt for some time that the sophistication of a system like Econet requires the sort of support traditionally associated with mainframe systems, and are attempting, at least partially, to fill the gap.

Our software, specifically for the Econet system, is *Cave*, the first multi-user dungeon adventure for the Econet system; *Network Operator*, a system supervisor's utility giving vast and flexible control of network primitives; *Networker's Friend*, a set of utilities to be added to the library making the system more user-friendly and secure; and *Archive*, which backs up directory trees to standard DFS format.

We have other items in the pipeline and are always interested to discuss the particular requirements of anyone with an Econet system.

If readers would like information on any of these products, or simply to chat about Econet interests and the possibility of setting up a National Econet Users Club, they should write to me at XOB, Balkeerie, Eassie, by Forfar, Angus DD8 1SR or phone (0307) 84364.

Michael Ryan
Angus

PUZZLING OVER PROTECTION

Sir, Not so long ago, I purchased a disc drive for my Beeb and have spent quite a substantial amount of time transferring a lot of software from tape to disc, as well as making back-up copies of the disc software that I have bought. In 90

per cent of cases this involves a lot of hard work getting past the various ploys used by the software houses to protect their products from piracy.

On the whole this is a pretty boring business. At the end of it all the only real satisfaction you get is from knowing that you've cracked a puzzle that must have taken someone a long time to construct!

However, I recently came across a small section of code buried on my *Elite* disc which made all my efforts seem worthwhile.

Having spent a good week deciphering the various uncatalogued loading routines, I happened to look at a hex dump of one download routine, and there, staring me in the face, was the message: 'Does your mother know you do this?'

It's nice to know that someone at Acornsoft has a sense of humour!

J M Millar
Bedford

STR\$ PUT STRAIGHT

Sir, Your April issue gave a reply to Mr Powell who was having trouble with the STR\$ function, but I think you may have inadvertently misled him.

It's essential that the STR\$ function if applied to a number returns the precise number *as a string* otherwise the function is useless. The problem has little to do with floating point hazards.

If the machine is asked to put into a string a number which is longer than 10 digits, it baulks and just returns the rounded number. So PRINT STR\$ (4.69999999) returns 4.7, but PRINT STR\$(4.69999999) will return the numeric string 4.69999999. There is a huge difference between P.STR\$ (a 15 digit number) which will return an exponential format or a rounded figure, and P. "a 15 digit number" which in fact it will do accurately even if put as A\$ =

"a 15 digit number": P.A\$ - this works too. So if we were to write:

A = 4.7: A\$ = STR\$(A): P.A\$

the display is 4.7. One has to ask what operating system Mr Powell has, and to say that if the machine will *not* do the following bits and pieces then it is faulty.

The whole point about the STR\$ function is to put numbers into string form so that one can use the string 'slicing' facility on them. It is impossible to designate, say, the third and fourth digits of an eight digit number without this ability to turn the number into its string form. (It is a pity that hand-books emphasise the string slicing with words instead of numbers, which is where the real utility of the slicing commands lies.)

I can assure Mr Powell that if he types in A\$ = STR\$(4.7): P.A\$ that 4.7 will be displayed and that P.LEFT\$(A\$,1) will display 4, while P.MID\$(A\$,2,1) will display the decimal point! Below is the test program which your machine should do.

On Run this will display in magenta the digit 6, and eight lines under that in yellow the digit 9, both still numeric strings, and eight lines under that the number 69. On larger numbers you can forget the STR\$ function and use the direct form of string - the desired number of any length, in quotes, for example, A\$ = "12345678912345678 123456" and one can perform wonders with it and the LEFT\$, RIGHT\$, and MID\$ commands. I hope this helps.

J Frank Hughes
Clwyd

UNCOVER A DIAMOND

Sir, Here are some clues to the passwords required for Superior Software's excellent game *Repton*: a) S__een One, b) C__am__le_n, c) T_e_r_p_n, d) S_d_i__er, e) G__ko, f) P_t_n, g) S_l_m_n_er, h) L_u__a, i) C_t_l_f_sh, j) O_t_p_s, k) G_a_t C__am, l) T__K__en.

Also, at certain points in the game a quick flick side to side is necessary to let a boulder drop, then push it to the side before it falls past you and covers a diamond.

At the end, you are told you must finish all the screens from the beginning before you can enter the competition!

On a different subject we have discovered an error message that I've not seen mentioned before - 'RENUMBER space'.

It occurs when the Basic has insufficient space to store pointers, and so on, when it is renumbering.

Stuart Hickinbottom
and Carlos Moreno
Stourbridge

KEYBOARD CONVERSION

Sir, In reply to Matthew Burgess' letter (Central Processing, August), there is a keyboard conversion program allowing you to use a joystick on keyboard-only games.

It's called *Joyset 2* from Bud Computers.

S A Oliver
Essex

```
10 A=4.699999
20 A#=STR$(A)
30 B#=STR$(VAL(MID$(A#,3,2)))
40 CLS
50 P.TAB(15,8);CHR#133;LEFT$(B#,1)
60 P.TAB(15,16);CHR#131;RIGHT$(B#,1)
70 P.TAB(15,24);CHR#132;VAL(B#)
```

Listing 2. Proves Frank Hughes' point about the STR\$ function

LETTERS

PHLOOPY HELP AND ADVICE

Sir, Perhaps I can throw some light on the problems Wayne Webb is experiencing with his Phloopy drive (letters, August). I installed a Phloopy interface and ROM in my Beeb, following the instruction in the manual, without any difficulty.

The 'Read Only' error message is produced when trying to write to a Phloopy cartridge that has been hardware protected by breaking off the tab.

Individual files can be software 'write protected' by using the *LOCK command, and attempting to write to such a file will result in the error message 'File Locked'. The file can be unprotected with the command

*UNLOCK.

If the 'Read Only' message occurs with the cartridge tab in place, then the problem probably lies with the switch that detects whether or not the tab is in place, when the cartridge is pushed fully into the drive. This switch is fairly crude in construction and it may be that it's not working properly due to the moving contact being incorrectly bent. This switch can be reached by removing the top half of the Phloopy casing. Care should be taken if the casing is opened as the cartridge door is likely to spring out due to its return spring.

Dave Beecham
Potters Bar

C A Jays from Bedford adds: I too had problems with a Phloopy drive and had the first unit re-

placed only to have exactly the same trouble - it would not read, format or write a tape.

I eventually found that the operation of the Phloopy was being upset by interference generated by my TV. I now keep the Phloopy and ribbon cable about a minimum of 6in away from the TV set and the system works properly.

I am very satisfied with its performance as a high speed tape reader and so long as the tapes are regularly erased in a bulk eraser there are no problems.

BAR CODE ADDITION

Sir, Those of your readers who have used the *Acorn User* bar code reader for storing product codes with the program called EAN

may have found difficulty reading codes that end in a zero.

The following additional line will cure the problem:

```
5195 If checksum = 10 THEN  
checksum = 0
```

Mike Bostock

MEP Technology Manager
Newcastle-upon-Tyne

HELP NEEDED TO ESCAPE

Sir, While I find George Hill's printer driver generator for use with *View* (AU June) is excellent and produces facilities which Acornsoft's cannot, I still have some problems.

I am using the Olivetti JP101 printer with *View* (A2.1), and can, with the aid of your program, produce figure 1.

APPROVED
for use with
telecommunication systems
run by British
Telecommunications
in accordance with the
conditions in the
instructions for use



TANDATA FOR

Tandata's complete communications package for the BBC Micro includes a Tm 110 smart auto-dial modem and matching Micropack complete with software, cable and instruction manual.

In short, everything you need to turn your BBC into an instant powerful viewdata terminal. You can access Prestel, including Micronet 800 and Viewfax, download telesoftware programmes - many of them free of charge, shop post and carry out home banking. You can even send and receive messages and telexes.

And Tandata's special Christmas Promotion of only £99.00 (plus VAT & carriage) saves you £49.00 off the usual price.

LETTERS

However, I cannot obtain the double height effect properly.

Finally, I wonder if the driver program could be modified to incorporate the commands which take five bytes in length, ie, to take into consideration the JP101's various languages available?

At least for the moment the program out-performs the one by Acornsoft and it's a shame that these minor niggles are sending me right round the bend!

Ron Winson
Berks

George Hill replies: Your problems with the Olivetti JP101 printer are not your fault, but those of the printer. I tried out my generator on it as a part of the proving program, and found all the problems which

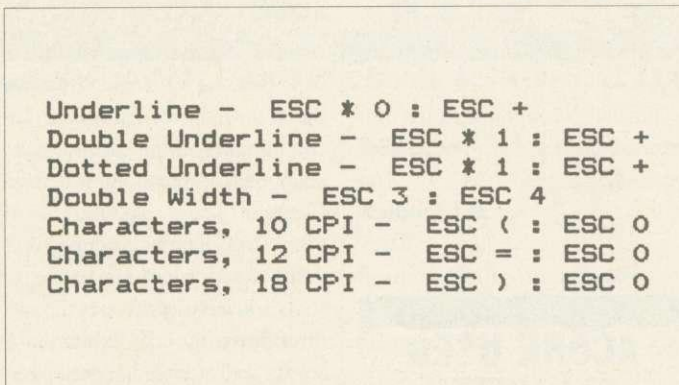


Figure 1. Escape codes produced on the Olivetti JP101

you describe. There is no solution, I'm afraid.

On your other point regarding the modification to codes of more than three characters there are two possibilities. Either rewrite the driver to use a smaller table with more bytes per entry, or use more than one highlight code per function. I

have neither the time nor inclination to do the former, but an example using method two would be to send ESC * 5 0 2 (the code for 512 dot graphics in plotter mode on the Epson), define 129 as 3 ESC * 5, define 130 as 2 0 2 and send *A*B to perform both one after the other.

ATTRACTIONS OF LEXIS

Sir, Geoff Nairn's article, 'Dial-a-database' in the August issue of *AU*, prompted me to follow up the possible attractions of Lexis, the legal database.

I had previously assumed that the charges would be so high as to deter any but the largest companies, and the £10 per hour quoted seemed so modest that I wondered whether there had been some change of heart by the organisation. On investigation I found there was a minimum charge of £400 per month (VAT extra) and a £400 (minimum) charge for equipment (I realise Geoff may not have known this).

Emlyn Williams
Kent

ACOMMUNICATIONS RYOUR BBC

INSTANT AUTO-DIAL

Plug the ROM chip into your BBC, connect it to the Tm 110 modem, and you're ready to go. Auto-dial up to 8 telephone numbers with a single key-stroke - the modem will automatically log-on to Prestel, or re-dial if the number is unobtainable. The external loud speaker, LED's and screen messages monitor call progress of the built-in V23 (1200/75 bps) Smart Modem.

COMPLETE SOFTWARE FEATURES

The software, instantly available from ROM, covers virtually all your communications requirements. Full colour Prestel, or conventional 80 column scrolling terminal, with its own editor for easy off-line messages or page preparation. Pages and data can be stored to disk/cassette or

recalled and can be printed. Pages can be tagged on line for quick recall, and programs can be down-loaded using the telesoftware down-loader.

It's ideal for Prestel, Micronet 800, Viewfax 258, private viewdata systems, Easylink, Telecom Gold and many Bulletin Boards.

FULL SUPPORT

A telephone Help Desk gives you full support, and an Installation Service is available for business customers.

Tandata

Tandata Marketing Limited

Albert Road North, MALVERN, Worcs. WR14 2TL.
Telephone: 06845 68421. Telex: 337617 Tandat G.
Prestel *799# Telecom Gold 81 : TANOOI

To order your sample Tandata communications package of modem, software and all leads for your BBC or to find out more, simply complete the coupon.

Please send me a Tandata complete communications package for the BBC at £116.15 (including VAT and carriage)

I enclose a cheque made payable to Tandata Marketing Ltd. OR charge my ACCESS/VISA number

Expiry Date _____

I would like further details on your BBC communications package (please tick)

Name _____

Address _____

Send to:

Tandata Marketing Limited,
Albert Road North, Malvern, Worcs. WR14 2TL.

Prestel is a registered trade mark of British Telecommunications plc. Micronet 800 is the trading style of Telemap Ltd. and British Telecommunications plc.

AU/02

TOUCHPAD SOLUTION

Sir, I recently bought one of the newly-launched Cumana touchpads complete with a cassette containing 'Pad' and 'Print' programs to drive the pad and give hard copy respectively.

I soon found that there was a problem on machines with the 6502 second processor so I wrote asking if they could give advice on how to overcome it. The snag concerns the addresses at which the picture is stored (I/O versus the 6502) and where it needs to be for printing out.

My letter elicited the all-too-familiar nil-response so, in case anyone else has a similar problem, here is my solution.

In the 'Pad' program change line 1 to HIMEM=&B700 (this pre-supposes that Hi-Basic is resident). Add lines 621 to 623, change lines 625 and 630 and add line 631 as shown below.

The only line changes to the 'PRINT' program are by way of tidying up. Delete line 0 (unnecessary HIMEM address) and use OSCLIs instead of \$N and CALL&FFF7.

So far, the programs as amended seem to do what is required of them. I feel sure that more

could be done with the touchpad; for instance, labelling of diagrams, etc.

Finally, congratulations on maintaining the high standard of *Acorn User*.

R J Lindsell
Essex

ACORN USER EXHIBITED

Sir, I would like to make a few comments on the Official *Acorn User* Exhibition that many readers will have attended.

Although Thursday was first and foremost a trade and press day, at 12.45 there was a long queue waiting to get in. This was quite a heart-warming sight – an indication that despite the problems of Acorn and the industry as a whole, users were still prepared to give up a warm summer's day to attend the event.

Once inside the building, however, the value of those crowds turned sharply downwards. The two halls were packed full all afternoon causing great discomfort for organisers, exhibitors and visitors alike. Apart from the obvious safety threat it meant that it was very hard to talk to the exhibitors on an individual basis. There are a number of causes for

this highly dangerous congestion.

First, the Barbican exhibition halls have very narrow areas for the stands, have inadequate air-conditioning and give a very cramped impression. *Personal Computer World* has moved its show to Olympia, which is a vastly superior location.

As you have learnt over the past three years, the *AU* exhibition is always well attended, indeed over-attended, and because of this problem entry should only be permitted to ticket holders who purchase tickets in advance, so that the number of visitors could be limited.

Many of the stands were badly laid out and run – not surprising since many exhibitors have had little experience of such events. A comprehensive guide book should be issued well in advance in order to give exhibitors a chance to properly organise their stands.

Many of these problems could possibly have been avoided with proper planning and management.

Thanks must go to *Acorn User* for supporting Acorn users when many other organisations have given up and abandoned their following. I look forward to another event – albeit much improved – next year.

Chris Haine
Warwicks

SEGMENTS MENU ANNOYS

Sir, *Wordwise Plus* has a main text area and a number of segment areas which can hold text or programs. It's annoying that the menu for the segments doesn't include an option for performing search and replacement edits.

Here's a tip on how to call up this function from the segment menu. To invoke the search and replace function you simply type:
:CALL &AC4C
from the menu, then follow the prompts in the normal way.


John Stewart
Cambridge

THE PLUS OF WORDWISE

Sir, As a user of Computer Concepts' *Wordwise Plus*, I was delighted to see Patrick Quick's excellent and well-timed review of the package in the August issue of *Acorn User*.

In the very generous space allotted, Patrick could 'only hint at the possibilities' of the programming language that the new chip includes.

Clearly he spent a long time playing with this unnamed lan-



guage (how about calling it Wordplus?), but I would very much like to reinforce his well-deserved enthusiasm.

The first day that I spent any time with Wordplus I found I was able to write sophisticated and useful programs. This programming language is a real joy to use, and I would like to urge readers to try and use it.

Not only is it a very simple yet versatile and structured language, it is a real delight to be able to write programs that work on text rather than just on numbers and strings.

The possibilities are endless, and I know that many people have already explored them a great deal further than I have.

Yet in that first day I was able to produce, among other things, a jargon-generator, a program for coding and decoding messages, and a version of 'consequences' that can amuse me and be instructive for hours.

Eric Deeson
Birmingham

```

621 INPUT"TAPE(T) OR DISC(D) "TD#
622 IF TD#="D" OSCLI"DISC" ELSE
OSCLI"TAPE"
623 IF TD#="D" INPUT"DRIVE NO.
(O-3) ",DR#: OSCLI"DRIVE"+STR$(DR#)

625 HIMEM=&B700:N=&B702: IF O=10
THEN $N="SAVE "+B#+ " FFFF3000" ELSE
$N="LOAD "+B#+ " FFFF3000"
630 YZ=&B7: XZ=&O2: CALL&FFF7
631 OSCLI"DRIVE"+STR$(O)
    
```

Listing 3. How to overcome the 6502 problem when using a touchpad

CENTRAL PROCESSING

For a fast answer to your question, write to Central Processing, Acorn User, 68 Long Acree, London WC2E 9JH

R van den Boorn, The Netherlands

BCPL stands for Basic Combined Programming Language. The April 1983 issue contained a very useful introductory article on BCPL by Stan Froco and this would certainly answer all your questions.

B Bedford, Hythe

I would not recommend the use of any disc drive cleaning kit, as they are likely to do more harm than good. The best housekeeping is to ensure the disc drive is clean by not subjecting it to dusty environments, tobacco smoke and coffee stains! Similarly, treat your discs with the utmost respect - always

replace them in their cardboard covers after use, keep them in a proper disc storage box and never leave them in the disc drive when not in use.

B Conway, Upper Norwood

I suggest you contact Oak Computers on (0274) 614167. They can supply you with the necessary leads to enable you to lengthen the minute cable supplied with your second processor.

Certainly, you will find that many ROMs are incompatible with the 6502 second processor but Acornsoft's ROMs are compatible. *Worldwise Plus* will run on the 6502 second processor and a Hi version is also available. If

compatibility is important, check with the dealer concerned before parting with your cash!

Bruce McBain, West Sussex

The *filename command (where filename is the name of the program) is used to load and run a machine code program that had been saved previously with the *SAVE command. This technique cannot be used readily to load and run Basic program: to do this use CHAIN "filename".

Michael Smith, Hove

You are quite correct in saying that the string escape character | can be used as an operating system command to emulate the Basic

REM statement. It is particularly useful in !BOOT files on discs. For example:

*| This is the !BOOT file used when *BUILDing a !BOOT file would be ignored by the operating system when the disc is booted.

Trevor Rymell, Singapore

The error message 'Bad name' is generated by the filing system when you use a filename containing more than the permissible number of characters. For example, the Cassette Filing System (CFS) allows the use of 10 characters for a filename. If you were to use more than this number a 'Bad name' error would be generated.

DEAR KITTY

For simple answers, send your queries or questions to Kitty


Each month on the front page of *Acorn User* it is stated that the contents are for BBC micro, Electron and Atom users. As an Electron owner I am concerned that in fact the articles do not really apply to my micro. Apart from Atom Forum everything else seems to be for the BBC micro only.

I have a similar problem when it comes to obtaining software and hardware for the Electron. For example, where can I get a suitable sideways ROM board or some sideways RAM?

Michael Black

Brixton

Acorn User certainly does cater for the Electron. All that you need to do is cast an eye over the index on the first yellow listings page. For example, in the October issue we carried 29 listings, and 26 of these would work on a

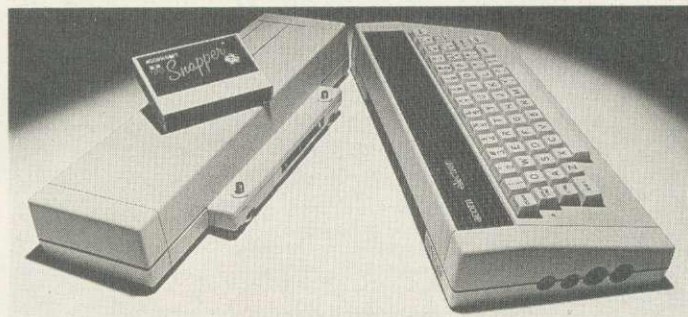

straight Electron while the other three required the Plus 1 add-on. In fact the main feature items printed in *Acorn User* are, in most instances, chosen because they will work on both.

In general, most programs written for the BBC micro will run on the Electron so long as they are not specific to the Beeb hardware and are not dependent on its teletext mode, mode 7.

Software and hardware support is readily available for the Electron.

Acornsoft, for example, has most of its titles on offer for the Electron. Many of the languages and wordprocessors on ROM for the BBC micro, eg, View, Logo and Pascal, are obtainable in cartridge for the Electron with Plus 1.

Slogger Software produces the Rombox, which is compatible with the Plus 1 and Plus 3, and will hold ROM-based software for the Electron. Slogger itself markets a range of

firmware (that's software in ROM) for the Electron.

Advanced Computer Products has recently launched a whole range of add-ons for the Electron Plus 1 and Plus 3 systems, including ROM adaptors, Advanced Disc Filing Systems and sideways RAM. The latter is in the form of a cartridge and plugs into the Plus 1. The company is planning future projects for the Electron including a 6502 second processor interface.

Cumana produces a disc interface for the Electron which plugs into the Plus 1 and also includes a real time clock plus a spare sideways ROM socket. Solidisk is advertising a disc interface for the Electron.

So, as you can see, *Acorn User* certainly is supporting the Electron, and there is a lot of hardware and software around for it when you know where to look.

Watford Electronics

Dept. AU, Jessa House, 250 Lower High Street, WATFORD, ENGLAND

Tel: Watford (0923) 37774/40588 Telex: 8956095 WATFRD

Credit Card Orders TEL ACCESS (0923) 50234 VISA (0923) 33383 (24 Hours)



All Watford products now available in Holland from: First Ludonics International,
2400 AJ Alphen aan den Rijn, Netherlands. Tel: 01720 72580



BBC Micro 'B' Only: £289

BBC B PLUS	£389
BBC B with Watford DFS	£339
BBC B with Acorn DFS	£335
BBC B with Watford DDFS	£355
BBC B with ECONET	£335
BBC B + DFS + ECONET	£395
BBC B + DFS + 32K RAM Card	£397
BBC B + 13 ROM Board fitted	£322
BBC B + 32K RAM + 13 ROM Board	£379
BBC B + DFS + 32K RAM + 13 ROM Board all fitted	£429

ECONET ACCESSORIES

ECONET UPGRADE KIT	£52
Econet STARTER KIT	£85
Clock Boxes	£39
Terminator	£30
File Server Level I	£75
File Server Level II	£205
Printer Server ROM	£40
10 Station Lead	£24
Advance Econet User Guide	£8.50

6502 Acorn 2nd Processor package	£175
Z80 Acorn 2nd Processor package	£339

TORCH Z80 Card + Perfect Software	£249
TORCH Z80 Card+Soft. + Disc Pack	£499
TORCH GRADUATE Z80 System	£725

Acorn Bitstick	£325
Acorn IEEE Interface Complete	£280
Acorn Teletext + Interface	£195

(Securicor carriage on Micros £7)

Dust Cover for BBC Micro
£3.50

VARIOUS PRINTERS

● EPSON RX100	£342
● EPSON FX80+ Printer	£289
● EPSON FX100+ Printer	£429
● EPSON JX-80 Full Colour Dot Matrix Printer. Prints in 7 Colours. Upto 160 cps	£499
● EPSON Paper Roll Holder	£17
● FX80 tractor attachment	£37
● SEIKOSHA GP50A & GP50S	£69
● Centronics Printer Cable to interface all the above Printers to BBC	£6

(Securicor carriage charge on printers £7)

EPSON LX-80 PRINTER

EPSON's new Low cost High performance printer. Print speed 100 cps, NLQ mode 22 cps. 9 needle print head. Full FX-80 capability is supported with downloadable fonts. Friction feed is supplied as standard, with tractor feed and an attractive auto sheet feeder as optional extra. NLQ Mode and current typeface selectable from front panel.

Price: **£220** (carr £6)
Tractor Feed Attachment **£20**
Single Sheet Feeder **£49**
Spare Ribbons **£4**

CENTRONICS GLP (NLQ) Printer

**A major price break-through in
NLQ Printers from Watford**

At last, a full feature Epson compatible NLQ printer at a price that everyone can afford. Due to Watford's bulk purchasing power and low margins we can now offer this incredible printer deal direct from the manufacturers to our customers.

The Centronics GLP features a near letter quality (NLQ) mode using a 23 by 18 dot matrix for each NLQ character (this is the same as is used by the very popular Kaga Taxan printers).

Single, double and quadruple density graphics modes as well as four character widths and super/sub script printing are also supported, along with many other facilities normally found on printers costing twice as much.

Although the GLP is a very compact printer, it can handle paper up to 10 inches wide. Friction feed is supplied as standard with a low cost tractor feed available as an optional extra.

The GLP is a bidirectional logic seeking printer with a 9 needle print head and features a long life ribbon cartridge. The GLP is supplied with a Centronics parallel interface and comes complete with a ready fitted alternate NLQ font ROM containing a different and more pleasing type face (other font ROMs available, including Gothic, Courier, Italic, Copper Plate, Script, Double, Bold etc.)

Send an SAE for further details of the GLP NLQ Designer and extra font ROMs.

Christmas Offer **£99** (carr £5)
Tractor Feed Attachment **£15**

BROTHER HR-15

Brother HR15 is a high-quality daisy-wheel ideal for a budget printer for serious use. Notable features of this printer include a 3k buffer, 18cps (max), bi-directional proportional spacing, Centronics interface standard, (RS232 optional), optional Sheet Feeder and Keyboard.

ONLY £299 (carr. £7)

Single Sheet Feeder	£185
Electronic KEYBOARD	£135
TRACTOR FEED Attachment	£84

RIBBON CARTRIDGES:
Fabric **£3.75**; Carbon **£3.75**;
Multistrike **£6**

DAISYWHEELS (various typefaces)	£18
---------------------------------	------------

**We are now offering at no extra cost
ON-SITE 12 months maintenance on all
HR15 Printers purchased from us.
W.E. GIVES YOU A GREAT DEAL**

Listing Paper (Perforated)

1,000 Sheets 9½" Fanfold Paper	£7
2,000 Sheets 9½" Fanfold Paper	£13
1,000 Sheets 15" Fanfold Paper	£9
Teletypewriter Roll (Econo paper)	£4

Carriage on 1,000 Sheets £1.50

PRINTER LABELS

(On continuous fanfold backing sheet)

1,000 90x36mm (Single Row)	£5.00
1,000 90x36mm (Twin Row)	£4.90
1,000 90x49mm (Twin Row)	£7.50
1,000 102x36mm (Twin Row)	£6.25

Carriage on 1,000 Labels £1.00

KAGA KP810 NLQ PRINTER

This excellent printer is fully Epson FX-80 compatible and offers superb NLQ printing. Over the last year, we have sold more of these printers than any other make. Write in for further details of this printer.

Special Offer: **ONLY £229** (£7 carr.)

Kaga RS232 Interface	£49
Kaga RS232 Interface + 2K Buffer	£69
Kaga RS232 Interface + 16K Buffer	£95

KAGA KP910 Printer

Similar to the KP810 but with 17" carriage for wide print. Gives 156 columns of normal print or 256 columns in condensed mode. Ideal for printing out spreadsheets.

ONLY £339 (£7 carr.)

PRINTER LEAD

Centronics lead to connect BBC micro to EPSON, KAGA, SEIKOSHA, NEC, STAR, JUKI, BROTHER, SHINWA etc. printers.

Standard length (4 feet long)	£6
Extra long (6 feet long)	£8

We can supply leads to any required length.

RS232 Cables available in any length and any combination. Please telephone for your requirement.

PRINTER RIBBONS & VARIOUS DUST COVERS

Type	Ribbons	Dust Covers
FX100	£10.00	£5.25
FX80/MX80	£4.50	£4.95
RX80	£4.50	£4.50
GP80	£4.50	-
GP100	£4.95	£3.95
GP250	£5.95	£3.95
KAGA KP810	£5.95	£4.75
CANON PW1080	£5.95	£4.75
MICROVITEC MONITORS	-	£5.50

Our attractive Dust Covers are manufactured from translucent PVC. The seams are stitched and edges are taped to prevent splitting due to continuous use.

SEIKOSHA SP-1000

This new attractively finished dot matrix printer features **Near Letter Quality** mode and is unsurpassed at the price. Provides high quality printout for word-processing, whilst retaining a fast mode (100 CPS) for draft copies. Other features include a variety of character sets, underlining, bold print and double strike, bi-directional logic seek, automatic paper loading, variable paper width etc. Friction Feed; Tractor feed optional extra. SP1000 makes available the facilities of much more sophisticated printers at a very reasonable price.

Introductory price: **£189** (carr £6)

SPECIAL OFFER
EPSON FX80
ONLY £289

RX & FX PRINTER INTERFACES

Epson interfaces fit inside the printer to allow connection using techniques other than Centronics.

RS232 £25 RS232 + 2K Buffer £55
IEEE 488 £62



We stock a range of monitors to suit all needs. Choice of a monitor is a matter of personal taste so we recommend that whenever possible, you ask for a demonstration at our shop. All Monitors are supplied complete with connecting lead.

MICROVITEC 14"

- 1431 - Medium resolution as used on the BBC television computer programme £179
- 1451 - High resolution, suitable for word processing in mode 0 £229
- 1441 - High res, exceeds the capabilities of the BBC micro £385
- 1431AP RGB + PAL and AUDIO £199
- 1451AP RGB + PAL and AUDIO £269
- Dust Cover for Microvitecs £5.50

KAGA/TAXAN 12"

- KAGA KX1201G Hi-res Green Monitor £90
- KAGA KX1202G Ultra-Hi-Res Green Monitor £105
- KAGA KX1203A Ultra-Hi-Res Amber Monitor £105
- KAGA Vision 2, Hi-Res, RGB Colour Monitor £225
- KAGA Vision 3, Ultra Hi-Res, RGB Monitor £310

FIDELITY COLOUR MONITOR

- Medium Resolution, attractively finished, 14" RGB and Composite VIDEO/AUDIO Input. Has a detachable anti-glare screen.

Introductory Offer: £169

ZENITH

12" high resolution monochrome monitor. Ideal for word processing as its green or amber screen is very restful to read. The high resolution makes it good for games too - you can really see the detail that has been put into the graphics.

Zenith Green Hi-res £70
Zenith Amber Hi-res £72


LEADS

BNC Lead for Zenith or Philips £3
RGB lead for KAGA £3

N.B. Carriage on Monitors £7 (securicor)



CREDIT CARDS
24 HOUR HOT LINES
ACCESS 0923 50234
VISA 0923 33383

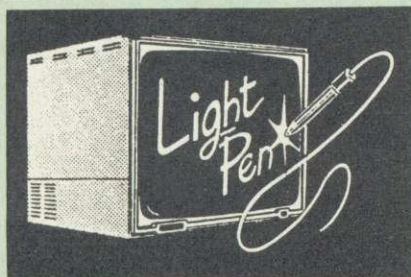

This Light Pen for the BBC micro is packaged in a neat pen shape with built in switch. Supplied complete with our sophisticated Pen-Pal software on cassette.

Only £23

(For software on disc please add £2)

4 COLOUR PLOTTER PRINTER

SAKATA SCP-800 printer/plotter facilitates plotting & printing in 4 colours on paper upto A4 size, using easily replaced pens. In text mode it prints upto 12 CPS. Max 160 Char. per line. In graphics mode it offers full plotting facilities incl. drawing, moving, scaling of text, rotation & drawing of axes. (Write for a sample printout).

Only £155

Set of 4 SPARE PENS only £4.50

SPECIAL OFFER

HITACHI EPROMs for Sideways ROMs

2764-250ns £2

27128-250ns £3

RAMs (Low power) for ATPL, WATFORD, etc., Sideways ROM Boards

6264LP (8K) £4

2 x 6264LD (16K) £7.50

PRINTER SHARERS

Connects
3 BBC Micros to 1 Printer £65
6 BBC Micros to 1 Printer £129

BBC MICRO WORD-PROCESSING PACKAGE

A complete word-processing package (which can be heavily modified to your requirements, maintaining the large discount). We supply everything you need to get a BBC micro running as a word-processor. Please call in for a demonstration.

EXAMPLE PACKAGE

BBC Model B, Watford Electronics' DFS upgrade, WORDWISE ROM, Twin 800k Mitsubishi drives in beige, Zenith 12" Hi-resolution monitor (Green or Amber), Brother HR15 daisywheel printer. Gemini software: BEEBCALC spreadsheet, analysis and DATABASE software on disc. 10 x 3M disc, 500 sheets fan-fold paper, 4 way mains trailing socket, manuals, all leads and BBC carrying case.

NEW LOW PRICE

Only £999

THE EPSON RX/FX/KAGA PRINTER COMMANDS REVEALED

So you bought yourself a new printer, because the salesman in the shop showed you how clever it is and impressed you with all sorts of printouts to show its capabilities - he may even have offered you a special price.

However, now that you have got it home and connected it to your BBC microcomputer, you are wondering how to make it perform these magical tasks. The manual seems to give no clues, and when you type in the example programs, the computer throws the LPRINT statements back in your face.

Now what do you do, when this £400 piece of high technology refuses even to move its head, and you have stayed up until 2 in the morning with copious supplies of coffee, desperately trying to print something out. Once again, Watford Electronics comes to your help with our new book entitled 'THE EPSON FX/KAGA PRINTER COMMANDS REVEALED'.

This book describes in plain, easy to understand English how to use your printer (Kaga KP810, Canon PW1080A, or any other Epson FX-80 compatible printer) with the BBC micro, both from Basic and your Wordwise wordprocessor.

It describes in detail how to obtain the maximum in graphics capability from your printer and includes full indexes allowing you to cross index the numerous commands. Every command is explained in detail, with an accompanying BBC Basic program and an example of its use from Wordwise.

This book is superb value at only
£5.95 (Book - No VAT)

Nightingale Modem

SPECIAL PRICE to our Customers

£119

(Price includes COMMSTAR ROM & comprehensive manuals)

Nightingale Modem without software Only £99
COMMSTAR ROM package only £29
(P&P on modem £2.00)

Auto Dial/Auto Answer Board £48
Auto Dial Utilities Disc £9.50
OBBS Bulletin Software £20.00

DATABASE MANAGEMENT SYSTEMS



DISCDATA

Discdata is an entirely disc based database handling system. It is extremely easy to use through its comprehensive menu system. The simplicity is such that we do not feel the need to provide explanation on use in the written guidance supplied with the program. The first-time database user will rapidly become familiar with this package designed throughout to be simple and obvious.

On disc at Only £17

(Please specify 40 or 80 track when ordering)
(Please write in for technical specifications)

FILE-PLUS

File-Plus is a powerful database for the BBC micro with many advanced features. Largely menu driven, File-Plus is provided on a 16k ROM with some extra utilities on disc. Features included are detailed below:

- Flexible full screen form layout.
- Built in File Query Language (FQL).
- Printer Output.
- Arithmetic operations in FQL.
- Looping in FQL.
- Number range of +- 9999999999.9999.
- File linking allows files over different drives.
- Multiple forms allow selection of displayed data.

Only £32

(Please specify 40T or 80T disc)

DATAGEM

Gemini's 24K ROM based
DATABASE Management System

Special Offer: £67

Continued →

The ULTIMATE DFSs for the BBC MICRO

WATFORD TOPS THE DFS CHART

Watford's Ultimate DFS has scored highest points in ACORN USER's unbiased DFS's Review of July 1985. In concluding, the reviewer writes "It must be said that Watford's DFS certainly offers a comprehensive range of facilities at a very attractive price". (Please write in for comprehensive details.) To celebrate the occasion, we are offering Watford's complete Disc Interface Kit at only £59 and the Double Density Unit at £66.

Just compare the features:

Features	Acorn	Watford	
	1.20	Single Density	Double Density
Max nos. of files per disc side	31	62	62
Max disc capacity	800k	800k	1440k
Tube compatible	Yes	Yes	Yes
Built-in Editor	No	Yes	Yes
Built-in Formatter	No	Yes	Yes
Built-in Verifier	No	Yes	Yes
MRUN a file	No	Yes	Yes
MLOAD a file	No	Yes	Yes
Extended RENAME	No	Yes	Yes
Selective COPY	No	Yes	Yes
Default file name	No	Yes	Yes
Disc space distribution	No	Yes	Yes
40/80 Software Switchable	No	Yes	Yes
Wide catalogue	No	Yes	Yes
Close open files	No	Yes	Yes
Improved OPENOUT	No	Yes	Yes
Copy between densities	N/A	N/A	Yes
OSWORD & 7F	Yes	Yes	Yes
Full entry point compatibility	Yes	Yes	Yes
Retain information over a break	1.20 partial	1.43 Yes	1.53 Yes
Games compatibility	Yes	Yes	Most
Econet file server	Yes	Yes	Yes
Econet station	Yes	Yes	Yes
Full wildcard facilities	No	Yes	Yes

WATFORD's & ACORN's SINGLE DENSITY DFS

Watford's popular and widely acclaimed DFS has now been available for two years, and has gained a large following amongst serious users of the BBC Micro. Owners of Acorn or any other standard DFS can upgrade to our "Ultimate" DFS merely by replacing their DFS ROM. See below for this upgrade.

PRICES

- Complete Disc Interface Kit incl. DFS ROM & fitting instructions **£59**
- Acorn's DFS Kit complete **£60**
- DFS Manual (Comprehensive) (no VAT) **£6.95**
- (P.S. Our comprehensive DFS Manual covers both Acorn & Watford DFSs)
- Watford's sophisticated DFS ROM only **£16**
- We will exchange your existing DFS ROM for Watford's Ultimate DFS ROM for only **£12**
- Watford's DFS is exclusively available from Watford Electronics. Every ROM carries a special label with our LOGO and serial number.

WATFORD's DOUBLE DENSITY DFS INTERFACE

The DDFS from Watford Electronics represents a new standard in DFSs for the BBC micro. This is a double density version of our popular single density DFS, and combines all the features of this powerful DFS with the advantages of a system that gives 80% more storage per disc in double density mode. P.S. - Please note that not all DDFSs are capable of providing either the full 80% storage increase, or of allowing a file the full size of the disc - Ours allows both of these!

The typical piece of games software these days is provided upon a protected disc. In order to work on any double density system (including the others on the market) a protected piece of software needs to make calls through the OSWORD & 7F routines. To ensure compatibility, the Watford DDFS features probably the most comprehensive and powerful 8271 emulation ever written for a double density system.

PRICES

- Complete DDFS Kit incl. fitting instructions **£60**
- DDFS Manual (no VAT) **£6.95**
- We will exchange your existing Single Density DFS Kit for our DDFS Unit at **£35**

The Watford Electronics DDFS for the BBC B Plus

Watford Electronics was the first company to produce a serious alternative Disc Filing System (DFS) for the standard BBC micro. Since then, we have been refining and advancing this sophisticated product right up to today.

Now WE'VE DONE IT AGAIN; Watford proudly presents the Double Density Disc filing system for the BBC B+, with all the advantages of the advanced Watford DDFS available on the new BBC B+ DDFS.

Acting as a powerful alternative DFS to Acorn's '1770 DFS' supplied with the BBC+, this superb addition to any BBC+ greatly enhances its performance with a simple fitting operation. Just compare the features below with those offered by the Standard DFS:

- SINGLE or DOUBLE DENSITY operation. Double Density operation gives 80% more storage.
- Automatic detection of density for operations.
- 31 or 62 file catalogue with automatic catalogue size detection.
- Files can be up to FULL size of disc (360k) due to extension bit.
- Multiple file rename with FULL wildcards (even more powerful than those offered by the Standard DFS on its *COPY operation!)
- *COPY with FULL wildcards; not the normal Acorn ones.
- Selective *COPY operation, with FULL wildcards.
- *COPY, *MOVE, *BACKUP, etc. over densities, 40/80.
- Status Display of open files (handle, full filename, pointer, extent and access type).
- Close all open files with a single * command.
- Built in single and double density verify routine.
- Built in single and double density sector editor.
- Read and WRITE in 40 track discs on 80 track drives.
- 40/80 switching drive independent.
- 40/80 switching automatically performed if needed.
- Built in formatter allows for mixing of density, catalogue size, 40/80 track and 40/80 switching.
- MLOAD and MRUN commands help run tape files from disc.
- Econet Level II file server capability Econet work station capability.
- Extremely powerful 8271 emulation for loading games, etc.
- Comprehensive OSWORD & 7F emulation.
- Default filename system, useful for program development.
- Full width wide catalogue display in 80 column modes.
- Extended *LIB specifications.
- Optional preceding letter on * commands to avoid ROM clashes.
- List of sector gaps unused on disc.
- Full retention of open files over Break.
- Full retention of drive settings over Break.
- Full retention density settings over Break.
- Extended read filenames (via extended OSGBPB functions).
- Automatic sector skewing during formatting.
- Assumes last density for next disc access for speed.
- Read drive of last *RUN / *LOAD operation.
- Load ambiguous filename for convenience.
- Improved space allocation for OPENOUT.
- Invalid execution address (&FFFFFFF) in *RUN causes *EXEC of file.
- Extended *HELP implementation shows syntax of individual commands.
- Extended error checking on operations.
- Catalogue shows number of files in catalogue.
- 40/80 stepping state displayed in catalogue.
- Catalogue shows catalogue size.
- Catalogue shows number of tracks.
- Default filename displayed in catalogue.

As you can see from the above information, Watford's DDFS for the BBC+ is far more sophisticated and well thought out than the standard. Take any disc produced by any Watford DFS from the standard BBC and catalogue straight off with no problems.

Unlike the Acorn 'ADFS', our DDFS+ system is just as easy to use as the standard DFSs, with no new complex concepts to have to learn. The features within our DFSs have been constantly enhanced over a period of three years during the time that they have been released; significant attention has been paid to feedback from our customers so that the features offered are carefully honed to the requirements of hobbyists and serious programmers alike.

The Watford DDFS+ is supplied with a comprehensive DDFS manual that explains the basics of disc drives, DFSs, etc. Priced at only £35 including the manual, the Watford DDFS+ is surely one of THE best buys you could make for your BBC B+!

Join the leaders in BBC peripherals; join Watford Electronics - committed to supporting the BBC micro.

BBC B+ DDFS £35

(Price includes comprehensive manual)

Quality Disc Drives from Watford Electronics

To help you decide which drive is the most suitable for your needs (and your pocket!), we have produced the table below.

The first capacity given in the first column indicates the single density capacity. The double density storage capacity is second one, (that within the brackets). All disc Drive type numbers start with the prefix "C".

The tinting on some of the boxes is used to indicate which Drives are 40 track and which are 80 track. The 40 track ones are manufactured by EPSON, the world famous Japanese company, (non-tinted boxes). The 80 track drives are famous MITSUBISHI drives (tinted boxes).

With two prices in a box (e.g. £295/£299), the first price is for the standard drive and the second for the same unit in switchable type. Users of either of the two Watford DFSs will not need switchable drives as their DFS will provide software switching for them. Users of Acorn's DFS will find that they need to pay the extra for switchable drives if they wish to use 40 track discs in an 80 track drive.

The drives we supply are fast (3ms track to track, 15ms settle), quiet and have a low power consumption (average well under 1 amp). Extensive experience of the usage of disc drives suggests that the MITSUBISHI and EPSON drives currently represent about the best in terms of speed, reliability and overall "elegance" available for the BBC Micro.


Various other "manufacturers" of disc drives for the BBC micro (more accurately, "packagers" label other manufacturers drives with their own name). We buy the high quality Epson and Mitsubishi drives in large quantities directly from the manufacturers, package them and sell them at "dealer" prices direct to the public.

Names you can trust, at prices you can afford!

If you look around the popular BBC micro press, you will find that the prices we quote for the top quality, new slimline disc drives are, virtually without exception, some of the best around. These prices, coupled with the backup of one of the country's largest distributors of BBC peripherals provides a superb deal.

Unless you anticipate using dual drives in a fully expanded BBC system for long periods of time with little ventilation, then we suggest that our range of "CL" disc drives without the PSU (Power Supply Unit) would be quite adequate: extensive tests within our workshops have confirmed this. All drives are supplied complete with a SPECIAL UTILITIES Disc, Cables and Plugs. The Drives with power supply have a mains moulded plug for safety purposes. (Ideal for Schools & Colleges. All single disc drives with power supply, (i.e. CS100, CS200 & CS400S) are supplied in a twin case with twin data cable for later inclusion of a second drive). At Watford we anticipate your needs of tomorrow not just today!

All disc drives advertised here will operate in double density mode with the appropriate interface and software.

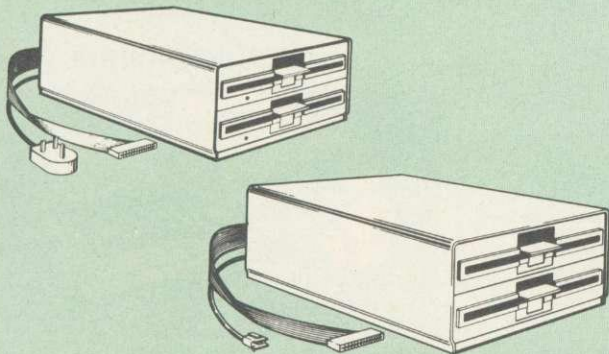

Capacity	Drives without P.S.U.		Drives with P.S.U.	
	Single	Twin	Single	Twin
100K (180K)	CLS100 £76		CS100 £99	
200K (360K)	CLS 200 £76	CLD200 £145	CS 200 £99	CD200 £145
400K (720K)	CLS 400 £78 £79 CLS400S	CLD 400 £145	CS 400 £78 £79 CS 400S	CD400 £145
800K (1.44M)		CLD800 £158 £159 CLD 800S		CD 800 £158 £159 CD 800S

Securicor carriage on Disc Drives £5

Prefix C = Cased Drive
L = Less PSU
S = Single
D = Double

Suffix S = 40/80 Switchable

e.g. CLS400S = Cased drive, Less power supply unit, Single 400K, Switchable (40/80 track).

MYSTERIES OF DISC DRIVES & DFS REVEALED

Are you tired of faulty cassettes, and lengthy loading times? Do you want to upgrade your BBC micro to take discs but you get tied up in the plethora of jargon surrounding the choice and use of these systems.

For instance, what is the difference between single and double density formats, how can you use a 40 track disc on an 80 track disc drive? What is the difference between a DFS and disc interface kit? Should you acquire a single Disc drive or twin? What does 48 TPI and 96 TPI discs mean? These are just a few of the questions you may have asked yourself and never found the answer or maybe you have yet to encounter these questions.

Now the mystery of buying a suitable interface and disc drive for your BBC micro is revealed in Watford's new book entitled 'MYSTERIES OF DISC DRIVES & DFS REVEALED'. It describes in fine detail, yet remaining very readable to the beginner, how disc drives operate, the type of interfaces available, which type of discs to use on a disc drive and how data is stored on the discs.

£5.95 (Book No VAT)

3M - DISKETTES

Top quality 3M - SCOTCH Diskettes from Watford Electronics (Your 3M Appointed Distributors). All our discs carry a lifetime warranty. These discs are quiet in operation and insert positively with their reinforced hub rings. Boxes of 10 supplied complete with self stick disc labels and write protect tabs.

- 10 x 5 1/4" S/S D/D 40 Track Diskettes £13
- 10 x 5 1/4" D/S D/D 40 Track Diskettes £18
- 10 x 5 1/4" S/S D/D 80 Track Diskettes £22
- 10 x 5 1/4" D/S D/D 80 Track Diskettes £24
- 10 x 3" S/S D/D 40/80 track Discs £37
- 10 x 3" D/D D/D 40/80 track Discs £45

Buy 2 packs of any of the above Diskettes & qualify for a FREE Egon Ronay's "JUST A BITE" Guide.

TOP QUALITY 5 1/4" DISKETTES

To complement the range of quality discs and disc drives that WE already sell, WE are now supplying some special offer packs of 10 high quality discs. Each Disc has a reinforced hub ring and carries a lifetime guarantee. These are supplied packaged in an attractive plastic library disc box to protect them from damage. We strongly recommend these Discs.

DON'T SETTLE FOR LESS, BUY THE BEST

- 10 x M4 S-S D/D 40 Track Discs £11
- 10 x M5 D/S D/D 40 Track Discs £14
- 10 x M7 D/S D/D 80 Track Discs £19



DISC ALBUMS

Attractively finished in beige leather-look vinyl, these conveniently store upto 20 Discs. Each Disc can easily be seen through the clear view pockets. £4

LOCKABLE DISC STORAGE UNITS

Strong plastic case that afford real protection to your discs. The smoked top locks down. Dividers and adhesive title strips are supplied for efficient filing of discs.

- M35 - holds upto 40 discs £10
- M85 - holds upto 95 discs £12



PLASTIC LIBRARY CASES

FOR 5 1/4" DISC STORAGE
holds 10 Discs. £1.80

FLOPPY HEAD CLEANER KIT

The heads in floppy drives are precision made and very sensitive to dirt. The use of a cleaner Kit is a sensible precaution against losing valuable data. It is recommended to clean the drive head once a week. It is very simple to use.

£8

DUST COVERS (For our Disc Drives)

- Single (without PSU) £3.20
- Single (with PSU) £3.25
- Twin (without PSU) £3.85
- Twin (with PSU) £3.90

Continued



EPSON NLQ ROM for the BBC Micro



Impress your friends and business colleagues with the quality of your letters and printed material with Watford's very simple to use EPSON NLQ! (Near Letter Quality) ROM. Suitable for FX80, RX80, RX80F/T, FX100.

Look at the features:

- Simply type *NLQ80/100 and a single VDU code to use NLQ print.
- NLQ is then available without any modifications from BASIC, WORDWISE, VIEW (with NLQ DRIVER) or virtually any other program or language.
- Single codes select PROPORTIONAL type (yes even on the RX80); ENLARGED type; UNDERLINED type. These features can be used separately or in any combination.
- Full UK character set; Standard 'pica size'; Proportional spacing; Enlarged; Underlined; Normal type.

The NLQ ROM is supplied complete with comprehensive manual.

P.S. NLQ ROM is compatible with the Torch Z80 system and can be used from within the Perfect Writer software.

Only: £22

VIEW PRINTER DRIVER for NLQ ROM

This specially written printer driver has been designed to allow View access to the full features of our NLQ ROM.

A must for all VIEW and NLQ ROM users.

£7.00

THE NLQ DESIGNER

The Kaga Taxan KP810 and KP910 are two superb printers, as our many thousands of satisfied customers would surely attest to. One of it's particularly strong points is the NLQ option that it offers; perhaps one of the more weaker points is the effort required to design your own custom NLQ font.

Well the solution is here NOW in the shape of Watford's NLQ DESIGNER ROM! This powerful piece of software allows easy design and entry of a full NLQ font, with further fonts recallable from disc. Once a font has been programmed with the versatile NLQ DESIGNER, it can be saved to disc, downloaded to your Kaga (or Canon) printer, or even programmed into an EPROM (given the appropriate hardware) and then plugged directly into your printer so that it is available immediately when you turn it on. Downloadable Fonts require 6264 RAM chip fitted.

A 40/80 track format disc containing 3 example fonts is included in the package.

(P.S. This ROM is not suitable for Epson printers as they don't normally have NLQ ability. Keep reading our adverts though - work is in development!)

NLQ DESIGNER & FONT DISC £25


**INDIVIDUAL Preprogrammed FONT ROMS
£15**

(Please write in for further details on both the NLQ DESIGNER and the individual font ROMs available.)

Now available...
Centronics GLP printer, additional font ROMs.

Price £15
(Please write in for full details).

DUMPOUT 3

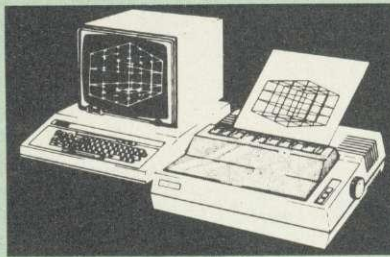

A highly sophisticated screen dump ROM. This has to be the most flexible and powerful screen dump ROM yet produced for the BBC micro. It will put on paper anything you see on the screen, including all Mode 7 facilities etc. We have to admit that there is one facility that we cannot replicate - if anyone can supply flashing ink we would like to know!

The ROM also provides window setting utilities and two new OSWORD calls that allow mode 7 graphics pixels to be read and plotted using the standard graphic co-ordinate system. The latest version includes a graphic dump trigger for dumping screens from games whilst they are running.

Two commands are used to operate the dump routines:

*GIMAGE - This provides a full graphics dump of any graphics mode, plus modes 7 and '8'. There are many optional parameters but you need only specify the parameters you wish to change.

Features available include:

- Vertical and horizontal scaling through all the graphic modes and mode 7
- Rotation of the image produced through 90, 180 and 270 degrees
- Left hand indentation setting
- Screen dump window definition
- Colour grey scaling
- Two tone fast dump
- Special colour mask
- Mode 7 contrast expansion
- Mode 7 contiguous dump
- Key triggered dumps
- User port switched dumps

What does the independent press say!

Practical Electronics, May 1985
"The Dump Out 3 ROM from Watford Electronics represents one of the most sophisticated types of printer dump utilities available for the BBC Micro ..."

"an extremely sophisticated and powerful dump utility".

"VERDICT - Dump Out 3 ROM has all the facilities which you are ever likely to need for producing printer dumps. The facilities available work extremely well and if printer dumps are something which you require, then this ROM can be recommended to help you to get the best out of your dot matrix printer".

The Micro User Feb. 1985.
"Well, here is that winner!"

"provide(s) some rather sophisticated screen dumps. Producing high resolution paper copies of graphic screens in any (graphics) mode will be the major reason for buying this ROM, and this is where Dump Out 3 performs PAR EXCELLENCE". (Our capitals for their italics.)

"The versatility of *GIMAGE (the graphics dump command) when using these parameters is amazing. Pictures of almost any size, shape, contrast or distortion may be produced without the need for a reducing photocopier or trick photography".

"Without reservation I wholeheartedly recommend the Dump Out 3 ROM as the ultimate screen dump facility for the BBC micro. It is easy to use yet highly versatile, and caters for all BBC screen modes in multitone high resolution printing. Whole, partial, rotated and scaled screens may be dumped to almost any BBC compatible dot matrix printer (see our list at the end of this advert). At £24 it must represent excellent value for money and surely cannot be beaten".

Designed for use with the following printers:
CP80, GP80/100/250, CANNON, STAR, KAGA/TAXAN, NEC, SHINWA CP80, GEMINI, EPSON MX/RX/FX, LPVII, NEC PC8023, DMP100/200/400, etc. etc.
Price including comprehensive manual

£24

VIEW

VIEW WORDPROCESSOR 2.1 **£46**

VIEW 3.0 ROM

This latest version features automatic relocation with a 6502 second processor and takes full advantage of any shadow memory fitted. BBC B Plus compatible. Supplied complete with Printer Driver Generator tape.

Price: Only **£60**

HI-VIEW

A special version of VIEW designed for use with 6502 2nd Processor. Available on disc, it offers 47K of text memory.

£49

VIEW SHEET (Acornsoft) £49

VIEWSTORE £52

**Watford's own Sophisticated
VIEW PRINTER DRIVER
for Epson FX80 & KAGA KP**

Only £10

**VIEW DRIVERS FOR JUKI &
BROTHER PRINTERS**

Only £10

**VIEW/VIEW SHEET PRINTER
DRIVER for SILVER REED**

(Officially approved by Silver Reed)

Only: £10

BEEB PRINTER ROM



"Makes Printing Childs Play"


This utility ROM is designed to simplify using all the facilities of your printer. It has many facilities:

- ★ Selection of printer modes such as underline, font and size is by 'Single Key' operations.
- ★ From Wordwise, a single number following OC will select a mode rather than a long and incomprehensible string of control codes. This makes using your printer with Wordwise much more convenient.
- ★ When using Basic (or other languages) you can have control over the formatting of the output to the printer in the style of a wordprocessor. You can define page top, bottom and side margins etc. with intelligent page skip for binders an option. All supported printers will now respond to form-feed etc. commands.
- ★ User defined characters are printed as you see them on the screen so that non-standard characters are automatically printed out correctly.
- ★ Commands select the options for the following printers:
GP100, STAR, NEC, MX/FX, KAGA, LPVII/DMP100, DMP200.
Operates with either parallel or serial interfaces.
- ★ Supplied with a 50 page manual that is very comprehensive and easy to follow. Please specify printer type when ordering so that we can send the correct function key strip.

Price: £24

TRANSFEROM

(Tape to Disc Utility)

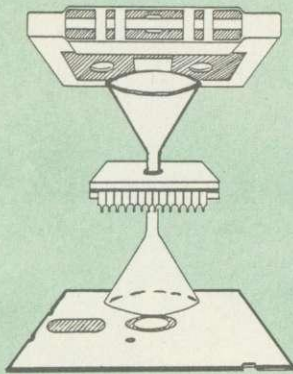

The only TAPE to DISC Utility ROM that works with our Double Density Disc Interface.

After months of top secret development, we are now able to supply details of this advanced and sophisticated utility ROM for the BBC micro. Just look at the features:


- Fully menu driven for ease of use
- Copes with locked programs
- A very comprehensive built in copying features
- Copies very long adventure games
- Supplied with comprehensive manual

TRANSFEROM is now available in BOTH single and double density versions. The single density version works with both the Acorn and Watford single density DFSs. The double density version works with the Watford DDFS system only.

TRANSFEROM takes your software on tape and saves them onto disc. TRANSFEROM does not stop when one disc is full; you just insert another disc in and carry on with that one! Surely this is the most valuable investment you could make if you have tape software that you wish to transfer to disc! Please specify version required - Single or Double Density.

£22.00

DIAGNOSTICS DISC



The BBC micro is a very complex machine and thus diagnosing a fault can be very difficult. Until now, the only way to discover the nature of a fault was either to find a competent friend with a large degree of patience or to find your nearest dealer and pay him to find out what is wrong.

At Watford Electronics, we realise how difficult it can be when faced with a problem, finding yourself a long way from your nearest dealer, or even just uncertain about your Beeb's health, but not wanting to waste time and money taking it to be looked at.

The solution to these problems is here now, in the form of the Watford's Diagnostics Disc. This excellent utility is specially designed to test out the following areas of your Beeb:

RAMs, ROMs, ULAs, Sound, Keyboard, Disc, RS423, ADC, User Port, Printer Port, Cassette, Joysticks, Speech, Disc Drives, 6502 and Z80 2nd Processors.


Continued

This utility is an invaluable aid for all those who take the reliability of their system seriously. A comprehensive manual provides full operating details and a list of possible causes and remedies for any faults that you may find along the way. The package also enables a permanent equipment and service record to be maintained.

Only £18.00

ROMAS

THE CROSS ASSEMBLER AND
MACRO EDITOR
FOR SERIOUS PROGRAMMERS!

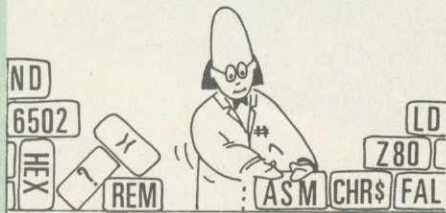

ROMAS is a carefully designed, sophisticated yet simple to use, development system for serious assembly language programmers. Using the BBC as the development system, you can choose your target system from the following processors:

6502, 65C02, Z80, 8085, 8041, 6809 and Z8 P.S. This includes the Acorn 6502 & Z80.

ROMAS features a powerful expression analyser, making complex table easy to generate. To aid in documentation, fully formatted assembly listings may be produced, with full symbol table output at the end.

ROMAS is provided with a powerful cross referencer to produce a listing of all the labels in a given "source" program; this makes it easy to check to see if you are about to duplicate a label.

The Macro Editor

Features of this powerful editor provided with the ROMAS package include:

- Works in all 40 and 80 column screen modes
- Fast load and save speeds
- Continuous line and column number displays
- Search, replace and move; all available in macros
- Command repetition

The ROMAS package includes a comprehensive manual, providing detailed documentation and plenty of examples.

A give away at... **Only £45**

Please specify 40 or 80 track disc when ordering.

ADE

'Systems' complete program development package in a 16K ROM. We are now supplying the new 6502 2nd processor compatible version.

SPECIAL OFFER ONLY **£43**

ULTRACALC 2

The mark 2 version of the BBC Publications' extremely popular electronic spreadsheet ROM.

Only: **£66**

THE INVESTIGATOR

This sophisticated Utility program on disc, enables you to make security back-up copies of most of your valuable Disc Software. Makes full use of all 8271 (will not run with double density DFSs) facilities to discover the precise format of your protected disc so that an exact copy can be produced. Supplied with detailed instructions. Please specify 40 or 80 track disc when ordering.

Only **£20**

ROM-SPELL

"way ahead of any competition"



ROM-SPELL is probably THE most advanced spelling checker available for the BBC Micro. Printed below are some extracts from a recent independent review (A&E Computing Nov. '85), which we feel sure will convince you that this is THE only spelling checker worth considering. "The editing system is very neat and simple, instead of replying to queries and beeps all of the time..."

"The other feature which places ROM-SPELL way in front of any competition is the ability to examine the user dictionary, so any spelling mistakes that have found themselves on the disc can be examined and taken out if necessary".

"... that it is compatible with many of the popular word processors on the market is a good indication that ROM-SPELL is going to be a very popular product indeed".

"... ROM-SPELL is by far the best spelling checker for the unexpanded BBC B (with or without word processor). It boasts features which are hard to find on conventional spellcheckers on CP/M and MSDOS, namely Spellstar and has a speed/performance ratio of roughly the same as its CP/M cousin. The difference is that the CP/M version would cost the best part of £500".

"... and with such vital house keeping features as an ambiguous word checker, the ability to edit the user dictionary, a comprehensive manual that is both easy to read and actually ENJOYABLE to learn from, ... I feel confident that ROM-SPELL will woo the word processing public with no problems at all".

ROM-SPELL costs only **£25**

(Please state 40 or 80 track disc)

DISC EXECUTOR

Disc Executor is a sophisticated disc utility for the transfer of your programs from cassette to disc. It copes with 'locked' files and full length adventures (up to &6E blocks long) and programs that load below &E00. Disc Executor is simple to use and provides menus to prompt the user along the way. Disc Executor will cope with the vast majority of tapes. (Please note that Disc Executor is not compatible with double density disc interfaces - keep reading our adverts though!)

Price only **£10** (40 or 80 track)

BEEBMON

BEEBMON is the most powerful and versatile machine code monitor from Watford Electronics. BEEBMON offers some superb features specially designed to make the task of understanding and debugging machine code easier; indeed BEEBMON is probably the only product with sufficient power to aid in the debugging of such complex pieces of software as a DFS. Offering a total emulation mode, BEEBMON can be used to single step through code anywhere in memory. All breakpoints are emulated and the workspace is totally relocatable, allowing for the simulation of all those "awkward" pieces of code.

£24


DISASSEMBLER ROM

Discover the hidden secrets of BASIC and the OPERATING SYSTEM with this easy to use programmers tool.

ONLY **£16**

Please write in for technical details.

SIDEWAYS ZIF SOCKET

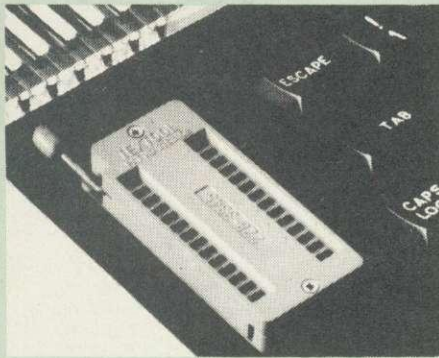

Now Watford Electronics brings you a ROM board for small budgets or for those of you who do not wish to open up your Micro frequently. It allows you to change ROMs quickly and efficiently with the minimum of effort – no screws to loosen or keyboard to remove. The unit consists mainly of a zero insertion force (ZIF) socket on a small circuit board which is located into the position of the 'ROM Cartridge' and is connected to one of the internal ROM sockets via a ribbon cable.

- Very simple to install. NO SOLDERING REQUIRED. The ZIF eliminates the possibility of damage to your ROM pins when inserting and extracting them.
- The low profile of the socket allows unrestricted access to the keyboard, unlike other cartridge systems. In addition, there are no costly extras, such as ROM cartridges for every new ROM.
- All data and address lines are correctly terminated to ensure correct operation of suitable ROMs with the BBC micro. We also supply a purpose designed see-through storage container with anti-static lining, allowing you to store up to 12 ROMs, protecting them from mechanical and static damage.
- This versatile hardware solves the problem of running out of socket space, simply unplug the ROM and plug in a different one. It is a real must for Professionals and Hobbyists alike.

ONLY £15

16K Sideways RAM Modules

This is it! The revolutionary design RAM Module you've been waiting for. Complete with such features as read and write protection, these new modules from Watford Electronics are ideal for the hobbyist, software developer and ROM collector.

Key points to note about this new addition to the Watford range of products are:


- Write protection (useful in a variety of circumstances).
- Read protection (allows recovery from ROM crashes).
- Compact construction.
- May be fitted in systems even with a ROM board.
- Multiple units may be fitted, even with a ROM board.
- No overheating or overloading problems.
- Free utilities disc supplied.
- Can be used as a 16K PRINTER BUFFER.
- Works with any ROM.
- Ideal for professional software development.
- Writes in &8000 to &BFFF region go to RAM.
- Assemble and *LOAD ROMs straight in to RAM.
- Supplied with utilities software disc.

Introductory offer: **£29**

Optional extras

READ and WRITE protect Switches **£2**
BATTERY BACKUP **£2**

32K RAM- PRINTER BUFFER EXPANSION BOARD

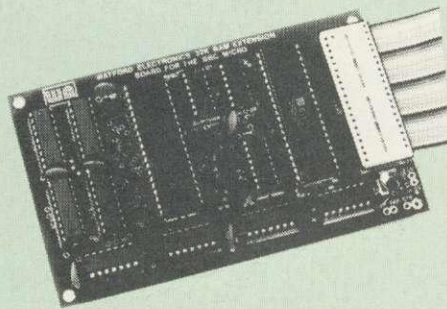

A MUST FOR WORD PROCESSING

Watford Electronics now brings you the latest state-of-the-art MEMORY EXPANSION BOARD for your BBC microcomputer. Just plug the ribbon cable into the 6502 processor socket, and fit the compact board inside the computer. Immediately you will gain not 16K or even 20K, but a massive 32K of extra RAM!!!

- IMPROVE your WORD PROCESSING system, whether disc or cassette based. Don't wait for a slow printer – type in text while printing. TWO JOBS DONE SIMULTANEOUSLY and £100+ saved on a printer buffer.
- "VIEW" Wordprocessor users can now type in text in 80 columns and have up to 28,000 bytes free – 5 times as much as normal.
- In WORDWISE (or WORDWISE-PLUS), preview in 80 columns with the full 24K of text in memory. This superb product is recommended by Computer Concepts for use with both Wordwise and Wordwise Plus. We wholeheartedly agree with this commendation.
- Combine GOOD GRAPHICS and LONG PROGRAMS. Use the top 20K of the expansion RAM as the screen display memory, leaving all the standard BBC RAM free for programs. Benefit from MODE 0/1/2 graphics and 28K of program space.

● Use the FULL 32K or the bottom 12K of the expansion RAM as a PRINTER buffer for PARALLEL or SERIAL printers, sound channels, RS423 etc. Only 12K Buffer can be used in Wordwise or Wordwise+ because of the way these softwares are written. Print large text files while running long graphics programs and have all your buffer options available as well (*FX15,21,138,145,ADVAL etc). Only 12K Buffer can be used in Wordwise or Wordwise+ because of the way these softwares are written.

● Ensure COMPATIBILITY with a vast range of hardware (including Watford & ATPL ROM boards, double density boards, second processors), and software (including BASIC, TOOLKIT, VIEW, WORDWISE (1.20+), WORDWISE-PLUS). This is because our board, unlike those of our competitors, is connected to the computer by a ribbon cable.

● Achieve EASY OPERATION with ROM based software. A large range of commands is available for machine code and BASIC users, including some useful *HELP messages.

**Offer price
Only: £59**


(Price includes a comprehensive manual and the ROM)

GRAPH PAD

With this popular British Micro's Graph-pad, you can add new dimensions to your computer enjoyment. It helps you to create your own application programs by the simple use of the Graphpad. Ideal for Educational use. Supplied complete with Cables, Manual and a two program cassette.

SPECIAL OFFER £60 (£3 carr)

Mk-3 13 ROM SOCKET EXPANSION BOARD

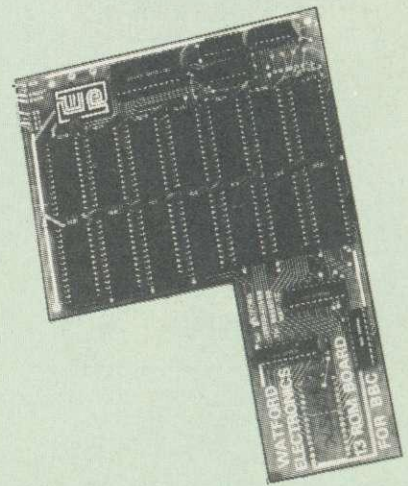

- Increase BBCs capacity for ROMs from 4 to 16.
- Easy installation; simply plug in with only 5 wires to solder.
- Minimal space needed.
- Compatible with our DDFS, RAM Card, Torch card, 2nd Processors, etc.
- Advanced low power chips keeps power consumption to a minimum.
- Very versatile Socket 14 can take 2716, 2732, 2764, 27128, 6116 and 6264 chips.
- *LOADs or writes in the region &8000 to &BFFF are automatically directed at the RAM.
- Auto-write protect line makes RAM look like ROM.
- READ protect line which makes socket 14 "vanish" – useful to get out of software crashes.
- On-board battery back-up option with a high speed charging circuit.
- Supplied ready-built and tested, complete with fitting instructions.

Price: Still Only £30

SOLDERLESS SIDEWAYS ROM SOCKET BOARD

Following the success of our 13 ROM SOCKET BOARD, we are proud to announce a new addition to our range – the New Solderless Sideways ROM Socket Board.

This brand new board from Watford Electronics is designed specifically for those wishing to add a ROM board to their own BBC without the need to perform any soldering.

This new board expands the total possible number of ROMs in a BBC from 4 to 16. Also permissible, are various configurations of RAM (up to 16k) and different sized EPROMs (see below).

- The key features of this new, no fuss, easy to install quality product from BBC leaders Watford Electronics are as follows:
- Increase your BBCs capacity for ROMs from 4 to 16.
- No soldering required.
- Very low power consumption.
- Minimal space required.
- Compatible with Torch, DDFS, RAM Card, 2nd Processor, etc.
- Socket 14 can take the following chips: 2716, 2732, 2764, 27128, 6116, 6264.
- Auto write protect for RAM chips.
- Read protect to make RAM "Vanish"; allows recovery from ROM crashes.
- Battery backup option for RAM chips.
- Supplied ready to fit with comprehensive instructions.

Price: Only £32
Battery backup fitted **£35**

Watford ROM/RAM CARD

A must for all serious users

Watford Electronics announced the first ever commercial ROM board for the BBC micro, the Watford Electronics 13 ROM Socket Board 3 years ago. Following the success of this board, we have designed what probably represents the ultimate in expansion boards, the new Watford Electronics ROM/RAM board. This highly versatile and sophisticated board represents the latest in "2nd generation" sideways ROM technology for the BBC micro, designed to satisfy the serious BBC user.

- NO SOLDERING required to fit the board.
- NO overheating problems.
- No User Port corruption (avoids problems with the mouse, modems, Eprom Programmers, etc.)
- Fully buffered for peace of mind.
- Firm mounting in BBC micro.
- Compatible with ALL BBC micros (not BBC Plus).
- Total number of ROMs increased from 4 to 8.
- Up to 8 banks of sideways RAM (dynamic).
- Option for 16k of Battery backed CMOS RAM (CMOS RAM needs one ROM socket).
- Write protect for ALL RAM.
- Master write protect for all sockets.
- Read protect for CMOS RAM (ALLEVIATES crashes during ROM development).
- Separate RAM write register (&FF30 to &FF3F).
- Automatic write to currently selected RAM socket for convenience.
- Can run ANY BBC ROM.
- FREE utilities disc packed with software.
- Compatible with our DDFS board, 32k RAM Card, Delta Card, sideways ZIF, etc.
- Large printer buffer.
- UNIQUE Fully implemented RAM FILING SYSTEM (similar to the popular Watford DFS).
- Fast *BACKUP via sideways RAM.
- ROM to RAM load and save facilities.

The RFS (FAM FILING SYSTEM) can utilise up to the full 128k of RAM (with the RFS in CMOS RAM) as a SILICON DISC. This behaves as a disc drive, with all the normal Watford DFS features (including OSWORD & 7F for ROM-SPELL, etc.) to provide an environment that looks like a disc but loads and saves MUCH faster.

The ROM/RAM Board plugs into the 6502 CPU socket. This leaves free all the existing ROM sockets, which can still be used normally.

Any ROM that can be plugged into the BBC micro's own ROM sockets may be used in the ROM/RAM Board.

The ROM/RAM Board is supplied with all ordered options fitted as standard. Upgrade kits (with full instructions) are available for all of the options, should the user wish to upgrade in the future. Please write in for further details.

INTRODUCTORY PRICES:

- ROM/RAM card with 32k dynamic RAM **£45**
- ROM/RAM card with 64k dynamic RAM **£69**
- ROM/RAM card with a massive 128k dynamic RAM **£109**

OPTIONAL EXTRAS:

- 16k plug-in Static RAM kit **£9**
 - Battery backup **£2**
 - Read and Write protect switches **£2**
- Complete ROM/RAM board
(all options installed) **£125**

Le Modem

The MODEM from Watford

At last a professional MODEM for the BBC Micro. Unlike other 'Modem packages' this is a complete package there are no extra software costs to get 'up and running'. Of course Le MODEM is multi-standard, i.e. 300/300, 1200/75 UK and BELL (USA) are all supported.

The features that make Le MODEM such good value are:

- A complete communications terminal that transforms your BBC Micro into a very powerful World-wide data transfer system.
- Auto Dials, Auto Answers, Auto Baud selects and is completely controlled by your Micro. There are no external controls!
- Allows you to access PRESTEL, B.T. GOLD, THE SOURCE, MICROLINK, MICRONET, MICROWEB, THE TIMES NETWORK, MICRO LIVE (BBC TV database), CITY BB and more.
- Designed to be SIMPLE but SOPHISTICATED.


To LOGON to a data base all you have to know is its TELEPHONE NUMBER, Le MODEM does the rest.

- Supplied with a comprehensive telecomms package in a 16K sideways ROM which includes a FULL PRESTEL terminal allowing TELESOFTWARE to be downloaded.
- A comprehensive 80 column terminal. This includes XMODEM error checked transfer protocol, to allow error free data transfer anywhere in the world!
- FULLY controlled by simple *COMMANDS allowing you to control it from your own BASIC programs. To get you started we supply a FREE disc of bundled software!
- Connects to the 1MHz bus. A *AUDIO ON/OFF command allows you to actually hear the telephone line through your BBC micro loudspeaker.
- Completely self contained with internal mains power supply. (Even a free mains plug is fitted!) A *TEST facility gives ON SCREEN indication that Le MODEM is working correctly.
- Packaged in such a way that you need nothing else except a BBC Micro to communicate with computers all over the world.

● BT Approval applied for.

Launch Price: Only **£89** (carr £3)

(Price includes Software ROM, Cables and Manual)





CHRISTMAS GIFT VOUCHERS

Following numerous requests from you the customers, we have at last introduced our GIFT VOUCHER service. The Vouchers are available in £5; £10 & £15 denominations and are an ideal answer when faced with that problem of what to give for that special Birthday/Christmas gift. Simply send your credit card number or your cheque for the amount of Vouchers you require and we shall send you these attractive Vouchers. (There is a 50p handling charge on any amount.)



CHRISTMAS DISC DRIVE OFFER



Watford Electronics has always been renowned for bringing high quality products to the consumer at realistic prices.

For the Christmas period, Watford is offering an even better deal on their top quality slimline MITSUBISHI DISC DRIVES for the BBC micro. Packaged in matching decor the BBC micro, these superb disc drives are an ideal complement to any DFS on the BBC. Backed by a twelve month warranty from Watford, UK's largest distributors of BBC micro peripherals. You can be sure of a great deal from Watford.

The following 40/80 track switchable Disc Drives are being offered at rock bottom prices. The price includes a Utilities Disc. (For technical specification, please see the opposite page.)

- CLS400S Single 40/80 track switchable Disc Drive, cased with cables **£79**

- CLD800S Twin 40/80 track switchable Disc Drives cased with cables **£159**
- CS400S Single 40/80 track switchable Disc Drive cased with cables & Power Supply **£79**
- CD800S Twin 40/80 track switchable Disc Drives cased with cables & Power Supply **£159**

BUY NOW & SAVE £ Ess...


LOGOTRON LOGO

The popular Logotron Logo in RCM. Recommended by most Education authorities.

Only: £55

PCB NI-CAD Battery for ROM Boards. £2

BUFFER & BACKUP ROM

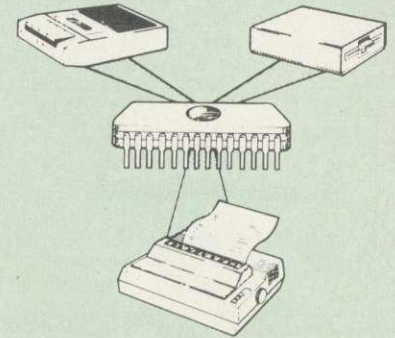

For those with sideways RAM fitted in their machines this utility ROM will make full use of this facility. By using the sideways RAM area for extra memory the following features are implemented:

- ★ 4K or 16K buffer for parallel printer.
- ★ Dumps selection of Disc files to Tape.
- ★ Makes backup copies of tapes on to tape and disc.
- ★ Displays contents of paged ROMs on screen.
- ★ Menu display of ROM filing system contents on Shift-Break.
- ★ Comprehensive manual.

Only £20

LUCKY 13

To celebrate our 13th Birthday we will be offering some sensational bargains at the Electron & BBC Micro User Show on November 14-17.

SEE YOU AT THE SHOW

Nazir

NAZIR P. JESSA



Continued →

Marconi TRACKER BALL

This popular Marconi's RB2 tracker ball now available with the popular Micro-Draw software.

Only: **£49**

COMPUTER CONCEPT'S ROMS

ACCELERATOR	£52
CARETAKER Basic Utility	£27
Graphics ROM	£26
Disc Doctor ROM	£26
INTER-SHEET	£45
INTERCHART	£34
TERMI	£27
COMMUNICATOR	£58
SPEECH ROM	£26

Wordwise

Without doubt a very sophisticated piece of software for the BBC Micro. It has all the features of a professional word processor yet is easy to use.

SPECIAL OFFER: **£32**

WORDWISE PLUS £46

FREE FREE FREE

This month we are giving away absolutely FREE, the superb Word-Aid ROM worth £15, with every WORDWISE PLUS package bought from us.

Word-Aid

The most comprehensive
utilities ROM for Wordwise-Plus

Extend the power of your Wordwise Plus word processor with this most advanced ROM from Watford. By utilising the powerful Wordwise Plus programming language, WordAid provides a whole host of extra features, all accessed via a special new menu option.

- Alphabetical sorting of names and addresses.
- Text transfer options.
- Chapter marker.
- Epson printer codes function key option.
- Search and display in preview mode.
- Embedded command removal.
- Print Multiple copies of a document.
- Multiple file options for print and preview.
- Address finder.
- Label printer.
- Mail-merger.
- Number/delete/renumber.
- Clear text/segment area.

Price; Only **£16**


EPSON HI-80 PLOTTER

The latest addition to the popular range of EPSON Printers/Plotters. Prints in upto 10 colours. Has many more features. Please write in for spec sheet.

£345 (£7 carr.)

THE AMX MOUSE

The AMX Mouse needs no introduction. It is simply the best.



Now supplied with the NEW SUPERART Software ROM & Disc at no extra cost.

ONLY: £67.95

We are giving away the sophisticated COLOUR ART Software package **ABSOLUTELY FREE** with every purchase of the AMX Mouse from us.

AMX DESK Package	£19.00
AMX UTILITY Package	£11.50
AMX SUPERART Package	£43
AMX PAGE-MAKER Pack	£43
AMX 3D ZICON Disc	£21
AMX Database Disc	£21
AMX XAM Educational	£21


COLOUR ART

This novel program allows you to add COLOUR to any drawing produced with your AMX Mouse package, and really brings those pictures alive. Not with just any colours, mind you, but a full range from up to 255 different shades! It's simplicity itself to use this "painting by numbers" painter to create simple, striking and powerful images to please the eye.

Price **£10**


(please specify 40 or 80 track disc when ordering)

PLINTHS FOR BBC MICRO AND PRINTERS

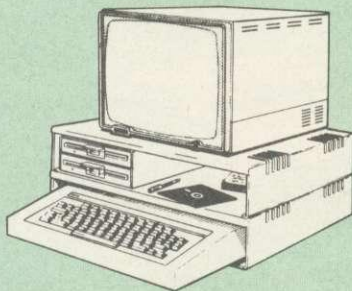

Protect your computer from the weight and heat of your monitor. The BBC micro plinths have slots for maximum ventilation. The single plinth is suitable for a BBC and monitor, whilst the double height version provides enough room for our stacked or side-by-side dual disc drives or TORCH Disc pack, to be placed in the centre section. If you use our stacked drives, the remaining space can be used for further peripherals e.g. Speech Synthesizer, EPROM programmer or simply stationery. The computer slides neatly in to the lower section allowing easy access to remove the lid. The printer plinth is equally sturdy but without the cooling slots. It allows for access to the paper from the front as well as from the rear, (a facility not often thought of in similar products) if the paper is located beneath the plinth. This is a very convenient way to work especially if your work area is not deep enough to take the printer and paper separately.

SINGLE BBC PLINTH	£11 (carr. £1.50)
DOUBLE BBC PLINTH	£19 (carr. £2.00)
PRINTER PLINTH	£10 (carr. £1.50)

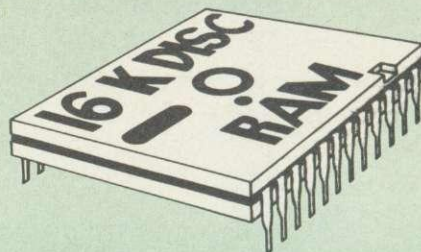

This is the RAM you've been waiting for!! This battery backed up, write protectable 16K sideways RAM board allows you to run from disk every sideways ROM available. Beware of other sideways RAM boards which are not backed up as certain ROMs will not run in these boards even though the RAM can be write protected. The Battery Backup facility allows retention of DATA after power off. On switch on the Micro will think the WATFORD DISC RAM is a ROM. Features available are:

- No soldering or modifications to BBC micro necessary.
- Plugs into normal ROM socket fitting neatly under the keyboard allowing room for other add-ons.
- Easy to use. Comes with disk based software to SAVE and LOAD ROMs. Allows you to make backup copies of your ROMs.
- Disk software can be copied onto other discs when disc is full.
- All existing ROMs can be stored on disk and used in DISC RAM.
- No messy plugging and unplugging of your ROMs. Simply Load the one you want into DISC RAM.
- Ideal for Professional users to develop ROMs. Backup facility allows testing of final versions without using EPROMs.
- The switch provided allows backup and write protection to be switched off externally.
- Can also be used as 16K printer buffer RAM in conjunction with our Buffer & Backup ROM.

New Low Price: £30

P.S. 16K DISC RAM Board is not designed to work in conjunction with a Sideways ROM Board.

Versatile **BEEB SPEECH
SYNTHESISER** Unit



The Watford Speech Synthesiser is a very flexible speech synthesis unit based upon the powerful phonemes system. This system stores the building blocks of speech (called phonemes) and allows you to combine them quickly and easily to form virtually any word imaginable.

Supplied with an advanced ROM, you are provided with a 500 word dictionary to get you started. These can easily be added to by following the notes given in the comprehensive manual.

SPECIAL PRICE £32

BOOKS (No VAT on Books)

21 Games for the BBC Micro	£5.95
30 Hour BASIC (BBC Micro)	£6.95
35 Education Programs for BBC	£6.95
100 Programs for BBC Micro	£6.95
6502 Assembly Language Program	£13.95
6502 Assembly Language Subroutines	£19.95
6502 Machine code for Humans	£7.95
68000 Assembly Lang. Programming	£19
A young persons guide to BBC Basic	£4.50
Advanced Machine Code Technique for BBC	£7.95
Advanced Programming for the BBC Micro	£6.95
Advanced User Guide for BBC Micro	£11.95
Advanced Graphics with BBC	£9.95
Advanced 6502 Programming	£12.45
Assembly Language Programming on BBC Micro	£7.95
Advanced Programming Techniques for the BBC Micro	£7.95
Applied Assembly Lang. for BBC	£7.95
Assembler Routines for the 6502	£XXX
Assembly Language Programming FOR the BBC Micro	£8.95
Assembly Programming made Easy	£5.95
Basic ROM User Guide	£9.95
BBC BASIC for Beginners	£7.95
BBC BASIC	£5.95
BBC Forth	£7.50
BBC Hardware Projects	£8.95
BBC Machine Code Portfolio	£7.95
BBC MICRO add on guide	£6.95
BBC Micro An Expert Guide	£6.95
BBC Micro Assembly Language	£7.95
BBC Micro Book BASIC Sound & Graphics	£7.95
BBC Micro Games Master	£5.95
BBC Micro Graphics and Sound	£6.95
BBC Micro Programs in Basic	£5.95
BBC Micro ROM Book	£9.95
BBC Micro ROM PAGING System Explained	£2.00
BBC Micro Revealed	£6.95
BBC Micro Disc Companion	£7.95
BBC Micro in Education	£6.50
BBC User Guide	£10.00
BBC Wargaming	£8.95
Basic Programming on BBC Micro	£5.95
BCPL User Guide	£15
Brain teasers for BBC micro	£5.95
Business Applications on BBC	£7.95
Computing for All the Family	£6.45
CP/M Bible	£16.00
CP/M Handbook with MPM	£13.95
CP/M Soul of	£14.95
CP/M The software BUS	£8.95
Creative Animation & Graphics	£7.95
Creative graphics on BBC Micro	£7.50
DISC FILING SYSTEM (DFS) Operating Manual for BBC	£6.95
Disc Programming Techniques	£7.95
Disc System for the BBC	£6.95
Discover BBC Machine Code	£6.95
Discover FORTH	£13.95
Easy Programming for the BBC Micro	£5.95
Electron Machine Code for Beginners	£6.95
Exploiting BBC Basic	£6.95
Exploring FORTH	£6.95
Filing System & Databases	£7.95
Further Prog. for BBC Micro	£5.95
FORTH on the BBC Micro	£7.95
Forth Programming	£14.40
Functional Forth for the BBC Micro	£5.95
Games BBC Computer Play	£6.95
Getting more from your BBC & Electron	£6.95
Graphics for Children	£7.95
Graphs & Charts on BBC Micro	£7.50
Graphic Art for BBC Computer	£5.95
Hackers Handbook	£4.95
Handbook of Procedure & Functions for the BBC Micro	£6.95
Interfacing Projects for the BBC	£6.95
Introducing the BBC Micro	£5.95
Introducing LOGO	£5.95
Introduction to FORTH	£8.95
Introduction to PASCAL	£16.50
Let your BBC teach u to program	£6.45

LISP	£9.25
LISP, A Beginners Guide to	£10.95
LISP Cassette	£15.50
Logo Programming	£8.95
Mysteries of DISC DRIVES and DFS REVEALED	£5.95
Mastering CP/M	£16.50
Micronet Handbook	£6.95
Programming the 6502	£13.95
Programming the BBC micro	£6.95
Programming the Z80	£16.95
Programming with Graphics	£5.95
Structured Prog. with BBC BASIC	£6.50
The Complete FORTH	£6.95
The Complete Programmer	£5.95
The Epson FX/KAGA PRINTER Commands REVEALED	£5.95
Using Floppy Discs with BBC Micro	£5.95
Using BBC Basic	£6.95
Wordstar & CP/M made easy	£7.45

BEEB VIDEO DIGITISER

Using any source of composite video (colour or monochrome) and the Watford Beeb Video Digitiser, you can convert an image from your camera into a graphics screen on the BBC Micro.

This uses the full graphics capacity of the BBC micro in modes 0, 1 or 2. The video source may be a camera, video recorder or television, and is connected via the video output socket.

Images produced can be compressed, stored to disc, printed on an Epson compatible printer, directly used to generate graphics, analysed for scientific and educational use or converted to other formats e.g. Slow Scan TV or receiving a picture from a remote camera using a modem.

The output from the digitiser exactly matches the graphics capability in each mode, with up to 8 levels of grey in mode 2. The unit connects into the User Port and automatically scans a complete picture in 1.6 seconds.

Both the black and white levels can be adjusted manually for the optimum picture, or switched to automatic for unattended use. The image produced can be reversed if necessary.

Full controlling software is supplied on a normal sideways ROM and this is easily accessed via additional * commands. The package is designed to allow easy input of complex screens and give full access of the data to the user. Once on the screen, the image can be used as a normal graphics screen, allowing any of the usual graphics commands in BASIC or other ROM's to work on it.

A special print dump routine is included with the driver programs. This is specially designed to produce a fast, correctly proportioned picture, with reduced "contouring", resulting in an accurate reproduction of the original image.

Features offered by this package include:


- The adding of pictures or written text to typed documents.
- Unattended recording of scientific data.
- Entry of real images into graphics programs.
- Generation of computer images.
- Slow scan television; sending images via a modem or radio.
- Security.
- Input from any video 1v video source.
- Full resolution in Modes 0,1 or 2.
- 1.6 seconds scan time.
- Up to 8 grey levels
- Manual or Auto level control
- Connects to user port

Detailed examples of driving this unit from BASIC or other languages are all provided in the extensive manual supplied.

£95 (Carr. £3)

(Price includes: Digitiser Unit, ROM & a comprehensive Manual.)

EPROM PROGRAMMER

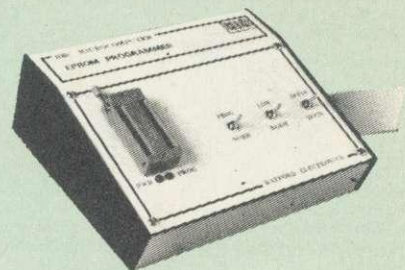

The Watford Electronics' EPROM programmer for the BBC micro is a high quality self contained package. Programs all popular EPROMs from 2K to 16K: 2716, 2516, 2532, 2564, 2764 and 27128. All manufacturers' specifications have been followed to program EPROMs at the correct speed - wrong timings could destroy your EPROMs. The unit has its own power supply so does not put heavy loads on the BBC power supply as do some other units. Connects directly to the 1MHz bus following all Acorn recommendations on addressing and bus loadings.

SOFTWARE PACKAGE

The software is supplied on an EPROM which plugs into the Micro and is instantly available with a single command (no time wasting as on Cassette/disc loading). It is a fully purpose designed and integrated package to simplify ROM development. The system is menu driven with many prompts to avoid any accidents.

Software facilities include:

Load File - Save File - Down Load EPROM - Program EPROM - Verify - Blank Check - Editing of memory contents prior to programming. Also included is an automatic system to allow Basic programs to be put in EPROM and accessed through the *ROM filing system. More than one program may be put in an EPROM. All these facilities and more are explained in the comprehensive and clear 15 page manual.

SPECIAL OFFER £69
(£3 carr.)

LOW COST 'DIN' EPROM PROGRAMMER

A high performance, low cost, self contained 'DIN' EPROM PROGRAMMER for the BBC Micro. Plugs into the BBC Micro's user port.

The features are:

- Will program 2716, 2732, 2532, 2764 & 27128 EPROMs.
- Copy Eprom into memory and compute checksum.
- Blank check EPROM.
- Program EPROM from memory.
- Verify programmed EPROM and display checksum.
- All * commands may be used from menu mode.
- High speed programming on 2764 & 27128.
- Machine code SOFTWARE supplied in ROM.

Only: **£49.50** (carr. £2)

TEX EPROM ERASERS

EPROMs need careful treatment if they are to survive their expected lifetime. Over erasure of EPROMs very rapidly turns them into ROMs! The TEX erasers operate following the manufacturers specifications to give the maximum possible working life by not erasing too fast. We use these erasers for all our own erasing work.

- **ERASER EB** - Standard version erases up to 16 chips. **£28**
- **ERASER GT** - Deluxe version erases up to 28 chips. Has automatic safety cut-off to switch off the UV lamp when opened. **£30**
- Spare UV tubes. **£9**

VOLTMACE JOYSTICKS

DELTA-14 JOYSTICK	£12
Adaptor Module	£12
Transfer Software	£7

ANTI GLARE MONITOR SAFETY SCREEN

Headaches? Tired Eyes? Don't take pills - Use Watford's Anti-glare screen filter. Made in Britain by a long established glass maker. Available in 14" version. - Please specify monitor type when ordering.

Special Price: **£13.00** (carr. £2)

SURGE PROTECTOR Plug

Fitted in place of your normal mains plug, this device protects your equipment against mains surges. Nearby lightning strikes, thermostats switching and many other sources put high voltage transient spikes on to the mains. This can lead to data corruption in memory and on disc and can result in spuriously crashing machines. A must for every computer user.

Protection for only **£9.50**

FLEXIBLE KEYBOARD CONNECTOR

A 'Keyboard to Micro' replacement jumper lead.

£4

ATTACHE CARRYING CASE for BBC Micro

The Attache carrying case is attractively finished in mottled antique brown leatherette. The case is made of tough plywood, providing a very solid and safe way to carry your BBC micro. There is room provided to fit all the leads necessary behind the computer and manuals in the front. Locks supplied with two keys. Price **£11** (£2 carr.)

DATA RECORDER

Top quality slimline portable cassette recorder designed specifically for use with home computers. Mains/Battery operated with tape counter.

£20

DATA CABLE to connect recorder to BBC **£2.00**

DATA CASSETTES

Top grade tested C12 Data cassettes supplied in library cases **35p** each; 10 for **£3.20**.

CONNECTING LEADS

(All ready made and tested)

CASSETTE LEADS 7 pin DIN Plug to 5 pin DIN Plug + 1 Jack Plug	£2.00
to 3 pin DIN Plug + 1 Jack Plug	£2.00
to 7 pin DIN Plug	£2.50
to 3 Jack Plugs	£2.00
6 pin DIN to 6 pin DIN Plug (RGB)	£2.50

DISC DRIVE POWER LEADS


Supply from BBC power supply to standard Disc Drive connector.

Single **£3.00** Dual **£3.75**

MISCELLANEOUS CONNECTORS

	Plugs	Sockets
RGB (6 PIN DIN)	30p	45p
RS423 (5 pin Domino)	40p	50p
Cassette (7 pin DIN)	25p	65p
ECONET (5 pin DIN)	20p	30p
Paddles (15 pin 'D')	110p	215p
BBC Power Plug 6 way	80p	-
Disc Drive Plug 4 way	75p	-

4 WAY MAINS DISTRIBUTION SOCKET

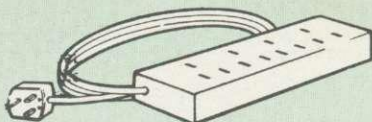

4 way top quality mains trailing sockets. Supplied wired up with mains plug ready for use. Can be screwed to floor or wall if required. Very useful for tidying up all the mains leads from your peripherals. Allows the whole system to be switched on from one plug.

£9.99



CREDIT CARDS 24 HOUR HOT LINES

ACCESS 0923 50234
VISA 0923 33383



SPARES for BBC Micro

Keyboard	£46;	Keystrip	£2
Power Supply	£45;	Case	£25
UHF Modulator	£4;	Speaker	£2
Speaker Grill	£1;	Keyswitch	£2

28 pin ZIF SOCKET (Textool) **£6.95**

28pin DIL HEADER PLUG	
SOLDER type	£1.50
IDC CRIMP type	£1.95

RIBBON CABLE

28way **55p/ft.**; 34way **60p/ft.**

8way DIP SWITCH **£0.85**

CHIP SHOP

7438	40p;	74LS00	25p
74LS04	25p;	74LS10	25p
74LS123	80p;	74LS163	70p
74LS244	80p;	74LS245	£1
74LS393	£1.20;	4013	60p

4020	£0.90	4816	£1.00
DS3691	£3.50	DS88LS120	£3.00
LM324	£0.45	UPD7002	£4.40
6502A CPU	£5	65C02 CPU	£9.50
6522	£3.40	6845SP	£6.75
SAA5050	£8.75	SN76489	£5.50
2764-250nS	£2.00	27128-250nS	£3.00
6116LP-2K	£2.75	6264LP-8K	£4.00
8271	£45	ACORN DNFS	£15
ACORN OS 1.2	£6	ACORN BASIC 2	£16

Acorn BCPL **£50**; Acorn COMAL **£43**; Acorn FORTH **£43**; Acorn LOGO **£60**; ISO Pascal **£60**; MURROM **£17**; SLEUTH ROM **£24**; TOOLKIT ROM **£23**; TERMULATOR **£30**; SERIAL ULA **£13**; VIDEO ULA **£15**.
BBC A to B Upgrade Kit **£45**.

ALNOOR ARABIC ROM

Now available from stock, ARABIC ROM and Keytops for the BBC Micro. Please write in for further details.

Acorn's GRAPHICS ROM **£24**

ACORN MUSIC 500 SYSTEM
Only: **£165**

Glentop's 3D GRAPHICS Development System
Only: **£22**

BEEBFONT ROM

BEEBFONT is a remarkable and different concept in BBC software. It allows you to display text on the screen in 13 different styles. It is supplied complete with a Spooler and Editor on 40 or 80 track disc.
(Please write in for technical details).

ONLY **£25**

ROM MANAGER

Probably the most powerful way of expanding the BBC micro is from the use of Sideways ROMs. One problem faced by the avid ROM collector is that of ROM command clashes. The solution is very simple in the form of the ROM that "Provides comprehensive management of all your installed ROMs". (Quote from BEEBUG November '84.)

Basically, ROM Manager offers you the ability to turn off any installed ROM, or to send any * command to any specific installed ROM. It is said that imitation is the sincerest form of flattery - Acorn's BBC Plus features many of the abilities of this powerful ROM.

Many more facilities available.

Price **SPECIAL OFFER £18**

ROM EXTRACTION TOOL

This extremely useful tool allows trouble free IC removal from your computer. No longer do you have to wield a screwdriver at your valuable ROM software. Instead this IC extractor distributes the removal force over the whole body of any 24 or 28 pin chip, thus preventing undue damage to your Chip. Isn't £2 a small price to pay to protect your ROMs stature?

Price: **£2**

Call in at our shop for a demonstration on any of the items listed in this advert. Be satisfied before your buy. You may write in for a technical leaflet on any of our products. (An SAE will be appreciated.)

SEE YOU AT THE ACORN & BBC MICRO USER SHOWS

Prices subject to change without notice and available on request.

MAIL ORDER AND RETAIL SHOP. TRADE AND EXPORT INQUIRIES WELCOME. GOVERNMENT AND EDUCATIONAL ESTABLISHMENTS OFFICIAL ORDERS ACCEPTED. CARRIAGE: Minimum £1 on all cash orders. On bulky items, Securicor charge applies. VAT: UK customers please add 15% VAT to the total cost incl. Carriage.

SHOP HOURS: 9.00am to 6.00pm. Monday to Saturday. (Ample Free Car Parking Spaces)

Watford Electronics

Dept. AU, JESSA HOUSE, 250, Lower High Street, WATFORD, ENGLAND
Credit Card Orders TEL: ACCESS (0923) 50234 VISA (0923) 33383
Telephone: (0923) 37774; Telex: 8956095 WATFRD

ROUND AND ROUND THE GARDEN

Add a little extra fun to your Christmas with our exciting game, *Shuggy's Garden*. Deep in the garden a monster is lying in wait, watching you collect the autumn apples, so look out!

Hugh Darby

Here's a game for you to type in the empty hours over Christmas after you've filled yourself with turkey and are fed up with your other presents. *Shuggy's Garden* will run on both the BBC micro and the Electron, and you'll find details of how to enter the listing on yellow page 107.

The scenario is autumn in Shuggy's garden. All the apples are ripening and he would love dearly to collect them, but a monster has entered the orchard, intent on bringing about his demise. Causing yet more chaos, the leaves are falling off the trees, threatening to crush poor Shuggy.


How to play

The aim is to guide Shuggy around the gardens collecting the apples as they appear, while avoiding the ravenous monster. As you attempt this already difficult task, piles of fallen leaves accumulate which bar your path.

If the monster reaches an apple before you, he will eat it, and you'll lose 100 points and forfeit two of your hard-earned apples. The mushroom is the monster's home and if you eat it he becomes infuriated and will chase you, laying a trail of leaves behind him, which makes life exceedingly difficult for you.

You cannot pass through the leaves that fall continuously, but the monster can. As they will always fall along the path you have taken, if you hang about too long, or retrace your steps, you could find yourself getting squashed. To help you, a flashing square indicates where the next pile of leaves is going to fall. Leaves will also appear behind you when you eat an apple, so be careful or you'll end up getting trapped.

There are four different gardens, and the monster speeds up through them, starting at about a fifth of your speed and progressing to half your rate on the fourth screen. Also increasing will be the number of apples you

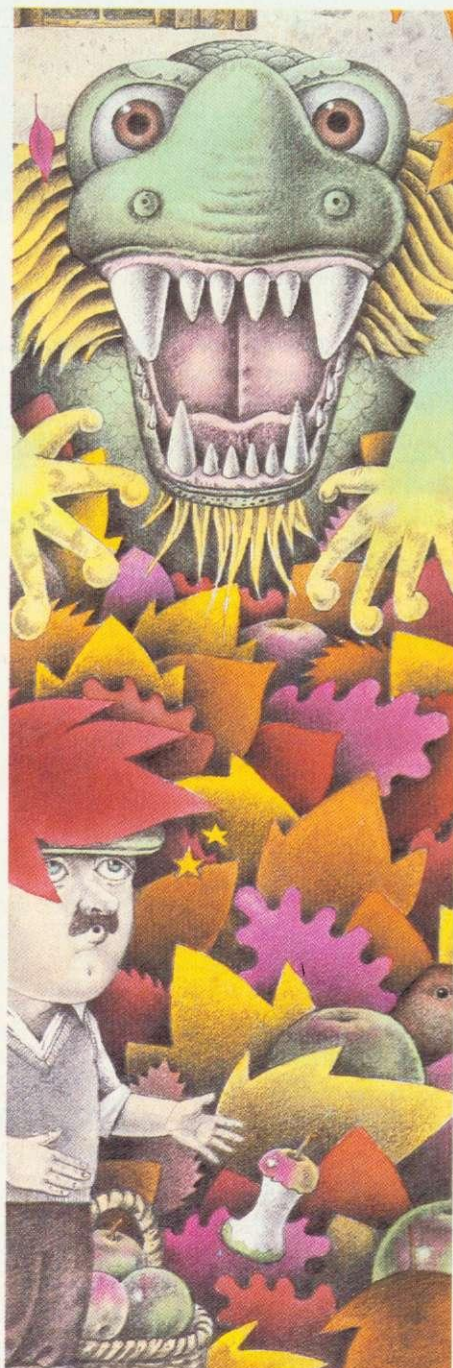

have to collect, which increments by three for every sheet completed.

When you have completed the fourth screen, you will return to the first screen and the number of apples and speed of the monster will be lowered accordingly – the catch is that the leaves now fall more frequently, and from the third level upwards, the screen quickly becomes almost unnavigable. Points awarded are 100 for an apple, 1000 for the mushroom and one for each square of grass.

The keys used are Z to move to the left, X to the right, while : will take you up, and / down. Press S to turn the tune on or Q if you prefer to play in silence. P/O will allow you to pause or restart as you want.

At the bottom of the screen you'll find your score, the number of lives remaining, the level and screen numbers (in that order), and the number of apples gathered followed by the amount to be collected.

Hints on playing

- Don't eat the mushroom until you need only one or two apples to finish that screen.
- If the apple is in a position where you would become trapped trying to collect it, find a place where the apple is between you and the monster, and wait for the monster to take the fruit as it approaches you.
- Don't stand still for any length of time, and if you have to (as in hint two) move only when you see the flashing square on top of you.
- On the third and fourth screens, if the monster is between you and the apple, it's best to take a circuitous route to get it, as the monster only follows at a half or a third of your speed and you can usually outrun it and get past by going along the edges.

Program details

For speed, the program contains two short sections of assembly. The first is used to determine the character at the current text cursor position, using OSBYTE 135. Al-


FEATURES

though still short, the routine is longer than it might be, because to obtain the 'correct' character number, 96 has to be added to the result of the call. This can cause complications when checking for characters that are not user-defined (by that I mean less than 224), but when dealing solely with user-defined characters – as in this program – it is a lot simpler than fiddling about with numbers that are all 96 less than you want them to be.

The second section of code is a general purpose routine to print multi-coloured characters on the screen. On entry, locations &70 and &71 contain the screen memory print position, while &74 and &75 contain the data position. This way variables can be set to the various data positions such as sh%, ap% mo%, and so on, and the screen position can be calculated from 'TAB' co-ordinates. These values are then just put into the memory, and one routine is used for all the multi-coloured characters, rather than having one separate routine per character.

This can easily be adapted to your own data, and with some alterations larger characters can be printed, (see *Acorn User* January 1984 pages 103-110 for full details).

Also used in the program is a 'centre-as-you-enter' input routine for the high score name entry. It's very easy to customise this, and you can alter the maximum length by changing the 20 in line 3850 to whatever length you wish,

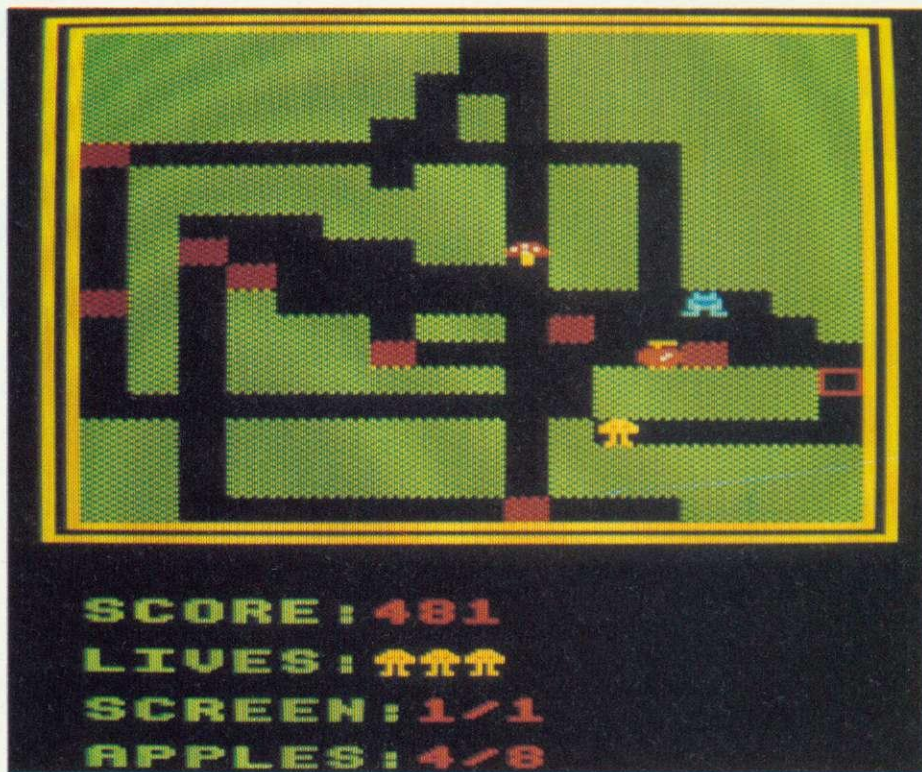

Here are all the features of the game – you, the monster, his mushroom home, piles of leaves and an apple

and the allowable characters by re-doing FNvalid.

Finally, to play the tune, rather than use lengthy and complex interrupts, all I have done is to check continuously if the buffer for channel 1 is empty, and, if it is, it will play a

note. This ensures that the buffer does not fill up, and thereby freeze the machine until the buffer empties, providing a quick, easy method of playing background music in Basic.

Turn to yellow page 107 for the listings for *Shuggy's Garden*

VARIABLES

A	used for name input
C	colour for monster or man
P	set if apple to be printed
N	pitch of note
D	duration of note
C%	position in high scores
pass	used in assembly OPT
ap%,mo%,mu%,sh%,bl%	memory locations for graphics data (apple, space monster, mushroom, shuggy, blank)
Q%,R%	general numeric variables
pos	position of centered text
pad%	number of dots after high score
so%	set in tune to be played
q%,r%	used for character checking, position calculation
A\$,B\$	general string variables
loop%	main game loop
t%	temporary store for game level
app%	number of apples needed to complete screen
A%	number of apples collected
co%	time to go before leaves fall
ti%	time between leaves falling
scr%	screen player is on
mad%	set if mushroom eaten

dead%	set if player dead
fin%	set if screen finished
char	result of screen check
LI%	lives
SC%	score
no%	number of moves monster gets
ax%,ay%	monster co-ordinates
mx%,my%	monster co-ordinates
nx%,ny%	next block co-ordinates
ox%,oy%	old player co-ordinates
x%,y%	current player co-ordinates

ARRAYS

H% (5)	five high scores
H\$ (5)	names for high scores

FUNCTIONS

check	checks character at (q%,r%)
input	inputs a string
valid	checks for valid input

PROCEDURES

assem	sets up machine code
array	sets up arrays
var	sets up constants
hi	prints out high scores
cent	centres text
screen	displays screen
path (1-4)	draws paths
var2	defines all non-constants

update	prints full player status
player	moves player
keys	handles keyboard check
ch2	check for players' death, etc.
gotapp	collects an apple
mad	collects mushroom
pr	prints Shuggy
apple	prints/reprints apple
block	drops leaves, makes square flash
monster	handles monster movement
move	move monster
pm	prints monster
ch	checks if monster on player/apple
monapp	monster eats apple
apsc	checks for minus score/apples
app	prints number of apples
score	prints score
finish	takes away life
newscr	resets for next screen
ti	increases leaf frequency
mushroom	prints mushroom
sound	mushroom chomping noise
lives	prints lives
s,m,a,r,b	prints Shuggy, monster, apple, mushroom, blank space
tune	plays one note in tune

Table 1. Variables, arrays, functions and procedures used in *Shuggy's Garden*

SAVE POUNDS ON THESE COMPUTER SUPPLIES

SPECIAL OFFER
UNBRANDED 5 1/4" DISCS

5 year warranty - hub rings - envelopes - labels - write protect tabs.
10 Discs packed in FREE plastic library box

SS/DD 48 TPI 40 Track £9.90
DS DD 48 TPI 40 Track £10.90
DS DD 96 TPI 80 Track £14.70



Computer Supplies

Rydal Mount Baker Street
Potters Bar Herts EN6 2BP
Telephone: (0707) 52698



Personal Callers Welcome

5 1/4" DISCS

PRICES PER BOX OF 10	1 Box	2 Bxs	3 Bxs
CUMANA			
DS/DD 96 TPI 80 Track	18.30	17.40	15.90
Packed in SEE 10 library box.			

NASHUA 5 YEAR GUARANTEE

SS/DD 48 TPI 40 Track	11.85	11.40	11.00
DS/DD 48 TPI 40 Track	14.75	14.50	14.15
SS/DD 96 TPI 80 Track	17.50	16.45	15.00
DS/DD 96 TPI 80 Track	19.20	18.05	17.00

3M LIFETIME GUARANTEE

SS/DD 48 TPI 40 Track	13.96	13.48	12.30
DS/DD 48 TPI 40 Track	18.96	18.22	16.57
SS/DD 96 TPI 80 Track	21.65	20.78	18.57
DS/DD 96 TPI 80 Track	24.87	24.00	21.43
DS HD 1.6 MB 96 TPI	44.83	41.93	39.11

VERBATIM DATALIFE

SS/DD 48 TPI 40 Track	16.40	15.29	14.28
DS/DD 48 TPI 40 Track	21.30	19.95	18.70
SS/DD 96 TPI 80 Track	21.75	20.60	19.35
DS/DD 96 TPI 80 Track	27.70	25.95	24.30

3 1/2" DISCS

3M			
SS/DD 135 TPI	28.60	26.50	24.80
DS/DD 135 TPI	42.60	39.70	37.00

3" DISCS

MAXELL			
SS/DD	41.50	39.00	37.00
DS/DD	41.90	39.70	38.00

For Quantity Discounts and Bulk Pack Prices ring 0707 52698

DISC CARE

5 1/4" Head Cleaning Disk with 15ml cleaning solution			
	5.88	5.57	5.25

DISC STORAGE BOXES

Plastic library case 5 1/4 x 10	1.70	1.60	1.40
SEE 10 5 1/4 x 10	2.15	2.09	2.03
REXEL 5 1/4 x 30	6.20	5.85	5.40
ABA LOCK LID 5 1/4 x 40	10.90	10.50	10.25
ROCKFORT 5 1/4 x 50	8.50	7.90	7.00
ABA LOCK LID 5 1/4 x 80	12.90	12.60	12.25

COMPUTER LISTING PAPER

All paper plain, fanfold with micro perf edges

Size	Weight	Boxed Sheets			
11 x 9 1/2	60gsm	2000	14.30	12.91	12.12
	60gsm	1000	8.66	7.48	7.01
	60gsm	500	5.37	4.38	3.94
	80gsm	2000	17.94	15.51	14.37
	80gsm	1000	10.17	9.39	8.24
EXACT A4	80gsm	500	6.09	5.17	4.34
	70gsm	2000	21.55	19.25	17.75
	70gsm	1000	12.20	11.70	10.05
11 3/8 x 9 1/4	70gsm	500	6.15	5.29	4.80
	90gsm	1000	12.70	11.70	10.08
	90gsm	500	7.65	6.57	6.05

COMPUTER LABELS

Continuous fanfold sprocket fed labels			
	1,000	2,000	3,000
89 x 36	5.35	4.85	4.20
89 x 49	7.40	6.55	5.75
102 x 36	5.65	5.10	4.40

Please state no of labels across sheets (1 or 2)

Many other sizes available. Ring 0707 52698

Trade and Educational Enquiries Welcomed

PRINTER RIBBONS

Price each per ribbon	1	3+	6+
BROTHER HR 5	3.00	2.70	2.50
EP 44	2.30	2.05	1.90
M 1009	4.00	3.70	3.40
EM 100/200 Correctable	2.80	2.55	2.35
Red Blue Brown Correctable	4.05	3.75	3.45
HR 15/25 - Multi-Strike	4.75	4.40	4.15
HR 15/25 - Fabric	4.20	3.80	3.45
CANON PW 1156A/1080	5.95	5.45	5.05
COMMODORE (CBM)			
4022/2022	3.90	3.55	3.25
4023/1526 Fabric	4.75	4.30	4.00
4023/1526 Multi-Strike	4.60	4.15	3.85
MPS 801	4.30	3.90	3.60
MPS 802	same as 1526		
C. ITOH 8510/8510A	4.00	3.65	3.35
DAISYSTEP 2000 Multi-Strike	3.45	3.15	2.90
2000 Fabric	5.45	5.05	4.75
EPSON FX/MX/RX 80	3.90	3.55	3.25
Red Brown Blue	5.20	4.80	4.50
LX 80	4.25	4.05	3.90
MX 100	5.05	4.60	4.20
LQ 1500	5.75	5.25	4.80
DX 100 Multi-Strike	4.70	4.35	4.10
DX 100 Fabric	4.20	3.85	3.45
JUKI 6100 Multi-Strike	2.75	2.45	2.30
6100 Single Strike	1.70	1.50	1.40
6300 Multi-Strike	2.65	2.40	2.20
6300 Fabric	3.55	3.20	3.00
2200 Single Strike	2.55	2.30	2.10
2200 Correctable	2.50	2.25	2.10
KAGA KP 810/910	5.95	5.45	5.05
M/TALLY MT 80 Fabric	4.75	4.35	4.00
MT 80 Multi-Strike	4.60	4.20	3.85
M/PERIPHERALS MP 165	3.90	3.55	3.25
NEC PC 8023	4.00	3.65	3.35
OKI MICROLINE 80/82/83	1.80	1.60	1.50
QUENDATA 2000 Multi-Strike	3.45	3.15	2.90
2000 Fabric	5.45	5.05	4.70
RITEMAN 80	6.45	5.95	5.70
SEIKOSHA GP 80	3.45	3.15	2.90
GP 100/250	3.75	3.40	3.15
GP 500	4.30	3.90	3.60
SHINWA CP 80 Multi-Strike	4.60	4.20	3.85
CP 80 Fabric	4.75	4.35	4.00
STAR GEMINI 10x / 15x	1.80	1.60	1.50
RADIX 10	5.75	5.35	5.05
WALTERS WM 80 Multi-Strike	4.60	4.20	3.85
WM 80 Fabric	4.75	4.35	4.00
WM 2000	5.15	4.75	4.40

If the ribbon you require is not listed ring 0707 52698 and let us quote

FLOWCHART TEMPLATE

19 symbols 1/16 & 1/10 graduations 1.29

PRINTER LEAD

Centronics lead to connect BBC Micro to Epson Kaga Canon etc
1 mtr - 6.50
2 mtr - 8.50

CONTRAST ENHANCEMENT ANTI-GLARE SCREEN 12" or 14" 19.25

ALL PRICES INCLUSIVE OF POSTAGE & PACKING
Please add VAT at 15%



Micro Media, Rydal Mount, Baker Street, Potters Bar, Herts EN6 2BP

Telephones: 0707 52698 & 50913

Wordwise

A double PLUS!

UNIQUE—String extension ROM for users of WORDWISE PLUS.
Provides a massive improvement in string handling capability.

- * Approved by Computer Concepts.
- * Over 20 string functions implemented.
- * Functions include MID\$, LEFT\$, RIGHT\$, STRING\$, INSTR.
- * Segment programs for mail merging, label printing etc. included on ROM.
(Segment programs to your requirements may be included—ask for details).
- * Function key editor.
- * Provides a MENU of disc files—loads a file of your choice with a single keypress.
- * Plus much more.

Price only £19.95 inclusive

Please specify your WORDWISE version number when ordering, e.g. 1.49, 1.4A.

B-UTILITY

Probably the best value in 8K utility ROMs for the BBC Micro.
30 useful commands include:

- * Search and replace (allows BASIC keywords)
- * String search
- * Excellent memory editor.
- * Powerful disassembler.
- * Can enable/disable itself or other ROMs (resists a Ctrl—BREAK).
- * Allows loading and saving of Disc sectors.
- * Partial renumbering routine.
- * Relocates programs.
- * Plus much more.

Price £21.95 inclusive

EPROM PROGRAMMER

High performance programmer for the BBC computer.

- * Programs 2764 (8K) and 27128 (16K) chips.
- * Driving software supplied on EPROM.
- * Menu driven.
- * Very easy to use.
- * Software supports intelligent programming algorithm—programming times reduced five-fold.
- * Formats programs for the ROM Filing System.
- * Facilities include Blank check, verify, Program, Read, Edit memory, etc.

Special offer this month, only £29.95 with IC socket, £34.15 with ZIF socket

We also supply blank EPROMs. New low prices.

2764 8K EPROM — £2.55
27128 16K EPROM — £3.85


Quantity discount available.

8K SIDeways RAM

- * Just plug in and go—absolutely no soldering!
- * Cuts development times of ROM software dramatically.
- * Complete with disc of utilities.

Price £20.50 inclusive

(Available soon—16K version)

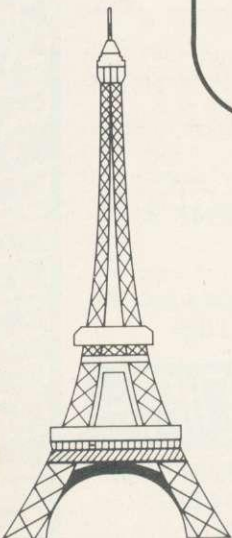

Write or phone for further details.

IFEL (Interface Electronic & Computing)

36 UPLAND DRIVE, PLYMOUTH, DEVON PL6 6BD

Telephone 0752 787058 (any time)

All prices include p & p, comprehensive manual and VAT.

CHRISTMAS

WITH CMC

'BOOKS by CMC'

The Advanced User Guide by
Bray, Dickens & Holmes £12.95

The Advanced Basic ROM Guide
by Colin Pharo £7.95

The Advanced Disk User Guide
by Colin Pharo £14.95

Hard Back Covers for
AUG & UG £4.50

Kai-180EX (180cps) NLQ has a
printing range of 8" £285.00

Kai-1800 (180cps) NLQ
has a printing range
of 13.6" £360.00

They both
have 7
selectable
inter -
- national
character
sets.

Tractor and
friction feed,
with standard
parallel/centronics
interface.



The BEST BUY is the Copal SC 1000 at NO ONE CAN MATCH

Just Some Of The Items We Sell

NAMAL TYPE & TALK £171.35

NAMAL DISK DRIVES

incorporating TEAC + MITSUBISHI mechanisms, fully cased, complete with cables, format disk and manual.

FROM
£130.00

TO
£244.15

P+P £5.00

With A Tale To Tell

As any one will tell you, It's always more often than not that those who climb higher and higher with the wrong equipment will always find the shortest and quickest route back to the BOTTOM.

At CMC we understand fully the needs of the small business and we know how to fulfill your needs of today and that of tomorrow.

We stock a comprehensive range of computer peripherals and computer consumables, also an informative selection of publications.

All prices include VAT.
All stock subject to availability.

At CMC we know that working closely with our customers we can provide individual solutions to to their individual needs from our highly trained staff.

And All The Facts

**Cambridge
Microcomputer
Centre**

153-154 East Road Cambridge CB1 1DB
☎ (0223) 355404 Telex 817445

Prices valid in UK only.
Please write for overseas prices.


VISA
ACCESS

SPEEDYSOFT

01-846 9353 (24 HRS)

EUROCARD
MASTERCARD


WE ALWAYS TRY TO SEND YOUR PROGRAMS ON THE SAME DAY WE GET YOUR ORDER, THAT'S WHY IT'S CALLED SPEEDYSOFT! All programs normally in stock before we advertise them! FOREIGN ORDERS WELCOME, satisfied customers in 64 countries over 3 years. UK prices include VAT: export prices are the same, plus p&p because of the extra work involved. Pay by sterling cheque, bank draft or postal order. All orders must be prepaid: we send your programs as soon as we get your money! It's fastest to order by phone from any country with your VISA, EUROCARD, MASTERCARD or ACCESS. Call 01-846 9353, 24 hrs, 7 days a week. BIG FREE ILLUSTRATED CATALOGUE WITH EVERY ORDER WITH DETAILED REVIEWS, LOAD TIMES, ETC. Includes lots of classic serious software, too. Send £1.00 cash (refunded with first order) for catalogue only. TWO FREE BLANK TAPES OR ONE FREE 5.25 INCH DISK IF YOUR ORDER FROM THIS AD COMES TO £30 OR MORE, excluding p&p. State choice on order form.




New BBC Mouse



New Wordwise




Boffin



Jump Jet



Revs



Match Day

WORDEASE

"This disk is easy to use and adds some genuinely useful extra commands to Wordwise+. It is excellent value and should be considered as highly desirable by any reasonably serious user of Wordwise+." (Home Computing Weekly) Wordease provides a whole string of utilities to make your Wordwise+ even easier and quicker to get the most out of. Plus mailmerge and label printing. (Beebugsoft) Disk only. 40/80 track disk £21.50

WORDWISE+ ROM

The greatest BBC wordprocessing ROM. 180-page manual plus 56-page manual. Keystrip. Typing tutor. COMPATIBLE WITH EXISTING WORDWISE FILES and with 6502 2nd processor. (Computer Concepts) Recommended price £56.35 OUR PRICE £50.00 SAVE £6.35

BOFFIN

"Boffin is beautiful and everyone deserves a go... The graphics are the best I've seen on a platform game for the BBC... a faultless piece of programming design." (A&B Computing) "One of the few arcade games released recently to make Spectrum owners envious." (Popular Computing Weekly) Two different versions of the game on the same tape: one has 25 screens, the other 20 new ones. Your umbrella is useful. Enjoy your ride on a Tarantula's back! (Addictive) Cassette £9.95

BORED OF THE RINGS

"An excellent and vast parody... Challenging and atmospherically written." (Popular Computing Weekly) Enhanced version of this huge, funny, text-only adventure spoof loads in four parts. No Stick. (Silversoft) Cassette £6.95

JUMP JET

"Combines not only the challenge of coping with a flight simulation, but also the thrill of combat... it's fairly easy to get airborne, but the rest of the mission is very challenging." (Computer & Video Games) Fly your own jump jet in combat. Good tunes, great graphics, very clear instruments, intelligent use of split-screens. Sticks OK. (Anirog) Cassette £9.95 Disk (40 Track only) £11.95

"YOU'RE GETTING BETTER WITH EVERY CATALOGUE"
(K. Volkmar, W. Germany)

REVS

"After the magnificent ELITE we now have another winner, Revs. Graphically, it is excellent. It feels like driving a real racing car... oozes class, style and, above all, realism... one of the best simulations ever." (Popular Computing Weekly) Sticks OK (Acornsoft) CASSETTE £14.95 DISK (40/80 Track OK) £17.65

MATCH DAY

"Far superior to any other... the reality of the whole match, with the reflection as the ball bounces and the quality graphics, make this a worthwhile buy." (ZX Computing) "Must be the definitive football game... this one has the best graphics, playability and atmosphere." (Crash) Good 3D graphics: play over many skill levels and time periods. Sticks OK. (Ocean) Cassette £9.95

"... A VERY PROFESSIONAL SERVICE AND LIKE A BREATH OF FRESH AIR"
(G. Mills, Surrey)

AMX MOUSE

The quickly installed Mouse is the easiest way yet to control your Beeb. 6502 2nd processor and Wordwise/View compatible. The kit includes disk, cassette, 2 manuals, ROM, Mouse, 2 demo programs, plus AMX ART and ICON DESIGNER. (AMS) State 40 or 80 Track, 5.25 inch or 3 inch disks. ROM/DISK PACKAGE £89.95

WORM IN PARADISE

A brand new adventure system from Level 9 is a major event! More text than ever, by compressing ordinary English by over 50%. Vocabulary over 1000 words. Understands more commands than any other adventure. 'Examine all but the helmet, dummy and leotard and go east.' Text only. No disks. (Level 9) Cassette £9.95

TERRORMOLINOS

"If you enjoyed Hampstead, I have no doubt at all that Terrormolinos will be equally if not more appealing... its endless sick humour will draw you from disaster to disaster... immensely silly, immense fun!" (Sinclair User) "A surprisingly addictive adventure with lots of originality... Package tours to Spain offer plenty of opportunities for cheap, tawdry, tasteless, trite, foolish, jingoistic and cliché-ed jokes and they're all here and they're pretty funny actually." (Popular Computing Weekly) Can you get from Slough to the Costa Brava and come back alive? Great comic adventure. No disks. (Melbourne House) Cassette £7.95

NEW REPLAY ROM

"THE BEST FORM OF TRANSFER I HAVE MET." (Personal Computing Today) "Promises to be a boon for disk-using games fans." (Beebug) 100% effective tape/disk transfers. Loads stopped screens for printing. Disk to disk transfer. Midplay stop-and-save. Order by type no: according to your DFS: TYPE 8271 for Acorn DFS, Acorn DNFS, AMCOM S/D, WATFORD S/D. TYPE 1770 for Opus DDOS 3.45 & SOLIDISK DDOS. TYPE 2791 for Opus 3.15. TYPE 2793 for Opus 3.35. (Vine) REPLAY ROM £35.00

POST TO: SPEEDYSOFT (ACU11)
37 CHURCH ROAD, LONDON SW13 9HQ, ENGLAND.
For CATALOGUE ONLY, send £1 cash. Refunded with your first order.

I own a I enclose a cheque/PO payable to Speedysoft OR charge my VISA/ACCESS/EUROCARD/MASTERCARD

No.

Signature: Expiry Date:

Please write clearly. If we can't read it, you won't get it.

Name:

Address:

Postcode:

PHONE NO: if any, in case of query

Program Name	Cass/Disk	Price
Postage & Packing		UK add 75p per order
		Europe ADD £1.00 per program
		Outside Europe ADD £1.50 per program
		Total Order

BOUNTY BOB STRIKES BACK!

Twenty-five Levels.

Multi Channel Music.

Dual Joystick Capability.

"Bounty Bob Strikes Back" is the sequel to "Miner 2049er" which was a huge success on the Commodore 64 and Atari machines. Now on the Amstrad, this version features Bob's toughest challenge to date and he needs your help more than ever before to guide him through the mine. The mutant organisms within have multiplied and over run the mine entirely, making it extremely difficult to survive the hazards of the underground passage-



ways. Using high powered special equipment in the twenty-five caverns is Bob's only hope of achieving his objective of securing the mine and defeating the evil plans of Yukon Yohan.

BEACH-HEAD

Multiscreen 3-D Arcade Action

A peaceful island is being held by a ruthless dictator and his troops. As Chief Commander of land and sea forces in the Pacific, you must obtain a quick naval victory and then invade the island with land forces. If your troops succeed in penetrating the island defence systems, the most difficult challenge still remains; capturing the enemy fortress of Khun-Lin.

Beach-Head is a multiscreen action game which requires different skills and provides new sequences as you progress through the game.



BRUCE LEE

Twenty secret chambers to explore

Unique multiple player options

Dazzling graphics and animation

In "Bruce Lee" you will experience the power and the glory of Bruce Lee, one of the greatest masters of the martial arts.

As Bruce Lee, you will confront a barrage of vicious foes. You must penetrate the fortress of the Evil Wizard and claim his fortunes. Destroying the Wizard will earn you immortality and infinite wealth!



THE BEST OF AMERICA...



U.S. GOLD ON THE BBC* - NOW ON

RAID!

Gripping Arcade Action

Multiple 3-D Scrolling Screens

The scene is one of World-wide conflict. The only hope of saving the World from nuclear annihilation is an attack by stealth bombers on the launch sites.

As squadron leader, you must lead your troops on a virtual suicide mission; knock out the launch sites, and proceed to the command headquarters. Armed only with the weapons you carry, you must destroy the defence centre and stop the attack!



DAMBUSTERS

Superb Graphics and Sound

At 21.15 hours on the evening of May 16th 1943, a flight of specially prepared Lancaster bombers left R.A.F. Scampton for Germany. And so, one of the most daring and courageous raids of the Second World War was underway. Now you have the opportunity to relive the drama and excitement of this famous action via your Amstrad computer. You will take the parts of Pilot, Navigator, Front and Rear Gunners, Bomb Aimer and Flight Engineer as you play this authentic reconstruction of the night's events. The multiple screen action is complemented by a comprehensive package of flight documents and authentic material from the period.



IMPOSSIBLE MISSION

Game of the Year 1985-
British Micro Awards

Message from the Agency computer....
"... Your mission, Agent 4125 is to foil a horrible plot. From an underground laboratory, Elvin, the scientist, is holding the world hostage under threat of nuclear annihilation. You must penetrate his stronghold, avoid his human-seeking robots and find pieces of the security code.

Somersault over the robots or use a precious snooze code to deactivate them long enough to search each room. Use the Agency's computer to unscramble the



passwords from the code pieces, or try to solve them yourself. You'd better beware.....This mission is stamped IMPOSSIBLE!"

BOG

COMING THIS AUTUMN



U.S. Gold Limited, Unit 10,
The Parkway Industrial Centre
Heneage Street, Birmingham B7 4JY.
Telephone: 021-359 8881 Telex: 337268.

YOU CAN PLAY THE GAME TOO!

*All screen shots as seen on the Commodore 64

RECURSION EXCURSION

You can use the technique of recursion in your graphics to imitate natural patterns such as snowflakes, trees and coastlines – the process isn't as difficult as you might think

Jim McGregor & Alan Watt





In this article we shall look at the fascinating application of recursive graphics. There are many complex patterns and curves that can easily be described recursively and recursion is a useful tool in computer graphics and computer generated art. Recursive techniques can also be used to imitate natural patterns such as snowflakes, trees and coastlines. The topic is discussed and demonstrated in greater detail in our book *The Art of Microcomputer Graphics for the BBC Micro/Electron*.

To use recursive graphics you need an understanding of recursion as a programming process. We will start with a simple introduction that does not involve the extra complications of graphics. Once you have understood the process of recursion you can utilise it as a tool in graphics.

What is recursion?

In computing, a recursive process is one that is 'described in terms of itself'. Recursion is viewed with suspicion by beginners, who ask how on earth can an operation be defined in terms of itself? Someone recently remarked to me that writing a recursive program seemed like an act of faith. However, once mastered, recursion is a powerful tool and should not be neglected – there are many programming problems where a recursive solution is elegant and easy to write, and the non-recursive answer is clumsy and difficult.

Many human problem-solving activities are recursive in nature – consider the planning of a route from Trafalgar Square to the British Museum in London. One solution might be to pick an intermediate landmark such as Covent Garden and break the original problem down into how to get from Trafalgar Square to Covent Garden, and from Covent Garden to the British Museum. A problem of navigation has been broken down into two easier subproblems, also of navigation.

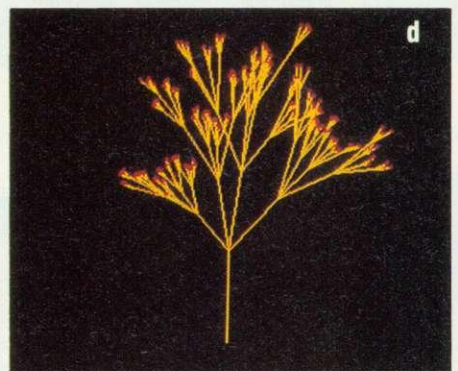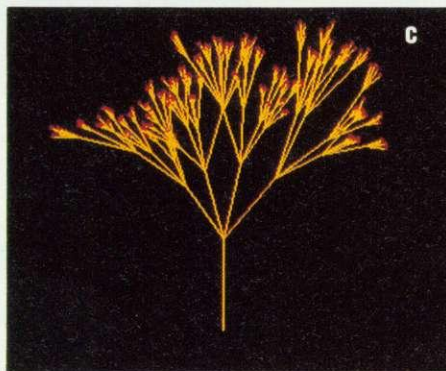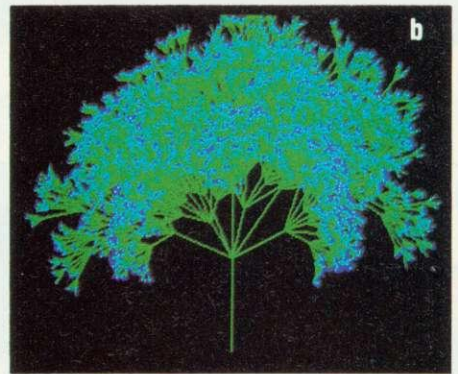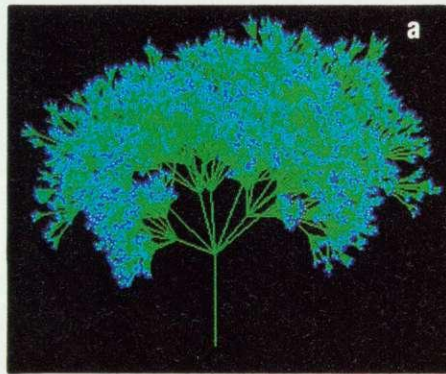

These tree shapes were generated recursively by a colour version of listing 4 which will produce a variety of plant-like forms. (a) and (b) are from two runs of the listing using the same 'bushy' parameters. (c) and (d) were generated by the program using the same 'skeletal' parameters

This is the essence of recursion – the solution to a problem is described in terms of answers to easier or smaller versions of the same question. This is the classic 'divide and conquer' approach to problem solving, so important in areas like artificial intelligence. With this simple concept in mind, we move on to the use of graphical recursive techniques in the imitation of coastlines and trees.

Fractals

There are a large number of curves that are variously called space-filling curves or fractals. The term fractal has been coined recently to describe curves or surfaces that become more and more discontinuous the more closely they are examined.

In computer graphics, fractal surfaces have been used successfully to simulate landscapes. The more accurately a fractal curve is plotted, the longer it gets! Many naturally occurring curves and surfaces are fractals, for example, a sponge is a fractal surface, as is the surface of the Earth.

A coastline is a commonly quoted example of a naturally occurring fractal curve. Imagine approaching the planet from outer space – at first sight, a coastline would appear to be a fairly smooth curve. As you get closer, indentations that were not previously apparent would begin to appear. As you get nearer still, you would discover that the sides of these indentations themselves contained further ir-

regularities, and the sequence would continue down to the level of individual grains of sand and even as far as the atomic structure of matter itself.

When you draw a map of a coastline, the amount of detail that you can show depends on the scale of the map. Irregularities that would not appear on a small scale map would have to be included on a larger scale. On a micro, the extent to which we can reduce the scale is, of course, limited by the resolution of the computer and the television monitor. You will reach a stage beyond which any attempts at greater accuracy will simply overwrite pixels that have already been plotted.

Simulating a coastline

You can generate fractal curves that simulate naturally occurring silhouettes such as coast-

lines superimpose realistic random variations on what is initially a very simple shape by replacing successive straight-line segments in the outline by fractal curves that exhibit some degree of randomness.

A completely random curve could be generated by:

```
REPEAT: theta=RND(360)
PLOT 1, 8*COS (RAD(theta)), 8*SIN
(RAD(theta))
UNTIL FALSE
```

However, if you try this, you find that the curve produced meanders aimlessly (with so-called Brownian motion).

We require a curve that connects two points, but exhibits random behaviour between them.





The range of values that theta is allowed to take determines the character of the coastline, listing 1 on the yellow pages demonstrates this. It generates a random fractal curve between two points, and at each recursive step theta is selected randomly from the range:

$$-\text{maxtheta} \dots +\text{maxtheta}$$

Low values of maxtheta result in minor variations in direction and larger values result in more violent fluctuations.

This is illustrated in figure 3 where PROCfractal from listing 1 has been used to connect pairs of points for nine different values of maxtheta ranging from 20° to 60°.

With values of maxtheta greater than 40 or 45, there is a tendency for the curve to turn

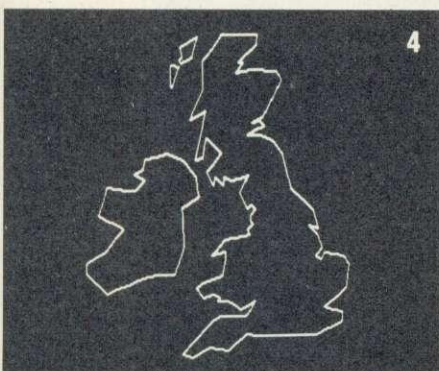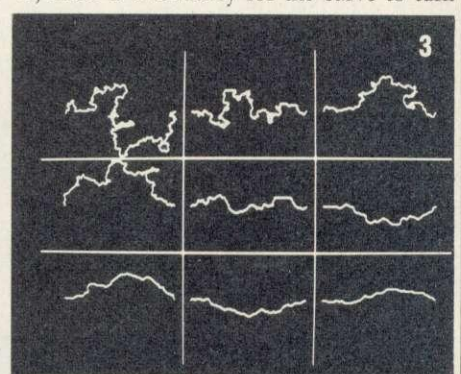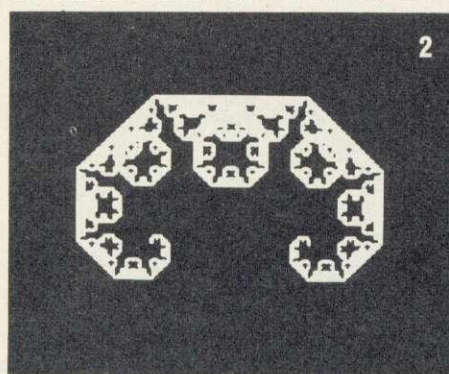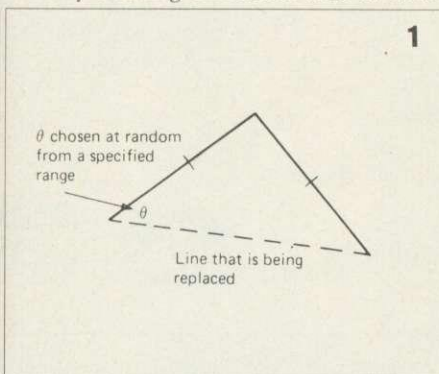

Top line, left to right: Figure 1. Recursive replacement of a line by an equilateral 'elbow' to generate irregularities. Figure 2. A C-curve where theta = 45, resolution = 15. Figure 3. 'Coastline' effects joining two points for various ranges of data (values for maxtheta range from 20 to 60 steps of 5°). Bottom line, left to right: Figure 4. A fractal variation on a map of Britain, coarsely digitised. Figure 5. The same outline, but maxstep = 50, maxtheta = 40. Figure 6. Filled fractal variations on the map

lines or skylines. Techniques like those described can be generalised to three dimensions and used to create natural textures on surfaces in images generated as backgrounds in flight simulators or in computer assisted animation. The mathematics of fractal curves is extremely complex, but we won't cover this in detail in this article.

Natural outlines tend to connect points in a very definite way. The initial shape of a coastline is originally determined by the geological events that formed the landmass. The erosive action of sea and wind then generates random variations which are superimposed on the outline.

We describe in detail how to make a pro-


The operation used to introduce discontinuity into these curves is to replace recursively a line by an 'equilateral elbow' where the sides of the elbow make an angle theta with the line they replace (figure 1). Thus a single line is broken into two lines, and each of these is broken into two lines. The stopping condition of this obviously recursive process is reached when the line length is less than or equal to the resolution of the screen.

If theta is kept at a constant value of 45, then the familiar C-curve is produced (figure 2). However, the most effective way of generating a realistic 'coastline curve' that connects two points is to select theta at random at every replacement stage.

back on itself. Figure 4 shows a map of Britain and Ireland that has been digitised fairly coarsely. Listing 2 was used to add some realistic variations to the map's outline by generating random fractal curves between successive points round the coast. The best results were obtained by using maxtheta=40 and by proceeding round the coast in steps of about 50 units of length at a time (figure 5).

Finally, figure 6 shows the results of colour filling a fractal map of Britain. It was generated by listing 3 which uses an even coarser digitisation than the previous one. The values used are contained in DATA statements. In this data, the coastline is broken into short runs and, at the start of each, the co-ordinates of an

DATA FROM SPACE!



- ASTRID receives from UOSAT satellites:-
- ★ News Bulletins on spacecraft matters.
 - ★ Operating schedule of UOSAT.
 - ★ Satellite Status.
 - ★ Experimental Data.
 - ★ Messages on the Electronic Mailbox System
 - ★ Orbit Information.
 - ★ Digitalker Speech Telemetry.
 - ★ CCD Television Camera Signals.

Don't just play games
on your computer - use REAL
DATA from SPACE!

ASTRID

Automatic Satellite Telemetry Receiver & Information Decoder

UOSAT Satellites are designed and built by the University of Surrey to encourage a deeper understanding of the rapidly expanding industries of space technology, electronics and computing.

ASTRID is a COMPLETE Satellite receiving and decoding package that allows data from UOSAT Satellites to be displayed on home computers via a serial interface, (ASCII format 1 start 7 data 1 even parity & 2 stop bits). The system is fully tested and ready to operate and comprises: Receiver/Decoder/Power Supply Unit/Aerial/Feeder/Test Tape/Connecting Leads/Instruction Manual.

ASTRID operates FULLY AUTOMATICALLY - using the remote control on your tape recorder - for those night time passes!

ASTRID is only available from the manufacturers. Please send cheque or postal order (or use your Barclaycard or Access number) for £144.00 + £5.00 carriage to MM Microwave Ltd., Thornton Road Industrial Estate, Pickering, N. Yorks. YO18 7JB. Tel: 0751 75455.

Additional software is available for the Spectrum and BBC/Electron giving satellite predictions etc. and facilities for better data presentation. For full information on the ASTRID system and other suitable computers, contact us as above.



PRICE BREAKTHROUGH

£24.95


BBC SPEECH

Speech Synthesizer for the BBC Computer

- Totally unlimited vocabulary is now possible with the revolutionary "SWEET TALKER" Speech Synthesizer for the B.B.C. A or B Microcomputer, any series.
- The CHEETAH "SWEET TALKER" simply plugs into speech socket IC99 within the computer. No soldering, no cutting of tracks, no headaches.
- Based on an allophone system you can easily program any word, sentence or phrase and incorporate speech into your software games.
- Fully tested and guaranteed. Complete with demonstration cassette and full instructions.

Prices include VAT, postage & packing.
Delivery normally 14 days.
Export orders at no extra cost.
Dealer enquiries welcome.

Cheetah, products available from branches of
John Menzies WHSMITH Rumbelows
WOOLWORTH Spectrum dealers
and all good computer stores.

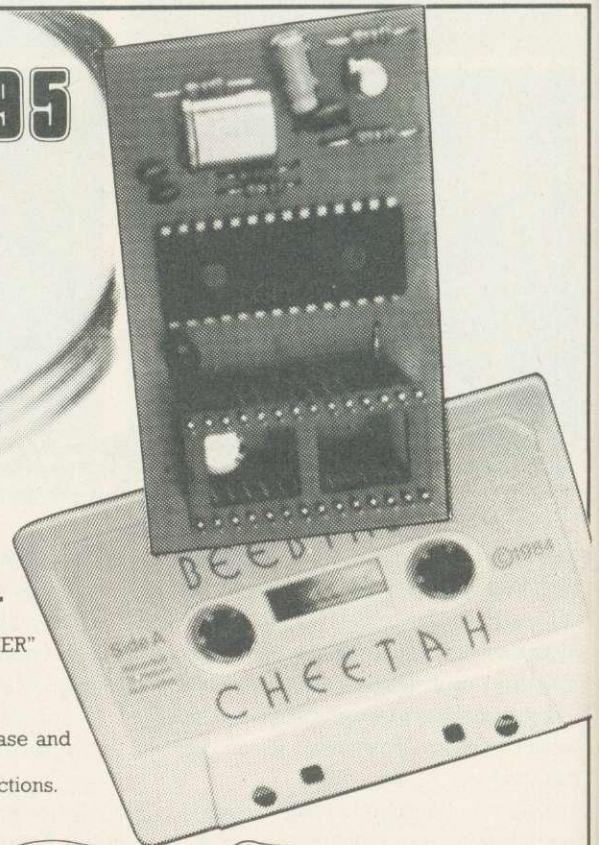

AU12

Cheetah Marketing Ltd, 24 Ray Street,
London EC1R 3DJ. Tel: 01 833 4909.
Telex: 8954958.

interior point have been included to be used for triangle fill during that run.

Generating trees

Mathematically generated computer art can sometimes mean extracting as much variation as possible from a program by building into it suitable parameters for variation. The resulting differences in shape that are generated by the program can then be tuned to the desired result and is best illustrated in the tree-generating program (listing 4) that will produce a large variety of forms.

The program is a simple example of recursion and uses the design statement: 'A tree is a branch with a tree on the end of it.' To draw the tree we simply write a procedure that draws a branch then recursively calls itself.

Six design parameters are used in the listing.

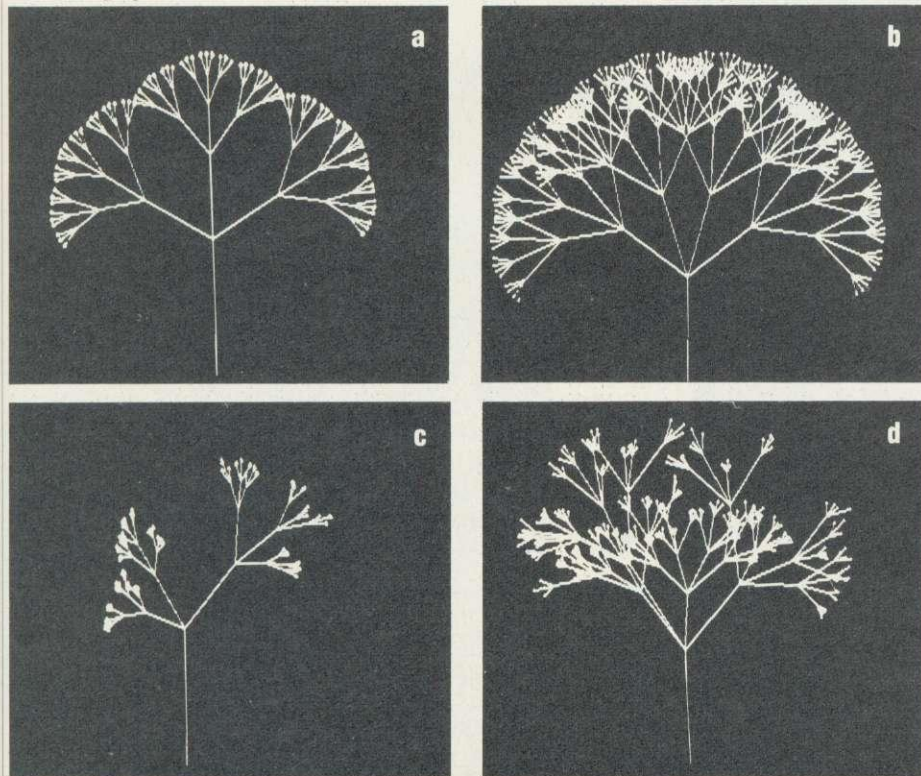


Figure 7. Two pairs of regular and randomised tree shapes. (a) and (c) are regular tree shapes with the randomising parameters set to 0, in (b) and (d) it is set to 1. The other five parameters are identical in each pair

The first, 'rand', is a randomising one. If it is set to 0 there is no random element in the program; if it is changed to 1 then the angle that each branch makes has a random perturbation added to it. The length of the branch is also randomly perturbed.

This means that the program will generate different trees using identical design parameters, but the forms will have an underlying 'sameness', and you can see the nature of this in the illustration on page 82 which is the output from a colour version of the program. One colour is used for the branches and another for the tips.

Figure 7 contains two pairs of pictures – each pair consists of a regular tree, together with its corresponding randomised version. The regular tree is generated with the

randomising parameter set to 0 and the randomised tree with the parameter set to 1. The remaining five parameters are identical for each pair.

The significance of these five can be seen in figure 8. They control the overall shape or 'look' of the tree. The first, 'branchfan', is the angle between the first and last branches. The second parameter is 'inpafact' (input angle factor), and this determines the ratio between the branch angles at consecutive depths. The next, 'branchdensity', is the number of branches that emanate from a node. 'Inphf' (input height factor) is the ratio between branch lengths at consecutive depth levels. Finally, 'depth' is the depth of recursion or the number of 'levels' in the tree.

The program can be further elaborated with more design parameters. For example, a finite branch thickness (proportional to branch length) could be incorporated. In the program the terminating 'leaves' are drawn as three extra pixels, but this could also be changed. You could create a windblown tree by making the branches have a tendency to lean to the right or the left.

The structure of PROCtree is very simple and calls PROCtree within itself in a FOR loop that controls the particular number of branches drawn at any level. The parameter 'rand' controls the selection of one out of two PROCtree calls and you can observe from the program the way in which the parameters are randomly perturbed.

This article is the second in a series of four adapted by Stephen Maddock from The Art of Microcomputer Graphics for the BBC Micro/Electron. The book, by Jim McGregor and Alan Watt, is published by Addison-Wesley Publishers Ltd. See page 87 for details of how to send for the book and associated software Graphito and Tesselator.

Turn to yellow page 111 for Jim McGregor and Alan Watt's listings



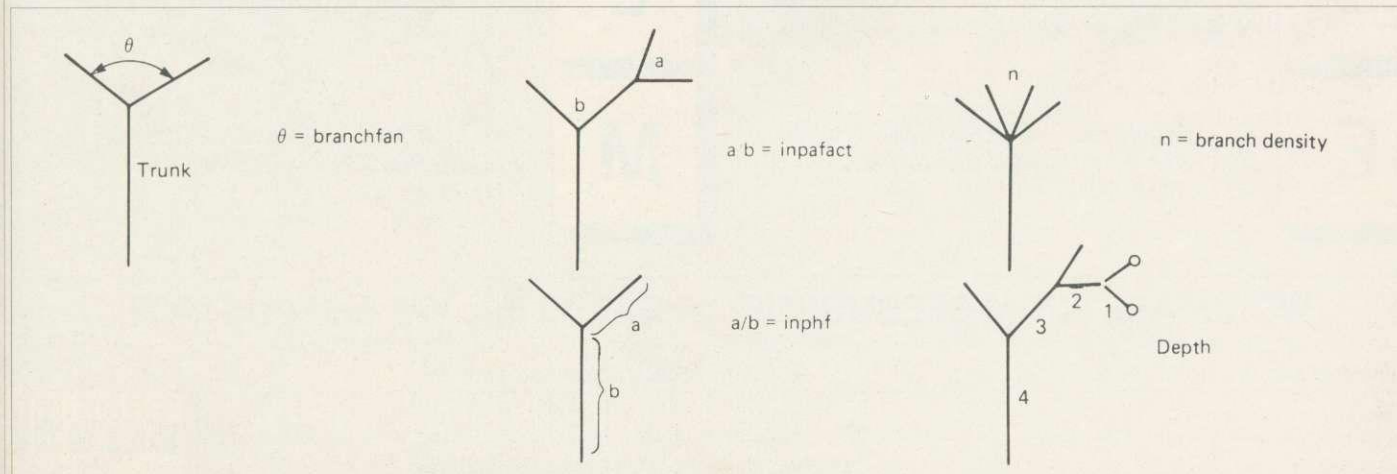


Figure 8. Five design parameters for recursive trees. These control the overall shape of the tree. You can elaborate on the program by adding more parameters

SEND IN FOR THE BOOK AND SOFTWARE

If this has whetted your appetite for more on graphics read on

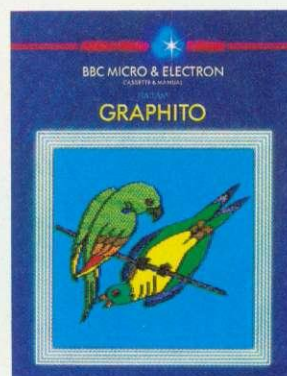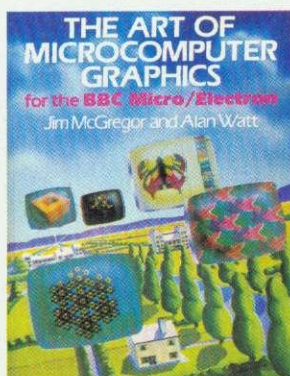

To accompany this series, *Acorn User* is making the book and programs developed from it available to readers – just complete and post the coupon below.

The Art of Microcomputer Graphics, published by Addison-Wesley, contains 448 pages – plus 16 pages in full colour – demonstrating the best in graphical techniques for the BBC micro (B/B+) and Electron.

100 programs

In 10 chapters and more than 100 programs it covers how computer graphics are generated, two-dimensional manipulation and patterns, tessellations, recursion and fractals, 3D pictures, 3D manipulation, introducing reality and mathematical patterns.

Tesselator

Tesselator takes up the subject of interlocking shapes made famous by the Dutch artist M C Escher, as well as Penrose patterns where an infinite number of patterns are revealed from just two simple shapes. An 80-page booklet introduces the concepts and presents the software to generate and manipulate shapes.

Graphito

Graphito presents the user with 40 pre-defined shapes and pictures which can be stretched, squeezed, shrunk, rotated, coloured and textured by a series of procedures – almost 50 in all. Recursive and fractal pattern generators are included in the package. A substantial 112-page booklet explains how it's done.

Please send me:

- The Art of Microcomputer Graphics for the BBC/Electron at £14.95
- Tesselator cassette £21.95 40-track disc £27.95
- Graphito cassette £22.95 40-track disc £29.95

Please add £1.50 per item for postage and packing.

I enclose cheque/postal order for £ made payable to Redwood Publishing

Name

Address

..... Postcode

Signed Date


Send this form with your remittance to:

Graphics Offer, Acorn User, Redwood Publishing, 68 Long Acre, London WC2E 9JH

Drive the M way

Cumana

False Economy

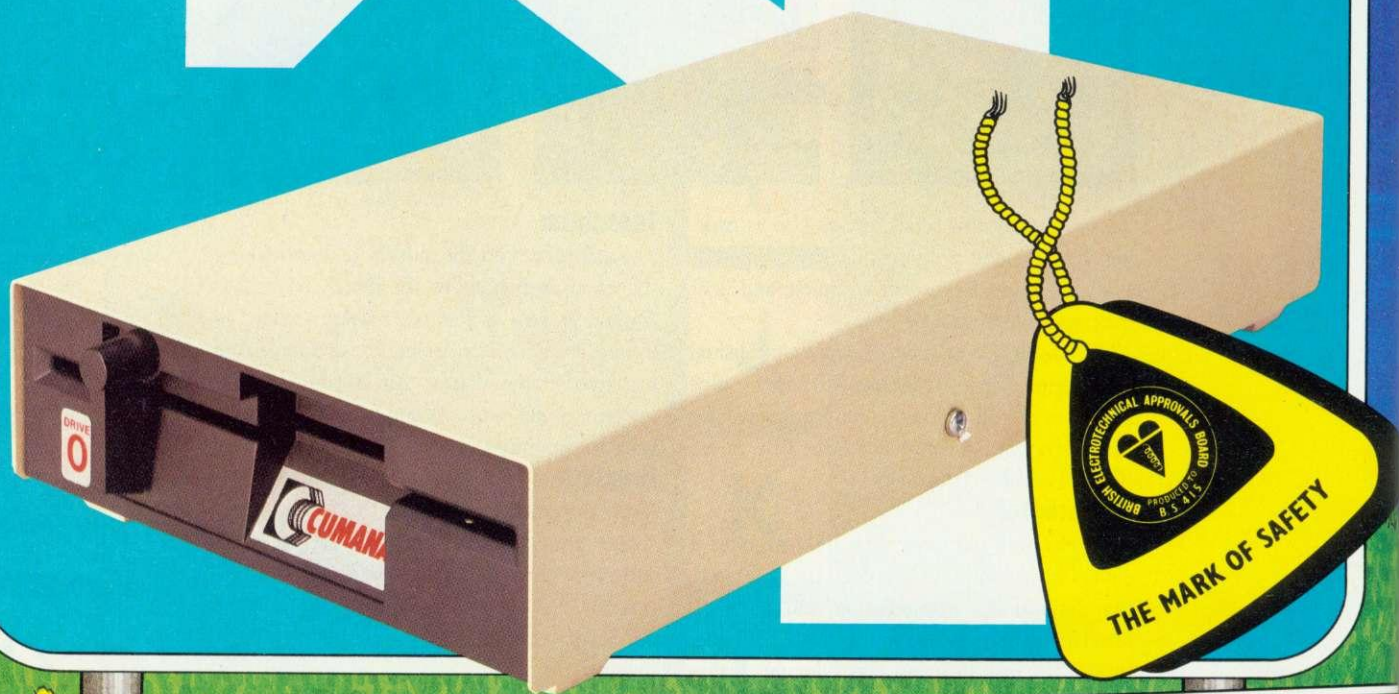

NEW

Mitsumi Disk Drives From Cumana

SEE THEM AT YOUR DEALER NOW!

Single Drives (100 K)	
CSX 100M (NO PSU)	£ 89.95
CS 100M (INC PSU).....	£114.95
Dual Drives (200 K)	
CDX 200M (NO PSU).....	£169.95
CD 200M (INC PSU).....	£209.95

CUMANA DISTRIBUTORS

CEM Micro Computer Services (Belfast) 0232 24411
Silicon Express Limited (Rothley) 0533 374917
Thompson Cook (Birmingham) 0527 25000
J.S. Simnett (Kingston-upon-Thames) 01-541 1495
Microworld (Edinburgh) 031-557-4196
Hugh Symonds (Bournemouth) 0202 26535
Eltec (Bradford) 0274 722512



Cumana Limited, Pines Trading Estate,
Broad Street, Guildford, Surrey, GU3 3BH.
Telephone: Guildford (0483) 503121
Telex: 859380

SPACE SAVER

Would you like to reduce the space needed to save the contents of high resolution screens? With this data compression program you can cut the memory used by more than half

David Pilling

This article describes a simple data compressor that can be incorporated into the BBC micro or Electron disc or tape filing system. It adds a new star command to your micro's vocabulary – when it's entered it will save the contents of the current screen in a compressed form, cutting the space required on tape or disc by more than half. A complementary command allows screens to be uncompressed and displayed in the normal form. These high resolution screens can be text or graphics and usually occur in modes 0,1,2,4 or 5.

An important use of computers is the storage of information. However, often more information than necessary is held which leads to a corresponding wastage of time and space, because the data being stored has redundancies in it, for example, unnecessary spaces. By coding it, these can be removed and the information kept in less space. This process is called data compression.


One of the first uses of computers was to process financial data, and it was soon realised that many financial documents contained large numbers of blank characters and strings of zeros. By implementing a data compression scheme to remove these, storage space could be saved.

From this beginning, a number of standard coding techniques have been developed. Some of them are as follows:

a) Diatomic In English certain pairs of letters occur more often than others: by using spare character codes (the complete ASCII set only occupies numbers 0 to 127 while computers usually handle data as bytes) to represent these combinations, text can be compressed.

b) Null Suppression Here the data to be compressed contains one character which is repeated often (usually the space character). This method works by replacing multiple repetitions of the character by a special code followed by the number of times the character was repeated.

c) Run Length This is very similar to b) except that now multiple repetitions of any character are replaced by a sequence of a special

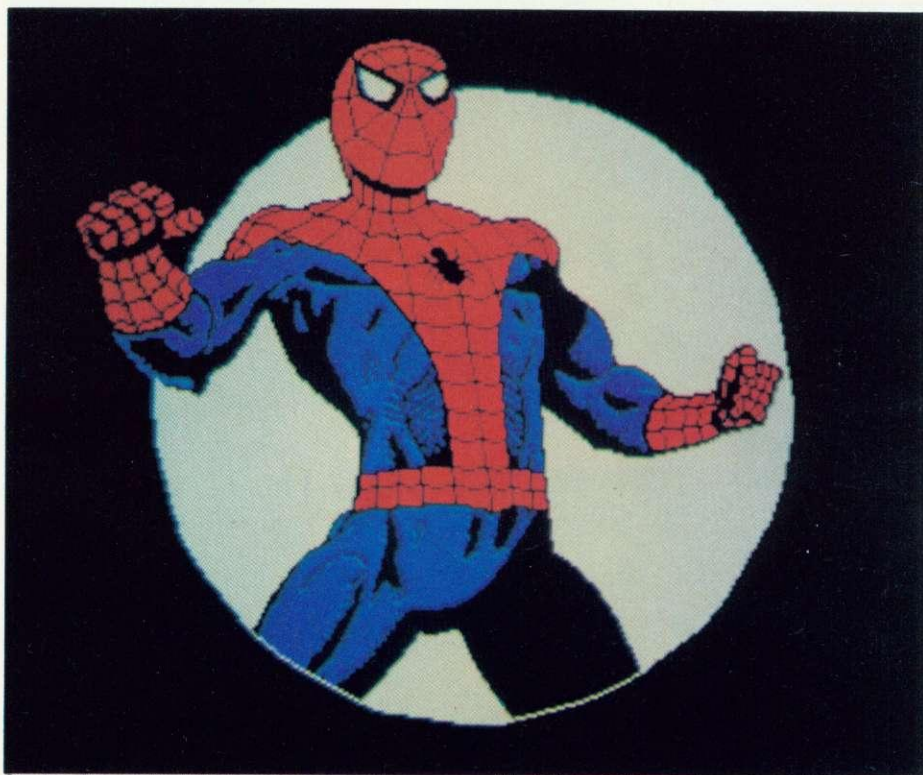

Stephen Townrow's Spiderman screen can be compressed to fit into 7867 bytes from over 20k

character, the character to be repeated and then the number of repetitions.

d) Tokenising Here, character sequences which are often repeated are replaced by spare codes. This technique is used in most micro-computer Basic systems for the storage of keywords: END, FOR, etc . . . On the BBC micro and Electron, character codes between 128 and 255 all correspond to a Basic keyword. The number for a keyword is called its token.

e) Bit Map In this technique, when some data is stored, a block of bytes is kept with it which contains a bit for each byte in the original data. A set bit means that a byte is a repetition of the previous one. Repeated bytes are, of course, not stored.

f) Variable Length Codes In the familiar ASCII code, the codes for each character are of the same length (7 bits). Clearly, less space would be taken up if the letters which occur most frequently had shorter codes (eg, 4 bits). A simple example of this type of code is morse

code. (Care must be taken, though, to ensure that a short code does not look like the beginning of a long one: there's a technique called Huffman coding which, given the relative frequencies with which characters occur, states how to construct the optimum variable length code.)

g) Half Byte In this, a special character is used to signify that the data following it is packed two characters to the byte. Data in such a form obviously represents a limited number of characters so a typical use of this technique would be to compress text which contains strings of numbers.

Very often the results of a program are displayed on one of the high resolution screens. When you want to save them the usual method is to *SAVE an area of memory corresponding to the screen.




Although this is very effective, it involves storing much more information than necessary because most screen pictures will involve large

Next year's best buys available now.

1986 SPECIFICATION UPGRADES FROM TORCH COMPUTERS.

The ZEP 100 Z80 extension processor

- Free software and utilities
- Free carry case

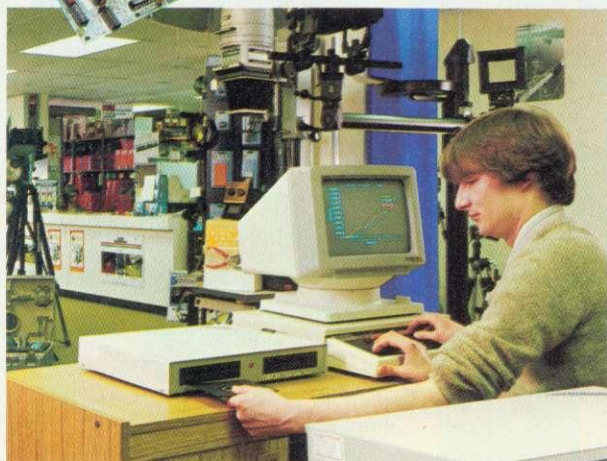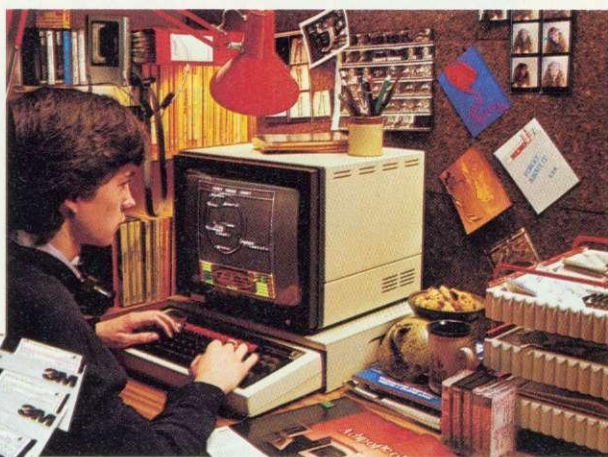


The ZDP 240 Twin floppy discs and processor

- For BBC-MOS and CP/M compatible business software
- Adds high quality double sided 400K floppy disc drives
- Storage for BBC DFS and CP/M programs.



The HDP Z80 Hard disc, floppy disc and processor

- Adding a massive 20 Mbytes of hard disc storage
- Ideally suited to the small business and educational environments.

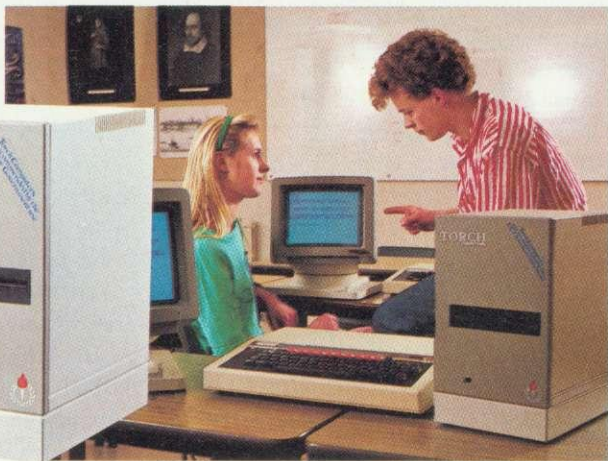

The official range of upgrades for the BBC Microcomputer now has an even higher specification.

The 1986 models now incorporate newly developed operating systems firmware for enhanced program running and disc access speeds faster than ever before.

Plus

New, improved and updated utilities and systems software together with a new comprehensive user guide.

Free

A complete suite of latest release Perfect Software with every upgrade system.

Buy now at 1985 prices from more than 120 TORCH appointed dealers throughout the country. Or for further details and the name of your nearest stockist, complete the coupon or phone 0223 841000.

TORCH 
COMPUTERS

Torch Computers Limited, Consumer Products Division, Abberley House, Great Shelford, Cambridge CB2 5LQ.

Please send further details of the new 1986 range of TORCH upgrades:

Name _____

Address _____

Telephone _____

AU12

areas of the same colour. Saving every single byte in such an area is very inefficient and what is required is a form of data compression.

Considering the techniques described above, run length coding would seem to be appropriate. However, the bytes in the screen take on the full range of values between 0 and 255. This means there is no special code available to signify that a number of bytes are to be repeated so a variation on ordinary run length coding is needed.

The method used here is to insert an extra byte every so often in the data being saved. This is split into two fields: the bottom five bits give the number of bytes (less one) to be read without change and the top three bits give the number of times that the last byte read is to be repeated.

Listing 1 on yellow page 114 is the data compressor system. Type in the program and save it. After the usual debugging process, running the program will set up the compressor. Once this has been done, another * command will have been added to the usual repertoire of the computer: *D+ will switch the data compressor on and *D- will switch it off. After a *D+ all data which is transferred to a file via the BPUT command will be compressed and data coming into the computer via BGET will be expanded. There are some limitations on the use of the compressor - only one channel can be used for input and one for output while the compressor is on. In addition, a *D- should be done before closing a file to flush the compressor buffer.

Implementing a data compressor on an Acorn micro is made easy by the use of vectors for all interaction with the filing system. It intercepts the three vectors of the operating system command line interpreter (OSCLI) BGET and BPUT. When the program is run, these vectors will be reset to point into the assembled piece of machine code. This means that the program must not be run twice without resetting the vectors by pressing Break and then typing OLD. If the program is run more than once, a message will be given saying that the vectors do not have legitimate values and so the system will not work.

On a tape system the compressor takes up just under 256 bytes and so can be accommodated in a single page, page C (the character definitions). The address at which the code is assembled is determined by the value given to the variable 'start' in line 60. Full details on how to enter the listing for tape and disc use can be found on the yellow pages.

Listing 2 is a typical example of how to use the data compressor and it consists of three procedures. PROCpattern displays a simple pattern on the screen, PROCsave saves this in

compressed form (note the use of *D in lines 20220 and 20080).


Saving a mode screen usually requires 10240 bytes; for the pattern produced by this program, only around 3000 bytes are needed for the compressed form. In other words, you save by a factor of three in loading time for a cassette system or get a factor of three increase in the number of screens that can be saved on a single disc - the actual saving will depend on the particular screen saved, with a typical figure being between 10 and 50 per cent.

The procedures PROCload and PROCsave

ever, all images saved or loaded by the new program will be in compressed form.

The output of any graphics program can be compressed. All you have to do is merge the two procedures (PROCload and PROCsave) with it and then insert a call of PROCsave at the point where the image you want to save is on the screen. A call, PROCload, can then be used from within the same or a different program to restore the image to the screen from disc or tape.

PROCload and PROCsave could be improved by replacing the string 'SCREEN'

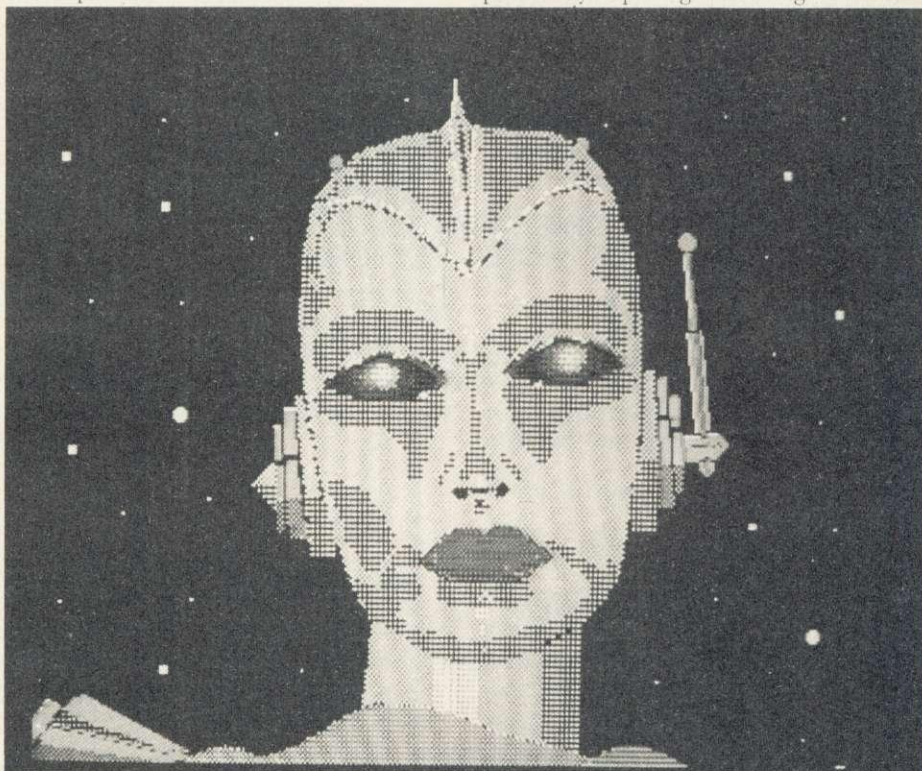

Brilliance by Malcolm Banthorpe can only be reduced from 20k to 10786 bytes as it contains lots of detail

in listing 2 are general and can be added to any graphics program - to do this, take your copy of the listing and delete lines 10 to 310. The resulting program, which consists of the two procedures, can then be saved. If you want to add data compression to a graphics program, this new file can be merged with it in one of the usual ways (see 'merging' in the User Guide).

As an example of this process, I'll describe how to add data compression to Rob Fenton's excellent drawing program in the February 1985 issue of *Acorn User*. First, load the *Paintbox* program and then merge it with your file containing PROCload and PROCsave. Next, delete lines 1680 to 1745 of *Paintbox* (the ordinary *save-type procedures used for storing screens). Finally, save the new program. In future, before using *Paintbox*, the program in listing 1 must be run to set up the data compressor. In addition, care should be taken not to press Break while using the program as this will reset the filing system vectors. How-

(lines 360 and 490) with a string variable supplied by the program to which they are added. Doing this would allow screens to be kept with different names. The best way of storing pictures is to keep the commands that generated them. To give a trivial example, a completely blank mode 5 screen requires 10240 bytes if *saved but only one byte if the command CLS is stored. When it's impossible to keep track of these commands saving the screen memory is most efficient.

The data compressor can be used on data of any type, although for it to be of any value the data must contain redundancies of the type mentioned, ie, repetition of certain characters. Program files (for instance) are a case where this type of data compression is of no use. Most of the redundancy has been taken out by tokenising - better candidates would be text files with lots of spaces.

David Pilling's two data compression listings are on yellow pages 114-116

A SERIOUS CHOICE!

DATABASES

BEL BASE


- Empirical database for Names, Addresses, etc.
- Simple reports, label printing, etc.
- Calculations and Default values
- Sort/Search ● Own Reports

BEL BASE 2

The ultimate Disc based system.

- 2,400 Records of up to 20 Fields
- Option for Data File to cover 2 Disc surfaces
- Sort on any 3 Fields
- Search on any 3 Fields
- Forms, Mail Merge, Labels
- Own Reports
- Create Sub Files
- Input/Output to Wordprocessor
- Extensive Calculation Options


POWERFUL EASY TO USE MENU DRIVEN PROGRAMS



ROOM DESIGN, ENGINEERING DRAWING, LOGOS, FORMS, ARTWORK, PATTERNS, ETC.

BEL CAD

- Character & Icon Designer included
- Screen Dump for Epson or use own
- Access own Screen Dump Rom
- Line Drawing - Rubber Band or Continuous
- 3D Rotation of Icons to 1° degree resolution
- Cylinder, Cube (hidden line removal), Compass
- Circle, Triangle, Rectangles, Ellipses, etc.
- Scale, Zoom, Shear, Mirror Images
- Cursor Key or Joystick Control
- Enlarged Text if required
- 10 Patterns/Fills, Eraser

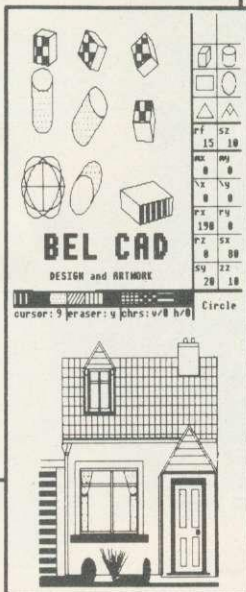

GENERAL USE

BEL WORKBOX

15 Handy Programs for everyday use. No nonsense set-up and fast operation.

Disc includes:


- Repetitive Label Printing
- Quick and easy Wordprocessor (80 column)
- Fast alpha/numeric Sort routine
- Numeric data manipulator (average, scale, invert, etc.)
- Statistic calculator (Means, Modes, Standard Deviations, etc.)
- Home Budgeting
- Mortgage/Investment Calculator
- Day of week calculator
- Character/Icon Designer

AND MORE!!

GRAPHICS

BEL GRAPH


- Extensive Edit/Sort facilities
- 4 Variable Data entries
- Automatic drawing of axes
- Optional self/automatic labelling
- Screen Dump for Epson or use own
- Access own Screen Dump Rom
- Save/Load Data and Screens
- Line Graphs, Bar Charts, Stacked Bar Charts, Histograms, Pie Charts
- Plain/3D charts
- Negative numbers catered for
- Graphs, Overlays, Function Plotting, Parametrics
- Curve Fitting

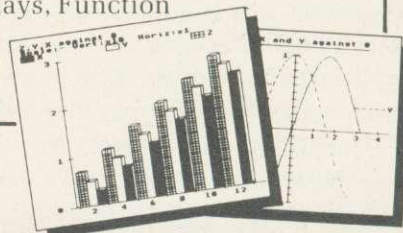

FAMILY HISTORY

BEL GEN

- 20 Fields include Occupation, Place, Will, Notes, Father, Mother, Spouses, Dates, etc.
- Male/Female Line Tree
- Trace Line Tree on Disc version
- Own reports ● Special reports
- Dates - circa, est., actual
- Extensive Edit facilities

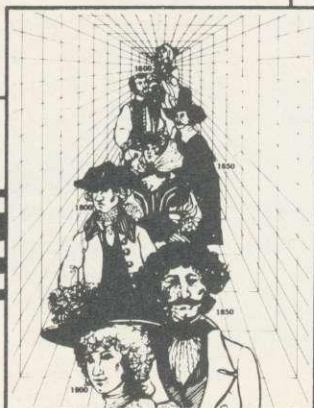

BEL TECH

Innovations in sophisticated software.

ORDER FORM	Tape	Disc	TOTAL
	Qty	Qty	
BEL BASE	16.00	18.00	
BEL BASE 2	N/A	27.00	
BEL CHARTS	16.00	17.00	
BEL GEN Genealogy	15.00	23.00	
BEL GRAPH	25.00	27.00	
BEL PLOT	16.00	17.00	
BEL CAD	18.00	20.00	
WORK BOX	18.00	20.00	

TOTAL inc. P&P £

CREDIT CARD No. PAYMENT BY CHEQUE, P.O., VISA, ACCESS

Please Complete and Return to: BEL TECH Limited, College House, St Leonard's Close, Bridgnorth, Shropshire WV16 4EW. Tel: 07462 5420 (24 hrs).



NAME _____
 ADDRESS _____

 COMPUTER TYPE _____ MODEL _____
 DISC (if applicable) _____

COMPETITION

SIX OF THE BEST

Solve six challenges to win one of five Challengers

Simon Dally

This month there are six problems for you to mull over. You could win one of five Opus Challenger 3s worth nearly £250 each. This 5.25in disc drive with built-in double density disc interface plus a 256K RAM disc offers an easy disc upgrade for the BBC micro.

1) Five members of a computer club decided to pool their resources at the computer show at Olympia which opened on Tuesday and closed on Saturday. Each already owned a computer and agreed to make a close inspection of another one on display. Each visited the show on a different day of the week.

Richard went to examine the Amiga. His visit was two days earlier than that of the member with a Commodore 64. Julian found it difficult to drag himself away from his Spectrum, as did the Amstrad owner. It wasn't Julian or George who inspected the 32016 processor on Tuesday. The BBC micro owner inspected the Macintosh whereas Henry looked at something else on the Saturday. Mark visited the show the day before the person who looked at the latest IBM lookalike whereas the Apple owner went on the Thursday. The person who saw the Atari ST was impressed. Who owned which machine, on which day did he visit the show and which machine did he inspect?

2) My Beeb has five ROM sockets laid out in a row. To save my failing eyesight I've colour-coded each chip. The chip in the middle slot is orange. The DFS is not one of the end chips. *View* is somewhere to the left of the OS and immediately to the right of the purple chip. The red chip isn't *Communicator*. The green chip is one to the left of the yellow one. Basic is not on the far right while *View* is to the right of the DFS.

What is the configuration of my ROM?

3) In the *Acorn User* dungeon turmoil has been created by the new rating system. Previously all dwarfs paid their rates in the form of an exact number of Quinns – the same number as there are trolls in the dungeon. The trolls paid nothing – and of course lied about having paid their rates when the inspectors came round.

Under the new system all rates are paid in Somerens, a Quinn being an exact number of



We've got five Opus Challenger 3s as prizes, so if you want an easy disc upgrade for the Beeb, you could be lucky.

Somerens. Every dungeon dweller now – both dwarf and troll – has to pay the same number of Somerens as the combined number of dwarfs and trolls in the dungeon.

The interesting thing is that under this new system the total amount collected (a five-figure number of Somerens using standard dungeon decimal notation) is just one Someren less than the most collected under the previous rating system.

How many Somerens make a Quinn?

In the puzzles below each letter stands for a different (base 10) digit. Different letters represent different digits.

4) ABCDEFGC + CGFEDCBA = BD9GGG90D. If $A*B = 8$ what is ABCDEFG?

5) ADDD, AACA, BCDB and BDAC are all prime numbers. What are they?

6) SEVEN
+ SEVEN
+ SIX
TWENTY

What is the value of each letter?

Answers on a postcard or back of an envelope to December Competition, *Acorn User*, 68 Long Acre, London WC2E 9JH, to arrive not later than 3 January 1985.

You must include the coupon printed on this page with your entry or you'll be disqualified – stick it on your postcard or envelope. A photocopy will not be accepted.

AUGUST WINNERS

The August competition attracted around 450 entries, about 70 per cent correct. One (or unity) is not usually accepted as a prime but this is by no means universal and one diligent reader triumphantly dug up a three-year-old issue of *Acorn User* to show that we had referred to one as a prime! I'm afraid a schizophrenic decision had to be made here. If you take one to be a prime then the highest superprime is 1,979,339,339. If not, then 73,939,133 was correct. Both those answers were accepted.

However, one was not acceptable as the answer to question three.

We were looking for 1549 as the answer. Those who wrote saying one fits the bill or that we hadn't excluded negative powers were entered for the draw provided they came up with 1549 as well.

As has been said before, using rigorous mathematical language in the context of a puzzle puts off many readers and when in doubt use your common sense. By all means state valid alternatives if you think you have them but don't imagine we're trying to trick you! Frankly, it may please you to point out that since Base 10 or something else wasn't specified your solution is quite valid, but we don't set out to be 'sneaky' to you and you should look for the most reasonable solution first of all.

The answer to the question of the largest cyclic prime was an unequivocal 999,331 and the anagram of CARTHORSE cracked by the Hacker was ORCHESTRA.

The winner of the Cumana disc drive was James Lindsay of Newbury, Berkshire. Second prize of a Cumana touch pad went to Collette Saxton of Sheffield.

The three runners-up, who each receive a box of Cumana discs, were Douglas Shaw of Glasgow, Mrs M Kitt from Glamorgan and Sue Miller, who lives in West Germany.

ACORN USER
COMPETITION
DECEMBER

THE GENERATION GAME

Would you like to use more than the BBC micro or Electron's normal character set on screen, but can't spare the ROM sockets or the cash? Well, this font generator program could be your answer

Matthew Cook

Have you ever found you are bored with looking at the Beeb's and Electron's straight, plain, character set? Have you ever wished you could do what some of these special ROMs do, but can't because you haven't any spare ROM sockets or can't afford it? Well, now you can smarten up your characters with this program, called *FONT.

By building up different font files with the Font Generator program and saving them on disc (tape users should see the notes on yellow page 116), you can load in the fonts at any time by just typing, for instance, *FONT ITALICS or *FONT BOLD. This will change the current character set for all subsequent screen output. The different sets can be conjured up at will, and without affecting either the text or graphics cursor, so that you can mix, say, bold, italic and normal print on one line. If you join the cursors with a VDU 5 command, you can

Different sets can be conjured up at will, without affecting either text or graphics cursor

even put the text anywhere on the screen (to within one pixel), which is especially useful when labelling graphs.

An added feature of this program is that you can superimpose one font on another, or even add such things as the French acute accent, the German umlaut, etc. This is very easy to do: you select VDU 5; redefine the '@' character to an acute accent (or whatever); MOVE the graphics cursor to the appropriate position; PRINT the text up to and including the acuted character; type in 'VDU 8' and finally PRINT an '@' followed by the rest of the line.

The programs that make up the *FONT series are: Font Generator – the program that

converts the normal character set into italics or bold, etc, and stores them on disc; Font Source – the program that makes *FONT; *FONT – the actual machine code program; and Demo, a demonstration program.

This is how the program works: type *FONT ITALICS (or bold, modern, etc). The operating system (OS) first interprets the *

An added feature of this program is that you can superimpose one font on another

command, and checks to see if it recognises it. It doesn't, so it asks the other ROM (not Basic) if they know anything about it. They don't, so the current disc is catalogued. If FONT (the rest of the command is ignored at this stage) is on the disc, it is loaded into pages &9 and &A. Then it is executed from &900, and *FONT begins. The first thing that *FONT does is to see if the italic (or bold, etc) file is on the disc. If it is, it redefines the characters according to the information on the file. Then, all you need do is take the computer out of mode 7 and you will find that you are in your selected font.

To build the *FONT program, first type in the Font Generator which is the program to generate and save the font files which you want. Then save it as "FONTGEN" and run it. You will be confronted by a line of characters, with a number in the middle. This is the ASCII (American Standard Code for Information Interchange) number for the present character to be edited. Press the space bar, alter the character as directed by the menu, and when you are satisfied, press R (redefine) and the character will be permanently changed. If you make a mess of it and want to start again, press space and you will find yourself back at the main menu, with the character

unchanged. (If you want a quicker way of changing to a different font, selecting various options from the menu lets you play around with the current character and make it do such things as change to italics, or bold, or both.)


One interesting feature of this program is that it works with the current character set and not the normal one. This means that you could change a character into bold, then make it italic, and then invert it (changing the black to white and the white to black).

If you don't want to go through the whole thing 26 times, make the present character 'A',

10-80	Sets up main variables
90-160	Prints main character list
170-190	Instructions
200-340	Detects which keys have been pressed
350-390	Makes an array of present character
410-430	Colour and x, y offsets
440-500	Prints a larger version of character in array
510-750	Secondary menu
760-810	Redefines character according to array
820-900	Procedures for binary conversion
910-1330	Various procedures
1340-1620	Font procedures
1630-1820	Multiple font procedure

Figure 1. Line explanations

select the <Zap 26 characters> option, and choose which of the fonts you want. The program will then run through the character set, changing it all to the requested font. This part of the program is quite slow as the procedures that contain the algorithms take a comparatively long time to execute (of course this only has to be done once for each font). When it has finished, you will find yourself

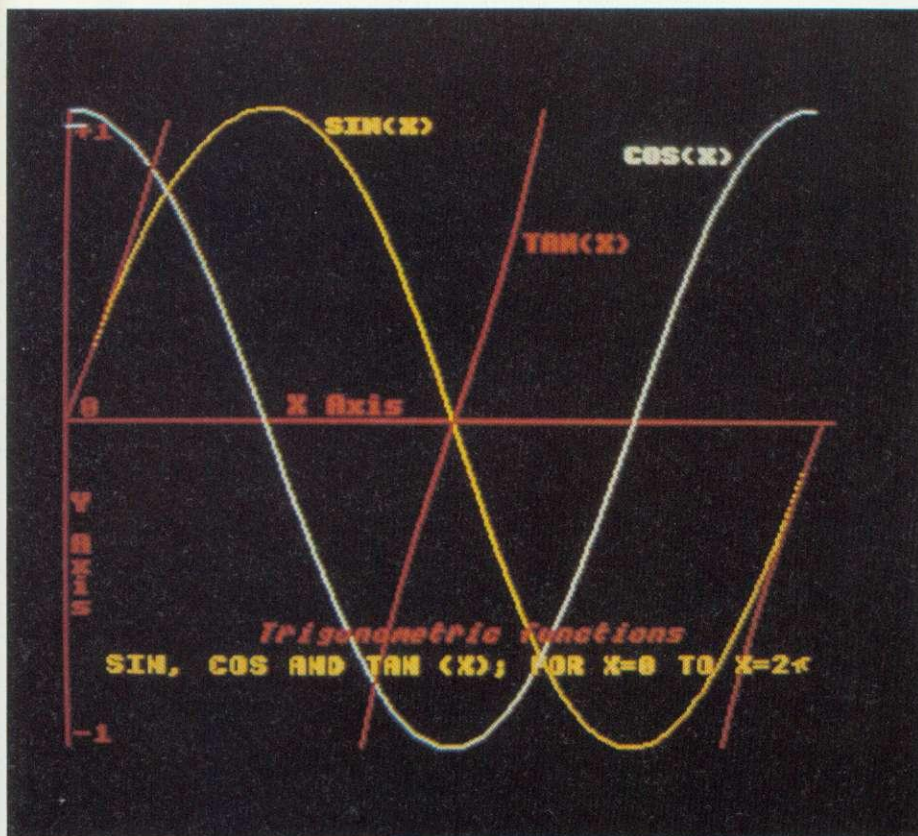

The demonstration program draws and labels a graph with sine, cosine and tangent lines

back at the original menu. This will now look strange as it's in a different font to when you last saw it.

Look through the character set with the cursor keys and you will probably find some you aren't quite happy with. Don't panic – press the space bar and edit the character until it looks right.

Then press R and you will see the character suitably adjusted. Continue pressing the space bar and doing the same to the other characters that don't look right. When you have finished all this, move on to the lower-case characters. When you have finished the whole character set, or done as much as you want, select the SAVE option, and save it to disc.

Since there will be several other programs and fonts that will need to be on the same disc, make sure that there is plenty of spare catalogue/disc space available.

Now that you have one font on the disc you are using, you can move on to the program that actually loads the font in. Type in the program called Font Source, and *save it before running it* – this is essential to avoid erasing the source program. Saving it will enable you to load it back in if anything goes wrong.

When you have saved it, run it. Some machine code and some numbers should appear on the screen. If at the bottom of the screen there is a message saying that you have made a mistake, go through the listing and check that you have typed in everything *exactly*

as it appears. If you are sure that you have, and it still says that there is an error, look at the error-checking routine, and make sure that any messages in it are typed in *exactly* as they appear, because if just one letter is incorrect, a checksum error will still occur.

When everything works the program will prompt you to save the completed machine code to disc – its filename should be FONT. When all this is done, switch off the computer to stop it 'cheating', and switch it on again.

It works with the current character set and not the normal one

Then type MODE ITALICS (or whichever the disc). The disc should get the prompt text will now be in italics selected. Now go back and make up the other save them, and test the MODERN, etc.

It should be noted at the end of this article character set (done automatically does require some space set &600 higher than usual

If PAGE is normally

fitted), then you should set it to &1F00; if it is normally &1B00, set it to &2100. To find out what PAGE is in your micro, type PRINT ~ PAGE. This will return a value, to which you will have to add &600. PAGE can then be reset by typing PAGE = <new number> (you must remember, though, that this is hex number addition!).

If this is not done, the lowest &600 bytes of the current program will be destroyed, resulting in the dreaded 'Bad Program' error.

You may also like to try the demonstration program, which draws and labels a graph, with sine, cosine and tangent lines.

It should be noted that there is a bug in the 0.90 Acorn DFS which is *not* present in the newer DNFS (see the yellow pages for more information on this).

Bits: Puts the present character in to the character array (B)

Print: Prints out the contents of the array (character definition) to the screen

Alter: Adjusts present character according to keypresses

Replace: Redefines the character according to the array

Bin, Seg, Hex, Seg2, Hex2: Parts of the binary to decimal converter

Save: Saves the current font

Load: Loads a new font with *FONT program

Sl, Sr: Shift left and shift right of present line (secondary menu)

G: Puts the specified line (array) into the returned string

Italic, Bold, Inverse, Modern: Font adjustments on the present character

Wipe: Wipes the present character array (secondary menu)

Zap: Changes the font of the next 26 characters

Figure 2. What the procedures do

FOOTNOTE: In normal circumstances it is only possible to define ASCII characters 128 to 159 – the definitions for



It's on its way... the BIGGEST show of all!

- ★ **Your first chance to see the exciting programs and peripherals now being planned for 1986.**
- ★ **Hundreds of Christmas hardware and software bargains from leading BBC Micro and Electron suppliers.**
- ★ **Free software – bring your own blank cassette and download programs directly from Micronet.**
- ★ **Use our satellite link to a giant American database and send messages to micro users in the USA.**
- ★ **Meet the experts – programmers and writers will be on hand to answer all your queries.**

even put the text anywhere on the screen (to within one pixel), which is especially useful when labelling graphs.

An added feature of this program is that you can superimpose one font on another, or even add such things as the French acute accent, the German umlaut, etc. This is very easy to do: you select VDU 5; redefine the '@' character to an acute accent (or whatever); MOVE the graphics cursor to the appropriate position; PRINT the text up to and including the acuted character; type in 'VDU 8' and finally PRINT an '@' followed by the rest of the line.

The programs that make up the *FONT series are: Font Generator – the program that

To build the *FONT the Font Generator which generate and save the want. Then save it as "F it. You will be confr characters, with a number is the ASCII (American Information Interchange present character to be bar, alter the character as and when you are satisf and the character will be If you make a mess of again, press space and back at the main men

This voucher is worth £1 per head!

There are also specially reduced prices for school and college groups. Parties of 10 or more will be admitted for £1 per head if bookings are made in advance. Send SAE and cheque (made payable to Database Publications) to:
**Electron & BBC Micro User Show,
68 Chester Road, Hazel Grove,
Stockport SK7 5NY.
Tel: 061-480 7863**



**ELECTRON &
BBC MICRO
USER SHOW**

Thursday to Sunday, November 14 to 17
New Horticultural Hall, Westminster, London SW1

BAR CODE

ACORN USER OFFER

Bar code readers and program booklets at special prices



Stay ahead with the latest development in computers and education with the Bar Code Teaching Pack, produced by the Micro-electronics Education Programme (MEP) and Addison-Wesley, available direct to readers of *Acorn User*. (See our review in December 1984, page 65.)

The pack includes:

- bar code reader
- explanatory booklet written by *Acorn User* author George Hill
- software to print bar codes
- music program by Joe Telford
- bar code stencil
- disc or cassette of utility software

Note to disc users: the disc supplied is 40 track – however, if you order the cassette, there are

instructions on how to transfer the software to 40 or 80 track discs.

All for £60.84 including VAT and £2.95 postage (£52.90 excluding VAT).

Bar code booklets

All the major listings for this issue, as printed on the yellow pages, are reproduced in bar code format in our booklet. Send a cheque or postal order for £1.60 plus an A4-sized sae to Bar Code Listings, *Acorn User*, 68 Long Acre, London WC2E 9JH. Please state which issue's listings you require.

The following back issues of bar code listings booklets are also available at £1.60 plus an sae: December 1984; January, February, May, June, July, August, September, October and November 1985.

Please send me:..... Bar Code Reader Teaching Packs* at £60.84 each inclusive

40 track disc or cassette (*Please tick appropriate box)

I enclose cheque/postal order for £..... made payable to Redwood Publishing

Name

Address

..... Postcode

Signed.....Date

Send this form with your remittance to:

Bar Code Offer, Redwood Publishing, 68 Long Acre, London WC2E 9JH

CASSETTE SUBSCRIPTIONS

ACORN USER OFFER

Receive all our listings cassettes for a year for £39

ACORNUSER

PROGRAM LISTINGS
SEPTEMBER 85 ISSUE



ACORNUSER

PROGRAM LISTINGS
OCTOBER 85 ISSUE



We have negotiated this special price of £39 (overseas readers please add £7 for postage) for a limited period only, so take advantage of our offer now and ensure you receive a regular copy of the *Acorn User* monthly listings cassette for the next year.

Our cassettes are suitable for use with the Electron and the BBC micro. Why not treat yourself, or perhaps someone you know would

enjoy a gift subscription?

Don't wait. Send in your order now to make sure you miss the Christmas rush and benefit from our special price.

Complete the form below and post it, with your remittance, to Subscription Manager, Acorn User Cassette Subscription Offer, Redwood Publishing, 68 Long Acre, London WC2E 9JH.

Yes please start my cassette subscription for *Acorn User* monthly program listings from the next available issue.

- UK £39 Overseas £39 (plus £7 for postage)
- I enclose a cheque/postal order/sterling bank draft made payable to

Redwood Publishing for £.....

Please debit my Access/American Express/Barclaycard

A/c No

Expiry date

Name

Address

..... Postcode

Signed..... Date.....


Send this form with your remittance to:

Subscriptions Manager, Acorn User Cassette Subscription Offer,
Redwood Publishing, 68 Long Acre, London WC2E 9JH

GRAPHICS CASSETTE

A C O R N U S E R O F F E R

Go for our graphics cassette it's only £3.95

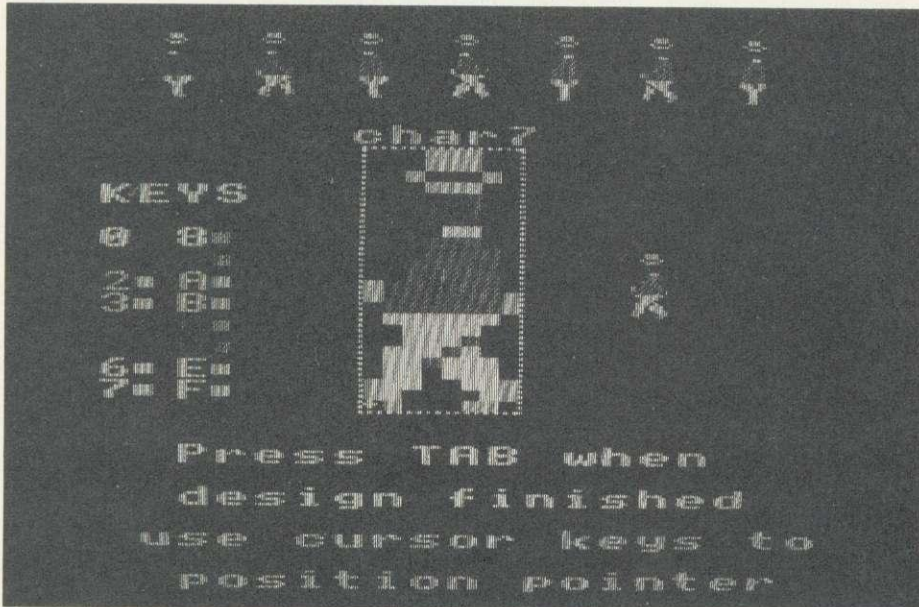

This sprite designer is just one of the popular Acorn User graphics programs now available on one cassette

Four of the most popular and useful graphics programs that we've presented in *Acorn User* – Rob Fenton's *Paintbox*, Peter Sandford's *Colfill* and *Dotfill* and Harry Sinclair's Sprite designer – are now available on one cassette, suitable for use with the BBC micro or Electron, competitively priced at £3.95.

Paintbox, (February 1985), offers you a wide palette of facilities – airbrushing, drawing circles and squares, colour filling, colour mixing and textured effects – and it's fast!

Peter Sandford's *Dotfill* and *Colfill* (January and February 1985) allow you to produce bar charts, pie charts, maps, etc, with up to 28 coloured fill patterns and 24 tone patterns, and

to mix foreground and background colours. The routines are easily incorporated into your own programs.

The final suite of programs is Harry Sinclair's Sprite designer from the September, October and November 1984 issues of *Acorn User*. It lets you design full-colour cartoon figures quickly, then edit, clone or mirror them and move them around the screen – an indispensable aid to all aspiring games authors.

Get your order in for Christmas now and miss the rush later. Our graphics cassette will make a great stocking filler. Send your order to Acorn User Products, PHS Mailing Ltd, PO Box 14, Horley, Sussex RH6 8DW.

Please send me Acorn User Graphics Cassette(s) at £3.95 each
I enclose a cheque/postal order made payable to Redwood Publishing for

£.....

Please debit my Access/Barclaycard

A/c No

Expiry date

Name

Address

..... Postcode.....

Signed..... Date

Send this form with your remittance to: **Acorn User Products, PHS Mailing Ltd, PO Box 14, Horley, Surrey RH6 8DW.** The above prices include postage and packing

USERDUMP

A C O R N U S E R O F F E R

A printer control ROM for £19.95



The wide variety of commands available on UserDump allow you to dump all sorts of screens without fuss

UserDUMP includes a ROM chip which plugs into any free ROM socket on your BBC micro, and an easy-to-use manual. With *UserDUMP* you'll have access to a wide range of commands to help you control your printer's facilities – all of this for just £19.95!

You will be able to dump any screen image in any display mode by entering a single command – either as a line of your program or typed in direct from the keyboard. *UserDUMP*

will also give you a perfect dump while a machine code program is running.

UserDUMP will work with all the popular dot-matrix printers including: Epson MX, RX, FX, JX; Star Gemini, Delta, SG, SD, SR; Canon NLQ; Kaga NLQ; Mannesmann-Tally Spirit 80 and Lucas 80.

And also all printers with single and double-density bit-image graphics, including CP80 and JX80 colour printer.

UserDUMP provides you with all these extra commands:

- *SDUMP** dumps the whole screen in any mode
- *WDUMP** dumps the graphics window
- *CDUMP** very fast screen dump using the computer's character definitions
- *ZDUMP** special distortion-free dump of a mode 0 screen for selected printers
- *TDUMP** dumps the text window in any mode
- *JDUMP** colour dump for the JX80 printer
- *WINDOW** defines a graphics window from the keyboard

- *TRANSTT** converts a teletext screen into mode 1
- *RTT** restores a teletext screen after *TRANSTT
- *LPRINT** directs all PRINT commands to the printer only
- *LPOFF** cancels *LPRINT
- *C@** sets up CTRL @ option
- *SET** sets the printer text style
- *RESET** turns off the effect of *SET
- *MAR** sets either printer margin
- *SHIFT** shifts an area of memory
- *CP80** selects a CP80-type printer
- *IBM** selects an IBM-style printer
- *EPSON** cancels *CP80 or *IBM and selects Epson-style printer

Please send me UserDUMP ROM(s) at £19.95 each
I enclose a cheque/postal order made payable to Redwood Publishing for
£.....

Please debit my Access/Barclaycard

A/c No

Expiry date

Name

Address

Postcode.....


Signed..... Date

Send this form with your remittance to: **Acorn User Products, PHS Mailing Ltd, PO Box 14, Horley, Surrey RH6 8DW.** The above prices include postage and packing

LISTINGS

ACORN USER OFFER

December listings on cassette, £3.75 or disc £5.75

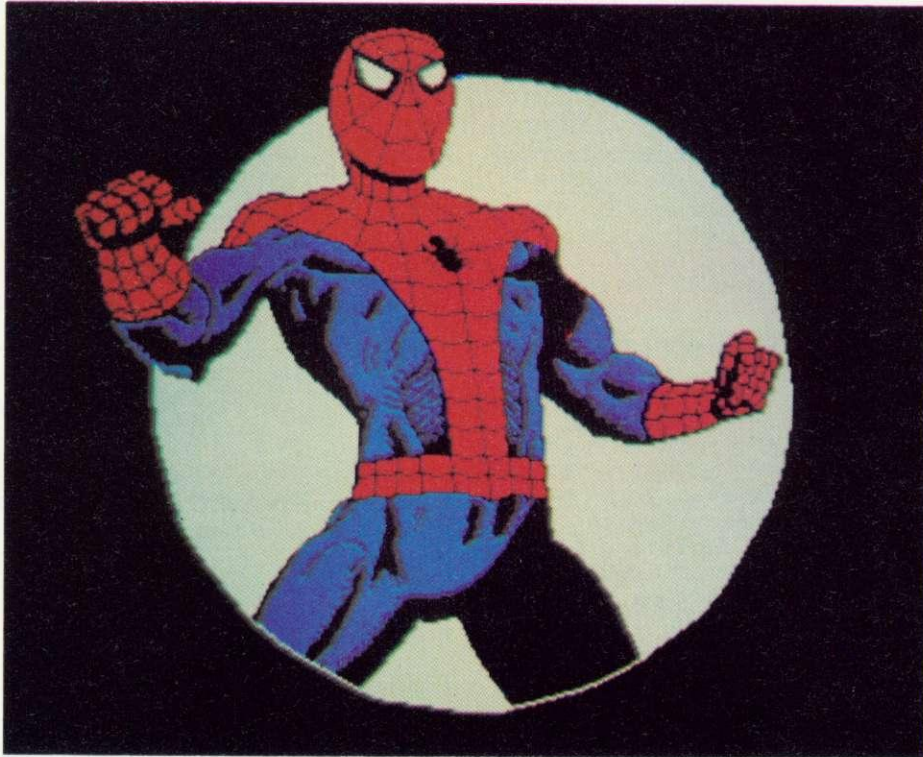

This month's program listings cassette features a font generator, a screen compressor, McGregor and Watt's recursion programs and a fun game - *Sbuggy's Garden*. There is a disc version of the December program listings available at £5.75 which also includes the Spiderman screen (from page 89) and recursive

tree screens. Plus we can still supply the October and November discs.

If you would like a cassette of our program listings from back issues, these are available from May 1984. Send all orders to Acorn User Products, PHS Mailing Ltd, PO Box 14, Horley, Surrey RH6 8DW.

Please send me a cassette of all major BBC micro and Electron program listings

Please state which issue(s) at £3.75 each

Or disc (available from Oct '85) at £5.75 each

I enclose a cheque/postal order made payable to Redwood Publishing for

£.....

Please debit my Access/Barclaycard

A/c No

Expiry date

Name

Address

..... Postcode.....

Signed..... Date

Send this form with your remittance to:

Acorn User Products, PHS Mailing Ltd, PO Box 14, Horley, Surrey RH6 8DW.

The above prices include postage and packing

ACORN USER

SUBSCRIPTIONS

Please start my subscription to Acorn User from the next available issue as indicated:

	12 months	24 months
01: UK	£17.50 <input type="checkbox"/>	£35 <input type="checkbox"/>
02: Europe	£25 <input type="checkbox"/>	£50 <input type="checkbox"/>
03: Middle East	£30 <input type="checkbox"/>	£60 <input type="checkbox"/>
04: The Americas and Africa	£30 <input type="checkbox"/>	£60 <input type="checkbox"/>
05: All other countries	£35 <input type="checkbox"/>	£70 <input type="checkbox"/>

Name

Address

Please answer these questions to help us improve your magazine.

- Do you use your micro for?
 - school
 - business
 - hobby
- Do you have, or intend to buy, any of the following?
 - monitor
 - disc drive
 - second processor
 - printer
 - modem
- How many software packages do you think you will buy in the next months?
 - 0-5
 - 6-10
 - 10 or more

- I enclose my cheque/postal order/sterling bank draft payable to Redwood Publishing for £.....
- Please debit my Access/American Express/Barclaycard

Account no.

Expiry date

Signed.....Date.....

Send this form, with your remittance, to Acorn User Subscriptions, Redwood Publishing, 68 Long Acre, London WC2E 9JH

ACORN USER

SERVICES

BACK DATED ISSUES @ £1.25 per copy

	MONTH	YEAR	
..... <input type="checkbox"/> AU <input type="checkbox"/>	£.....
..... <input type="checkbox"/> AU <input type="checkbox"/>	£.....
..... <input type="checkbox"/> AU <input type="checkbox"/>	£.....
			Total £.....

BINDERS

In red with silver logo on the spine. Holds 12 issues of over 200 pages. ONLY £4.75 inc. p&p.

..... RPOI Binders @ £4.75 £.....

Please add £1.00 each for overseas items. Please allow 28 days for delivery.

Name

Address

- I enclose my cheque/PO payable to Redwood

Publishing for £.....

- Please debit my Access/Barclaycard

Account no.

Expiry date

Signed.....Date.....

Send this form, with your remittance, to Acorn User Services, PHS Mailing Ltd, PO Box 14, Horley, Surrey RH6 8DW. All the above prices include postage and packing.

ACORN USER

SOFTWARE

MONTHLY PROGRAM LISTING CASSETTES

Please send me the following listings cassettes @ £3.75 each. (State which month(s) you require.)

Name

Address

- I enclose my cheque/PO payable to Redwood

Publishing for £.....

- Please debit my Access/Barclaycard

Account no.

Expiry date

Signed.....Date.....

Send this form, with your remittance, to Acorn User Software, PHS Mailing Ltd, PO Box 14, Horley, Surrey RH6 8DW. All the above prices include postage and packing.



24 HOUR PHONE SERVICE (02937)72208

YELLOW PAGES

HINTS & TIPS

INDEX

PROGRAM	Page	BBC B	BBC B+	BBCB+128k	6502SP	Electron	Monthly cassette
Hints & Tips	Listing 1-2	Y	Y	Y	Y	Y	Y
	Listing 3-4	Y	Y	Y	Y		
First Byte	Listing 1	Y	Y	Y		Y	Y
Shaggy's Garden	Listing 1	Y	Y	Y*		Y	Y(a)
	Listing 2-3	Y	Y	Y*		Y	Y
Fractals and Recursion	Listing 1-2	Y	Y	Y	Y	Y	Y
	Listing 3-4	Y	Y	Y	Y	Y	Y
Data Compressor	Listing 1	Y	Y	Y	Y	Y	Y
	Listing 2	Y	Y	Y	Y	Y	Y
Font Generator	Listing 1	Y	Y	Y	Y	Y	Y
	Listing 2	Y	Y	Y	Y	Y	Y
	Listing 3	Y	Y	Y	Y	Y	Y

Note: (a) Sideways RAM required; (*) With Shadow RAM off.

Enter listings

Where possible, programs are listed with line numbers in increments of 10. With these listings, simply type AUTO <RETURN> before you begin. This will give automatic line numbering. Don't type a space after the line number. To list your program so it appears identical to the printed version in the magazine, type: LISTO 1 <RETURN> WIDTH 40 <RETURN> LIST <RETURN>

With screen models 1,4,6 or 7, WIDTH 40 is not needed. Note that occasionally, for clarity, programs are listed with a text width different to our standard of 40 characters.

Most typing mistakes in Basic will cause error messages when the program is run. Finding errors in assembly language listings is often harder, so we provide checksums where we can. These are small routines which report any mistakes in assembled machine-code. In the August issue of *Acorn User* we published a program for calculating checksums for Basic programs. See page 109 for details of our monthly Basic checksum sheets.

Hints & Tips, see page 48

Listing 1. Program to choose 'random' letter

```

10 REM Select a letter
20 REM by Martin Phillips
30 REM for BBC B/B+ and Electron
40 REM (c) Acorn User December 1985
50 :
60 MODE 2
70 PROCsetscreen
80 PROCrun
90 PROCend
100 END
110 :
120 DEF PROCsetscreen
130 PRINT"" "Guess the letter"
140 FOR Y=128 TO 384 STEP 256
150 FOR X=0 TO 1192 STEP 120
160 GCOL 0,128+RND(6)
170 VDU 24,X;Y;X+120;Y+128;
180 VDU 16,26
190 MOVE X,Y:DRAW X,Y+128
200 NEXT X
210 MOVE 1200,Y:DRAW 1200,Y+128
220 NEXT Y
230 FOR Y=128 TO 512 STEP 128
240 MOVE 0,Y:DRAW 1200,Y
250 NEXT Y
260 VDU 5:GCOL 3,2
270 FOR N=0 TO 19
280 MOVE 120*(N MOD10)+32,200+256*(N D
IV 10)
290 PRINT CHR$(65+N)
300 NEXT N
310 ENDPROC
320 :
330 DEF PROCrun
340 A$="ABCDEFGHJKLMNQPQRST"
350 count=0:test=21
360 REPEAT
370 REPEAT
380 letter$=CHR$(GET AND 95)
390 position=INSTR(A$,letter$)
400 UNTIL position>0
410 count=count+1
420 N=position-1

```

Continued ►

◀ Continued

```

430 MOVE 120*(N MOD10)+32,200+256*(N D
IV 10)
440 PRINT CHR$(65+N)
450 A$=LEFT$(A$,position-1)+"~"+RIGHT$
(A$,20-position)
460 SOUND 1,-5,position*8,5
470 IF count=10 THEN PROCrnd
480 UNTIL position=test
490 ENDPROC
500 :
510 DEF PROCend
520 FOR N=0 TO 200 STEP 8
530 SOUND 1,-5,N,2
540 NEXT N
550 VDU 4
560 ENDPROC
570 :
580 DEF PROCrnd
590 Z=RND(-TIME)
600 REPEAT
610 test=RND(20)
620 UNTIL MID$(A$,test,1)<>"~"
630 ENDPROC

```

Listing 2. Routine for drawing a solid polygon

```

10 REM VDU problems
20 REM by Martin Phillips
30 REM for BBC B/B+ and Electron
40 REM (c) Acorn User December 1985
50 :
60 MODE 4
70 VDU 19,0,4,0,0,0
80 PROCpolygon(5)
90 END
100 :
110 DEF PROCpolygon(N)
120 startx=512:X=startx
130 starty=256:Y=starty
140 size=1500/N

```

Continued ►

YELLOW PAGES

FIRST BYTE

First Byte, see page 53

◀ Continued

```

150 angle=2*PI/N
160 FOR I=0 TO N
170 MOVE startx,starty
180 MOVE X,Y
190 X=X+size*COS(I*angle)
200 Y=Y+size*SIN(I*angle)
210 PLOT 85,X,Y
220 NEXT I
230 ENDPROC

```

Listing 3. This procedure prints a heart

```

10 REM Epson bit image
20 REM by Martin Phillips
30 REM for BBC B/B+ and Electron with
Plus 1
40 REM (c) Acorn User December 1985
50 :
60 VDU 2
70 PRINT"Heart ";
80 PROCheart
90 VDU 3
100 END
110 :
120 DEF PROCheart
130 VDU 1,27,1,75,1,8,1,0
140 VDU 1,48,1,120,1,126,1,63
150 VDU 1,126,1,120,1,48,1,0
160 ENDPROC

```

Listing 4. Draws a dual-density heart

```

10 REM Epson dual-density bit image
20 REM by Martin Phillips
30 REM for BBC B/B+ and Electron with
Plus 1
40 REM (c) Acorn User December 1985
50 :
60 VDU 2
70 PRINT"Heart ";
80 PROCheart
90 VDU 3
100 END
110 :
120 DEF PROCheart
130 VDU 1,27,1,76,1,16,1,0
140 VDU 1,48,1,48,1,120,1,120
150 VDU 1,126,1,126,1,63,1,63
160 VDU 1,126,1,126,1,120,1,120
170 VDU 1,48,1,48,1,0,1,0
180 ENDPROC

```

First Byte, see page 53

How to enter *BEEP

Type in and save the program as normal – see the notes on the first yellow page for guidance. Save the program under a suitable filename, ie, SAVE "SBEEP".

Now run the program, correcting any errors that are reported. If the machine code assembles correctly, it will then

be checked by the program. If it is incorrect the message "Listing error" will be reported. If this happens then check carefully through lines 90 to 800. Correct the error(s) and resave the program before running it again. When the machine code is correct it will be saved automatically under the name BEEP, so make sure you have a tape or disc ready.

To load the program into sideways RAM follow the instructions provided in your sideways RAM manual.

If you have an Acorn User UserRAM, you can load the new *BEEP routine into the sideways RAM by using the *RLOAD facility supplied on the utilities disc. Full instructions are provided in the UserRAM manual.

Once loaded press the Break key to initialise the program. Typing *HELP should display the Help messages from all your ROMs including First Byte! Type *BEEP to hear the effect.

Listing 1. Program for use in sideways RAM

```

10 REM Implement *BEEP
20 REM by Tessie Revisis
30 REM for BBC B/B+ and Electron
40 REM with Sideways RAM
50 REM (c) Acorn User December 1985
60 :
70 MODE 6
80 osnewl=&FFE7
90 diff%=&3000
100 comline=&F2
110 :
120 FOR pass=0 TO 3 STEP 3
130 P%=&5000
140 [
150 OPT pass
160 BRK
170 BRK
180 BRK
190 JMP service_entry+diff%
200 OPT FNequb(&82,pass)
210 OPT FNequb((offset MOD 256),pass)
220 OPT FNequb(1,3)
230 .title
240 OPT FNequs("First Byte 1.00",pass)
250 BRK
260 .offset
270 BRK
280 OPT FNequs("(C) Acorn User",pass)
290 BRK
300 .service_entry
310 PHA
320 CMP #9
330 BEQ help
340 CMP #4
350 BEQ unrec
360 PLA
370 RTS
380 .help
390 JSR osnewl
400 LDX #&FF
410 .helploop
420 INX
430 LDA title+diff%,X
440 JSR &FFE3
450 BNE helploop
460 JSR osnewl

```

Continued ▶

YELLOW PAGES

GAMES

Shuggy's Garden, see page 73

◀ Continued

```

470 RTS
480 :
490 .unrec
500 TYA
510 PHA
520 TXA
530 PHA
540 LDX #&FF
550 DEY
560 .ctloop
570 INY
580 INX
590 LDA table+diff%,X
600 BMI found
610 CMP (comline),Y
620 BEQ ctloop
630 JMP out+diff%
640 .found
650 LDA #7
660 JSR &FFEE
670 PLA
680 PLA
690 PLA
700 LDA #0
710 RTS
720 .out
730 PLA
740 TAX
750 PLA
760 TAY
770 PLA
780 RTS
790 .table
800 OPT FNequs ("BEEP",pass)
810 OPT FNequb (255,pass)
820 J
830 NEXT
840 PROCchecksum
850 *SAVE BEEP 5000 5072 8000 8000
860 END
870 :
880 DEF FNequb (byte%,opt)
890 ?P%=byte%
900 P%=P%+1
910 =opt
920 :
930 DEF FNequs (string$,opt)
940 $P%=string$
950 P%=P%+LEN(string$)
960 =opt
970 :
980 DEF PROCchecksum
990 C%=0
1000 FOR N%=&5000 TO P%
1010 C%=C%+?N%
1020 NEXT
1030 IF C%<>12679 PRINT"Listing error":
END
1040 ENDPROC

```

Shuggy's Garden, see page 73

How to enter Shuggy's Garden

Shuggy's Garden is in three parts. Listing 1 should be typed in first and saved on tape or disc with the name "SHUGGYS". When you have done this delete listing 1 from the memory by typing NEW <Return> and then

type in listing 2. This is just a short loading routine and should be saved with the name "LOADER". If you are using a cassette-based system then ensure that "LOADER" is saved immediately after "SHUGGYS".

Finally, type in listing 3. This is the main game and should be saved with the name "GARDEN". The listing is long so you should save what you have typed in at regular intervals. "GARDEN" contains two small sections of assembly language - lines 370 to 440 and lines 530 to 610. If you are unfamiliar with assembly language don't worry - just type in these lines exactly as they are printed.

"GARDEN" also contains quite a lot of data for the graphics and tune used in the game. If the message "Out of data" appears when you run the game then the chances are that you have missed out a ',' in one of the DATA statements. Take care not to type extra commas, also. Any errors that are made in the data lines will not be fatal, although the tune or characters may be corrupted.

Once you have saved "GARDEN" simply type CHAIN "SHUGGYS" <Return> to run the game. Again, "GARDEN" should be saved immediately after "LOADER" if you are using cassettes. To escape from "GARDEN" press Shift and Escape together. Note that if you have a disc-based system you will be unable to recover "GARDEN" with OLD after pressing Break.

Shuggy's Garden will run on both cassette and disc-based machines and is suitable for both the BBC micro and Electron, without alterations.

Listing 1. Determines the character cursor position

```

10 REM Shuggys
20 REM by Hugh Darby
30 REM for BBC B/B+ and Electron
40 REM (c) Acorn User December 1985
50 :
60 MODE 6
70 VDU 23,225,170,85,170,85,170,85,17
0,85
80 VDU 23,226,85,170,85,170,85,170,85
,170
90 VDU 23,227,0,0,255,255,0,0,255,255
100 VDU 23,228,255,255,0,0,255,255,0,0
110 VDU 23,229,204,204,204,204,204,204
,204,204
120 VDU 23,230,51,51,51,51,51,51,51,51
130 VDU 23,231,255,129,129,129,129,129
,129,255
140 VDU 23,232,0,0,0,24,24,0,0,0
150 VDU 23,233,51,51,48,48,63,63,0,0
160 VDU 23,234,0,0,63,63,48,48,51,51
170 VDU 23,235,0,0,252,252,12,12,204,2
04
180 VDU 23,236,204,204,12,12,252,252,0
,0
190 ENVELOPE 1,2,-1,1,-1,0,0,0,126,126
,-3,-3,120,120
200 ENVELOPE 2,1,-1,1,-1,-4,-4,-4,0,0,
-1,-1,126,126
210 ENVELOPE 3,1,-1,-1,-1,4,4,4,-1,-1,
1,1,126,126
220 PRINT TAB(12,7)"Shuggy's Garden"
230 VDU 28,10,17,30,15
240 PAGE=&5000:CHAIN"LOADER"

```


YELLOW PAGES

GAMES

Listing 2. Prints multi-coloured characters on screen

```

10 REM Loader
20 REM by Hugh Darby
30 REM for BBC B/B+ and Electron
40 REM (c) Acorn User December 1985
50 :
60 *L. GARDEN 1B00
70 *T.
80 *K.0 VDU12,21:MFORd%=0T0&1FOOS.4:d
%!*&E00=d%!*&1B00:N. !MPA.=&E00!MD. !MRUN!F!
M
90 *FX 138,0,128
100 END

```

Listing 3. Sets up the game

```

10 REM Garden
20 REM by Hugh Darby
30 REM for BBC B/B+ and Electron
40 REM (c) Acorn User December 1985
50 :
60 ON ERROR GOTO300
70 MODE 1
80 PROCassem:PROCarray
90 REPEAT
100 PROCvar:PROChi
110 MODE 2
120 REPEAT PROCscreen
130 *FX 178
140 REPEAT
150 FOR loop%=0 TO no%
160 PROCplayer:PROCmonster:PROCcaps
170 PROCapple:PROCmushroom:PROCblock
180 fin%=(A%=app%)
190 IF fin% OR dead% loop%=no%
200 IF ADVAL(-6)=15 PROCTune
210 NEXT
220 UNTIL dead% OR fin%
230 *FX 178,255
240 IF dead% PROCfinish ELSE PROCnewsc
F
250 UNTIL dead%
260 MODE 1:PROCend
270 UNTIL 0
280 END
290 :
300 IF INKEY(-1) CLS:PRINT"OK":END
310 RUN
320 :
330 DEF PROCassem
340 FOR pass=0 TO 3 STEP 3
350 P%=&80
360 [
370 OPT pass
380 LDA #135
390 JSR &FFF4
400 TXA
410 CLC
420 ADC #96
430 STA &70
440 RTS
450 ]
460 NEXT pass

```

Continued ►

◀ Continued

```

470 DIM mcode 15:data=&900
480 FOR Q%=0 TO 127:READ Q%?data:NEXT
490 FOR Q%=128 TO 159:Q%?data=0:NEXT
500 FOR pass=0 TO 3 STEP 3
510 P%=mcode
520 [
530 OPT pass
540 .code
550 LDY #31
560 .loop
570 LDA (&74),Y
580 STA (&70),Y
590 DEY
600 BPL loop
610 RTS
620 ]
630 NEXT pass
640 ENDPROC
650 :
660 REM Graphics data
670 DATA 0,0,5,5,0,0,0,0
680 DATA 5,15,11,15,5,5,5,15
690 DATA 15,15,11,15,5,5,5,5
700 DATA 0,10,15,15,0,0,0,10
710 DATA 0,0,0,20,20,20,0,60
720 DATA 0,40,60,48,144,60,40,40
730 DATA 0,20,60,48,96,60,20,20
740 DATA 0,0,0,40,40,40,0,60
750 DATA 0,0,1,3,3,3,1,0
760 DATA 15,5,3,3,3,3,3,3
770 DATA 15,0,3,3,23,43,3,3
780 DATA 10,0,2,3,3,3,2,0
790 DATA 0,0,1,23,3,0,0,0
800 DATA 0,3,23,3,23,5,5,5
810 DATA 0,3,3,23,3,10,10,10
820 DATA 0,0,2,3,3,0,0,0
830 :
840 DEF PROCarray
850 DIM H%(5),H*(5)
860 FOR Q%=1 TO 5
870 H*(Q%)="Shuggy OK"
880 H%(Q%)=12000-2000*Q%
890 NEXT Q%
900 ENDPROC
910 :
920 DEF PROCvar
930 scr%=1:A%=0:LI%=3:SC%=0:ti%=26
940 so%=-1:sh%=data:mo%=data+32
950 ap%=data+64:mu%=data+96
960 bl%=data+128
970 ENDPROC
980 :
990 DEF PROChi
1000 CLS
1010 PRINT TAB(9,5)"Today's Top Shuggys
"
1020 FOR Q%=1 TO 5
1030 COLOUR2:PRINT TAB(8,2*Q%+9);Q%
1040 COLOUR1:PRINT TAB(11,2*Q%+9);H%(Q%
)
1050 COLOUR3:PRINT TAB(20,2*Q%+9)H*(Q%)
1060 NEXT
1070 PRINT TAB(8,28)"Press any key to p
lay"
1080 U=GET
1090 ENDPROC

```

Continued ►

YELLOW PAGES

GAMES

◀ Continued

```
1100 :
1110 DEF PROCcent (A$)
1120 pos=20-LEN(A$)/2
1130 PRINT TAB(pos, VPOS)A$
1140 ENDPROC
1150 :
1160 DEF PROCscreen
1170 RESTORE 4060
1180 CLS:COLOUR 3
1190 VDU 23;8202;0;0;0;VDU 19,9,2;0;
1200 A$=CHR$(234)+STRING$(17,CHR$(227))
1210 B$=CHR$(233)+STRING$(17,CHR$(228))
1220 PRINT TAB(0,0)A$ TAB(0,21)B$
1230 FOR Q%=1 TO 20
1240 VDU 31,0,Q%,230,31,18,Q%,229
1250 NEXT Q%
1260 VDU 31,18,0,235,31,18,21,236
1270 COLOUR 9
1280 PROCgrass
1290 PROCpath
1300 PRINT TAB(1,24)"SCORE:"
1310 PRINT TAB(1,26)"LIVES:"
1320 PRINT TAB(1,28)"SCREEN:"
1330 PRINT TAB(1,30)"APPLES:"
1340 PROCvar2:PROCupdate
1350 ENDPROC
1360 :
1370 DEF PROCpath
1380 ON scr% GOTO 1390,1400,1410,1420
1390 PROCpath1:ENDPROC
1400 PROCpath2:ENDPROC
1410 PROCpath3:ENDPROC
1420 PROCpath4
1430 ENDPROC
1440 :
1450 DEF PROCpath1
1460 FOR Q%=1 TO 20:VDU 31,10,Q%,32:NEX
T
1470 FOR Q%=7 TO 13:VDU 31,Q%,20,32:NEX
T
1480 VDU 31,7,7:FOR Q%=0 TO 2
1490 VDU 32,8,11,32,8,11,32
1500 NEXT Q%
1510 ENDPROC
1520 :
1530 DEF PROCpath2
1540 FOR Q%=2 TO 16:VDU 31,Q%,19,32:NEX
T
1550 FOR Q%=5 TO 14:VDU 31,Q%,4,32:NEXT
1560 VDU 31,2,18,32,31,2,17,32,31,2,16
1570 VDU 32,31,2,15,32,31,2,14,32
1580 VDU 31,2,13,32,32,32,8,11,32,32
1590 VDU 32,8,11,32,32,32,32,32,32,32
1600 VDU 8,11,32,32,32,8,11,32,32,8,11
1610 VDU 32,8,11,32,8,11,32,8,8,8,11
1620 VDU 32,32,32,31,3,5,32,32,8,11,32
1630 ENDPROC
1640 :
1650 DEF PROCpath3
1660 FOR Q%=3 TO 16:VDU 31,Q%,20,32:NEX
T
1670 FOR Q%=4 TO 16:VDU 31,Q%,2,32:NEXT
1680 FOR Q%=10 TO 16:VDU 31,Q%,10,32:NE
XT
1690 FOR Q%=1 TO 7
1700 VDU 31,17,Q%+2,32,31,17,Q%+10,32
```

Continued ▶

◀ Continued

```
1710 NEXT
1720 VDU 31,1,19,32,32,8,10,32
1730 VDU 31,16,19,32,32,31,17,18,32,31
1740 VDU 16,3,32,31,16,11,32,8,11,11
1750 VDU 32,31,3,3,32,32
1760 ENDPROC
1770 :
1780 DEF PROCpath4
1790 FOR Q%=1 TO 20:VDU 31,10,Q%,32:NEX
T
1800 FOR Q%=3 TO 14:VDU 31,Q%,15,32:NEX
T
1810 VDU 31,3,15:FOR Q%=0 TO6
1820 VDU 32,8,11,32,8,11,32
1830 NEXT Q%
1840 ENDPROC
1850 :
1860 DEF PROCvar2
1870 fin%=0:dead%=0:x%=10:y%=20
1880 ax%=RND(16):ay%=RND(20)
1890 L%=0:P=-1:nx%=x%:ny%=y%:co%=0
1900 mad%=0:no%=5-scr%:app%=5+3*scr%
1910 mx%=10:my%=10
1920 ENDPROC
1930 :
1940 DEF PROCupdate
1950 COLOUR 1
1960 PROCscore:PROClives:PROCapp
1970 t%=6-((ti%-1)/5)
1980 PRINT TAB(8,28);t%;"/";scr%
1990 ENDPROC
2000 :
2010 DEF PROCplayer
2020 PROCpr(0)
2030 ox%=x%:oy%=y%
2040 PROCkeys:PROCch2:PROCpr(1)
2050 ENDPROC
2060 :
2070 DEF PROCkeys
2080 IF INKEY(-98) AND x%>1 x%=x%-1:END
PROC
2090 IF INKEY(-67) AND x%<17 x%=x%+1:EN
DPROC
2100 IF INKEY(-105) AND y%<20 y%=y%+1:E
NDPROC
2110 IF INKEY(-73) AND y%>1 y%=y%-1
2120 IF INKEY(-17) so%=0
2130 IF INKEY(-82) so%=-1
2140 IF INKEY(-56) REPEAT UNTIL INKEY(-
55)
2150 ENDPROC
2160 IF INKEY(-56) REPEAT UNTIL GET=79
2170 DEF PROCch2
2180 char=FNcheck(x%,y%)
2190 IF x%=mx% AND y%=my% dead%=-1:ENDP
ROC
2200 IF char=225 SC%=SC%+1:PROCscore:EN
DPROC
2210 IF char=226 x%=ox%:y%=oy%:ENDPROC
2220 IF x%=ax% AND y%=ay% PROCgotapp:EN
DPROC
2230 IF x%=10 AND y%=10 PROCmad
2240 ENDPROC
2250 :
2260 DEF PROCgotapp
2270 P=0:SC%=SC%+100:AX%=AX%+1
```

Continued ▶

YELLOW PAGES

GAMES

◀ Continued

```

2280 PROCapple:PROCscore:SOUND1,1,200,1
2290 VDU17,1,31,ox%,oy%,226
2300 ENDPROC
2310 :
2320 DEF PROCmad
2330 IF mad% ENDPROC
2340 mad%=-1:SC%=SC%+1000
2350 PROCsound:PROCscore
2360 ENDPROC
2370 :
2380 DEF PROCpr(C)
2390 !&70=&3000+x%*&20+y%*&280
2400 IF C PROCs ELSE PROCb
2410 ENDPROC
2420 :
2430 DEF FNcheck(q%,r%)
2440 VDU 31,q%,r%:CALL&80
2450 =?&70
2460 :
2470 :
2480 DEF PROCapple
2490 !&70=&3000+ax%*&20+ay%*&280
2500 IF P PROCa:ENDPROC
2510 PROCb
2520 ax%=RND(16):ay%=RND(20):PROCapp
2530 IF (ax%=mx% AND ay%=my%) OR (ax%=x
% AND ay%=y%) OR (ax%=nx% AND ay%=ny%) O
R (ax%=10 AND ay%=10) PROCapple
2540 P=-1:PROCapple
2550 ENDPROC
2560 :
2570 DEF PROCblock
2580 LX=NOT LX:co%=co%+1
2590 IF co%<>ti% GOTO 2630
2600 VDU 17,1,31,nx%,ny%,226
2610 IF nx%=x% AND ny%=y% dead%=-1:ENDP
ROC
2620 nx%=x%:ny%=y%:co%=0
2630 VDU 17,1,31,nx%,ny%,231-L%
2640 ENDPROC
2650 :
2660 DEF PROCmonster
2670 IF loop%<>1 ENDPROC
2680 PROCpm(0)
2690 ox%=mx%:oy%=my%:PROCmove
2700 PROCch:PROCpm(1)
2710 ENDPROC
2720 :
2730 DEF PROCmove
2740 IF mx%<x% mx%=mx%+1:ENDPROC
2750 IF mx%>x% mx%=mx%-1:ENDPROC
2760 IF my%<y% my%=my%+1:ENDPROC
2770 IF my%>y% my%=my%-1
2780 ENDPROC
2790 :
2800 DEF PROCpm(C)
2810 !&70=&3000+mx%*&20+my%*&280
2820 IF C=0 PROCb ELSE PROCm
2830 ENDPROC
2840 :
2850 DEF PROCch
2860 IF mad% VDU 17,1,31,ox%,oy%,226
2870 IF mx%=ax% AND my%=ay% PROCmonapp
2880 IF mx%=x% AND my%=y% dead%=-1
2890 ENDPROC
2900 :

```

Continued ▶

◀ Continued

```

2910 DEF PROCmonapp
2920 P=0:SC%=SC%-100:A%=A%-2
2930 SOUND 1,1,0,1:PROCapple:PROCscore
2940 ENDPROC
2950 :
2960 DEF PROCapsc
2970 IF SC%<0 SC%=0:PROCscore
2980 IF A%<0 A%=0:PROCapp
2990 ENDPROC
3000 :
3010 DEF PROCapp
3020 PRINT TAB(8,30);A%;"/";app%;SPC(2)
3030 ENDPROC
3040 :
3050 DEF PROCscore
3060 COLOUR 1:PRINT TAB(7,24);SC%;SPC(3
)
3070 ENDPROC
3080 :
3090 DEF PROCfinish
3100 SOUND 1,2,0,1
3110 LI%=LI%-1:IF LI%>=0 dead%=0
3120 ENDPROC
3130 :
3140 DEF PROCnewscr
3150 A%=0:scr%=scr%+1:IF scr%>4 PROCTi
3160 PROCvar2
3170 ENDPROC
3180 :
3190 DEF PROCTi
3200 scr%=1:ti%=ti%-5
3210 IF ti%<1 ti%=1
3220 ENDPROC
3230 :
3240 DEF PROCmushroom
3250 !&70=&4A40
3260 IF mad% ENDPROC ELSE PROCr
3270 ENDPROC
3280 :
3290 DEF PROCsound
3300 VDU 19,9,5;0;
3310 FOR Q%=0 TO255 STEP4
3320 SOUND 1,3,Q%,.9:SOUND 0,3,Q%,.9
3330 NEXT Q%
3340 FOR Q%=255 TO80 STEP -90
3350 SOUND 1,2,Q%,1
3360 NEXT Q%
3370 ENDPROC
3380 :
3390 DEF PROClives
3400 PRINT TAB(7,26)SPC(3):!&70=&71E0
3410 IF LI%=0 ENDPROC
3420 Q%=1:REPEAT
3430 PROCs:Q%=Q%+1:!&70=!&70+&20
3440 UNTIL Q%>LI%
3450 ENDPROC
3460 :
3470 DEF PROCs:!&74=sh%:CALLcode:ENDPRO
C
3480 :
3490 DEF PROCm:!&74=mo%:CALLcode:ENDPRO
C
3500 :
3510 DEF PROCa:!&74=ap%:CALLcode:ENDPRO
C
3520 :

```

Continued ▶

YELLOW PAGES

GRAPHICS

◀ Continued

```

3530 DEF PROCr: !&74=mu%: CALLcode: ENDPRO
C
3540 :
3550 DEF PROCb: !&74=b1%: CALLcode: ENDPRO
C
3560 :
3570 DEF PROCend
3580 VDU23; 8202; 0; 0; 0; : *FX21, 0
3590 IF SC%<=H%(5) ENDPROC
3600 FOR Q%=5 TO 1 STEP-1
3610 IF H%(Q%)<SC% C%=Q%
3620 NEXT Q%
3630 CLS
3640 PROCcent("WELL DONE!!!")
3650 PRINT'''
3660 PROCcent("Your score of "+STR$(SC%
))
3670 PRINT'
3680 B%=MID$(" stndrdthth", C%*2, 2)
3690 PROCcent("ranks you "+STR$(C%)+B%)
3700 PRINT'
3710 PROCcent("Enter your name")
3720 A%=FNinput(17)
3730 IF C%=5 GOTO3770
3740 FOR Q%=4 TO C% STEP-1
3750 H%(Q%+1)=H%(Q%): H$(Q%+1)=H$(Q%)
3760 NEXT Q%
3770 H%(C%)=SC%: H$(C%)=A%
3780 ENDPROC
3790 :
3800 DEF FNinput(up)
3810 A$=""
3820 REPEAT
3830 A=GET
3840 IF A=127 A%=LEFT$(A$, LENA%-1)
3850 IF FNvalid(A) AND LEN(A%)<20 A%=A$
+CHR$(A)
3860 PRINT TAB(0, up) SPC(40); TAB(0, up-1)
3870 PROCcent(A%)
3880 UNTIL A=13
3890 =A$
3900 :
3910 DEF FNvalid(A)
3920 =((A>64 AND A<91) OR (A>96 AND A<1
23) OR A=32)
3930 :
3940 DEF PROCtune
3950 IF so%=0 ENDPROC
3960 READ N, D: IF N=0 RESTORE 4060: N=1
3970 IF N=1 SOUND 1, 0, 0, 2: ENDPROC
3980 SOUND 1, 1, N-48, D*2
3990 ENDPROC
4000 DEF PROCgrass
4010 FOR Y% = 1 TO 20
4020 PRINT TAB(1, Y%) STRING$(17, CHR$(225))
4030 NEXT: ENDPROC
4040 :
4050 REM Tune data
4060 DATA 101, 2, 117, 2, 129, 2, 129, 4, 177, 2
4070 DATA 177, 2, 1, 1, 165, 2, 165, 2, 1, 1
4080 DATA 101, 2, 101, 2, 117, 2, 129, 2, 129, 4
4090 DATA 177, 2, 177, 2, 1, 1, 169, 2, 169, 2
4100 DATA 1, 1, 97, 2, 97, 2, 109, 2, 137, 2
4110 DATA 137, 4, 185, 2, 185, 2, 1, 1, 169, 2
4120 DATA 169, 2, 1, 1, 97, 2, 97, 2, 109, 2
4130 DATA 137, 2, 137, 4, 185, 2, 185, 2, 1, 1

```

Continued ▶

McGregor & Watt, see page 82

◀ Continued

```

4140 DATA 165, 2, 165, 2, 1, 1, 101, 2, 101, 2
4150 DATA 117, 2, 129, 2, 149, 4, 197, 2, 197, 2
4160 DATA 1, 1, 177, 2, 177, 2, 1, 1, 101, 2
4170 DATA 101, 2, 117, 2, 129, 2, 149, 4, 197, 2
4180 DATA 197, 2, 1, 1, 185, 2, 185, 2, 1, 1
4190 DATA 157, 2, 157, 2, 169, 2, 185, 2, 185, 8
4200 DATA 173, 2, 177, 2, 213, 8, 197, 2, 165, 2
4210 DATA 165, 4, 157, 2, 185, 4, 177, 2
4220 DATA 149, 12, 0, 0

```

McGregor & Watt, see page 82

How to enter McGregor and Watt's listings

All four listings are written only in Basic, so should be straightforward to type in. Because of the large amount of data used in listings 2 and 3, however, a checksum routine has been included. If you have made a mistake typing in the data lines an error message will appear, prompting you to check your listing.

No alterations are required to run the programs on an Electron, B+ or B+128k.

Listing 1. Generates a random fractal curve

```

10 REM Program 1 - a simple fractal
20 REM by Jim McGregor and Alan Watt
30 REM for BBC B/B+ and Electron
40 REM (c) Acorn User December 1985
50 :
60 MODE 0
70 resolution=10
80 ressq=resolution*resolution
90 maxtheta=40
100 PROCfractal(450, 500, 830, 500)
110 K=GET: MODE 7: END
120 DEF PROCfractal(x1, y1, x2, y2)
130 LOCAL xdiff, ydiff, xdir, ydir, mx, my
140 xdiff=x2-x1: ydiff=y2-y1
150 IF xdiff*xdiff+ydiff*ydiff<=ressq
THEN MOVE x1, y1: DRAW x2, y2: ENDPROC
160 theta=maxtheta-RND(2*maxtheta)
170 sinh=SINRADtheta
180 costh=COSRAD(theta)
190 xdir=xdiff/2/costh
200 ydir=ydiff/2/costh
210 mx=x1+xdir*costh-ydir*sinh
220 my=y1+xdir*sinh+ydir*costh
230 PROCfractal(x1, y1, mx, my)
240 PROCfractal(mx, my, x2, y2)
250 ENDPROC

```

If keying-in all these listings gets you down and your fingers in a tangle, why not send off for our monthly listings cassette or disc?

The cassette tape for the BBC or Electron costs just £3.75; a disc for the BBC is priced at £5.75. See page 103 for more details.

YELLOW PAGES

GRAPHICS

Listing 2. Gives successive fractal curves

```

10 REM Program 2 - coastline
20 REM by Jim McGregor and Alan Watt
30 REM for BBC B/B+ and Electron
40 REM (c) Acorn User December 1985
50 :
60 PROCcheckdata
70 maxtheta=40
80 DIM sin(maxtheta),cos(maxtheta)
90 FOR a=0 TO maxtheta
100 sin(a)=SIN(RAD(a))
110 cos(a)=COS(RAD(a))
120 NEXT a
130 resolution=12
140 ressq=resolution*resolution
150 maxstep=50
160 MODE 0
170 RESTORE
180 READ plotop,x,y
190 prevx=x:prevy=y
200 MOVE prevx,prevy
210 REPEAT
220 READ plotop,x,y
230 IF plotop=5 THEN PROCjoin(prevx,pr
evy,x,y)
240 prevx=x:prevy=y
250 UNTIL (x=470) AND (y=431)
260 END
270 :
280 DEF PROCjoin(prevx,prevy,nextx,nex
ty)
290 LOCAL xdiff,ydiff,steps,xstep,yste
p,s,x,y
300 xdiff=nextx-prevx
310 ydiff=nexty-prevy
320 steps=INT(SQR(xdiff*xdiff+ydiff*yd
iff)/maxstep)+1
330 xstep=xdiff/steps
340 ystep=ydiff/steps
350 FOR s=1 TO steps
360 x=prevx+xstep:y=prevy+ystep
370 PROCfractal(prevx,prevy,x,y)
380 prevx=x:prevy=y
390 NEXT s
400 ENDPROC
410 DEF PROCfractal(x1,y1,x2,y2)
420 LOCAL xdiff,ydiff,mx,my,theta,s,c,
c2,cs
430 xdiff=x2-x1:ydiff=y2-y1
440 IF xdiff*xdiff+ydiff*ydiff<ressq T
HEN MOVE x1,y1:DRAW x2,y2:ENDPROC
450 theta=maxtheta-RND(2*maxtheta)
460 IF theta<0 THEN sinth=-sin(-theta)
:costh=cos(-theta) ELSE sinth=sin(theta)
:costh=cos(theta)
470 xdir=xdiff/2/costh
480 ydir=ydiff/2/costh
490 mx=x1+xdir*costh+ydir*sinth
500 my=y1+xdir*sinth+ydir*costh
510 PROCfractal(x1,y1,mx,my)
520 PROCfractal(mx,my,x2,y2)
530 ENDPROC
540 DATA 4,569,823,5,659,820
550 DATA 5,656,799,5,611,757
560 DATA 5,622,757,5,605,732
570 DATA 5,642,742,5,705,738
580 DATA 5,717,717,5,668,634
590 DATA 5,642,623,5,660,626

```

Continued ►

◀ Continued

```

600 DATA 5,672,613,5,631,595
610 DATA 5,663,595,5,692,580
620 DATA 5,716,551,5,737,468
630 DATA 5,791,421,5,802,379
640 DATA 5,780,384,5,802,362
650 DATA 5,813,333,5,797,314
660 DATA 5,810,305,5,818,320
670 DATA 5,866,315,5,881,294
680 DATA 5,874,242,5,851,216
690 DATA 5,819,192,5,864,180
700 DATA 5,864,159,5,800,125
710 DATA 5,743,126,5,677,124
720 DATA 5,627,130,5,580,88
730 DATA 5,534,99,5,492,73
740 DATA 5,467,83,5,540,160
750 DATA 5,560,175,5,625,173
760 DATA 5,647,208,5,610,191
770 DATA 5,580,210,5,555,210
780 DATA 5,560,217,5,545,225
790 DATA 5,519,216,5,502,243
800 DATA 5,519,252,5,566,270
810 DATA 5,575,308,5,575,325
820 DATA 5,540,317,5,573,352
830 DATA 5,594,359,5,619,362
840 DATA 5,634,366,5,629,378
850 DATA 5,642,391,5,636,396
860 DATA 5,636,409,5,649,427
870 DATA 5,638,434,5,628,426
880 DATA 5,610,463,5,633,501
890 DATA 5,589,488,5,572,499
900 DATA 5,570,479,5,551,496
910 DATA 5,547,479,5,531,508
920 DATA 5,567,553,5,531,588
930 DATA 5,520,543,5,503,538
940 DATA 5,529,648,5,490,630
950 DATA 5,523,699,5,523,761
960 DATA 5,575,825,4,511,819
970 DATA 5,496,771,5,469,756
980 DATA 5,465,766,5,472,773
990 DATA 5,466,795,5,510,818
1000 DATA 4,444,754,5,465,751
1010 DATA 5,446,703,5,442,705
1020 DATA 5,443,728,5,442,749
1030 DATA 4,469,431,5,473,336
1040 DATA 5,449,274,5,385,271
1050 DATA 5,279,230,5,229,278
1060 DATA 5,229,303,5,279,331
1070 DATA 5,323,382,5,261,414
1080 DATA 5,284,477,5,354,468
1090 DATA 5,377,494,5,351,506
1100 DATA 5,373,519,5,379,541
1110 DATA 5,432,552,5,472,539
1120 DATA 5,504,497,5,511,454
1130 DATA 5,470,431
1140 :
1150 DEF PROCcheckdata
1160 ON ERROR IF ERR=42 GOTO 1220 ELSE
CLS:REPORT:PRINT" at line ";ERL:END
1170 total%=0
1180 FOR x%=1 TO 357
1190 READ k%:total%=total%+k%
1200 NEXT
1210 IF total%=122772 ENDPROC
1220 PRINT"Data error - please check li
sting"
1230 END

```


YELLOW PAGES

GRAPHICS

Listing 3. Colour fills the map

```

10 REM Program 3 - variations
20 REM by Jim McGregor and Alan Watt
30 REM for BBC B/B+ and Electron
40 REM (c) Acorn User December 1985
50 :
60 PROCcheckdata
70 RESTORE
80 maxtheta=40
90 DIM sin(maxtheta),cos(maxtheta)
100 FOR a=0 TO maxtheta
110 sin(a)=SIN(RAD(a))
120 cos(a)=COS(RAD(a))
130 NEXT a
140 resolution=12
150 ressq=resolution*resolution
160 MODE 4
170 PRINT TAB(1,1)"Fractal variations
on the shape of"TAB(15,2)"Britain"
180 VDU 29,640;512;
190 READ sections,startx,starty
200 MOVE startx,starty
210 FOR sect=1 TO sections
220 READ centrex,centrey,points
230 FOR p=1 TO points:READ x,y
240 DRAW x,y:NEXT p
250 NEXT sect
260 FOR x=300 TO 900 STEP 600
270 FOR y=300 TO 700 STEP 400
280 RESTORE
290 VDU 29,x;y;
300 READ sections,prevx,prevy
310 MOVE prevx,prevy:MOVE prevx,prevy
320 FOR sect=1 TO sections
330 READ centrex,centrey,points
340 PLOT 85,centrex,centrey
350 FOR p=1 TO points
360 READ nextx,nexty
370 PROCfractal (prevx,prevy,nextx,next
y)
380 prevx=nextx:prevy=nexty
390 NEXT p
400 MOVE prevx,prevy
410 MOVE centrex,centrey
420 NEXT sect
430 READ centrex,centrey
440 PLOT 85,centrex,centrey
450 NEXT:NEXT
460 END
470 DEF PROCfractal (x1,y1,x2,y2)
480 LOCAL xdiff,ydiff,mx,my,theta,s,c,
c2,cs
490 xdiff=x2-x1:ydiff=y2-y1
500 IF xdiff*xdiff+ydiff*ydiff<ressq T
HEN MOVE x1,y1:MOVE centrex,centrey:PLOT
85,x2,y2:ENDPROC
510 theta=maxtheta-RND(2*maxtheta)
520 IF theta<0 THEN sinth=-sin(-theta)
:costh=cos(-theta) ELSE sinth=sin(theta)
:costh=cos(theta)
530 xdir=xdiff/2/costh
540 ydir=ydiff/2/costh
550 mx=x1+xdir*costh-ydir*sinth
560 my=y1+xdir*sinth+ydir*costh
570 PROCfractal (x1,y1,mx,my)
580 PROCfractal (mx,my,x2,y2)

```

Continued ►

◀ Continued

```

590 ENDPROC
600 :
610 DATA 8,-50,60
620 DATA -25,75,5,-40,75,-30,90,-10
630 DATA 90,-15,80,-20,70,-20,55,4
640 DATA -7,70,5,70,-2,55,-10,40,0,0
650 DATA 7,-5,30,0,20,5,10,10,0,15
660 DATA -10, 20,-20, 25,-30,10,-50
670 DATA 3,35,-30,50,-50,40,-65,20
680 DATA -70,12,55,-70,35,-75,15,-80
690 DATA -5,-85,-15,-87,-25,-90,-35
700 DATA -93,-45,-95,-35,-87,-25,-80
710 DATA -15,-72,-5,-65,10,-50,5,-17
720 DATA -63,-30,-60,-25,-45,-20,-30
730 DATA -10,-30,0,0,4,-12,-20,-15
740 DATA -10,-18,0,-20,10,-20,55,4
750 DATA -30,10,-30,30,-40,45,-50,60
760 DATA -25,75
770 :
780 DEF PROCcheckdata
790 ON ERROR IF ERR=42 GOTO 850 ELSE C
LS:REPORT:PRINT" at line ";ERL:END
800 total%=0
810 FOR x%=1 TO 117
820 READ k%:total%=total%+k%
830 NEXT
840 IF total%=-836 ENDPROC
850 PRINT "Data error - please check l
isting"
860 END

```

Listing 4. Generates tree growth

```

10 REM Program 4 - fractal trees
20 REM by Jim McGregor and Alan Watt
30 REM for BBC B/B+ and Electron
40 REM (c) Acorn User December 1985
50 :
60 MODE 7
70 PROCinitialise
80 MODE 1:VDU 23,1,0;0;0;0;
90 MOVE 640,100:GCOL 0,2
100 PROCtree(angle,branchfan,height, d
epth%)
110 END
120 DEF PROCinitialise
130 PRINT"Enter parameters :""
140 INPUT"rand : "rand
150 INPUT"branchfan : "branchfan
160 INPUT"inpafact : "inpafact
170 INPUT"branchdensity : "branchdensi
ty
180 INPUT"inphf : "inphf
190 INPUT"depth% : "depth%
200 angle=90:height=250
210 ENDPROC
220 DEF PROCtree (angle,branchfan,heigh
t,depth%)
230 LOCAL i,x,y,start,theta,heightfact
or
240 IF depth%=0 THEN GCOL 0,1:PLOT 65,
-2,0:PLOT 65,2,4:PLOT 65,2,-4:PLOT 0,-2,
0:GCOL0,2:ENDPROC

```

Continued ►

YELLOW PAGES

TECHNIQUES

Data compressor program, see Techniques, page 89

◀ Continued

```
250 start=angle-branchfan/2
260 theta=branchfan/branchdensity
270 IF depth% <= 2 THEN heightfactor=i
nphf/2 ELSE heightfactor=inphf
280 x=height*COS(RAD(angle))
290 y=height*SIN(RAD(angle))
300 angle=start
310 FOR i=1 TO branchdensity+1
320 PLOT 1,x,y
330 IF rand=0 THEN PROCtree(angle,bran
chfan*inphfact,height*heightfactor,depth
%-1):angle=angle+theta
340 IF rand=1 THEN PROCtree(angle-thet
a/2+RND(theta),branchfan*inphfact,height
*heightfactor*(0.5+RND(1)/1.5),depth%-1)
:angle=angle+theta
350 PLOT 0,-x,-y
360 NEXT i
370 ENDPROC
```

set it to Record; disc users should insert a suitable disc into the drive. Now type RUN. The screen will fill with a squared pattern which will be saved to tape or disc in a compressed form.

Once this has finished, the screen will clear and you will be requested to press the Return key. Tape users should rewind the tape to the beginning of the screen just saved. Press Return (press Play if you're using tape), and the screen will be reloaded.

If this all proceeds well, then the compressor is working fine and the 10k demo screen will have been saved in less than 3k!

Note that pressing Break will reset the bput and bget vectors, as will changing the filing system. You will need to re-run the first listing to reset them. If you anticipate hitting Break a few times it would be worth noting the new contents of the two vectors (ie, the contents of &216 to &219 inclusive) and resetting them 'by hand' on each occasion. To use the compressor on other screens, use the techniques given in listing 2, although you can, of course, get rid of the pattern drawing routine.

Data compressor program, page 89

How to enter Data Compressor

Enter the listing as normal and then save it to disc or tape. Once this has been performed run the program. Any errors will be reported.

If you get the message 'Checksum error' then you have made a mistake somewhere in the assembly listing, so re-check it.

If the message 'Invalid vectors' is printed at the end of the assembly listing, press the Break key, type OLD, press the Return key and re-run the program.

As listed, the program assembles into an awkward 257 bytes, so disc users cannot fit it neatly into a single page of memory (tape users can - see the notes below). It assembles from &900 to &A01 - if you need this area of memory you could use the top end of the function key buffer and the user definable character buffer. To do this, for example, change the &900 in line 60 to &BF0. Do this after you have run and checked the program otherwise the checksum will be different!

Tape Users

As mentioned above, tape users can fit the machine code into a page of memory, say from &C00 to &CFF. To do this, first enter and run the program as detailed above, correcting any errors. Once you have done this, delete lines 800 and 1180. Next delete line 110 and lines 2130 to 2210 inclusive, then resave the program.

Tape users should not attempt to use the program with the machine code assembled at either &900 or &A00.

Testing the compressor

Listing 2 is a simple test routine. Enter this as shown and save it to tape or disc under the filename DEMO. For the test you should not use a 6502 second processor or any shadow RAM as the demonstration peeks and pokes the screen directly.

Now hit the Break key, reload listing 1 and run this. Now reload DEMO - do not press the Break key. If you are using tape

Listing 1. Data compressor program

```
10 REM Data Compressor
20 REM by D J Pilling
30 REM BBC B/B+/B128/6502 and Electron
40 REM (c) Acorn User December 1985
50 :
60 start=&900
70 PROCsetup
80 PROCassemble
90 PROCvectors
100 PROCend
110 PROCchecksum
120 END
130 :
140 DEFPROCsetup
150 FOR L%=start TO (start+40)
160 ?L%=0 : NEXT L%
170 cliv=&208
180 bgetv=&216
190 bputv=&218
200 clia=FNcalcvec(cliv)
210 bgeta=FNcalcvec(bgetv)
220 bputa=FNcalcvec(bputv)
230 low=&70
240 high=&71
250 ENDPROC
260 :
270 DEF FNcalcvec(a%)=?a%+256*a%?1
280 :
290 DEF PROCassemble
300 FOR pass=0 TO 3 STEP 3
310 P%=start
320 PROCvars
330 [OPT pass
340 .clix
350 STX low
360 STY high
370 LDY #255
380 :
390 .s1
```

Continued ▶

YELLOW PAGES

TECHNIQUES

```
400 INY
410 LDA (low),Y
420 CMP #ASC"#"
430 BEQ sl
440 CMP #ASC"D"
450 BNE exit
460 INY
470 LDA (low),Y
480 CMP #ASC"+"
490 BEQ don
500 CMP #ASC"--"
510 BEQ dof
520 :
530 .exit
540 LDX low
550 LDY high
560 JMP clia
570 :
580 .don
590 LDX #255
600 STX write
610 INX
620 STX copy
630 STX rep
640 STX read
650 INX
660 STX of
670 RTS
680 :
690 .dof
700 LDA write
710 BMI dofg
720 JSR writebytes
730 :
740 .dofg
750 LDA #0
760 STA of
770 RTS
780 :
790 .bputx
800 STY channel
810 LDX of
820 BNE bp1
830 JMP bputa
840 :
850 .bp1
860 PHA
870 LDX write
880 BMI nw
890 CMP last
900 BNE df
910 PLA
920 INC copy
930 LDA copy
940 CMP #7
950 BNE bgx
960 JSR writebytes
970 RTS
980 :
990 .df
1000 LDA copy
1010 BEQ nw
1020 JSR writebytes
1030 :
1040 .nw
1050 PLA
1060 STA last
1070 INX
```

Continued ►

◀ Continued

```
1080 STX write
1090 STA buff,X
1100 CPX #31
1110 BNE bgx
1120 JSR writebytes
1130 :
1140 .bgx
1150 RTS
1160 :
1170 .writebytes
1180 LDY channel
1190 LDA copy
1200 ASL A
1210 ASL A
1220 ASL A
1230 ASL A
1240 ASL A
1250 ADC write
1260 JSR bputa
1270 LDX #0
1280 INC write
1290 :
1300 .wrbl
1310 LDA buff,X
1320 JSR bputa
1330 INX
1340 CPX write
1350 BNE wrbl
1360 LDX #0
1370 STX copy
1380 DEX
1390 STX write
1400 RTS
1410 :
1420 .bgetx
1430 LDA of
1440 BEQ bg1
1450 :
1460 .bg2
1470 DEC read
1480 BMI nor
1490 :
1500 .bg1
1510 JSR bgeta
1520 STA rbyte
1530 RTS
1540 :
1550 .nor
1560 DEC rep
1570 BMI norp
1580 LDA rbyte
1590 RTS
1600 :
1610 .norp
1620 JSR bgeta
1630 PHA
1640 AND #31
1650 TAX
1660 INX
1670 STX read
1680 PLA
1690 ROL A
1700 ROL A
1710 ROL A
1720 ROL A
1730 AND #7
```

Continued ►

YELLOW PAGES

FEATURES

See Features, page 94

◀ Continued

```

1740 STA rep
1750 JMP bg2
1760 :
1770 J
1780 NEXT
1790 ENDPROC
1800 :
1810 DEF PROCvars
1820 of=FNV(1)
1830 buff=FNV(32)
1840 write=FNV(1)
1850 copy=&72
1860 last=&73
1870 channel=&74
1880 last=FNV(1)
1890 rep=FNV(1)
1900 read=FNV(1)
1910 rbyte=FNV(1)
1920 ENDPROC
1930 :
1940 DEF FNV(x%)
1950 P%=P%+x%
1960 =P%-x%
1970 :
1980 DEF PROCvectors
1990 IF clia=clix OR bgeta=bgetx OR bput
a=bputx PRINT "Invalid vectors!":END
2000 PROCD(cliv,clix)
2010 PROCD(bgetv,bgetx)
2020 PROCD(bputv,bputx)
2030 ENDPROC
2040 :
2050 DEF PROCD(a,x)
2060 ?a=x
2070 a?1=x DIV256
2080 ENDPROC
2090 :
2100 DEF PROCend
2110 PRINT'?' "Data Compressor set up at &
";~start'?' "Length =&";~P%-start'?'
2120 ENDPROC
2130 :
2140 DEF PROCchecksum
2150 Z%=0
2160 FOR N%=&900 TO &A00
2170 Z%=Z%+?N%
2180 NEXT
2190 IF Z%=21315 THEN ENDPROC
2200 VDU 7
2210 PRINT"Checksum Error!"

```

Listing 2. Data compressor demonstration

```

10 REM Data Compressor Demonstration
20 REM by D J Pilling
30 REM BBC B/B+/128k/6502 & Electron
40 REM (c) Acorn User December 1985
50 :
60 MODE 5
70 PROCpattern
80 PROCsave
90 CLS:*FX 21,0
100 PRINT"PRESS RETURN TO'" "RESTORE SC

```

Continued ▶

◀ Continued

```

REEN";
110 REPEAT UNTIL GET=13:PRINT
120 PROCload
130 END
140 :
150 DEF PROCpattern
160 VDU 19,0,4,0,0,0
170 VDU 19,3,5,0,0,0
180 VDU 23;8202;0;0;0;
190 FOR I%=0 TO 8
200 LH%=I%*80:RH%=1280-LH%
210 BT%=I%*60:UP%=1024-BT%
220 VDU 24,LH%;BT%;RH%;UP%;
230 VDU 24,LH%;BT%;RH%;UP%;
240 GCOL 0,(128+I%):CLG
250 NEXT
260 VDU 26
270 ENDPROC
280 :
290 DEF PROCsave
300 LOCAL I%,X%
310 *D+
320 *OPT 1,0
330 X%=OPENOUT("SCREEN")
340 FOR I%=HIMEM TO &8000
350 BPUT#X%,?I%
360 NEXT
370 *D-
380 CLOSE#X%
390 *OPT
400 ENDPROC
410 :
420 DEF PROCload
430 LOCAL I%,X%
440 *D+
450 *OPT 1,1
460 X%=OPENUP("SCREEN")
470 *OPT 1,0
480 FOR I%=HIMEM TO &8000
490 ?I%=BGET#X%
500 NEXT
510 *D-
520 CLOSE#X%
530 *OPT
540 ENDPROC

```

See Features, page 94

How to enter Fonts

Listing 1 is the font generator, and as it is written entirely in Basic, it should be easy to enter.

*Listing 2 is the source program for the machine code font loading routine. It contains quite a lot of assembly language so a checksum routine has been included at line 1470. This routine will report any errors that you might have made in entering the program. When no errors are reported you will be given the option of saving the finished machine code, which will be saved under the name "FONT". Refer to the article on page 94 for details on using the routine. Note that lines 270 to 330 should only be entered if you have a 0.9 DFS or earlier - type *HELP to find out which version you have: if you do have a later version, 1.2 for example, then ignore these lines.*

Listing 3 is a demonstration program showing how a variety of

YELLOW PAGES

FEATURES

fonts can be used when annotating diagrams (an illustration of this can be seen on page 95). You will, though, need to create italic, bold and modern fonts using the font generator (and save these with the names "ITALIC", "BOLD" and "MODERN" respectively) before the demonstration program can be run. Again, refer to the article on page 94 for details.

Listing 1. Matthew Cook's font generator program

```

10 REM Font Generator
20 REM by Matthew Cook
30 REM BBC B/B+/128k and Electron
40 REM (c) Acorn User December 1985
50 :
60 @%=&903
70 DIM B(8,8),oscli% 40
80 ON ERROR GOTO 1100
90 *FX 4,1
100 IF PAGE<>&2100 THEN PRINT"Reload a
t &2100":END
110 MODE 4
120 P=65
130 REPEAT
140 PRINT TAB(5,21);
150 FOR loop=P-12 TO P+12
160 P%=CHR$(loop)
170 IF loop<32 OR loop>255 OR loop=127
THEN P%=" "
180 IF loop<32 OR loop>255 THEN PRINT"
.";:NEXT loop:GOTO 270
190 IF loop=P THEN VDU32,10:PRINTP%;VD
U11,8,8,11:PRINTP% " ";:VDU10:ELSE PRINT
P%;
200 NEXT
210 PRINT TAB(0,0);"LEFT ARROW -LEFT
""RIGHT ARROW -RIGHT"
220 PRINT"SPACE -EDIT LETTER""
'B' -BOLD"
230 PRINT"F' -ITALIC""'I'
-INVERSE CHARACTER"
240 PRINT"M' -MODERN FONT"
250 PRINT"S' SAVE""'L'
LOAD"
260 PRINT"Z' ZAP 26 CHARACT
ERS"
270 A%=GET$
280 *FX 15,1
290 IF A%=CHR$(136) THEN P=P-1
300 IF A%=CHR$(137) THEN P=P+1
310 IF A%=" THEN PROCalter:CLS
320 IF A%="F" THEN PROCbits:PROCitalic
:PROCreplace
330 IF A%="B" THEN PROCbits:PROCbld:P
ROCreplace
340 IF A%="I" THEN PROCbits:PROCinvers
e:PROCreplace
350 IF A%="S" THEN PROCsave
360 IF A%="L" THEN PROCload
370 IF A%="M" THEN PROCbits:PROCmodern
:PROCreplace
380 IF A%="Z" THEN PROCzap
390 VDU 28,0,25,39,13
400 CLS

```

Continued ►

◀ Continued

```

410 VDU 26:UNTIL FALSE
420 DEF PROCbits
430 FOR T=1 TO 32 STEP 4
440 FOR X=1 TO 32 STEP 4
450 IF POINT(FNx(X),FNy(T))=FNc THEN B
(X/4,(32-T)/4)=-1:ELSE B(X/4,(32-T)/4)=0
460 NEXT:NEXT
470 ENDPROC
480 DEF FNc=1
490 DEF FNy(Y)=Y+354
500 DEF FNx(X)=X+610
510 DEF PROCprin
520 PRINT TAB(0,0);
530 LOCAL X,Y
540 FOR Y=0 TO 7:PRINT'SPC(15);
550 FOR X=0 TO 7
560 IF B(X,Y) THEN PRINT"O"; ELSE PRIN
T".";
570 NEXT:NEXT
580 ENDPROC
590 DEF PROCalter
600 PROCbits:CLS:PROCprin
610 PRINT TAB(0,20)"ARROW KEYS MOVE
AROUND""'I' INVERSE PIXEL"
620 PRINT"D' 'T' SHIFT ROW LEFT/
RIGHT""SPACE BACK TO MAIN MENU"
630 PRINT"R' REDIFINE THIS
CHARACTER""'W' WIPE WHOLE CHAR
ACTER"
640 XP=1:YP=1
650 REPEAT
660 *FX 4,1
670 A%=INKEY$(10)
680 IF ADVAL(2)>60000 A%=CHR$(139)
690 IF ADVAL(2)<5000 A%=CHR$(138)
700 IF ADVAL(1)<5000 A%=CHR$(137)
710 IF ADVAL(1)>60000 A%=CHR$(136)
720 IF (ADVAL(0) AND 3)<>0 A%="I"
730 IF A%=CHR$(137) AND XP<7 XP=XP+1
740 IF A%=CHR$(136) AND XP>0 XP=XP-1
750 IF A%=CHR$(138) AND YP<7 YP=YP+1
760 IF A%=CHR$(139) AND YP>0 YP=YP-1
770 IF A%=" THEN UNTILTRUE:ENDPROC
780 IF A%="R" THEN PROCreplace:PRINTTA
B(0,0);CHR$(P);
790 IF A%="W" THEN PROCwipe:PROCprin
800 IF A%="I" THEN B(XP,YP)=NOT B(XP,Y
P):PROCprin
810 PRINTTAB(15+XP,YP+1);"#";TAB(15+XP
,YP+1);
820 PRINT;CHR$(((B(XP,YP)=-1)*-(ASC("O
")))+(B(XP,YP)=0)*-(ASC(".")))
830 IF A%="D" THEN PROCs1:PROCprin
840 IF A%="T" THEN PROCsr:PROCprin
850 IF A%="F" THEN PROCitalic:PROCprin
:PROCreplace
860 UNTILFALSE
870 DEF PROCreplace
880 VDU 23,P
890 FOR T=0 TO 7
900 VDU FNbin(T)
910 NEXT
920 ENDPROC
930 DEF FNbin(N)
940 =(FNseg(0,N)*16)+FNseg(4,N)
950 DEF FNseg(P,N)

```

Continued ►

YELLOW PAGES

FEATURES

◀ Continued

```

960 LOCAL T,TTL
970 TTL=0
980 FOR T=P TO P+3
990 TTL=TTL+(B(T,N)* -(2^(3-(T-P))))
1000 NEXT
1010 =TTL
1020 DEF PROCsave
1030 CLS
1040 REPEAT
1050 INPUT"Filename for <save> ?"F$
1060 UNTIL LENF$<8 AND F$<>""
1070 PROCoscli("SA. "+F$+" 1800 2100")
1080 CLS
1090 ENDPROC
1100 IF ERR=17 THEN PROCoscli("FX4"):EN
D:ELSE CLS:REPORT:PRINT" at line ";ERL:P
RINT"Press any key ...":A$=GET$:CLS:GOTO
130
1110 END
1120 DEF FNhex(D%)
1130 LOCAL T1,T,T2,H$
1140 T1=D% AND 15
1150 T2=D% AND 240
1160 T2=D%/16
1170 =FNseg2(T2)+FNseg2(T1)
1180 DEF FNseg2(X)=MID$("0123456789ABCD
EF",X+1,1)
1190 DEF FNhex2(BIG%)=FNhex((BIG% AND &
FF00)/256)+FNhex((BIG% AND &00FF))
1200 DEF PROCload
1210 INPUT"File name ?"F$
1220 PROCoscli("FONT "+F$)
1230 CLS
1240 ENDPROC
1250 DEF PROCs1
1260 LOCAL T$
1270 T$=FNg(YP)
1280 T$=T$+"0":T$=RIGHT$(T$,8)
1290 PROCg(T$,YP)
1300 ENDPROC
1310 DEF PROCsr
1320 LOCAL T$
1330 T$=FNg(YP)
1340 T$="0"+T$:T$=LEFT$(T$,8)
1350 PROCg(T$,YP)
1360 ENDPROC
1370 DEF FNg(Y)
1380 LOCAL D$
1390 FOR T=0 TO 7
1400 D$=D$+STR$(- B(T,Y))
1410 NEXT
1420 =D$
1430 DEF PROCg(D$,Y)
1440 LOCAL T
1450 FOR T=0 TO 7
1460 B(T,Y)=-VAL(MID$(D$,T+1,1))
1470 NEXT
1480 ENDPROC
1490 DEF PROCitalic
1500 LOCAL YP,A
1510 DATA 0,-1,-1,0,0,1,1,2
1520 RESTORE 1510
1530 FOR NN=7 TO 0 STEP -1
1540 YP=NN
1550 READ A
1560 IF A=-1 THEN PROCs1:NEXT:ENDPROC

```

Continued ▶

◀ Continued

```

1570 IF A=1 THEN PROCsr:NEXT:ENDPROC
1580 IF A=2 THEN PROCsr:PROCsr:NEXT:END
PROC
1590 NEXT
1600 ENDPROC
1610 DEF PROCbold
1620 FOR T=0 TO 7
1630 FOR X=7 TO 1 STEP -1
1640 B(X,T)=(B(X-1,T)) OR B(X,T)
1650 NEXT:NEXT
1660 ENDPROC
1670 DEF PROCinverse
1680 FOR T=0 TO 7:FORX=0 TO 7:B(T,X)=NO
T B(T,X):NEXT:NEXT
1690 ENDPROC
1700 DEF PROCwipe
1710 FOR T=0 TO 7
1720 FOR X=0 TO 7:B(T,X)=0
1730 NEXT:NEXT:ENDPROC
1740 DEF PROCmodern
1750 FOR T=0 TO 7
1760 FOR X=0 TO 7
1770 IF B(X,T) THEN B(X,T)=FALSE:X=8:NE
XT:ELSE NEXT
1780 FOR X=7 TO 0 STEP -1
1790 IF B(X,T) THEN B(X+1,T)=-1:X=-1:NE
XT:ELSE NEXT
1800 NEXT
1810 ENDPROC
1820 DEF PROCzap
1830 CLS
1840 PRINTTAB(0,0);"1.....BOLD""2.....
ITALIC""3.....INVERSE""4.....MODERN""
1850 PRINT"Which one shall I do 26 tim
es - from thepresent character ?"
1860 PRINT"PRESS '0' TO NOT DO ANYTHING
"
1870 REPEAT A=GET:UNTIL A>47 AND A<53
1880 IF A=48 THEN CLS:ENDPROC
1890 A=A-48
1900 L=P:FORP=L TO L+25
1910 PRINT TAB(19,20);CHR$(P)
1920 PROCbits
1930 IF A=1 THEN PROCbold
1940 IF A=2 THEN PROCitalic
1950 IF A=3 THEN PROCinverse
1960 IF A=4 THEN PROCmodern
1970 PROCreplace
1980 PRINT TAB(19,21);CHR$(P)
1990 NEXT
2000 CLS
2010 ENDPROC
2020 DEF PROCoscli($oscli%)
2030 X%=oscli%:Y%=oscli% DIV 256
2040 CALL &FFF7:ENDPROC

```

Listing 2. Font source program

```

10 REM *FONT source program
20 REM by Matthew Cook
30 REM BBC B/B+/128k and Electron
40 REM (c) Acorn User December 1985
50 :

```

Continued ▶

YELLOW PAGES

FEATURES

◀ Continued

```
60 L=&900
70 oswrch=&FFEE:osbyte=&FFF4
80 osword=&FFF1
90 osbget=&FFD7:osfind=&FFCE
100 FOR T=0 TO 3 STEP 3
110 P%=&900
120 [
130 OPT T
140 LDA #20
150 LDX #6
160 JSR &FFF4
170 LDA #1
180 LDX #&70
190 LDY #0
200 JSR &FFDA
210 LDX &70
220 LDY &71
230 \ Type lines 270 - 330
240 \ only if you have a
250 \ 0.9 DFS or earlier
260 :
270 TXA
280 CLC
290 ADC #5
300 TAX
310 TYA
320 ADC #0
330 TAY
340 :
350 LDA #&40
360 JSR osfind
370 TAY
380 BNE skip
390 JMP end
400 .skip
410 LDX #&FF
420 LDA #&A0
430 JSR gt
440 LDX #&FF
450 LDA #&C0
460 JSR gt
470 LDX #&FF
480 LDA #&E0
490 JSR gt
500 LDX #&FF
510 LDA #&20
520 JSR gt
530 LDX #&00
540 LDA #&40
550 JSR gt
560 LDX #&00
570 LDA #&60
580 JSR gt
590 .fin
600 LDA #0
610 LDY #0
620 JSR osfind
630 RTS
640 .gt
650 CLC
660 STA alt1
670 ADC #&20
680 STA alt2
690 .loop
700 CPX #&FF
710 BNE over
```

Continued ▶

◀ Continued

```
720 JSR gt8
730 JMP back
740 .over
750 LDA #23
760 JSR oswrch
770 LDA alt1
780 JSR oswrch
790 LDA #7
800 STA temp
810 .tialoop
820 JSR osbget
830 BCS enfile
840 JSR oswrch
850 DEC temp
860 BPL tialoop
870 .back
880 INC alt1
890 LDA alt2
900 CMP alt1
910 BEQ gten
920 JMP loop
930 .gten
940 RTS
950 .gt8
960 LDA #7
970 STA temp
980 .gt8loop
990 JSR osbget
1000 BCS enfile
1010 DEC temp
1020 BPL gt8loop
1030 RTS
1040 .file
1050 OPT FNequs("ITI"+CHR$(13),T)
1060 .temp
1070 OPT FNequb(0,T)
1080 .enfile
1090 LDA #0
1100 LDX #8
1110 .12
1120 JSR oswrch
1130 DEX
1140 BNE 12
1150 BRK
1160 OPT FNequb(13,T)
1170 OPT FNequs("Endfile"+CHR$(0),T)
1180 .end
1190 BRK
1200 OPT FNequb(14,T)
1210 OPT FNequs("Can't open file",T)
1220 BRK
1230 .alt1
1240 OPT FNequb(0,T)
1250 .alt2
1260 OPT FNequb(0,T)
1270 NOP:NOP
1280 NOP:NOP
1290 NOP:NOP
1300 NOP:NOP
1310 ]:NEXT
1320 :
1330 PROCcheck
1340 PRINT"Save code? (Y/N) ";
1350 q$=GET$
1360 PRINTq$
```

Continued ▶

YELLOW PAGES

FEATURES

◀ Continued

```

1370 IF q$="Y" OR q$="y" THEN *SAVE FON
T 900 9FF
1380 END
1390 DEF FNequb(byte,opt)
1400 ?P%=byte
1410 P%=P%+1
1420 =opt
1430 DEF FNequs(string$,opt)
1440 $P%=string$
1450 P%=P%+LEN(string$)
1460 =opt
1470 DEF PROCcheck
1480 total%=0
1490 FOR byte%=&900 TO P%-1
1500 total%=total%+?byte%
1510 NEXT byte%
1520 IF total%=25747 OR total%=24700 EN
DPROC
1530 PRINT"Error - Check listing":END

```

◀ Continued

```

420 Y=(EVAL(arg$)*big)+offset
430 IF Y>1024 OR Y<0 THEN MOVEX,Y:ELSE
DRAW X,Y
440 NEXT X
450 ENDPROC
460 :
470 DEF PROCwrite
480 VDU 5
490 MOVE 8,32
500 PRINT "-1"
510 MOVE 8,992
520 PRINT "+1"
530 MOVE 24,544
540 PRINT "0"
550 MOVE 410,1000
560 *FONT BOLD
570 GCOL 0,2
580 PRINT "SIN(X)"
590 MOVE 928,950
600 GCOL 0,3
610 PRINT "COS(X)"
620 MOVE 750,800
630 GCOL 0,1
640 PRINT "TAN(X)"
650 MOVE 350,550
660 PRINT "X Axis"
670 MOVE 8,400
680 PROCvertical("Y Axis")
690 MOVE 300,200
700 *FONT ITALICS
710 PRINT "Trigonometric functions"
720 GCOL 0,2
730 MOVE 62,150
740 *FONT MODERN
750 PRINT "SIN, COS AND TAN (X); FOR X
=0 TO X=2"CHR$(224);
760 GCOL 0,3
770 ENDPROC
780 :
790 DEF PROCvertical(vert$)
800 FOR t=1 TO LEN(vert$)
810 PRINT MID$(vert$,t,1);:VDU8,10
820 NEXT
830 ENDPROC

```

Listing 3. Font demonstration program

```

10 REM *FONT Demonstration Program
20 REM by Matthew D Cook
30 REM BBC B/B+/128k and Electron
40 REM (c) Acorn User December 1985
50 :
60 IF PAGE<>&2100 PRINT"Reload at &21
00":END
70 big=512
80 offset=512
90 ON ERROR VDU 4:END
100 *FX 20,6
110 VDU 23,224,0,7,28,116,20,18,16,0
120 MODE 1
130 PROCsetup
140 PROCgraphs
150 PROCwrite
160 VDU 4
170 a$=GET$
180 END
190 :
200 DEF PROCsetup
210 GCOL 0,1
220 MOVE 0,0
230 DRAW 0,1024
240 MOVE 0,512
250 DRAW 1278,512
260 GCOL 0,3
270 ENDPROC
280 :
290 DEF PROCgraphs
300 GCOL 0,2
310 PROCgraph("SIN(X/200)")
320 GCOL 0,3
330 PROCgraph("COS(X/200)")
340 GCOL 0,1
350 PROCgraph("TAN(X/200)")
360 ENDPROC
370 :
380 DEF PROCgraph(arg$)
390 X=0
400 MOVE 0,(EVAL(arg$)*512)+512
410 FOR X=0 TO 1257 STEP 8

```

Continued ▶

Check-out our Checksums

If you're having problems checking your listings, then send an A4 sized stamped addressed envelope plus a cheque or postal order for 50p, and we'll send you a photocopy of a line-by-line checksum value for each program in this month's Acorn User. These values can then be matched against your own using Tessie Revivis' BSUM program presented in the August 1985 Acorn User, so that you can spot instantly where the erroneous line is.

Cheques and postal orders should be made payable to Redwood Publishing and your envelope should be clearly marked Checksums and sent to Acorn User, Redwood Publishing, 68 Long Acre, London WC2E 9JH.

DON'T MISS OUT ON ACORN USER — ORDER NOW!

Your local newsagent or computer dealer will be pleased to reserve a copy of Acorn User each month – many newsagents will even deliver straight to your door. To take advantage of these services, complete the coupon below.

Please reserve me a copy of Acorn User every month until further notice.

I will collect it Please deliver to my house

(tick as required)

NAME _____

ADDRESS _____

Acorn User is distributed to the news trade by Comag on 0895 4440555

Computer dealers can place orders with the Subs Manager (Acorn User) 01-836 2441

MONTHLY PROGRAM LISTINGS CASSETTE

Each month Acorn User publishes a cassette containing all the major listings in the 16 yellow pages and often extra programs not in the issue (edited by our technical editor Bruce Smith). So preserve your fingers, save time and typing errors, and get your programs to work first time round.

Each cassette costs £3.75 and covers the Electron and BBC micro. It includes a menu and disc transfer routines to help you find your way around.

FREE CASSETTE OFFER WORTH £3.95 IF YOU SUBSCRIBE NOW!



◀ Continued

```
1370 IF q$="Y" C
T 900 9FF
1380 END
1390 DEF FNequb
1400 ?P%=byte
1410 P%=P%+1
1420 =opt
1430 DEF FNequs
1440 $P%=string$
1450 P%=P%+LEN($
1460 =opt
1470 DEF PROCche
1480 total%=0
1490 FOR byte%=$
1500 total%=total%+byte%
1510 NEXT byte%
1520 IF total%=$
DPROC
1530 PRINT"Error"
```

Listing 3. Font demonstration pr

```
10 REM *FONT D
20 REM by Matt
30 REM BBC B/B
40 REM (c) Acc
50 :
60 IF PAGE<>&2
00":END
70 big=512
80 offset=512
90 ON ERROR VD
100 *FX 20,6
110 VDU 23,224,
120 MODE 1
130 PROCsetup
140 PROCgraphs
150 PROCwrite
160 VDU 4
170 a$=GET$
180 END
190 :
200 DEF PROCset
210 GCOL 0,1
220 MOVE 0,0
230 DRAW 0,1024
240 MOVE 0,512
250 DRAW 1278,512
260 GCOL 0,3
270 ENDPROC
280 :
290 DEF PROCgraphs
300 GCOL 0,2
310 PROCgraph("SIN(X/200)")
320 GCOL 0,3
330 PROCgraph("COS(X/200)")
340 GCOL 0,1
350 PROCgraph("TAN(X/200)")
360 ENDPROC
370 :
380 DEF PROCgraph(arg$)
390 X=0
400 MOVE 0,(EVAL(arg$)*512)+512
410 FOR X=0 TO 1257 STEP 8
```

Continued ▶

Check-out our Checksums

IF you're having problems checking your listings, then send an A4 sized stamped addressed envelope plus a cheque or postal order for 50p, and we'll send you a photocopy of a line-by-line checksum value for each program in this month's Acorn User. These values can then be matched against your own using Tessie Revivis' BSUM program presented in the August 1985 Acorn User, so that you can spot instantly where the erroneous line is.

Cheques and postal orders should be made payable to Redwood Publishing and your envelope should be clearly marked Checksums and sent to Acorn User, Redwood Publishing, 68 Long Acre, London WC2E 9JH.

USERRAM

ACORN USER OFFER

Easy-fit sideways RAM at new easy prices!

- 16k ● Fully-compatible with BBC B/B+ ● Backed by *Acorn User* ● 3 minutes to fit ● Software support ● Comprehensive manual ● Disc or cassette ● Simple for schools ● Ideal for Econet ● No soldering

Take a piece of software, load it in *UserRAM* using the utilities provided and it can be accessed instantly using a '*' command or run as a Basic program.

The *Acorn User UserRAM* is as easy to install as a sideways ROM, with just one lead to clip onto the leg of a chip (there's a choice of two) - there's no need to unplug the chip to fit the lead. It takes three minutes to do.

A comprehensive printed manual gives fitting instructions, information on how to create your own sideways RAM software and technical notes on how the utilities provided work. Also, a standard disc (which runs on 40 and 80 track drives with any DFS and is unprotected) is supplied with all the basic utilities needed. One year's guarantee is given, with postage and VAT included.

Copyright notice:

No party connected with this product will give aid to anyone seeking to break software copyright. *Acorn User* welcomes details from software houses willing to license schools and other users of *UserRAM* for their products.

So easy to fit


- Switch off BBC micro. Remove lid and keyboard to reveal sideways ROM sockets.
- Insert *UserRAM* into any empty sideways ROM socket, just like a normal chip.
- Take lead over to left of BBC board and clip to leg of a chip (does not have to be soldered, or chip removed).
- Replace keyboard and lid.
- That's it! You're ready to check the installation with the software supplied.

Pack 1 £38.50

- 16k sideways RAM chip with attached connecting lead.
- Disc of utility software.
- Instruction booklet.

Pack 2 £57.95

- As in pack 1, plus
- 19 new utilities including printer buffer, *FORMAT and *VERIFY for discs, ROM auto boot, two OS calls, save graphics screen, list function keys, and more.
- BBC Micro ROM Book by Bruce Smith (published by Collins at £9.95).

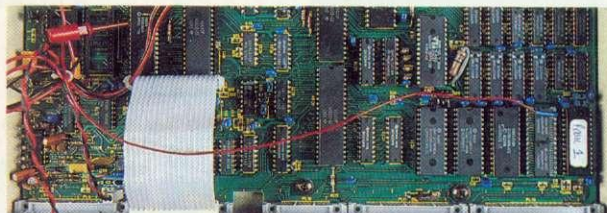

Fill in this coupon and send it (or a copy) with your remittance to:
UserRAM, Acorn User, 68 Long Acre, London WC2E 9JH.

- Please send me copies of pack 1 at £38.50 each
- Please send me copies of pack 2 at £57.95 each

I enclose a cheque/postal order made payable to Frondwood Ltd for

£.....

Please debit my Access/Barclaycard




A/c No Expiry date

Name





Address

..... Postcode.....


Signed..... Date

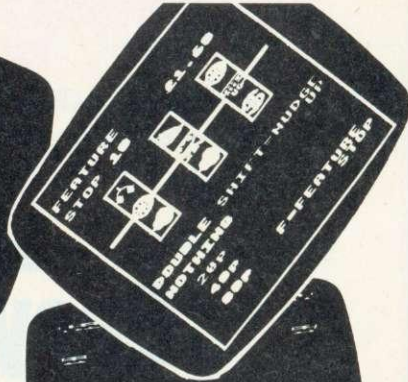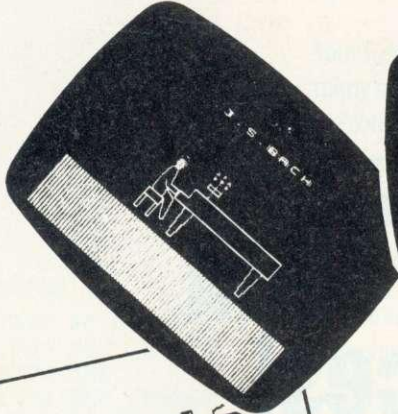


GET IN THE PICTURE WITH BEEBUG

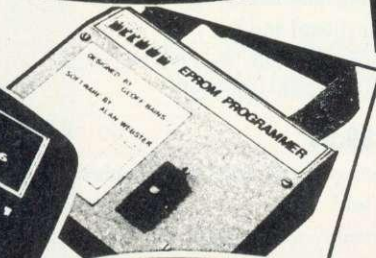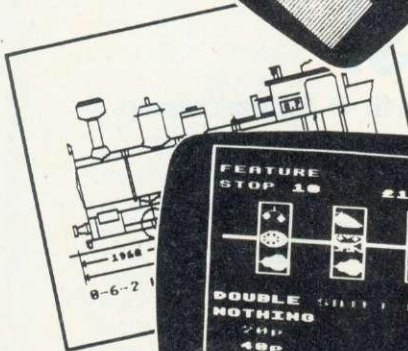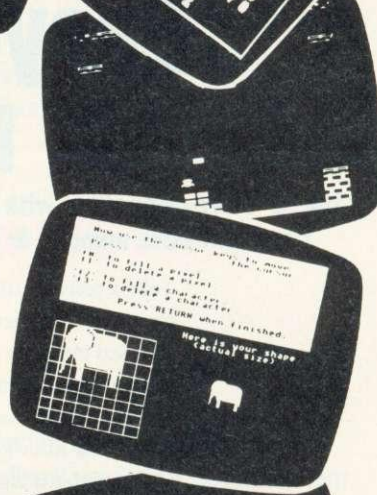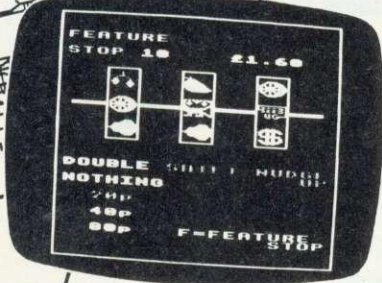



JOIN BRITAIN'S LARGEST COMPUTER USER GROUP TO GET THE MOST FROM YOUR BBC MICRO

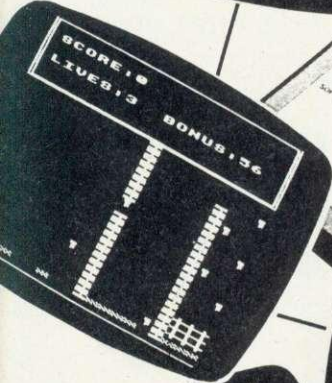

JOIN BY SENDING £11.90 FOR 1 YEAR MEMBERSHIP (10 MAGAZINES)
OR £6.40 for 6 MONTHS MEMBERSHIP (5 MAGAZINES).
OR SEND £1.00 FOR A SAMPLE ISSUE (UK ONLY)

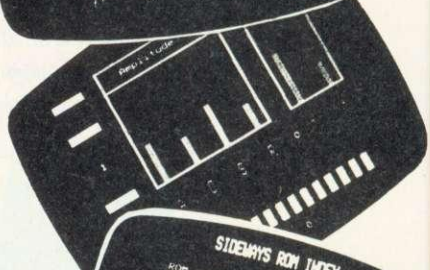

UK ONLY — OVERSEAS PRICES ON APPLICATION






MAKE CHEQUES PAYABLE TO BEEBUG PO BOX 109 HIGH WYCOMBE BUCKS.

BBC GIANT TEXT



- NEWS
- GAMES
- REVIEWS
- UTILITIES
- GRAPHICS
- SOFTWARE
- DISCOUNTS
- PROGRAMS
- HINTS & TIPS
- USER GROUPS
- INFORMATION
- APPLICATIONS
- SPECIAL OFFERS
- TEN MAGAZINES PER YEAR
- TECHNICAL SUPPORT

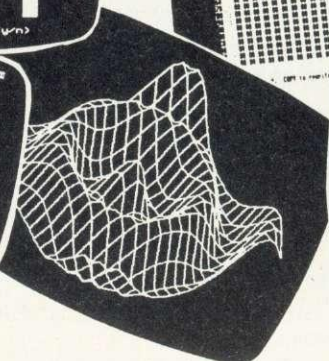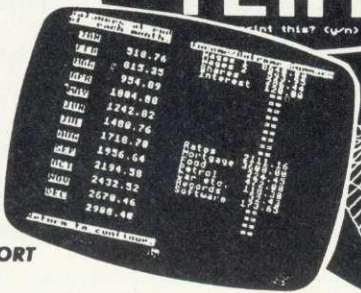

BEEB FORUM

Edited by Bruce Smith, the offerings this month include a one line screen dump, a tip for *Wordwise Plus* users and a challenge!

£10 CENTRED TEXT ON SCREEN

Although named Beeb Forum, this portion of *AU* is certainly not limited to the BBC micro alone. I am always pleased to receive letters and routines from Electron owners, and to prove the point the following Electron-only procedure has been sent in by B Gabel of Lewes.

The procedure (listing 1) will take some text passed into it via a string and print it centrally on the specified screen line, thus avoiding the need to calculate the Tab values for the screen mode in use. This is particularly useful if you are changing mode several times within a program, or if the text to be printed centrally will be of a varying length.

Strings of text longer than the width of the screen are not allowed. Mr Gabel explains:

The procedure begins by ascertaining the screen mode.

It does this by looking at the Operating System copy of the ULA register SHELIA &FE07, which is held in location 282 hex. Bits

```

1000 DEFPROCcentre(y%,m%)
1010 LOCALm%,w%,l%,x%
1020 m%=((?&282) AND 56)/8
1030 IF m%=0 OR m%=3 w%=80
1040 IF m%=1 OR m%=4 OR
m%=6 w%=40
1050 IF m%=2 OR m%=5 w%=20
1060 l%=LEN(m%)
1070 IF l%>w% VDU7:ENDPROC
1080 x%=(w%-l%)/2
1090 PRINTTAB(x%,y%);m%
1100 ENDPROC

```

Listing 1. Prints text centrally on screen

3, 4 and 5 hold the mode number and so the rest are masked out using AND 56. The result is then shifted 3 bits to the right by dividing it by eight. This leaves the mode number which is put into m%. The rest of the procedure then just computes the width of the screen and centres the text string accordingly. Obviously if the string is an odd number of characters long, then it is impossible to centre it exactly; it will be one character too far to the left. This, however, should present no problems. Therefore typing:

```
PROCcentre (20, "Acorn User")
```

will print "Acorn User" in the centre of the 20th line down (ie, like the Y co-ordinate of a

Tab statement) in any mode! Or you can:

```
INPUT name$
PROCcentre (16, name$)
```

This will print the name entered in the middle of the 15th line down in any mode. This is very useful to produce a 'professional look'.

Mr Gabel could, of course, use OSBYTE &87 to ascertain the screen mode. When called, the mode number is returned in the X register. By changing line 1020 of the procedure Beeb owners can also take advantage of the routine.

£5 WORDWISE PLUS SEGMENTS

R Green of Rotherham is a teacher who has helped his pupils use their Bees and Electrons to prepare all their reports, using just a single BBC micro at school fitted with *Wordwise Plus* and a short segment program (listing 2). Mr Green explains . . .

The text of the report is prepared at home using Basic's line numbers. Typing AUTO first makes this process a fairly painless task. Once complete the program is saved to tape or disc as an ASCII file using *SPOOL. At school the segment program is loaded into Segment 0 and this program is executed by pressing Shift-

```

CLS
print"Filename to
be stripped >";
A$=glk$
select text
load text A$
cursor bottom
cursor up
delete word
cursor top
delete word
delete at 6
repeat
find "!"
delete at 7
type CHR#13
until eot
display

```

Listing 2. A short segment program

f0. The filename is entered, the file is loaded in and the program deletes all excess text, ie, line numbers and commands, from the file leaving just the text. This can then be formatted to suit your needs.

£5 ONE-LINER AND A CHALLENGE

One line printer dumps have graced these pages over the past year or so. Their only draw-back tends to be the time they take to perform the task in hand.

Simon Hallam of Atherstone was inspired by Bernard Beeston's one-liner in September '84 and decided to grease its sides enough

```

10 VDU2,1,27,1,51,1,24:FOR
C%=&57FO TO &5928 STEP 8:VDU
1,27,1,42,1,0,1,0,1,1:FOR A%
=C%+&26DO TO C% STEP-320:
FOR B%=A%+7TOA% STEP-1:VDU1,
?B%:NEXT,:VDU1,13,1,10:NEXT:
VDU3


```

Listing 3. Simon Hallam's one-line screen dump

for it to break the one minute barrier.

Simon's program, or rather line, will dump the contents of a mode 4 screen to an Epson FX80 or compatible printer (ie, Star, Shinwa, etc) in just 55 seconds.

As shown, the routine will produce an

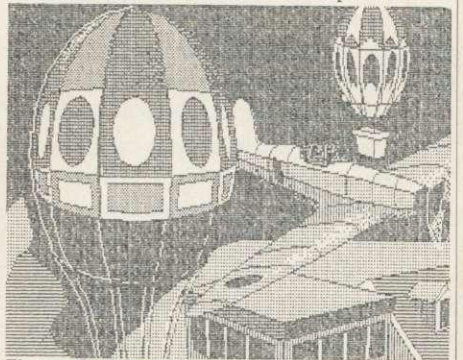

The result of dumping a mode 4 screen

inverse (or normal) screen dump. This can be changed to a true 'colour' dump by changing VDU 1,?B% to VDU 1, NOT ?B.

The routine is 'illegal' in that it peeks screen memory - which accounts for the increased speed. Users of second processors and shadow RAM boards such as the Aries should switch them off beforehand.

Now, here come the challenge. There are three prizes (£20, £10 and £5) waiting for the best use of a single line program. The program can be anything you want it to be - a three second screen dump, a full 16 channel sound editor, a multi-mode sprite generator or *Elite 6*. Just make sure that it has a good practical use!

ATOM FORUM

Mike Barwise turns his mind to aspects of Atomic energy, and answers some readers' queries

LIGHT PEN ENLIGHTENMENT

Is there any way of connecting a light pen to the Atom, asks John Goldsmith on behalf of the Heron Computing Club, Bury St Edmunds? There is, but making it work will depend on what you want to do with it.

The concept of the light pen is based on the way the video picture is maintained. Video information in most home computers is stored in what is called a bit map. This means that an area of memory is set aside to hold either the actual pixel pattern of the screen (as in Atom mode 4) or references to the storage of that information elsewhere (text mode). (The actual pixel patterns for text characters are stored in a ROM built into the video controller, and the character codes in RAM amount to the addresses applied to that ROM.)

Either way, ultimately a continuous stream of bits is sent via a parallel to serial converter, down the video cable to the monitor. For the purposes of argument, say a one (high) bit causes the scanning spot in the monitor tube to light up, and a zero (low) causes it to remain unlit. The frame is re-written on the monitor every 60th of a second.

Any fixed point on the screen is thus being turned on (lit) or off (allowed to fade) 60 times a second. In graphics mode 4, this point or pixel corresponds to an absolute address in the video RAM which holds the bit map.

A light pen is simply an optical sensor which detects the intensity pulse of the pixel you are pointing it at and sends a signal to the computer via a suitable port. The magic is to use that signal to do something useful.

This is not as difficult as it sounds. You can cheat and use a CRT controller with a light pen register, but that's just using someone else's cleverness. The 6847 does not have an internal light pen register, but it's not a complicated add-on in concept.

Every video frame starts after an FS (frame sync) pulse. This sets the video beam to the top left corner and starts it scanning. Data bits are then sent at a fixed rate as the beam scans, forming the first line of the image, and this process is repeated for each line of the screen. There is also an HS (horizontal sync) pulse available, as the CRT needs to be told when to expect the start of every line.

Thus, given a pixel counter per line and a

line counter, both of which are synchronised to the video bit stream using FS and HS, the absolute address of any pixel on the screen may be calculated from the contents of the counters at any time. The action of the light pen is just to provide an output pulse which freezes the counters until you have read their contents. You will then know where you were when the count froze, and software can take over to do what you want with the chosen pixel.

In practical terms, the construction of a light pen and interface which will discriminate individual pixels is a job which requires some ingenuity, and it may not be cheap. However, for text manipulation the light pen needs to be much less precise and costly, and the counting job requires a lot less hardware and conceptual understanding of the video frame.

The character RAM for Atom text mode holds bytes which are used as the base addresses of the locations in the 6847 internal ROM where the bit stream (pixel map) patterns are stored. Whenever you are not writing to video RAM (which means most of the time, even when you are typing to the screen) the 6847 is continuously generating addresses to the video RAM and picking up the character references for use by its screen refresh ROM. Thus the address on the 6847 AD lines at any moment points to a specific RAM location and hence a specific character slot on the screen. A nine bit latch fed from the lower nine address lines can be frozen by the light pen output pulse to identify one of the 512 character slots on the text mode screen.

A technical problem of interfacing is to include hardware to lock out the light pen latch freeze during CPU accesses to the RAM to avoid contention.

The MR (memory request) pin of the 6847 is already nearly adequately controlled for this purpose. The nine bit latch is probably best divided into a four bit row nibble and a five bit column nibble, so that direct reads can be compared with the equivalent Zero Page row and column stores.

It's possible to obtain opto sensors with built in microchips providing a wide range of characteristics. The ideal, though expensive, is a receptor with a digital output triggered by a sudden change at the opto input rather than at a finite light level. This will substantially reduce interference from room light, etc. A more conventional linear sensor can frequently be adapted via external electronics to this response with some saving in cost.

Purely practical problems are encountered in the design of the pen itself, in terms of ensuring adequate sensitivity without spurious triggering as a result of screen flicker, etc. The simple answer is to include an enable push button on the pen, for use when correctly positioned on the screen. Attention to the pen tip to avoid damage to the VDU screen surface is also important.

Any bright ideas or circuit designs based on these notes will be welcome candidates for discussion on these pages, so let's get experimenting. There may even be another approach I haven't thought of!

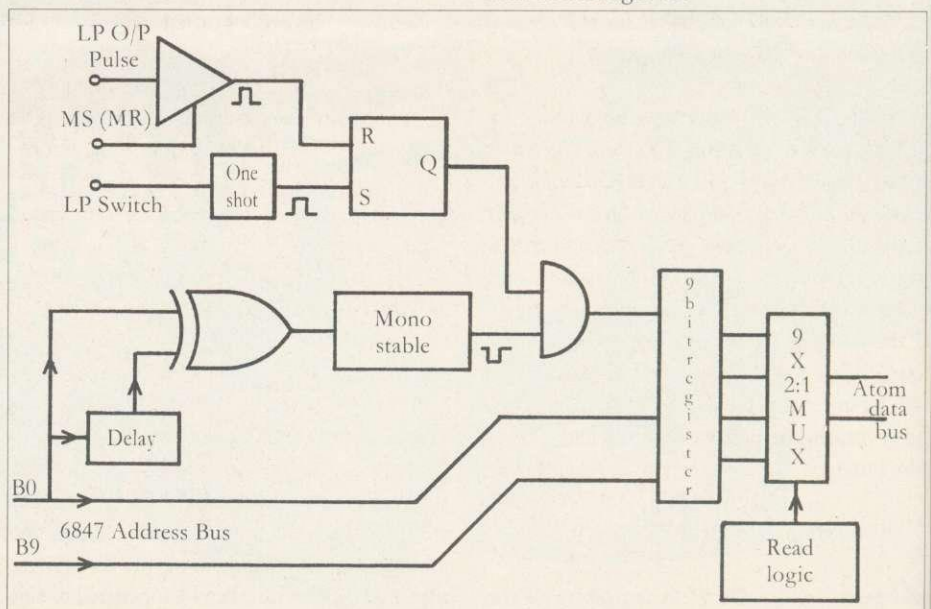


Figure 1. General schematic diagram of an Atom 6847 light pen register

ATOM FORUM

VIDEO CHIP QUERIES

And another question from the Heron Computing Club – on the Atom circuit board, what is link 4 for, and what are the video output lines phA, phB, CHB and notHS?

Link 4 was never very fully documented, but it appears to be a select link for one or other of the two four-colour palettes of the 6847 video controller.

The mysterious outputs, available incidentally on the 10-way connector you attach your monitor cable to, are RGB and sync outputs for a colour monitor to the American NTSC (Never Twice the Same Colour) standard. The conversion of NTSC to PAL (the UK standard) is quite involved, so you can't just plug in an RGB monitor bought in the UK and expect it to work. There are conversion boards around, though, and I am keeping my eyes open and will keep you informed.

TWICE THE SPEED: TWICE THE TROUBLE?

I have received another suggestion about how to run the Atom at 2MHz, this time from Anders Erlandsson of Finspang, Sweden. The real question, however, is, not how to, but whether to.

The actual conversion job is trivial enough, as the divider circuit has a 2MHz output unused. Fitted with a 6502A, the 12k Atom will frequently just about run at 2MHz, if you discount the cassette interface which will try to run at 600 baud. The cassette tones will also be doubled in frequency.

The VIA which constitutes the printer port could be changed to a 2MHz version, but the printer strobe is software controlled, so it might well not prove long enough at 2MHz for reliable printer operation – this will depend on your printer. The 8255 could be changed as well, to allow reliable operation of the keyboard at the increased speed, but often at a considerable price disadvantage.

On the positive side, Atom Basic is really fast at 2MHz. It is a moot point whether it is actually faster or only just about matches the speed of the BBC micro at this clock rate. This is, however, the only advantage. File transfer via I/O ports will in no way benefit, as data rates to the outside world are relatively slow anyway and dictated by the real world device rather than the memory buffer speed.

Screen noise may be exacerbated, as twice the number of CPU accesses will be made in

relation to the refresh DMA rate. Contention could even occur, causing screen flicker.

The bus expansion will not function reliably at 2MHz, due to the delays induced by adequate buffering of the address lines, so you now have a fast machine with no cassette interface and no possibility of running discs.

Several readers will no doubt answer with 'but I've done the 2MHz conversion and it works fine!' This may be so, but not for everyone and not necessarily for protracted periods of operation.

What we are discussing in reality is reliability as a function of system timing margins (what a mouthful!). This is essentially a statistical concept, and is based on averages determined by observation, due to the enormous range of potential contributing factors.

It is easy to forget when using Atom Basic that the micro is not working at the speed of a typewriter, but whipping along at an average 300,000 instructions per second (running at 1MHz). Subjective reliability is reckoned in crashes per working day or week. One crash a week is bad, more than once a day and the micro should hit the junk pile. Assuming about four hours work on the micro per day, you should scrap it if it loses itself more often than a ratio of once in 4.3 thousand million.

To achieve this order of reliability (which is still awful – one crash per four hours on average) there must be a very high tolerance in all critical areas of operation. The major factors involved are, in reducing order of influence:

1. The 'access time' of the slowest device in the system. Access time is a summation of the delays induced by the logical pathways and any micro-cycle operations inside a given silicon package, and can be taken to indicate the real average or maximum wait between an initiation and a result. In terms of RAM, for example, the access time is the delay between the application of a stable address to the chip and the availability of a stable data word. It is usually quoted in manufacturers' data, but can be significantly degraded by adverse conditions of operation, for example, low power supply voltage.

2. Any differential delays in the address or data busses caused by either decoding chips or parallel devices.

3. The thermal and loading characteristics of microchips, and their influence on timings.

These factors are too involved to discuss in depth here, but if the slowest device in the system has an access time of not more than half the clock cycle time, the other factors can be ignored (generally) and the system should function with reasonable reliability. This means 450nS at 1MHz and 220nS at 2MHz are

the slowest devices it is safe to run if you want a reasonable error rate (say, one in 100 thousand million or one crash per 40-hour week).

There is the major problem, as the main OS ROM is a mask programmed 450nS part, and is not pin compatible with the equivalent EPROM, so even an EPROM version from a licensed source would not be a plug-in replacement.

The ideal, given a legal and compatible 200nS OS, would be to have a two-speed clock (as on the BBC micro) which runs at 2MHz during memory and number crunching, and at 1MHz during in/out operations. However, as Acorn found out, technical considerations make the two-speed clock on the 6502 a significant design problem. I think the modification would require too much hacking about of the board to be a good idea.

It's worth noting that even at 2MHz you will probably not get twice as much work done, as most micro tasks incorporate a substantial proportion of I/O which cannot readily be speeded up.

CORRUPTION-FREE SCREEN SAVING

How to save and reload mode 4 screens without corruption due to prompts has been bothering some readers.

When you save a screen, send a NAK (\$21) first. This stops anything passing down WRCVEC being written to the screen. If you are using tape, it's probably a good idea to include a BELL (\$7) or two prompt you to hit Space when required. You will have to ACK (\$6) after the save to get your subsequent input echoed to the screen again.

On reloading, the only corruption is normally the return to Basic prompt when a program finishes. If the screen load is the last thing you do, a prompt will corrupt the screen when the program ends. So the best thing to do is follow the screen load with either a delay loop giving you time to use your screen, or an infinite loop (line X GOTO line X) which requires Escape to exit.

This column is your contact point with other Atom users, but don't forget to read the rest of the magazine as well – lots of ideas can be transported from the BBC micro. If you have a question ask it – maybe another reader knows the answer.

If you've invented a routine or discovered a hardware modification for the Atom here's a chance to show your originality and win some cash. Send your idea to: Mike Barwise, Atom Forum, Acorn User, Redwood Publishing, 68 Long Acre, London WC2E 9JH.

IBM compatibility for your BBC micro



At an amazing mail order
price of £499 inc VAT*

Yes, at an amazing mail order price of just £499 inc VAT*, the TORCH Graduate will upgrade your BBC Model B to a powerful 16-bit business computer.

This direct from the manufacturer offer is for a limited period ONLY and includes FREE PSION XCHANGE software worth £500.

Disc and hardware compatible with the IBM PC, the Graduate's MS-DOS operating system allows the exploration of the massive range of IBM compatible business software, programming aids, compilers and languages universally available from all major software houses.

What the press say

“Just by one simple connection the Graduate transforms the BBC into an IBM compatible with sufficient professional computing power to assist in all aspects of a business”

“The TORCH Graduate represents what most people would probably regard as the 'Ultimate Upgrade' for the BBC Micro”

“For comparison, an IBM PC with 256K of RAM, a parallel printer port and a colour card, two 5¼" disc drives of 360K each plus the keyboard, would cost £2,680”

“As an upgrade path for the BBC Micro, the Graduate makes a lot more sense”

Technical Specification

- 8088 16-bit CPU (5MHz)
- 256K RAM
- MSTM-DOS operating system customised to IBM^{PC} compatibility
- Twin doubled sided, 5¼" floppy disc drives (each 360K formatted)
- 2 IBM^{PC} compatible expansion slots
- Free PSION XCHANGE software (Abacus, Easel, Archive, Quill)
- Software compatibility allows Lotus 1-2-3TM, FrameworkTM, dBASE IIITM and most popular IBM business programs to run without modification, subject to constraints of BBC keyboard and display
- Acorn Disc interface is not required
- Keyboard, text and graphics by BBC Model B Micro

* Post and packing extra.

Just Plug it in

The TORCH Graduate simply plugs into the 1 MHz bus on the Model B, so within minutes you can be up and running with an IBM PC compatible system that really means business.

Complete the order form below today.

TORCH

COMPUTERS

Torch Computers Ltd., Abberley House,
Great Shelford, Cambridge CB2 5LQ.
Tel: (0223) 841000

To Torch Computers Ltd., Abberley House, Great Shelford, Cambridge CB2 5LQ.

Please send me

Qty _____ Torch Graduate(s) @ £499 (inc VAT) TOTAL £ _____

Add p & p £19.50 per unit £ _____

Cheque enclosed for _____ TOTAL £ _____

or charge my credit account: Access Visa

Card No.

Signature: _____

Name: _____

Address: _____


Tel: _____

Allow 7 days for despatch of goods.

The Graduate is manufactured by Torch Computers under licence from Data Technologies Ltd. Product names referred to are trademarks of those companies.

**MAIL ORDER FOR
A LIMITED
PERIOD
ONLY**

ACORNUSER

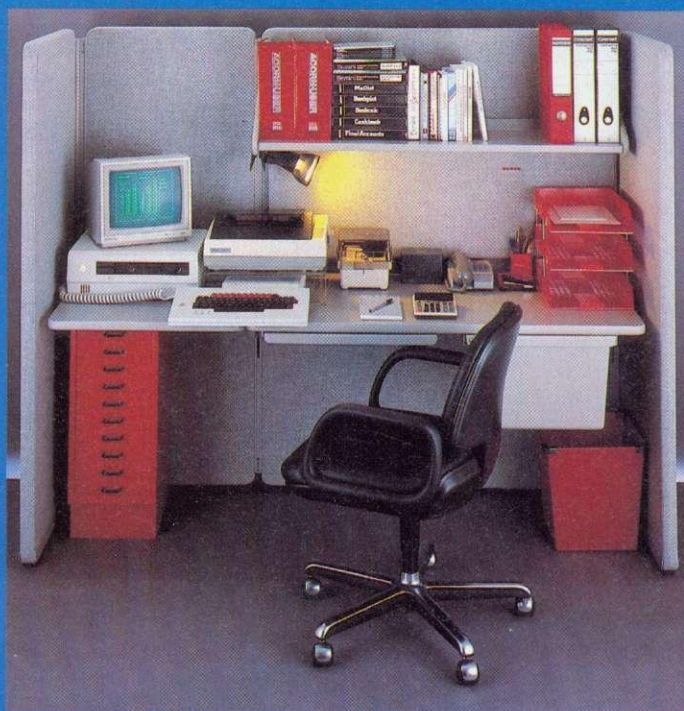

How best to organise your office: see page 135

GUIDE TO BUSINESS

Latest news/Top five chart

131,133

Setting up for business

135

Major CP/M packages explored

139

Hints and tips for CP/M users

141


Gemini's DDD suite reviewed

183

Printer round-up

203

BBC ? -

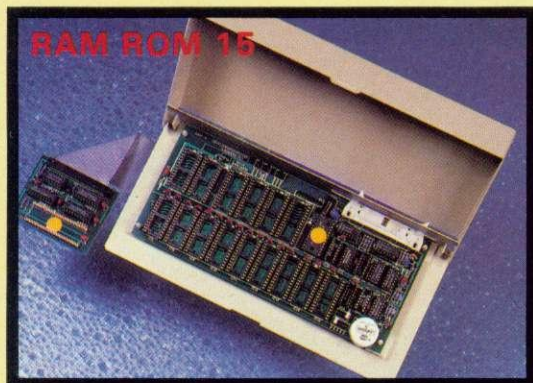

GCC!

3"

One
featu
The t
times
comp
In its
varied
£86.0

5 1/4"

This
drive
The d
and d
colou
BBC M

5 1/4"

Finishe
compa
BBC M
Featur
switch
LED ill
Comple
manua
£358.0

GC

BBC MIC

BBC MODEL B
BBC DISC INT
BBC DISC INT
BBC A to B U
BBC MEMORY

MONOCH

KAGA AMBER
KAGA KX-12

COLOUR

KAGA VISION
KAGA VISION
KAGA VISION

DAISYW

DAISYWHEEL
JUKI 6100



5 WAYS TO IMPROVE YOUR BBC

3" SINGLE DISC DRIVE

One of the most compact disc drives available today, the 3" Drive features the ingenious dual-sided cartridge style protected disc. The twin sided discs, 100K both sides, are physically protected at all times. The whole unit is very quiet and fast in operation and comes complete with all necessary cables, manual and formatting disc. In its sturdy, BBC colour coded metal case this drive is ideal for many varied uses especially within the educational field.
 £86.00 + VAT = £98.90 inc. P. & P.

5 1/4" SINGLE DISC DRIVE

This highly reliable, high performance half height single 5 1/4" disc drive is fully BBC compatible 400K 40/80 Track switchable drive. The drives come complete with all necessary cables, formatting disc and disc drive manual, one year warranty and are supplied in a BBC colour coded metal case. Equally at home alongside or on top of your BBC Micro at £167.85 + VAT = £193.03 inc. P. & P.

5 1/4" DUAL DISC DRIVE

Finished in a metal case the same colour as the BBC, this slim compact dual disc drive, fully BBC compatible, is at home on top of the BBC Micro and is angled to allow easy access to the drive doors. Featuring twin 400K 80 Track drives the unit is also 40/80 Track switchable, the switch being mounted on the front of the unit with LED illumination. Complete with all necessary cables, formatting disc and disc drive manual and a one year warranty, the complete unit is available at £358.00 + VAT = £411.70 inc. P. & P.

RAM ROM 15

... for those who want an expansion board (RAM/ROM) of the highest specification the RAM ROM 15 will not disappoint". (Acorn User April 1985). The RAM ROM 15 is an external board which allows the use of a maximum 16 sideways ROM sockets plus the necessary hardware for up to 16K of battery backed sideways RAM. With "No Solder" installation, the fully buffered RAM ROM 15 can be optionally powered by an external PSU, thereby virtually eliminating power drain and overheating problems. RAM ROM 15 is "of the highest specification" but ONLY £89.99 + VAT = £100.79 inc. P. & P.

MONITOR STANDS

These robust metal monitor stands are finished in the same colour as the BBC Micro. They are available in two heights:
 The High Stand: Which enables the stand to be used in conjunction with the BBC Micro and disc drive.
 The Low Stand: Fits neatly over the BBC Micro on its own.
 To tidy up your BBC, Disc Drives and Monitor, these drives are available at:
 High Stand £18.00 + VAT = £20.70 inc. P. & P.
 Low Stand £16.00 + VAT = £18.40 inc. P. & P.

ALSO AVAILABLE:

- ROMEX 13
- STARdataBASE
- THE CRACKER
- COMPONENTS
- COMING SOON - NEW PRINTER SHARER/BUFFER

FOR FURTHER TECHNICAL SPECIFICATIONS RING GCC ON

GCC (Cambridge) Ltd



BBC PRODUCTS AND COMPATIBLE PERIPHERALS

BBC MICROCOMPUTER SYSTEM

MODEL B	£323 + VAT = £380.00
DISC INTERFACE KIT	£82.61 + VAT = £95.00
DISC INTERFACE KIT % 1.2 ROM	£91.30 + VAT = £105.00
A to B UPGRADE KIT	£60.87 + VAT = £70.00
MEMORY UPGRADE KIT (8 x 4816-100ns)	£17.39 + VAT = £20.00

MONOCHROME MONITORS

AMBER SCREEN	£109.00 + VAT = £125.35
KX-12 GREEN SCREEN	£109.00 + VAT = £125.35

COLOUR MONITORS

VISION EX Medium Resolution	£215.00 + VAT = £247.25
VISION 2 High Resolution	£285.00 + VAT = £327.65
VISION 3 Super High Resolution	£399.00 + VAT = £458.85

DAISYWHEEL PRINTERS

DAISYWHEEL 2000	£289.00 + VAT = £332.35
DAISYWHEEL 6100	£346.95 + VAT = £399.00

DOT MATRIX PRINTERS

STAR DP510	80 Col.	£199.00 + VAT = £228.85
NEC PC8023	80 Col.	£223.20 + VAT = £256.75
EPSON RX8080	Col.	£249.00 + VAT = £286.35
EPSON RX80FT	80 Col.	£285.00 + VAT = £327.75
EPSON FX80	80 Col.	£438.00 + VAT = £503.70
EPSON FX100	132 Col.	£450.00 + VAT = £517.50
EPSON MX100	132 Col.	£475.00 + VAT = £546.25
EPSON LQ1500 (NLQ)	132 Col.	£1100 + VAT = £1265.00
KAGA KP810 (NLQ)	80 Col.	£434.74 + VAT = £499.95
SEIKOSHA GP 100	80 Col.	£199.00 + VAT = £228.85
GEMINI 10X	80 Col.	PRICE ON APPLICATION

BBC FIRMWARE

GRAPHICS ROM	£29.90 + VAT = £33.35
DISC DOCTOR	£29.00 + VAT = £33.35
GREMLIN	£29.00 + VAT = £33.35
TERMI	£29.00 + VAT = £33.35
PRINT MASTER	£29.00 + VAT = £33.35
PASCAL	£59.00 + VAT = £67.85
FORTH	£34.72 + VAT = £39.93
VIEW	£52.00 + VAT = £59.80
WORDWISE	£40.00 + VAT = £46.00
BEEBASE	£35.00 + VAT = £40.25

BBC ACCESSORIES

STARdataBASE	£67.22 + VAT = £77.30
CRACKER	£62.50 + VAT = £71.88
EXTRA LANGUAGES	£60.00 + VAT = £69.00
SINGLE 400K 5 1/4" DISC DRIVE	£167.85 + VAT = £193.03
40/80T SWITCHABLE	
DUAL 800K 5 1/4" DISC DRIVE	
40/80T SWITCHABLE + PSU	£358.00 + VAT = £411.70
SINGLE 3" DISC DRIVE	£86.00 + VAT = £98.90
LOW MONITOR STAND	£18.00 + VAT = £20.70
HIGH MONITOR STAND	£18.00 + VAT = £20.70
G11G (2K)	£5.50 + VAT = £6.33
G264 (8K)	£15.00 + VAT = £17.25
TEXTTOOL	£8.00 + VAT = £9.20
GCC NIF	£8.00 + VAT = £9.20
ULTRA CALC	£69.13 + VAT = £79.50

BBC ACCESSORIES (continued)

ROBIN LIGHT PEN (Standard)	£26.00 + VAT = £29.90
ROBIN LIGHT PEN (Touch Switch)	£36.00 + VAT = £41.40
RGB MONITOR LEADS	£6.04 + VAT = £6.95
MONOCHROME MONITOR LEADS	£3.48 + VAT = £4.00
562 PRINTER RIBBONS	£3.00 + VAT = £3.45
570 PRINTER RIBBONS	£2.50 + VAT = £2.87
EPSON MX-80	£4.25 + VAT = £4.89
SHINWA CP-80	£5.50 + VAT = £6.33
IBM (MULTI-STRIKE)	£5.00 + VAT = £5.75
KAGA (Cartridge for KP810/KP910)	£4.00 + VAT = £4.60
BBC PRINTER CABLE	£8.33 + VAT = £9.57
BOX LISTING PAPER	£16.00 + VAT = £18.40
ALL IC's Available for BBC	PRICES ON APPLICATION
GCC ROMEX 13 Sideways ROM Extension	£35.00 + VAT = £40.25
GCC RAM/ROM Extension Board	£86.95 + VAT = £99.99



TRADE ENQUIRIES WELCOME



GCC (Cambridge) Limited
 66 High Street, Sawston,
 Cambridge CB2 4BG
 Telex: 81594 SAWCOM

0223-835330/834641

WHATEVER YOUR DISC DRIVE FOR THE BBC MICRO COMPUTER YOU NEED THE BEST FILING SYSTEM

Kenda Professional DMFS with PADS £98 + VAT

The complete package for the serious user

P.A.D.S. Professional Architecture for Disc Storage. This powerful new release of software represents a further advance by Kenda's development team. It is supported by improved hardware: lighter module with revised terminations.

The product retains the *CP/M type disc structure used in the original Kenda DMFS, but has an even greater flexibility and much wider compatibility with other software and hardware.

*CP/M is a Registered Trade Mark of Digital Research Inc.

- MORE UTILITIES including User Program selection by menu
- ENHANCED COMPATIBILITY with other software and hardware
- IMPROVED ERROR HANDLING
- SINGLE/DOUBLE DENSITY
- BAD BLOCK HANDLING
- UP TO 379 FILES PER DISC with maximum flexibility
- NO USER RAM USED releasing typically 2.7K bytes 'extra'
- AUTO INTERNAL DIAGNOSTICS
- AUTO DENSITY RECOGNITION
- AUTO BACK-UP ON ERASE

Ideal for data-base applications

- ANY FILE EASILY EXTENDED until disc full
- ALL FILES open for output CAN BE EXTENDED INDIVIDUALLY
- BOTH SIDES of disc treated as ONE STORAGE AREA

Page 0E00 : up to 3 files open. [Page 1900: allows 5 files open]

Kenda Electronic Systems Limited

A member of the Kenda Group
Nutsey Lane, Totton, Southampton SO4 3NB Telephone 0703 869922 Telex 477163

Please send details of DMFS with PADS

Please send details of PADS upgrade
for current DMFS (for existing users)

Please send Professional DMFS with PADS incl "Welcome" diskette,
for inch disc drive.
I enclose cheque for £112.70 incl P&P and VAT
(Delivery within 10 days subject to availability)

Name _____

Address _____

Telephone _____

K

**Kenda
Electronic
Systems Ltd**

A member of the Kenda Group
Nutsey Lane, Totton, Southampton SO4 3NB
Facsimile 0703 860800 Telex 477163
Telephone 0703 869922

BUSINESS

NEWS

Get down to business with the new look

Welcome to the new look business section in *Acorn User*. From now on we will be presenting features covering all aspects of using the BBC micro and Electron in business, from the smallest one-man outfit to large companies.

The business news pages will inform you about the latest happenings and alert you to the newest equipment.

Our Top Five national chart devoted to business and utilities – now provided by the renowned Gallup group – will keep you abreast of the best-sellers.

Roger Carus kicks off a three-part guide for those wanting to set up a business system. Next month he'll look at the software you need and where to get it, and then at some practical uses for micros.

Edward Brown and Richard Clement continue their support for users of the CP/M business operating system on BBC Z80 second processors.

Plus there will be regular reviews of business hardware and software.

And all this coverage demands the best authors: Bruce Smith, author of 16 books including a guide to CP/M; Edward Brown and Richard Clement, prominent members of the British CP/M user group; George Hill, author of the UserDUMP printer control ROM and a regular *Acorn User* writer for three years; and Simon Williams, whose book on using the BBC micro in business has just been published by BBC Publications.

But the best contributors are you, the readers: state your opinions, tell us the news and let us know your needs. That way we can really get down to business.

A plum from Peartree

The 128k BBC B+ is at the heart of a complete business package of hardware and software for an inclusive price of £1345.50. The KBL 128 PC from Peartree Systems comes in an IBM-style package with an integrated suite of software.

The KBL 128 PC doesn't look at all like a BBC micro. The main printed circuit board has been housed inside a totally new case, which also incorporates a pair of double-sided 80-track disc drives and cooling fan.

The latest Acorn Disc Filing System (ADFS) is fitted as standard, so discs can be used for double density storage – in effect, a total of 1.4Mb. The Acornsoft *View* wordprocessor is also fitted.

The keyboard (which is completely detached) is based on the popular IBM PC design and works on an infra red device in a similar way to a remote TV or video control. As the keyboard can be up to seven metres from the rest of the system it should cope with the largest of offices.

Included in the price is a hi-resolution green screen monochrome monitor, providing comfortable viewing in 80 column mode. A colour monitor costs an



KBL: 'The software alone is well worth the price of the system'

extra £241.50 including VAT.

The export market has not been overlooked, with French, Greek and Arabic Operating Systems already available, and User Guides appropriately translated. Spanish, Danish, Swedish, German and Italian versions will follow.

Peartree Systems marketing director, Vartan Mundigan, sees the software supplies with the KBL 128 PC as an important feature.

He said, 'The software alone is well worth the price of the system – in fact we're giving the computer away with the software!'

The philosophy behind the system is to provide the businessman with a complete set-up. Mr Mundigan continued, 'People want to buy a complete system, they don't want to look around gathering their equipment together from several sources in the hope that it will work. For £1200 they can become completely computerised.'

The software comes under ten headings: wordprocessor (*View*), stock control, customer database, purchase ledger, sales ledger, sales ledger, nominal ledger, invoicing/credit notes, proforma quotations, bank account control and petty cash control.

For further details contact Peartree Systems on (0480) 811573.

Sign on the register

If your business uses a computer for processing details relating to an individual, you are now required to register under the Data Protection Act, which came into effect this month.


Computers handling information for personal, household or recreational purposes are exempt, but business and professional us-

ers have until 11 May 1986 to register – at a cost of £22. Failure to register by that date is a criminal offence.

The purpose of Act is to give protection to individuals.

Contact the Data Protection Registrar, Springfield House, Water Lane, Wilmslow, Cheshire SK9 5AX.

BOXED CLEVER

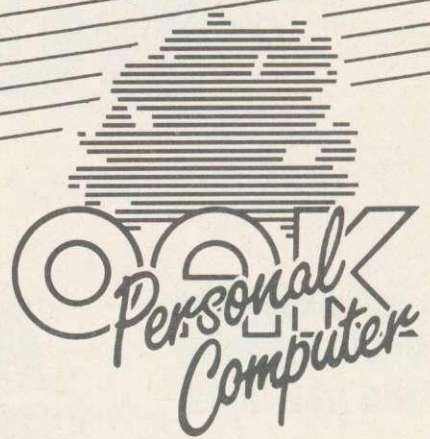

No matter what your customised BBC Computer requirements are, from a case to a complex computer system, Oak Universal gives you all the options.

The Oak metal case offers the user a tough computer capable of performing in the harshest of environments. Cases from £159.00.

Whilst the stylish Oak Personal Computer fits unobtrusively into office or home. Cases from £105.95 (pictured).

No matter which option you take, opt for Oak, the logical choice.

For further details of the complete range please complete and return the coupon below.

OAK UNIVERSAL LTD
 20 Crofters Green, Green Lane, Idle, Bradford BD10 8RR
 TEL: BRADFORD (0274) 614167

Please send me more details of the Oak ranges
 My main use is:

Home Business Scientific Education

Name _____

Address _____

Post Code _____

The Oak and Oak PC ranges can house

BBC Model B
 or BBC Model B+ (64K)
 or BBC Model B+ (128K)
 with BBC power supply
 BBC keyboard and speaker
 Up to 2 half height disc drives
 Disc drive power supply
 Ram Rom expansion boards

Plus a choice of options
 65 watt power supply
 or 100 watt power supply
 10mb or 20mb Winchester Hard Disc
 Fan
 Modem
 IEEE Interface
 Co-processors: Z80
 6502
 32016
 68000



OAK UNIVERSAL LTD
 20 Crofters Green, Green Lane, Idle, Bradford BD10 8RR
 TEL: BRADFORD (0274) 614167
 All prices shown above are exclusive of VAT

BUSINESS

NEWS

Shops can cash in with Meadow

Meadow Computers has produced BBC micro accounting software for wholesalers and retailers.

Micro-Trader costs £200 (plus VAT) on disc and consists of integrated sales, purchase and nominal ledgers, and can hold up to 450 accounts in each ledger and 4000 transactions per month.

Invoices, credit notes, statements and remittance advice notes can be printed out, along with a profit and loss account and a balance sheet.

Micro-Stock is a stock control program designed to be used with *Micro-Trader* – though it can be used alone. It can handle 4000 stock lines and has invoice and credit note routines for cash and account sales. *Micro-Stock* costs £95 (plus VAT) on disc.

Contact Meadow at: 11 London Street, Whitchurch, Hants RG28 7LH. Tel: (025682) 2008.

Farmlink goes nationwide

Farmlink is now available nationwide. The closed database runs on Prestel and offers micro-owning farmers a variety of agricultural and business information, specialist software and interactive services such as product ordering.

British Telecom, which runs Prestel, was prompted to buy a majority share in Farmlink Services, providers of *Farmlink*, and launch a fully national service.

Telex link-up widens Prestel's scope

Prestel users can now send and receive messages from anyone with a telex machine by using the Telex Link facility.

Messages are created as Prestel response frames which Telex Link then automatically transmits to any business with a telex machine anywhere in the world.

Charges start at 50p per frame for UK destinations and incoming telexes are received free of charge.

The One-to-One electronic mail service can also send and receive telexes.

The service was launched last year and offers telexes and electronic mail between subscribers.

Prices start at £5 per month for a mailbox, a £50 registration fee, plus time-based online charges and, of course, telephone charges.

The company has produced a 'plain man's guide' to electronic mail, available free of charge from One-to-One, Scorpio House, 102 Sydney St, London SW3 6NL.

Torch and Acorn battle over Z80

by Geoff Nairn

The battle for the lucrative Z80 second processors market continues unabated and now Torch and Acorn are squabbling over sales figures.

The Torch ZEP100 – price £330 plus VAT – was first on the market some three years ago and it has recently been enhanced to include a new network version of MCP, which runs applications programs faster.

The Acorn add-on costs £348 plus VAT and comes with the 'real thing' – disc-based CP/M operating system, version 2.2. Both the Acorn and Torch second processors come with bundled software for wordprocessors, database and spreadsheet applications.

Torch's Jan Edbrooke claimed that over 15,000 ZEP had been sold as opposed to 'just a few

hundred' for the Acorn Z80.

Acorn's David Bell was reticent about the exact number of Acorn Z80s sold, but claimed it was 'many thousands – certainly not just a few hundred'.

He said: 'Torch stole the lead on us by releasing a Z80 card first, so their greater sales are simply due to the fact that there was initially no competition. Our Z80 is faster than any other Z80 add-on for the BBC micro and is proving very successful.'

For Acorn, the Z80 add-on is the only remaining product from Acorn's foray into business computers. As with Torch, it's a profitable product line for Acorn and when the Z80 market eventually dries up the company will struggle to find a replacement. David Bell would not disclose whether Acorn had any plans for a 16-bit business machine.

Statistics pack for BBC micro

Instat is a comprehensive statistics package for the BBC micro, developed by the University of Reading and two universities.

Facilities include data summary and presentation, simple and multiple regression, variance analysis, random sampling and plotting.

Data is stored on disc as separate 'worksheets' and subsets are loaded in as needed.

Price to a single user is less than £100, with discounts for educational users.

Details from Statistical Services Centre, Department of Applied Statistics, University of Reading, PO Box 217, Reading RG6 2AN.

Network choice

Networking is a 45-minute video about . . . networking. It aims to cover all aspects of micro networks and enable businesses to decide whether to take the plunge.

The video costs £50 and is presented by former BBC TV newsreader Peter Woods. It's available from Computer Television on 01-631 1801.

Our mistake!


The *Datanurse* nursing administration package was developed by and is available from Syntec Ltd and not from Torch Computers. Price for the software is £995. Further details on (0234) 857105.

BUSINESS TOP FIVE

Title	Publisher	Cassette	Disc	ROM	Electron	Shadow on B+	6502	Econet
1 Mini Office	Database Publications	£5.95	£7.95 £9.95 ⁺	—	£5.95	*	*	—
2 Wordwise	Computer Concepts	—	—	£56.35	—	—	Yes £4.95	—
3 Viewsheet	Acornsoft	—	—	£59.50	£29.95	Yes	Yes	Yes
4 Wordwise	Computer Concepts	—	—	£56.35	—	—	—	—
5 View	Acornsoft	—	—	£59.80	£29.95	Yes	Yes	Yes

Compiled by Gallup from a panel of specialist dealers. Contact publisher: Database, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY, 061-480 0171; Computer Concepts, Gaddesden Place, Hemel Hempstead, Herts HP2 6EX, (0442) 63933; Acornsoft, 645 Newmarket Road, Cambridge CB5 8PD, (0223) 214411 ⁺ 3 inch disc

Yet another unbeatable deal from Datastar Systems!

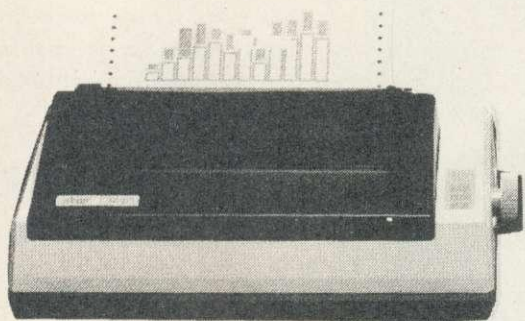

STAR SG10

Character Sets

- 96 Standard ASCII Characters
- 88 Standard International Characters
- 96 Italic Characters
- 88 Italic International Characters
- 96 NLQ Characters
- 88 NLQ International Characters

Character Matrix

- Standard Characters: 9 dot x 11 dot
- STAR Block Graphics: 6 dot x 6 dot
- IBM Block Graphics: 12 dot x 11 dot
- User Defined: 8 dot x 4 to 11 dot
- Near Letter Quality: 17 dot x 11 dot

Character Fonts

- Normal (10 CPI)
- Elite (12 CPI)
- Condensed (17 CPI)
- NLQ (10 CPI)

Line Spacing 1/6, 1/8 in. or 7/32 in. Standard

Dimensions (W x D x H)
392 x 315 x 145mm (15.4 x 12.4 x 5.7 in.)

Number of Columns
80, 96, 136, (40, 48, 68 Double Width)

Print Head 9 Wires (User Replaceable)

THE INCREDIBLE NEW STAR SG-10 NEAR LETTER QUALITY PRINTER.

features:—

- ✦ Epson and IBM compatible print codes
- ✦ Friction and tractor feeds.
- ✦ Externally Accessible DIP-Switches
- ✦ High-resolution bit-image graphics
- ✦ Downloadable character sets
- ✦ NLQ, italics, condensed, enlarged, super & subscript styles.
- ✦ High 120 CPS print speed, logic seeking.
- ✦ Hex dump facility.
- ✦ Macro-instructions.
- ✦ Touch-sensitive control panel.
- ✦ Standard parallel Centronics interface
- ✦ 2K print buffer — expandable to 10K

**SPECIAL OFFER
TO BBC MICRO USERS**
£30 off all in price of
£297.85

Just clip this advertisement to
your order and send cheque
for **£267.85**
Offer extended until
10th December, 1985

Star SG-10 £259 + VAT	£297.85
Parallel cable for any Micro (max. price)	£20
2 Spare ink ribbons	£5
2000 sheets of continuous listing paper	£15
Next day doorstep delivery service	£10
	£347.85

Datastar's all in price £297.85!!!

Post your cheques to

Datastar Systems UK

Unicom House, 182 Royal College Street, London NW1 9NN. Telex 295931 UNICOM G

PERSONAL CALLERS WELCOME — We are situated by the junction of Camden Road, near the railway bridge
MONDAY-FRIDAY 9-6 SUNDAY 10-1 EXPORT ENQUIRIES WELCOME

Credit Card Hot Line 01-482 1711

AS MAIN DISTRIBUTORS FOR THE STAR RANGE, WE ARE ABLE TO OFFER EXCELLENT DEALER MARGINS

BUSINESS

MINDING YOUR OWN BUSINESS MADE EASY

In this article, the first in a series of three, advice and guidance are given to those wanting to set up a business system

Roger Carus

If you run a business, either full- or part-time, you may wonder whether it is possible to use a BBC micro to help you. Since you are reading this in *Acorn User*, you probably have some knowledge of the machine's capabilities already, but the considerations for business users are rather different from those of the enthusiast.

To begin with you are aiming for a profit so the time you spend on computing costs you money. Since you (or your employee) could be doing something else, you need a simple system which does not take up too much of your time.

You need 'off the peg' programs that you can run with little knowledge: even if you are keen and knowledgeable about computing, your staff are unlikely to share your feelings. Finally you need reliability, above all.

If you are self-employed, even if only part-time, then you may be able to get some tax relief on the cost of running the system – provided that it is 'wholly and exclusively' used for your business.

You should first consider your business to see in which ways a computer would be useful and repeated surveys show this to be in the following areas: the wordprocessor, the database, the spreadsheet, and various special programs including accounts packages in roughly that order.

This is not the place to guide your choice of products, which can, of course, change very quickly, but rather to give you an idea of what factors to take into account when you are making your choices.

Your needs

You should look at what you do, and remember – each business is unique. Try writing down a list of what you have done in the last month: the letters (and were there several the same?); the records of purchases, sales and stock; any printing or advertisements you have prepared; any calculations you have made – and did you use a calculator? If so what for? Now do the same for anyone who helps you with the work.

If your list makes you think that a computer can help you – and your business is not too large – then you should consider what a BBC micro can do. But do remember that if you employ more than 25 people you are probably already too large for it to be a wise choice. On the other hand, a part-time worker with a typist/book keeper for one day each week could probably break even.

The object is to get the same work done in less time either to free you for more profitable activities, or else to give you more leisure: the choice is entirely up to you.

Equipment

What sort of system should you be considering? Starting with the micro itself the simple answer is the BBC B+ which is fitted with a disc filling system (DFS). I share the view of Vincent Fojut (DFS review, July '85) that choosing a standard DFS saves problems later as new software appears.

The next choice concerns the disc drive (which is essential), and the idea is twin disc drives which have their own power supply, double-sided with the facility of switching between 40 and 80 tracks using standard 5 1/4in discs. For more information see the guide to disc drives by Bruce Smith in the July '85 issue.

The ease of copying is particularly important to a business user, because to lose the data on the disc can be devastating if it happens to be your order book, list of customers or record of transactions. It is essential that you keep three full copies of all your work and up-date them daily after any alterations, by systematic copying. Anyone who has lost a complete address book of 120 names, as I have, and then had to spend a week recovering entries from the wreckage will appreciate this fact.

Most of the uses (particularly word-processing) require someone to read the characters on the screen for long periods, and that calls for a high resolution monitor rather than a domestic television – in any case you may be committing an offence if you employ someone to operate the system in such a way that it

could damage their sight.

You must choose between a monochrome monitor (which in practice means an amber or olive green screen) and a colour monitor; in either case between 12in and 14in diagonal for size. The main differences are of cost and weight: a 14in colour monitor would cost and weigh about four times as much as a 12in monochrome set. Unless you are going to use graphics from the start I would suggest a 14in amber monitor with the highest resolution you can get. If you plan to use any graphics, or money is not too tight, then pay the extra for a colour monitor of the same size, making sure that it is an RGB (Red, Green and Blue) set, which describes those with the best circuitry to produce high resolution.

You then come to the most difficult choice of all – what type of printer to buy – and here the answer lies in knowing what you are going to do with the system. There are many different types on the market at present, and an even larger number of makers, many of whom will probably disappear over the next few years when spare parts get difficult to obtain.

The main kinds are the dot-matrix, the daisywheel (with or without a keyboard) and the ink-jet.

The dot-matrix prints a group of dots in patterns which create characters, but equally can produce any other kind of image including graphs and diagrams.

It is fast, but gives the distinctive 'computer' print which may not convey the best image for your business if used for outside letters or publicity material since it is obviously mass produced, although this can be greatly improved by using an NLQ (Near Letter Quality) mode, assisted by one of the many printer drivers which are available for most, but not all, such printers. Indeed, I recommend that you should not even consider buying a dot-matrix without the NLQ facility.

The ink-jet system has much in common with the dot-matrix but has the benefit of better colour reproduction.

For almost everything that a traditional

BUSINESS

typist would do, the daisywheel printer produces the 'perfect' copy (although more slowly), and although it is possible to get connections to an electronic typewriter I suggest a separate machine with an identical typeface would be better. Watch, however, to see that it does not use a typeface with the distinctive zero character, which identifies it as a computer output (if that matters).

It would also be better to choose one with the capability to provide proportional spacing, since that produces a more professional output. Naturally, with a daisywheel you can always change the wheels. It is also useful to have a printer which can take either single sheets, or special continuous stationery for long print jobs.

How should you choose? If you are content with the distinctive look and want any kind of diagrams, enlarged characters and speed, then choose the dot-matrix with NLQ, or the more expensive ink-jet type (if you want good colour). If you want top quality typed material and high reliability, go for a daisywheel.


Once you have made that general decision, take a sample of typical work along to the dealer – on the largest size of paper you will use and containing zero and £ characters – and insist on seeing it printed out.

The point about the £ character is that many printers use the USA character set in which ASCII code 35 gives a #, and they need special handling to produce £ signs with the natural keyboard stroke. So, if this is going to be a problem it is better to know in advance.

You will need a place to keep your system, a firm table top (or better still a work station) at least 100cm x 75cm and a comfortable chair. Choose a place where the system doesn't need to be moved often and where there is not too much dust around. For ease of use try to avoid having the sun shining on the screen.

It is worth buying from a large, well established specialist dealer, not too far from where the system will be used – even if this does work out a little more expensive. You are going to need help occasionally and repairs and maintenance will have to be carried out and if you have bought your system all in one place, at least you reduce the risks of buying incompatible hardware. Unfortunately, with more general dealers, that is not always the case.

The cost of all this is likely to be in the range from £1200 to £1900, depending on your choices. Over the next few months we will explore the software you need to make the system pay, and the kind of work which can be expected of it.

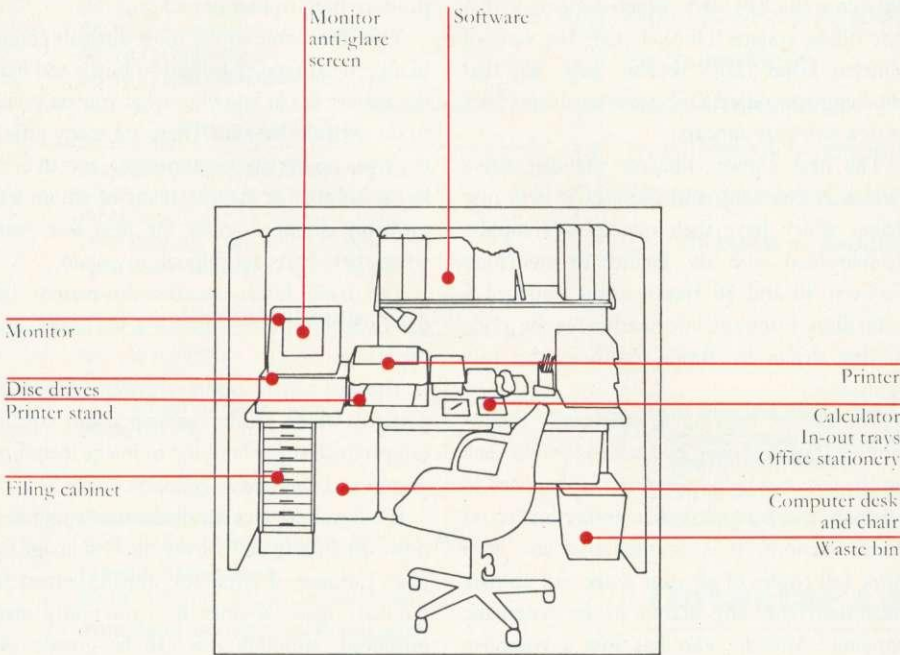

Many thanks to the following suppliers for lending us equipment:


BBC in Oak box, Oak, PC Model 5 – £950 + VAT (see Business Cover). **Disc Drive**, Ahkter, Dual Disk Drive, MD802D – £286 + VAT. **Monitor**, Technomatic, High-Res 1441 – £389 + VAT. **Clear printer stand**, Viglen Computer Supplies, 490 Printer Stand – £16.95 + VAT. **Printer**, Star, Dot Matrix, SD10 – £389 + VAT. **Panel-based workstation** (including desk and chair), Workbase, Office in a Box, Configuration 20 – £650 + VAT, (range from £500 – £700). **Monitor anti-glare screen**, Watford Electronics, safety screen – £13 + VAT. **Acorn User binders**, Acorn User Services, PHS Mailing. **Software**, various titles supplied by Computer Concepts, Gemini Marketing, Contex Computing, Meadow Software. **Office equipment**, various, supplied by Ryman Ltd.

Oak Universal Ltd, 20 Crofters Green, Green Lane, Idle, Bradford BD10 8RR. Tel: (0274) 614167. **Ahkter Computer Group**, 28/29 Burnt Hill, Harlow, Essex CM20 2HU. Tel: (0279) 443521. **Technomatic**, 17 Burnley Road, London NW10 1ED. Tel: 01-208 1177. **Viglen Computer Services**, Unit 7, Trumpers Way, Hanwell, W7 2QA. Tel: 01-843 9903. **Star Micronics UK**, Craven House, 40 Uxbridge Road, Ealing, London W5 2BS. Tel: 01-840 1800. **Workbase Ltd**, Bumpers Way, Chippenham, Wiltshire SN14 6LH. Tel: (0249) 659196. **Watford Electronics**, Jessa House, 250 Lower High Street, Watford WD1 2AN. Tel: (0923) 37774. **Computer Concepts**, Gaddesden Place, Hemel Hempstead, Herts HP2 6EX. Tel: (0442) 63933. **Gemini Marketing Ltd**, Unit 21, Dinan Way Trading Estates, Exmouth, Devon EX8 4RS. Tel: (0395) 265165. **Contex Computing**, 15 Woodlands Close, Cople, Bedford MK44 3UE. Tel: (02303) 347. **Meadow Software**, 11 London Street, Whitechurch, Hampshire RG28 7LH. Tel: (025682) 2008. **Ryman Ltd**, Head Office, 59 Markham Place, London SW3. Tel: 01-351 5671. **Acorn User Services**, PHS Mailing Ltd, PO Box 14, Horley, Surrey RH6 8DW. Tel: (02937) 72206.





**MORE FEATURES
MORE FUNCTIONS
MORE POWER**

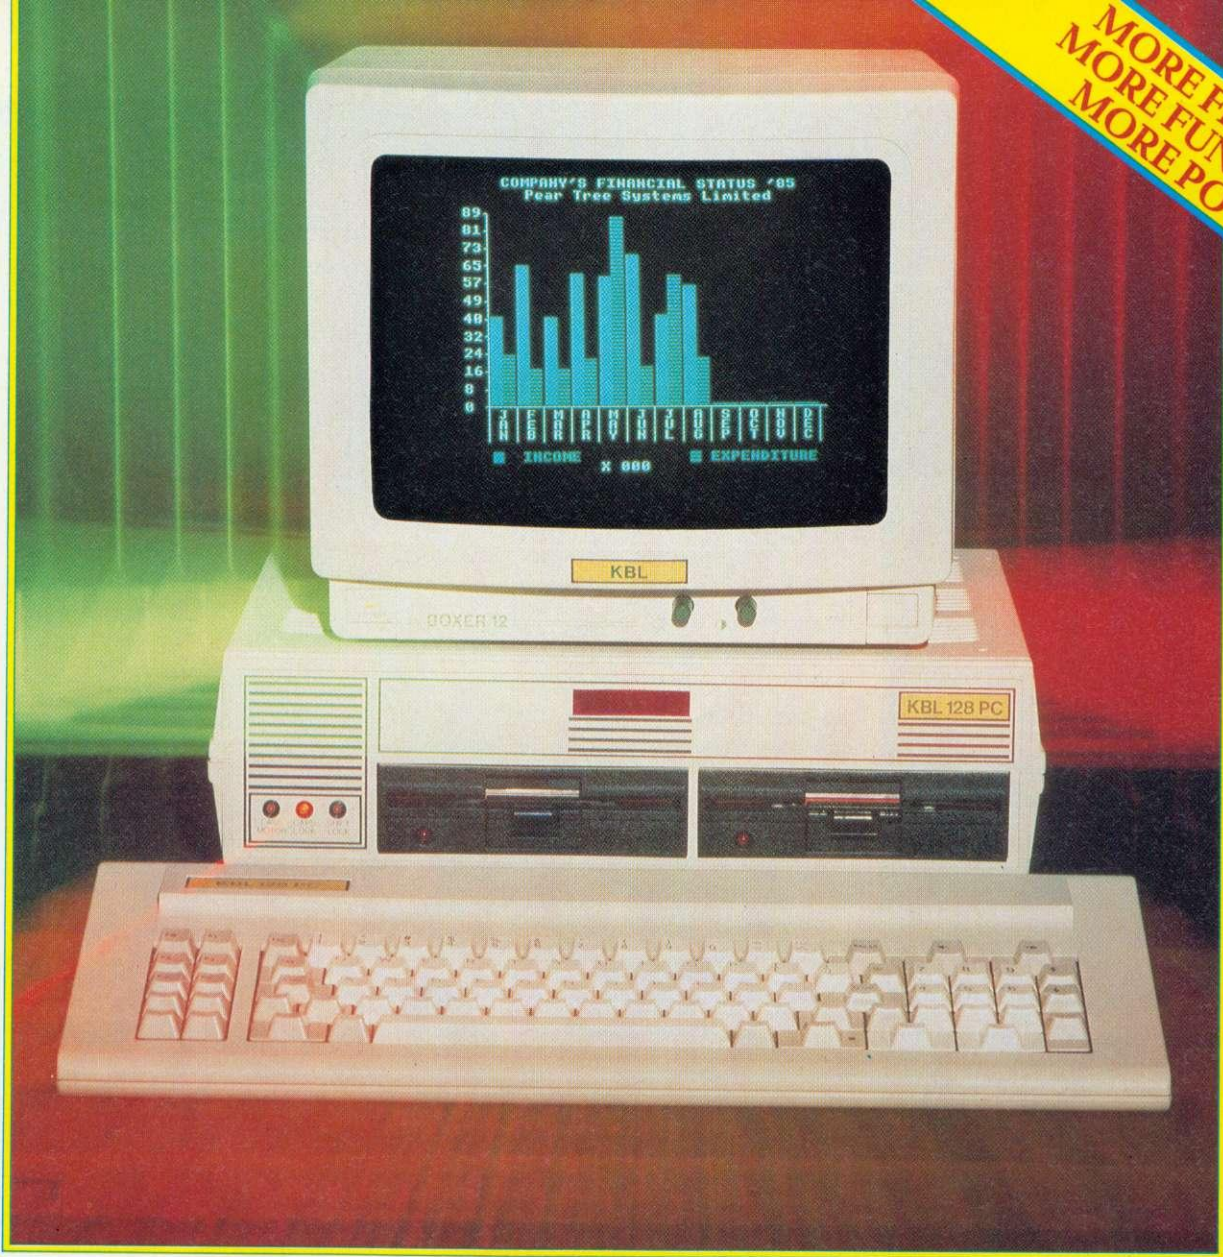

Buy the Software and the computer comes FREE!

The KBL 128 PC is a remarkable new small business system with a powerful 128K RAM.

Complete with Hi-Res Monochrome Monitor, twin 1.4 MByte Data Storage Disk Drives, a choice of English/French/Greek/Arabic operating systems, PLUS a staggering range of Business Software Programs worth £1170 – the complete package costs only £1170 ex VAT.

The KBL 128 PC is fully compatible with all Acornsoft, giving access to thousands of additional programs.

- THE HARDWARE**
- * 128K RAM COMPUTER
 - * ACORN ADFS FITTED STANDARD
 - * 1.4 MByte DISK DRIVES
 - * 80mm COOLING FAN FITTED
 - * HI-RES MONOCHROME MONITOR (COLOUR OPTION AVAILABLE)

**PEARTREE
COMPUTERS
LIMITED**

PEAR TREE MEADOW
ELLINGTON THORPE
HUNTINGDON
CAMBS PE18 0AW
TELEPHONE 0480 811573

- THE SOFTWARE**
- WORD PROCESSOR
 - STOCK CONTROL
 - CUSTOMER DATA BASE
 - PURCHASE LEDGER
 - SALES LEDGER
 - NOMINAL LEDGER
 - INVOICING/CREDIT NOTES
 - PROFORMA QUOTATIONS
 - BANK A/C CONTROL
 - PETTY CASH CONTROL

TO PEAR TREE COMPUTERS
ELLINGTON THORPE
HUNTINGDON CAMBS PE18 0AW

PLEASE RUSH ME DETAILS OF
YOUR AMAZING LAUNCH OFFER

NAME _____

ADDRESS _____

TELEPHONE _____

THE TROUBLE WITH MY PACKAGE . . .

This month, the software packages that have raised most reader queries – and those with an apparently serious limitation – are examined

Edward Brown

Over the last few months I've looked at various aspects of the Z80 second processor, and in particular the wordprocessor program, *MemoPlan*. Throughout the articles, problems with the various software packages have been pointed out and cures for some of the problems have been given.

In this article I will cover the various software packages and what options are available for upgrading or improving those that are supplied with the Z80 second processor. Due to the quantity of software bundled with the Z80 and the time it takes to review each package, it has not been possible to examine every program in detail.

Some of the packages will be examined in more detail in future articles.

Next month, for instance, I will be looking at the two versions of Basic supplied with the Z80 second processor, most particularly at Mallard Basic.

To provide the best overview of what is available, I have concentrated on the packages about which I have had most correspondence and those with some serious limitation which has been highlighted.

The software that was examined was a full specification version of Mallard Basic from Locomotive Software, a full specification version of *Nucleus* from Compact Software, and upgrades of packages supplied with the Z80 second processor from Acorn.

The full specification Mallard Basic and *Nucleus* are available now (see below for details) and the upgrade pack of software from Acorn will be available sometime around the turn of the year.

MemoPlan

This package has been extensively upgraded to overcome most of the limitations previously present. The package now contains a much extended configuration program which allows the user to set up the editor as he or she wishes.

This will avoid patching the programs and the CONFIG.DAT file to accomplish such things as colour screens and the use of different printer types.

The configuration program provides the facility to alter how the screen behaves, how the keyboard and swap file are used, and how the background printing is performed. The printing program MEMOP has been tidied up and now handles all the print options correctly. This, together with the way the printout can be controlled using the new CONFIG program, makes it a much more flexible printing system.

The real improvements lie in the MEMO program itself which has had several functions modified, upgraded or added as follows.

Underlining now appears on-screen as you type, giving a visual representation of what you will see on the printout.

It is possible, using the CONFIG program, to change the default setting of the highlight mode from 'underline' something else such as 'italics'. Those items that are underlined on screen will then be output in italics.

The main thing is that, whatever highlight is chosen – and it will normally be underlining – it is possible to see exactly what is affected on the screen.

The quote key (CTRL f1) has now been renamed 'new page'. When pressed, a down arrow is displayed on the screen to indicate where the new page will be and a CTRL Z character is placed in the file. This means that, when the document is printed using MEMOP, a page will appear in place of the down arrow.

One of the two blank function keys, CTRL f6, has been assigned the function of providing information on the files on disc. When CTRL f6 is pressed, a drive or file specification is requested, and files which match this specification are displayed. This means that, when you want to read or write a file but can't remember it's name, you can look it up without having to come out of *MemoPlan*.

The naming of files has also been improved. Only legal filenames will now be accepted, so you no longer cause yourself problems by saving an edited document with a name that cannot be accessed from the CP/M command level.

The many control sequences which used to be available from the keyboard and which produced strange results have now been tidied up so that they are no longer available. Now, if you type any control character that isn't documented, an error is generated.

Words can now be deleted forwards and backwards whereas previously they could only be deleted forwards.

If the command line length of 16 characters is exceeded when printing is requested from MEMO, the program no longer crashes, but instead gives an audible warning.

The occasional corruption of screen characters should also have been corrected. However, I was unable to generate this problem with my original copy of *MemoPlan* so could not check this.

Conclusion

The *MemoPlan* package has been tidied up and several new features added to enhance it. The new directory facility and the complete configuration program are particularly welcome. The latter will help to solve a great many of the problems readers have been experiencing.

BBC Basic

The new version of BBC Basic cures the ACS and ASN function bugs which caused PI to be missed out of the calculation. These now return the correct values. The computed RESTORE problem has also been solved.

Mallard Basic

Mallard Basic is the full specification version of the run-only Professional Basic provided with the Z80 second processor package. It allows programs to be created and altered interactively without a special program having to be written to save them in ASCII and then

editing carried out using *MemoPlan*. The package also allows lines to be edited by using the cursor keys, and insertion and deletion of characters.

A new manual comes with the package, which is an excellent reference source for the language. In addition to the Mallard Basic, a B-Tree file utility called JETSAM is supplied. This takes a lot of the headaches out of writing file handling programs.

The version of Mallard Basic supplied is 1.29. This is incompatible with earlier versions of JETSAM file handling, which means that earlier programs written using JETSAM will not run without modification; but this can be accomplished by one statement and is well documented with the package. The original Compact software can still be run under the original versions of Professional Basic supplied with the Z80.

Nucleus

Nucleus, as supplied with the Z80, is a useful program generator. Its main drawback is that, once an application has been generated, it cannot be altered. So once you've designed and generated your program, if you want to position things differently on the screen you have to regenerate the application from stage one. The upgraded version of *Nucleus* overcomes this limitation by allowing you to return to a previously defined program and alter the screen and file layouts. This greatly enhances its usefulness.

The methods of specifying sorting have been improved, so that it is now possible to sort by date.

Multi-line sort criteria are joined by 'AND' instead of 'OR'. Before acquiring the update of Mallard Basic or *Nucleus*, check with Compact that programs generated by *Nucleus* will be compatible with the version of Mallard Basic you intend to run under.

Accountant

Some early versions of *Accountant*, supplied with the first 500 Z80 second processors, contained bugs relating to VAT calculations. The updated version has been supplied with the preview discs. I doubt, though, whether it will be included in eventual release as there should no longer be any faulty *Accountant* packages in circulation.

GraphPlan

This package has been upgraded in a number of areas and the most prominent of these are as follows.

Zero values are now displayed on graphs. A number of faults in the printing routines have been put right, and *GraphPlan* will now print on Olivetti printers. Filenames have been given the same treatment as in *MemoPlan*. And the various places where the screen was not

updated with new information when it was altered have been corrected.

FilePlan

This package has received the same treatment as *MemoPlan* and *GraphPlan* in the area of file handling, along with some updating in the area of file deletion. The 'help' information can now be displayed without deleting the main menu. Output from the package has been improved, and the production of labels and merging with *MemoPlan* documents now work much better.

Summary of improvements

MemoPlan

Underlining on screen; directory function; 'New page' replaces 'Quote'; filenames checked for validity; redundant control keys disabled; print line options work correctly; command overflow in MEMO doesn't crash the system; CONFIG program expanded; easier to specify printer; easier to configure *MemoPlan* for own use; and easier to control format of print-out.

FilePlan

Menus remain on screen during 'help'; files can now be deleted and reused; and reports can now be deleted.

GraphPlan

Zero values now plotted; filenames checked for validity; and files now removed from directory when deleted.

Nucleus

Sort on date now permitted; multi-line sort criteria joined by 'AND' instead of 'OR'; file handling more flexible; and generated progress can be easily altered.

Accountant

VAT bugs cured.

BBC Basic

ASC and ASN bugs cured; and computed RESTORE bug cured.

Mallard Basic

Full specification version 1.29 available, which allows interactive program development.

What's in the packages

Mallard Basic version 1.29: Full specification Mallard Basic interpreter which allows full interaction for program development. Comes installed for the BBC micro and includes the run-only version.

Nucleus: Full specification version of *Nucleus* that allows the alteration of screens, files and programs once they have been defined.

Acorn upgrade pack: Contents not yet defined, but will include an upgraded *MemoPlan*, BBC Basic, *GraphPlan* and *Accountant*.

If you have any problems, advice or suggestions regarding CP/M, write to Edward Brown c/o CP/M Corner, Acorn User, 68 Long Acre, London WC2E 9JH.

USEFUL ADDRESSES

Locomotive Software, 1 South Street, Dorking, Surrey RH4 2DY. Tel: (0306) 887902.

Compact Software International, 1 Paper Mews, 330 High Street, Dorking, Surrey. Tel: (0306) 887373.

Acorn Computers, Fulbourn Road, Cherry Hinton, Cambridge, CB1 4JN. Tel: (0223) 245200.

CORRECTIONS

In the October article on *MemoPlan*, a number of errors crept into the text. The following corrections should be made.

Page 128:

The bytes to alter for different colours that appear in the third column should be A24H, A2AH, A30H and A36H.

I did not provide any instructions for the INTIP program that was supplied in the article. This program should be typed in using MEMO in the line mode and then saved with the extension ASM. It should then be assembled using the assembler ASM (see section 3 of the CP/M 2.2 with GSX Graphics manual) to create an Intel Hex file with the extension HEX. This is then loaded with the LOAD utility to form a COM file. Now it is possible to run the program by typing INITP.

For those who want to alter this program for their own printer, the following should be noted. All the strings for output consist of two parts. The first part up to the \$ is output to the printer, and the second part after the \$ is output to the screen. To change the initialisation strings for your own printer, only the first part should be altered. If further initialisation commands are required then:

- 1) extend the INIT: string to include the new command:
- 2) add an extra compare and call into the sequence following MODE:
- 3) add the appropriate string into the MSG table below INIT:
- 4) add a further subroutine to output the string.

On some printers it is necessary to output the \$ character. With these, change the second line of the PRINT: subroute to compare with a different value and to change all the printer terminators to the new character. The printer terminator is the first \$ in the strings.

CP/M CORNER

Edward Brown and Richard Clement

ALIVE AND WELWYN

I recently had the pleasure of addressing the Chiltern Branch of the CP/M UG (UK) in Welwyn Garden City. I was pleased to find an audience of some 40 people prepared to listen to me ramble on about the Z80 second processor and CP/M.

Many of the questions were all too familiar and pointed me in the direction of future articles. To all those who attended, a hearty thank you. Over the coming months, I will deal with your various points. Keep the questions coming – they will all be answered eventually. Some just take more solving than others.

USEFUL DUMPING GROUND

During the course of the *Acorn User Show*, I had the chance to experiment with a number of programs for both the Z80 and the Beeb. One utility of particular note for Z80 processor users is *Acorn User's* own *UserDUMP* ROM. This allows you to dump screens to a printer, and was used to produce screen dumps of pictures created on the Z80 second processor.

JUST AN ECHO IN THE PRINTER

From the CCP, it is possible to type CTRL P – then everything typed on the console is echoed on the printer. This is useful for getting hard copy of the directory of each disc or the sizes of each file for future reference. However, once an application program is loaded, this feature is often disabled – so one can't get copies of application program screens.

One way round this is to modify the BIOS jump vector so that when a character is sent to the console, it is also sent to the printer. This is achieved by replacing the console out-jump with a call.

The printer out-jump then follows directly after the console one, and the character held in register C is not corrupted. Four short programs are shown here which turn this console echo facility on and off. Notice that two are written in BBC Basic and two in Mallard Basic.

```
10 REM Echo screen to printer
20 REM by Edward Brown
30 REM for BBC with Z80
40 REM (c) Acorn User Dec 85
50 :
60 BIOSVECT=&H1
70 CALLVAL=&HCD
80 BIOSLO=PEEK(BIOSVECT)
90 BIOSHI=PEEK(BIOSVECT+1)
100 CONOUT=BIOSHI*256+BIOSLO+9
110 POKE(CONOUT),CALLVAL
120 PRINT"Echo enabled on return to CCP level"
130 SYSTEM
```

```
10 REM Echo screen to printer off
20 REM by Edward Brown
30 REM for BBC with Z80
40 REM (c) Acorn User Dec 85
50 :
60 BIOSVECT=&H1
70 JUMPVAL=&HCS
80 BIOSLO=PEEK(BIOSVECT)
90 BIOSHI=PEEK(BIOSVECT+1)
100 CONOUT=BIOSHI*256+BIOSLO+9
110 POKE(CONOUT),JUMPVAL
120 PRINT"Echo disabled on return to CCP level"
130 SYSTEM
```

```
10 REM Echo screen to printer
20 REM by Edward Brown
30 REM for BBC with Z80
40 REM (c) Acorn User Dec 85
50 :
60 BIOSVECT=&1
70 CALVAL=&CD
80 BIOSLO=?BIOSVECT
90 BIOSHI=?BIOSVECT+1
100 CONOUT=BIOSHI*256+BIOSLO+9
110 ?CONOUT=CALVAL
120 PRINT"Echo enabled on return to CCP"
130 *CPM
```

```
10 REM Echo screen to printer off
20 REM by Edward Brown
30 REM for BBC with Z80
40 REM (c) Acorn User Dec 85
50 :
60 BIOSVECT=&1
70 JUMPVAL=&C3
80 BIOSLO=?BIOSVECT
90 BIOSHI=?BIOSVECT+1
100 CONOUT=BIOSHI*256+BIOSLO+9
110 ?CONOUT=JUMPVAL
120 PRINT"Echo disabled on return to CCP"
130 *CPM
```

Four programs for turning the console echo facility on and off

GRAPHPLAN PRINTING PROCESS

A number of readers have asked for help to use different printers with *GraphPlan*. Acorn supplies device drivers for Epson and Okidata printers with the GSX package and to use any other printer presents a problem.

First, see if your printer can be made compatible with one of these printers. If it can, edit the file *ASSIGN.SYS* according to the instructions in the addendum to the user guide and the printer should work.

If your printer cannot be made compatible with either the Epson or the Okidata printers you need a specialised device driver for your printer.

This is liable to be expensive, as it will have to be written specially for you so you should try contacting existing software distributors to see whether they have a device driver 'off the shelf' that will suit your printer. If this fails then contact a software house and ask how much it would cost to develop a device driver for your printer or plotter.

Once you know the cost you can decide whether to proceed or not – you might very well find it a lot cheaper to buy a different printer rather than have a device driver specially written for you.

We will cover GSX more fully in a future article, but until then if you require further information contact Digital Research.

BULLETIN BOARD ACCESS

A version of the *UKM7* communications program already installed for the BBC is now available from the CP/M UG (UK) library. This program will enable people to access bulletin boards around the country as well as the bulletin board run for CP/M UG (UK) members.

PROGRAM CHALLENGE

Davis Ruben Associates have recently sent me a new set of discs for their *Free Software Handbook*.

It is now possible to run all the Basic games using the Mallard Basic supplied with the Z80 second processor. *STRTRK* – which was originally written in OBasic – will run, but is not totally correct and should prove an interesting challenge to all those who program. Let me have a copy when you've got it working. The other programs on the disc have been customised for the BBC micro screen and now work such better.

CP/M CORNER

Edward Brown and Richard Clement

BBC USER GUIDE UPDATES

The following updates for the BBC Microcomputer System Z80 Second Processor User Guides have been released.

CIS/COBOL with Animator and Forms-2 User Guide 0409,000 Issue 1:

page 2-35 Table 3-2. CRT Cursor Control Keys. Delete: 'first key entry "Ctrl ^"; insert 'Copy'

CP/M 2.2 with GSX Graphics User Guide 0409,001 Issue:

page J-5 Faults and Events (third line from bottom of page). Delete: 'instructions'; Insert: 'instruction'. Delete: 'EI; enable interrupts, RETI; return from maskable interrupt routine'. Insert: 'RET; return from subroutine'

page J-7 LPT: the printer. Delete: '... , ignoring linefeeds...'; Insert: '... with no ignore character...'. Add to end of paragraph: 'UL1: is the same as the LPT: device except that no messages appear if a printer is not connected or if it is not on line. The system will hang waiting for a printer to be connected or put on line.'

Z80 BBC Basic User Guide 0409,003 Issue 1

page 12 Sixth line. Delete: '*DRIVE d'; Insert: '*DRIVE d:'

Memo Plan User Guide 0409,005 Issue 1:

page 50 Printing the current document. Add to last paragraph: 'However, the total length of the line - including space - must not exceed 16 characters.'

page 51 Fifth line down. Delete: 'Type -5 -P -PAGE 3 RETURN'; Insert: 'Type -5 -PAGE 3 RETURN'

page 9 The Screen. The 'T's shown in the screen illustration are deleted and replaced by hyphens, so that it now looks like this:

<----->-----

Ruler line. Delete: 'T shows the position of a tab stop'; Insert: 'T show the position of a tab stop (not shown in screen above)'. See pages 16 and 24 for tab information.

page 53 Interrupting printing now reads:

'Type CTRL C to stop printing and go back to the A> prompt

CTRL Z to stop printing and go back to the A> prompt

CTRL G to stop printing and go back to the A> prompt

CTRL S to pause

To continue after a pause, press any key.'

page 54 Printing without entering MemoPlan. Last paragraph now reads: 'The options are the

same as in ordinary MemoPlan printing, with the addition of -P. This option makes the printer pause at the end of each page (to give you time to feed sheets of paper in).'

Accountant User Guide 0409,008 Issue 1:

page 117 VAT reports - option 4 Purchase daybook program menu VAT summary report. Delete: 'output tax'; Insert: 'input tax'. VAT detail report. Delete: 'output tax'; Insert: 'input tax'.

Let me know of any other misprints or errors you have found. I will list them as they are received.

SCREENING ACROSS THE TUBE

```

10 REM Save & Load Screen Memory
20 REM by Bruce Smith
30 REM for BBC micro and Z80
40 REM (c) Acorn User December 1985
50 :
60 MODE 1
70 PROCscreen
80 DIM block% 20 , buffer% &5000
90 himem%=FNgethmem(FNgetmode)
100 ?block%?1=1
110 block%?1=1
120 block%?2=himem%
130 block%?6=buffer%
140 block%?10=&8000-himem%
150 block%?12=1
160 X%=block%
170 Y%=block% DIV 256
180 PROCsave
190 PRINT"Press key to load screen" : K%
=GET
200 CLS
210 PROCload
220 END
230 :
240 DEF PROCscreen
250 CX=1
260 FOR NX=0 TO 400 STEP 100
270 MOVE NX,0
280 MOVE 1000-NX,NX
290 PLOT 85,500,1000-NX
300 GCOL 0,CX
310 CX=CX+1
320 NEXT
330 ENDPROC
340 :
350 DEF PROCsave
360 AX=&FF
370 CALL &FFF1
380 OSCLI("sa. screen "+STR$(buffer%)+
+"+STR$( &8000-himem%))
390 ENDPROC
400 :
410 DEF PROCload
420 block%?12=0
430 OSCLI("1o. screen "+STR$(buffer%))
440 CALL &FFF1
450 ENDPROC
460 :
470 DEF FNgetmode
480 AX=&87
490 =USR &FFF4 DIV &10000 AND &FF
500 :
510 DEF FNgethmem(mode)
520 AX=&85
530 X%=mode
540 =USR &FFF4 DIV &100 AND &FFFF

```

Listing 1. Demonstrates screen saving and loading using OSWORD and OSCLI

Some readers have been adapting their standard BBC Basic programs to run on the Z80 version of Basic. Problems have occurred when trying to save the screen memory using *SAVE, and re-loading it with *LOAD. Using these commands across the Tube is not possi-

ble, so screen memory must be transferred to or from the Z80 memory before it can be saved or loaded.

This is done using an OSWORD call with A% set to 255. The OSWORD parameter block is pointed to by X% and Y% and is arranged as follows:

- XY + 0 = 13
- XY + 1 = 1
- XY + 2 = HIMEM
- XY + 6 = Load address in Z80
- XY + 10 = &8000 - HIMEM
- XY + 12 = 0 to write / 1 to read

In the case of the relocation address in the Z80, it is worth using DIM to reserve the correct number of bytes - DIM buffer% &5000 - for a 20k screen.

Once the screen memory has been transferred to the Z80, it can be saved using OSCLI; listing 1 demonstrates the technique.

The June 1985 issue (page 135) contains more details on the OSWORD 255 call and a more general transfer program.

COLOURFUL TEXT MADE EASY

Long spells spent at the keyboard can prove painful, eye-aching experiences even when using a high-resolution 80-column screen with white characters on black. Why not change the colours to reduce the strain? For example, in CP/M type the following:


- CTRL-S
- CTRL-A
- CTRL-S
- CTRL-@
- CTRL-@
- CTRL-@

That is, keep one finger on the CTRL key and press S,A,S,@,@,@. Now the text turns yellow - much more pleasing!


Here's a list of other useful colours that can be obtained in the same way:

Colour	CTRL sequence
Yellow	SAS@@@
Red	SAA@@@
Magenta	SAQ@@@
White	SAW@@@
Cyan	SAE@@@
Blue	SAD@@@
Green	SAE@@@


"VIEW handles very well,
and is certainly the best
word-processing system
of its size..." Practical Computing.

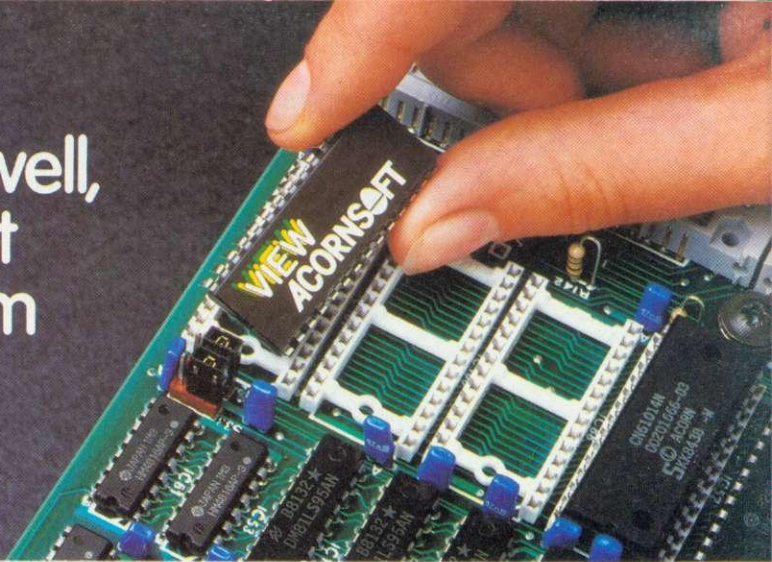

".....probably the most
sophisticated spreadsheet
yet developed on a
home micro..." Accountancy Age.

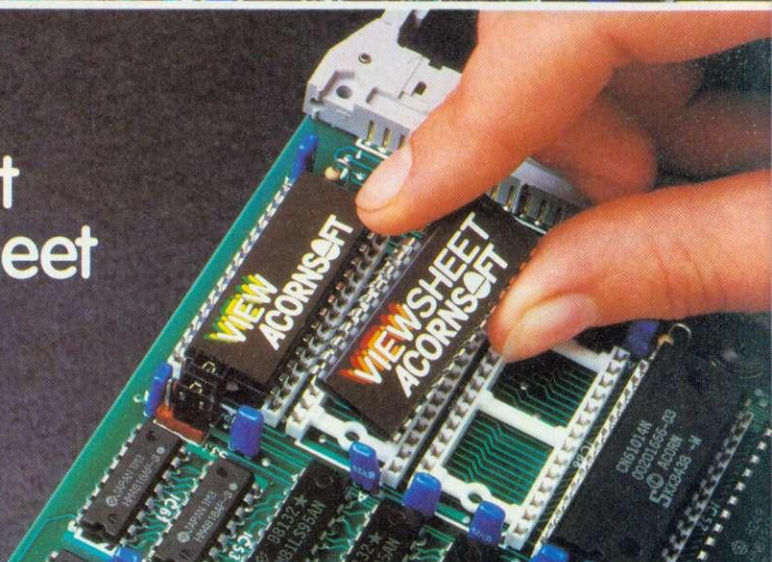

"ViewStore achieves that
highly desirable objective-of
being powerful and easy
to use..." A & B Computing.

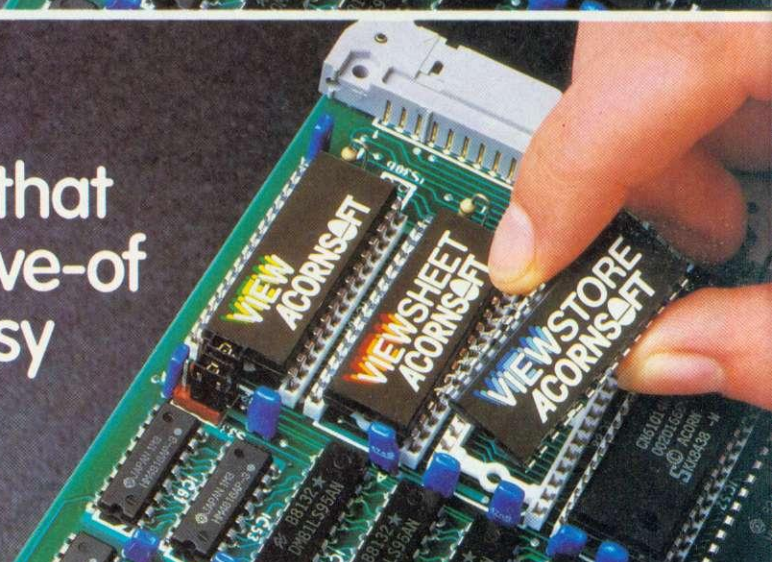

Why everyone's so happy to express their point of view.

The View range is the largest range of software available for the BBC Micro. And the most sophisticated.

Hardly surprising, since the View range comes from Acornsoft, and is designed to use the capabilities of the BBC Micro rather more fully than any other software package. Indeed, VIEW was awarded the 1984 British Microcomputing Award for home software.

The View range also includes ViewIndex, ViewSpell, ViewPlot and a Printer Driver Generator, all of them powerful, sophisticated and, above all, friendly to use.

Why not fill in the coupon (or call us on 0223 214411) for more details? And then you'll be able to form your own point of view.

Please send me information on
the View range.

Name _____

Address _____

Post Code _____

Send to: Acornsoft Limited Cambridge Technopark
645 Newmarket Road
Cambridge CB5 8PD.

ACORNSOFT

INTEGRATION—THE FACTS

INTER-SHEET and INTER-CHART are the first of a new generation of integrated packages for the BBC Micro. They are more powerful and much easier to use than any other similar application program.

The ROM-LINK concept is unique to this range of programs; it ensures that all ROM-LINK programs are totally compatible and truly integrated.

The word 'integrated' has been much abused recently. In our eyes 'integrated' should mean that all programs in the range should share a common data format, that it should be possible to transfer data directly from one program to another (not just by saving and loading) and it should be possible to have multiple programs resident in the machine at once. The integrated programs in the ROM-LINK series are the only ones that can do this.

The ROM-LINK system allows up to 16 packages to be resident in memory at the same time. It makes no distinction between any of the packages, so that you could have up to 16 separate spreadsheets stored in memory or (more usefully) a few spreadsheets, a few graphs and a couple of documents being word processed. It is a simple matter to transfer data from any package into the one in current use, and because the packages are resident in memory, the data transfer is very fast. It is also possible to use data from other packages without actually transferring, thereby saving memory.

Put simply, this means that INTER-SHEET can use multiple spreadsheets and use data from one sheet in another sheet, and INTER-CHART can plot graphs using data taken directly from a spreadsheet. When INTER-WORD and INTER-BASE are available then these will be able to use data from the other packages in the same way.


FACTS

INTER-CHART

The chart and graph plotting program

This general purpose graph and chart plotting program allows the user to display data in the most easily understood manner—graphically.

Two quite distinct sorts of graphs are catered for. 'Labelled' graphs that always have fixed increments on the X axis like yearly sales figures, and 'scaled' or scatter graphs. These allow both the X and Y values to be specified.



Data can be entered into the system from three distinct sources: Typing at the keyboard is the simplest method, but data can be read from ASCII files produced by WORDWISE, VIEW or a programming language such as BASIC. Because INTER-CHART is ROM-LINK compatible it can also import its data directly from other ROM-LINK packages such as INTER-SHEET.


Once the data has been entered a straightforward editor allows any previous data to be altered or new values to be inserted at any position.

TEXT WITH GRAPHS: Labels are normally printed along the X-axis for lines and bars. Pie charts have their labels and values printed around the chart. These may be optionally switched off. With a pie chart the values may be replaced with a percentage figure. All graph displays can have additional labels or messages printed at any position on the screen using a powerful label editor. This allows headings to be easily added to graphs. These labels are stored with each graph when saved.

COMPATIBLE WITH: All shadow RAM boards and the 6502 2nd processor. However the ROM-LINK facilities are not available when using a 2nd proc., these include multiple INTER-CHARTS and direct data transfer from other ROM-LINK programs.

PRICE: £36.80 incl.

INTER-CHART allows up to 16 graphs to be held in memory at the same time as one 'package'. Each graph is named and, once entered, any named graph can be selected from a simple menu display.

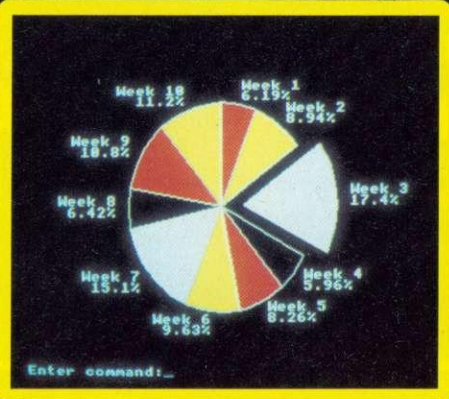


SCREEN DISPLAY: The graphs can be displayed in any of the BBC's graphics modes. The colours of the bars, lines or segments can be altered in a simple table of colours. This also allows special striped colour combinations and for bar charts a variety of cross hatching styles is available. It is also possible to use a VDU19 statement to alter the colour palette.

DISPLAY OPTIONS: Where appropriate (not pies, etc) either axis can be displayed as a log or linear scale, and there is an option to display dotted graduation lines on either axis. Pie segments and bars can be highlighted (segment 'pulled out').


PRINTERS: INTER-CHART has a built in screen dump routine for all EPSON matrix printers and compatibles. It is possible to use other screen dump routines from within (or external to) INTER-CHART for other printers or plotters.

FILING OPERATIONS: Any named graph can be saved or loaded individually to disc or cassette, or all graphs can be saved together in one file.

GRAPH TYPES: INTER-CHART supports the three main graph types, lines, bar charts and pie charts. Scatter graphs are also catered for and can be displayed as points or lines.

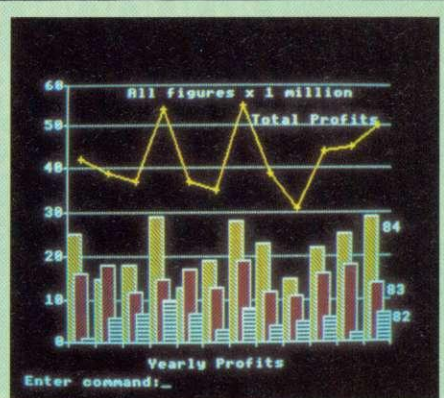

SCALING: INTER-CHART automatically scales the graph display to cover the full range of values entered. INTER-CHART can cope with numbers in the range 2E-39 to 2E+38. It is possible however to force the scale independently on the X and Y axis to show any specified range, including the option for log scales on either or both axes.

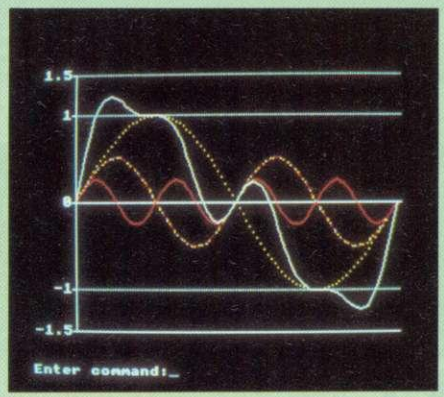

FUTURE RELEASES

Both INTER-SHEET and INTER-CHART are available now. INTER-BASE and INTER-WORD are under development at the moment, and are likely to be released in early 1986. Both are fully ROM-LINK compatible so that they will be totally integrated with the others in the range.

INTER-WORD is an 80 and 105 column word processor (not 40 columns). This will be a 'WYSIWYG' word processor showing the page on screen exactly as it would appear on the page, including page breaks, headings/footings and centered lines, justification, margins, etc. It will also handle 'continuous' documents on disc up to the capacity of your filing system.

Like all of our products this will be smooth and very fast in operation, and of course very easy to use. Editing operations will be similar to WORDWISE but this is not totally WORDWISE compatible. There will be an exchange arrangement available to WORDWISE owners—more details available nearer the release date.

AVAILABILITY: Winter 85/86
PRICE: Approx. £49.00 + VAT

INTER-BASE will simply be the most powerful database available. This will operate with all disc filing systems and have a very large data handling capacity. It will contain a powerful BASIC-like programming language with full string and mathematical operations.

This will work at 2 levels, a simple user interface will allow card-index like operations but, via the programming language, the system can be easily tailored to the individual needs. Up to 250 fields per record, each field up to 32K long. This would enable the user to store complete documents in the database. Variable length fields and records.

AVAILABILITY: Early 1986
PRICE: Approx. £59.00 + VAT

INTER-SHEET

The electronic spreadsheet program

FACTS

FILING OPERATIONS: Load and Save entire sheet. Save specified part of sheet. Load part of sheet to any sheet position. Spool sheet to file. Save all ROM-LINK packages. Load all ROM-LINK packages.

IMPORT/EXPORT: Export any part of sheet for use in word processors. Import sheets created on word processors. Import data directly from other ROM-LINK packages.

PRINTING: Print all or specified part of worksheet. Print with or without sheet borders. Print with or without held lines (windowing). Sheets titles can be printed and control codes can be sent to the printer. Print all formulae. The pound sign code can be altered to a sequence of codes for different printers.

AUTO-STEP: Whenever an entry has been made the cursor can automatically move one box up, down, right or left.

CELL DISPLAY: Any box (cell) can be displayed left or right justified. Labels can also be centered. Numbers may be displayed in three formats, exponent, fixed or general format. The number of digits is controllable from 0 to 10.

LOCKING: Any box, row or column or all boxes can be locked to prevent accidental alteration.

LABELS: Formulae can refer to other boxes in the normal way (e.g. A1 or G5) but can also refer to boxes in a much more meaningful way via labels (e.g. JAN SALES), the box referred to is at the intersection of the column and row of the specified labels. Labels are not restricted to being placed on the borders of the sheet only.

REPLICATION: Any box or area can be copied to any other box or area on the sheet, giving total flexibility. The replication is very fast—see comparisons. Single key operations for inserting or deleting a row or column. Formulae can automatically be altered, if desired, relative to their new position.

OPTIONS: A variety of spreadsheet defaults can be altered, such as the default box justification, number format, sheet area. Screen colours are easily alterable.

WINDOWING: A unique system that allows any row or column (or multiple rows and columns) of the sheet to appear at a fixed position on screen, still allowing the sheet to scroll underneath. Far easier to use and more flexible than other windowing systems.

The first published review of INTER-SHEET says:

"... It offers higher capacities than any previous Beeb spreadsheet, but it runs significantly faster than Lotus 1-2-3 and Symphony on the IBM-PC,"

"INTER-SHEET is quicker, has more features and is cheaper than either of its competitors. If the remainder of the "Inter-" series are as good as this Acornsoft and the rest better look to their laurels. Software of such quality can only make the Beeb even more attractive as a business machine."

Gordon Taylor—A&B Computing Sept. 85

PRESS

COMPATIBLE WITH: Shadow RAM boards such as the Aries B20 and Watford electronics 32K RAM board. Because the ROM-LINK system needs to switch ROMs INTER-SHEET is not compatible with the 2nd processor, although a HI version of INTER-SHEET will be available for the 6502 2nd processor (No ROM-LINK facilities and no 105 screen mode). INTER-SHEET is supplied in 2 ROMs, but if you only have 1 socket then only the ROM-LINK facilities are lost (multiple spreadsheets etc).

For the BBC MICRO
Available from all good software dealers or directly from ourselves

INTER-SHEET and the rest of the ROM-LINK series belong to the 2nd generation of application programs for the BBC Micro. They are larger, more powerful and easier to use than any previous products of this sort.



INTER-SHEET offers many quite unique features.

- 1 The fastest spreadsheet—see comparison box
- 2 The largest capacity—see comparison box
- 3 40, 80 and special 105 column screen mode
- 4 Multiple spreadsheets in memory at once
- 5 Data transfer between sheets in memory
- 6 Data transfer to and from word processors such as WORDWISE and VIEW
- 7 Menu operation and fully prompting commands
- 8 Complete documentation. 2 manuals, an introduction and a reference, are supplied along with a quick reference card.
- 9 Will integrate directly with INTER-CHART and other ROM-LINK compatible products.


Some further facts about INTER-SHEET:

CURSOR MOVEMENT: WORDWISE-like cursor movement allowing the user to move left or right one box, one screenful or to the extremes of the used sheet area. A further command allows immediate movement to any specified box.

SCREEN DISPLAY: Single key switch for 40, 80 and a special 105 column screen mode. This allows much more of the spreadsheet to be visible on screen at once. The 105 column mode requires no special monitors—if you can read the 80 column mode then the 105 will work perfectly well.

SHEET SIZE: 64 columns by 255 rows. Each box can hold up to 80 characters. Column widths are variable up to 31 characters wide. There is no gap between boxes so labels can continue across boxes.

MATHS: A full range of maths functions is included. There are also additional special spreadsheet functions such as AVERAGE, COUNT, IF..., LOOKUP, MAX, MIN, SUM, BOX and SQRS (sum of the squares). Numbers can range from 2E-39 to 2E+38 and can be printed to 10 significant figures.

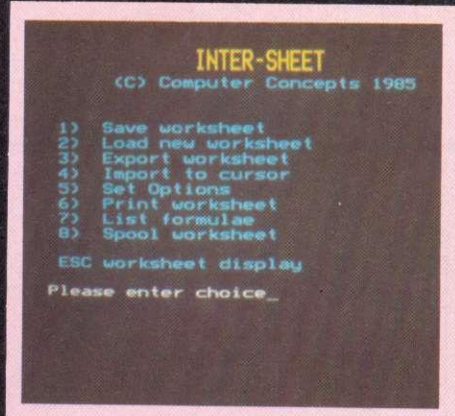

ROM BASED SOFTWARE FOR THE BBC MICRO

Spreadsheet comparisons


Times in seconds	VIEW-SHEET	ULTRA-CALC 2	INTER-SHEET
Replicate SIN(PI) into boxes A1 to Z50	66	65	7
Recalculate the above	28	33	5
Number of bytes free with above sheet	4664	1415	8400
Price (Exclusive of VAT)	£52.00	£69.13	£49.00

PRICE: £56.35 incl.



Computer Concepts

Gaddesden Place, Hemel Hempstead,
Herts HP2 6EX (0442) 63933

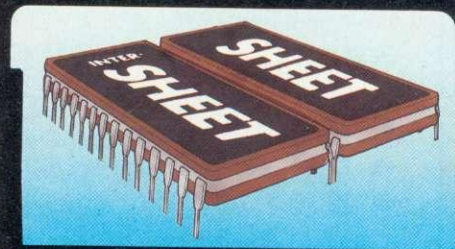

ENET-THE BBC HARD DISC NETWORK

- * Portable Tapestreamer back-up.
- * Acorn Z80/6502/Bitstick compatible.
- * No Second Processor required for fileserver.
- * Easy, economic expansions from 10 to 650 Megabytes
- * Superb educational features.
- * Easy to use-ICON driven fileserver.
- * Reliability and security tried and tested with hundreds of users for over two years
- * User Group for help and hits.

Free with pre-Christmas order, Viewdata, Mailbox and library records packages, plus Amcom Icon system complete with AMX Mouse – Worth £450 when bought separately.

SEE US AT

The Acorn User Christmas Show, 22-23rd November Stand 348
Microuser Show, 14-17th November Stand 6
Computers In Education Show, 22-25th January Stand 117



Please phone or write for details NOW!

Amcom Software Limited

35 Carters Lane,
Kiln Farm, Milton Keynes MK11 3HL
Tel: (0908) 569212

TURN YOUR BBC MICRO INTO A PROFESSIONAL MICROPROCESSOR DEVELOPMENT SYSTEM

THE OPERATING SYSTEM

- FLEX—The Professional Operating System
- Versatile, Flexible & Powerful, the ideal operating system for industrial control
- Provides the power, sophistication and ease of development, previously only offered by larger, more expensive systems

THE HARDWARE


- 6809 Advanced 16 Bit Processor
- Choice of Industrial Interfaces for Target Applications:
 - High Resolution Colour Graphics
 - Industrial input/output boards
 - IEEE communications
 - and many more

THE TOOLS

- PL9—A fast, efficient control language
- CMS FORTH Interpreter & Compiler
- Cross Assemblers for most 8 bit & 16 bit micro's
- "C", BCPL, PASCAL

THE SUPPORT

- Top rate after sales technical support
- Systems / Hardware Design

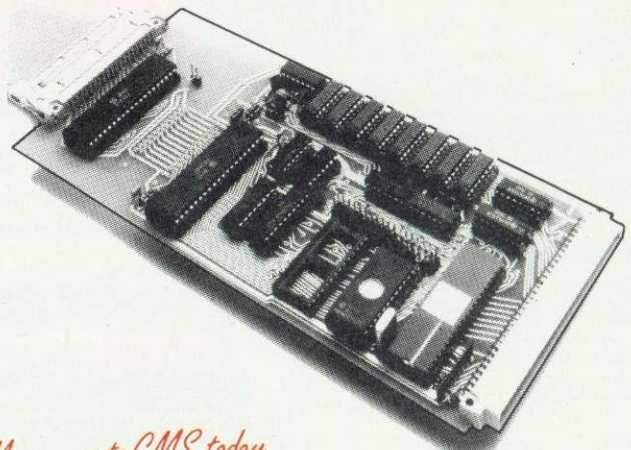

Move over to CMS today

CMS

44a Hobson Street
Cambridge CB1 1NL
(0223) 324141

Cambridge
Microprocessor
Systems Limited

EDUCATION

NEWS

Course plotting in the classroom

The Plotmate Plotter and *Qmap* software combine to produce a tool which can be used in many school situations, including geography, history, social sciences and biology classes, where it is helpful to be able to produce maps and plans that show data in symbolic form plotted against an outline.

The *Quest* database from AUCBE (the Advisory Unit for Computer Based Education in Hatfield) has been with us for some time now and is used in many schools throughout the country. Data files come with it, on topics as diverse as horses, bowls, chemical elements and records of criminals transported to Tasmania. Or it can be used with the data children have recorded for themselves. It has proved to be a robust and well-constructed package and is flexible enough to fulfil a wide variety of applications, including producing frequency distributions of numeric data, mail labels, scattergrams and barcharts. The machine code version, *Questd*, is able to handle larger data files as it is a disc-based random access package. Fundamentally, though, its method of use is the same as *Quest*, the same commands being employed for handling the data.

To these two packages has been added a third which provides some very interesting features for classroom teachers. Called *Qmap*, this program allows the creation of maps and plans onto which may be superimposed signs and symbols relating to data held in *Quest* files. To quote from the handbook: 'It is possible to:

- *Create a correctly scaled distribution map with choice of 4 symbols of the result of any *Quest* or *Questd* search on geographical data.

- *Compare the mapped results by altering the size and position of

the map and putting two or more maps on screen at the same time.

- *Label each of the mapped points, add a title and scale bar.

- *Print copies of the maps exactly as they appear on the screen, or obtain a copy on a plotter.

- *Make your own base maps for your own *Quest* or *Questd* data.'

The maps may be produced either by using a British micro Grafpad or the AMX Mouse. The output can be either to a printer or

tions. The use of a pen rather than a matrix of pins and a ribbon gives the appearance of high-quality draughtsmanship – output from such plotters, on a larger scale, is used to produce plans, engineering drawings and maps in a wide variety of industries. The Plotmate works quite simply by following the standard BBC micro plotting instructions such as MOVE, DRAW and PLOT in exactly the same way as drawings



A robust, well constructed and flexible package, ideal for the schoolroom

a plotter. The problem with dot matrix printer output is that, although the results are acceptable, they always look like computer-printed material. Using the Plotmate plotter provides a different finish altogether (see Joe Telford's review on page 179).

A plotter works on the basis of an arm which moves in two orientations in order to cover the whole paper. Attached to the arm is a pen which is raised and lowered according to the computer's direc-

are plotted on the screen. This is not a screen-dump. These work by copying pixels from the screen on a row-by-row basis. The Plotmate produces actual line drawings in a variety of colours, simply by changing the pens when prompted. Hence the high quality.

Using the *Qmap* program is simplicity itself, provided you have suitable *Quest* files available – there are several provided with the package – and you can operate the plotter. All this involves is

connecting it to the user port and switching it on. Once the hardware is set and the software loaded, the base map can be loaded, followed by the data to be plotted. The map may then be drawn on-screen, titled and scaled. The data can be added in one of four forms – a cross, a triangle, a diamond or a square. The map may be moved to one side of the screen and another map added beside it; the data points may be labelled with a set of letters or numbers; and, finally, the map may be re-displayed at a different size to focus on one particular area, with the related data being plotted on a scale with the map.

Of course, this is not the only application for the Plotmate. Any program which uses the standard BBC graphics commands may be adapted to produce output on the plotter. So graphs, charts, plans and maps may easily be created as well as more intricate engineering or artistic drawings.

The Plotmate represents good value for money, especially considering its ability to interface with *Quest*. The photograph shows Plotmate in use on a primary school project. It is presenting, in an easily understandable graphic form, a mass of data on local weather changes which was collected by the children over a four-week period. This item of hardware has been approved for use by the Inner London Education Authority and is recommended by advisers in many other LEAs as a desirable item of equipment.


Quest and *Qmap* are available from AUCBE, Endymion Road, Hatfield AL10 8AU. Tel: (07072) 65443.

The Plotmate plotter is available from Linear Graphics Ltd, 28 Purdeys Way, Rochford, Essex SS4 1NE. Tel: (0702) 541664.

Commentary by Nick Evans

MEDSTAT LTD

MedStat Ltd introduce a suite of new, exciting French/English Language Teaching Programmes.



- Developed by experienced Teachers
- Motivating
- Fun
- Challenging
- Choose your ability level
- Colourfully packaged
- 40 track Disks

"LE VOCAB" (BBC B) A 5,000 French/English vocabulary for School, Business and Holiday. Game-based. Test Units. Print out facility. (3 disk pack) **£27.90**

"LA CONJUGAISON" (BBC B, Commodore 64). Regular verbs. Gives practise in 30 verbs and 17 tenses. Game-based. Test Units. (1 disk pack). **£13.95**

"LA CONJUGAISON" (BBC B) regular/irregular verbs. 10 regular and 50 irregular verbs. 17 tenses. Tough test units. An excellent back-up to class/college work. (2 disk pack). **£13.95**

Prices include V.A.T.

Orders being taken for German and Spanish versions. Italian version in preparation.

24 hour telephone Ordering Service Access accepted

Immediate Dispatch P&P: Add 50p per pack

Further details free on request

Orders over £50 – free

MedStat Ltd,
Dept. A,
City House, Maid Marion Way,
Nottingham NG1 6BH.
Tel: 0602 411120
Telex: 377844 ABCPLS G
Trade Enquiries welcome

See us on Stand 3 at the Acorn
User Christmas Show
10% discount for visitors
to our stand

AA18

Educational Software

LCL



For BBC Micro (A, B, B+, B128)
(Tapes, 40/80 track discs Econet compatible)

IMMEDIATE DESPATCH

of software below. Send coupon, or phone orders or requests for free colour catalogue to:

LCL (Dept A), 126 Avondale Ave, Staines, Middx. (Tel 0784 58771) (most hours – days).

**£5 off total for 2 courses,
£10 off total for three.**

MEGA MATHS (BBC, Electron). 24 program step by step. A-level course of 105 topics for mature beginners, A-level students and Micro Maths users (2 discs/tapes & 2 books) £24.

MICRO ENGLISH (BBC, Electron). Complete English Language self-tuition and revision course, to O-level, of 24 programs. Includes "Speak-and-Spell" with real voice (no extras required). £24.

MICRO MATHS (NEW) 24 program revision or self-tuition course to O-level. Includes 59 topics on 2 discs/tapes plus two books (now has more colour graphics) £24 (upgrade £4).

BRAINTEASERS Book of IQ tests and puzzle programs. £5.95 "Excellent". EDUCATIONAL COMPUTING.

LCL Dept A, 26 Avondale Ave, Staines, Middx.

Tel: 0784 58771

WORLD LEADERS IN COMPLETE SELF-TUITION
COURSE SOFTWARE (IN 24 COUNTRIES).

NAME ADDRESS

TITLE COMPUTER 40/80 Disc/tape

AA41

NEWTECH

KEYMASTER

ALLOWS THE PHYSICALLY HANDICAPPED USER TO CONTROL ANY COMMERCIALY AVAILABLE BBC SOFTWARE

As featured in September's Acorn User – "One Boy and his Micros" feature. used by Christopher to enable him to run software programs on his BBC Micro.

Keymaster plugs directly into the keyboard socket and can be used with almost any input device – a simple blow switch, a joystick, a speech decoder or even another computer. Easy to install and easily tailored to the needs of the individual, Keymaster transmits data to the computer in parallel with data sent from the keyboard, thus simulating the pressing of any key or combination of keys.

Please contact us for more details



CLWYD TECHNICS LIMITED

Tel: Hendre
(035283) 751

Dept AU12, Unit 4b, Antelope Industrial Estate
Rhydymwyn, nr Mold, Clwyd CH7 5JH

Calling all schools and BBC software packagers – we want to hear what you have to say

Beginning next month, this column will feature a regular series on school administration packages for the BBC micro. We will try to cover as wide a range of topics as possible, including timetabling, options, cover lists, examination entries and results, markbooks and any other applications that are useful in teaching or school administration.

Many companies that produce software of this kind have been asked for information for the series, but it may be that your company has not heard from us. If this is the case, please contact us at *Acorn User* and give us the chance to feature your package in future issues.

We would also welcome feedback from schools on how useful or otherwise they have found the packages to be, any improvements they would like to see made, and features they feel should be added.

French lessons without tears?

I have a particular interest in modern languages, at this is my own subject.

Consequently, my attention is immediately grabbed by information about new programs for French teaching – especially in the light of a comment from one adviser, who told me that there is no real application for computer technology in the teaching of modern languages.

MedStat Ltd have come out with *Le Vocab* and *La Conjugaison*. The former covers vocabulary in 191 topic-based units embracing 5000 words, while the latter covers 50 regular and irregular verbs in 17 tenses.

As MedStat didn't send me a

copy of either, I cannot tell you whether a lower ability pupil would be able to find his way through that mass of information to something useful for himself; but hopefully I shall learn more about this package in the future. For further details, contact MedStat, City House, Maid Marian Way, Nottingham NG1 6BH. Tel: (0602) 411120.

Teacher's choice

Still on the subject of small producers of software – many of whom produce very fine products despite the small scale of their operation – I receive a good deal of review and advertising material from software houses that have been set up either by individual teachers or consortia of teachers aiming to fulfil their own needs in the classroom and hoping to do the same for others. This is often very successful, as teachers are in a much better position to know classroom needs than commercial publishers and some interesting titles have come my way from such sources.

The infant *Maths Series* from MRH Software is one. It is designed to develop in three to six year olds the concepts of size, shape and position. All the pro-

Meyer muse-ings

Richard Meyer from London writes in response to my answer to John Willett's letter in July's *Acorn User* about the reluctance of publishers to look at school software.

He says: 'I read your article and was surprised to see no mention of

MUSE (Microcomputer Users in Secondary Education). MUSE markets teacher members' programs and is run by teachers for teachers.

John Willetts should send his software to MUSE, PO Box 43, Hull HU1 2HD.'

grams develop the skills of perception and sequencing which are so essential during the pre-reading stage.

MRH also produce a Reading and Language Development series aimed at nursery, infant and ESN children. It deals with word recognition (all in big infant print), handwriting, matching, sentence completion and prepositions. These programs are available on disc at £9.95 or tape at £7.95, from MRH, 20 Highfield Road, Kidderminster, Worcester DY10 2TL.

Another company with a useful package is Strawberry Fair, which market a variant on the *Janeplus* program. In this, a machine acts on a pair of numbers to produce a result, and the child must work out which function the machine is performing.

Golfer provides help with estimation of angles and *Scales* gives similar assistance with the concept of length. These are available on disc at £10.25 or cassette at £8.95, from 15 Walker Road, Portsmouth PO2 8PQ.

More about small companies next month.

User wise

It is always heartening to hear of a software house which is willing to update its program in response to information received from users. This is not usually possible with large companies. With Peter Sharp Software the documentation states: 'The author would appreciate feedback from educational establishments . . . If you also return our program with the data, the new information will be incorporated and your program returned by return.'

This relates to a program about the Periodic table of the Elements and their relative melting and boiling points. He acknowledges that all data about the elements is not known, and asks users to help him keep up-to-date with progress. Improvements in style, presentation or information can then be incorporated.

The program is available on 40 or 80 track disc, price £4.95, from Peter Sharpe Software, Llwylfan, Minffordd Road, Penrhyn-dudraeth, Gwynedd LL48 6AU. Tel: (0766) 770528.

EDUCATION TOP FIVE

	Title	Publisher	Cassette	Disc	ROM	Electron Shadow on B+	6502	Econet
1	Music System	Island Logic	—	£29.95	—	—	Yes	—
2	Podd	ASK	£9.95	£11.50	—	Yes	Yes	—
3	Number Painter	ASK	£9.95	£11.50	—	Yes	Yes	—
4	French 'O' Level	Hill McGibbon	£14.95	£19.95	—	—	—	—
5	Best Four Language	ASK	£19.95	£19.95	—	Yes	Yes	—

Compiled by Gallup from a panel of specialist dealers. Contact publishers: Hill MacGibbon, 8 Graston Street, London W1X 3LA (01) 493 7070; Island Logic System, 12 Collegiate Crescent, Sheffield S10 2BA (0742) 682321; ASK, London House, 68 Upper Richmond Road, London SW15 (01) 874 6046

CONTROL IN THE CLASSROOM

The education column this month looks at ways to use your school Beeb in the world of robots and computer control

Chris Drage and Nick Evans

Robots are becoming more numerous and finding varied roles in the world of adults, so computer control, measuring and metering is gaining importance in the primary classroom. But it is an area which, as yet, is sadly neglected.

There are at least three ways you can use your school Beeb for control purposes: as a sensor to read and display information from the outside world; as a switching device controlling aspects of the environment under instructions from an operator, and as an artificially intelligent device (still following operator instructions) encompassing changes in the environment which the computer senses and reponds to.

Timer and Meter – two packs developed by Ely Area Resource Office (EARO) and marketed by Educational Software for Microcomputers (ESM) – enable the computer to act as a sensor. The Meter pack displays the information in a variety of ways. *Timer* transforms the computer into a stop clock and event counter.

As a stop clock it can have four settings accurate to one second, 0.1 second, 0.01 second and 0.001 second. The event counter notes changes such as the number of times an electric circuit (or light beam) is broken.

The Meter pack measures changes in voltage or resistance through such devices as simple electric motors, potentiometers, voltmeters, thermistors and light-dependent resistors. The results may be displayed in large digits (000 to 0.000), as a simulated moving needle, or as a graph with a variety of time settings. Both packs provide considerable scope for discovery-based activities.

Timer offers a wide range of possibilities which can be quickly and cheaply implemented in the classroom. Using simple foil and crocodile clip 'switches' children are able to measure the time it takes objects to roll down a slope

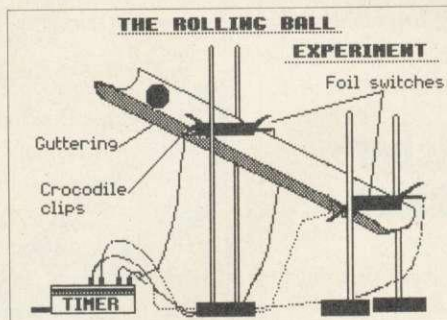


Figure 1. A simple timing device

(figure 1). My class of 10-year-olds were keen to find out who had the fastest roller skate, matchbox toy, or whatever. Some children might realise that they can realistically time vertically falling objects and so open up the whole sub-topic of dropping things of differing shapes and mass from various heights.

Ideas sheets available from Sarah Bidwell at EARO (address below), suggest making a reaction timer. A 'light switch' can be made quite cheaply and provides another set of testing situations, for example, for calculating the speed at which a piece of card of known length passes the light switch, or to count the number of people passing along a corridor during a period of time. Reed switches and infra-red sensors provide many other timing possibilities.

The Meter pack prompts a multitude of activities once a light switch and a thermistor have been made. EARO can provide the parts for these on request.

Before any measurements take place, the thermistor/light switch must be calibrated. (My class did not understand why this should be so and a lot of discussion about units of measurement ensued.)

Children can use the thermistor to measure temperature differences across their hands and for finding the hottest part of the body – both at rest and after exercise.

Both Timer and Meter complement the science curriculum very well indeed and require a minimum of computing knowledge to operate. Each positively encourages the experience of first-hand discovery. The value of using the micro to monitor the type of events mentioned here is that the data collected is related to the children's direct experience.

Robots provide a wonderful opportunity for children to experiment with computer control. They are an excellent means to illustrate the potential of the computer, whether it be setting a turtle a predefined pathway to draw or sending the BBC Buggy off to collect something with its grab-arm and to return it. The important point is that programming a robot really makes children think about what they are doing and why; if the robot does not respond as expected then they have to re-examine and revise their work. Children learn by this type of activity because their awareness, use of language and mathematical concepts are all enriched. Angles, movement, direction, levers and fulcrums become very real indeed. The whole learning process is enhanced.

There are two types of robots suitable for educational use: robot arms which perform a mechanical action relative to their base, and mobile wheeled vehicles such as floor turtles and buggies. My favourite is the BBC Buggy from Economatics. I have found this extremely versatile device provides a useful starting point on the road to studies in control technology and artificial intelligence. Whereas floor turtles like the Valiant Turtle are concerned with Logo, turtle graphics and problem solving, the Buggy can teach a tremendous amount about computer control and the fundamental principles of robotics.

The Buggy's wealth of sensor perception is where it scores over other floor-crawling robots. It is equipped with collision bumpers, a light sensor and a bar code reader. To this may

be added a grab arm and a pen kit. There is an accompanying suite of 13 programs to help make the most of the robot.

It is the software which transforms the Buggy into a valuable educational tool. The programs aim to involve children in an interactive manner to demonstrate how a micro can be configured progressively as a switching device, a memory, a graphics terminal, a programmable device and a problem solving unit. They feature a 'building block' approach which enables and encourages older children to use the procedures in their own programs. There is real scope for exciting, experimental applications.

For young children the *Switch* program is ideal. It introduces how the Buggy's movement can be controlled and programmed in a really enjoyable way. *Memory Switch* extends these ideas and allows the Buggy to retrace its movements. Ideas of programming are further developed in *Snail*. The children prepare coded (Logo-like) instructions to drive the Buggy. Principles of artificial intelligence are demonstrated admirably in *Explore For Object*. Children really appreciate seeing the Buggy using its collision detectors to map out an object's shape on the screen. They are amazed that the Buggy exhibits 'intelligence'. The activity prompts much discussion and questioning. *Line Follower*, *Bar Code Route Planner*, *Sunseeker* and *Man v Buggy* are extremely valuable programs which are fun for children to use. They enjoy planning routes for the Buggy using masking tape and cards containing bar codes. The important point here is that they become aware of the application of these features in the real world. *Man v Buggy* never fails to fascinate.

To get the best out of the Buggy, it really pays to build a 'Buggy Park': a walled, working area for the Buggy to explore. Ideas for this are given in the manual. An area 150cm x 100cm surrounded by 4cm walls is ideal.

As an introduction to robotics and control the Buggy represents excellent value-for-money. It has so many capabilities: unlike other 'crawlers' it is far more difficult to exhaust its possibilities (see the review of the grab arm and pen kit in the June '85 issue).

Those teachers wishing to research the whole area of control and robotics will appreciate the help being given by specialist hardware companies such as Commotion, Innovonics and Pilot One. Each produces and/or markets kits and ready-assembled pieces of equipment which enable simple control and robotics to be undertaken at a reasonable price.

Taking Commotion first, this company has made a great name for itself with its Beasty interface - a device that allows the control of up to eight servo motors or relays from a BBC

micro. This type of interface is important since it provides a buffer between the computer and the device being controlled, protecting the micro in the event of a problem with the device. The Beasty reinforces that protection since control is by infra-red transmission and there is no direct link between computer and device transmission. A cable version is also available.

This type of interface is specifically tailored to robotics applications but more general-purpose buffer boxes are available.

As well as supplying the Beasty, Commotion produces a robot arm kit and a whole catalogue full of bits and pieces needed to produce the robot of your dreams. The emphasis has been on cheapness without loss of quality.

Innovonics produces a very useful interface



The BBC Buggy: 'provides a useful starting point'

buffer board which is simple to use and designed for those who want to see the bare bones of what they are doing. It is a simple printed circuit board which may be purchased as a kit or ready made up (£10 or £11.50 respectively). It has a set of LEDs which light up according to the state of the user port to which they are connected and switching devices may be run from the board to enable the powering of motors and the like. Extensions to the board's facilities are likely in the future. If you want a cheap and cheerful start this is as good a place as any.

Finally, Pilot One produces a complete

course of hardware, software and documentation for the teaching of control. To give you a taster of the hardware, it includes Lego buggy kits, a variety of sensors, an electric loco, an alarm kit and an interface. The classroom kit which contains six interfaces and enough kit to keep a full class happy costs just under £1000. Both this company and Commotion make use of Lego and Fischertechnik construction kits. The larger Lego kit costs around £30, whereas the Fischertechnik Computing kit comes in at around £80. Both products are very robust and will take a good deal of pounding and provide a focus for projects of all sorts.

A book that is of a great deal of help to teachers in this area and should find a place on every school library shelf is *The Robot Book* by Richard Pawson. This colourful and well written summary of mankind's progress in robotics is readable and grabs the attention.

Robotics and control are exciting, develop skills of problem-solving and bring out the creative instinct in children of all ages. The companies featured here have gone some way to providing for your needs. They, as well as this magazine, welcome feedback.

PRODUCTS

Timer

Inter-face box 26.85 + VAT
Driver software £10.95 + VAT (disc or cassette)
'Make a Start' cards £2 + VAT

Meter

Interface box £36.45 + VAT
Driver software £10.95 + VAT (disc or cassette) 'Make a Start' cards £2 + VAT

BBC Buggy

Buggy £164.35 + VAT (software included)
Grab arm £79 + VAT (software included)
Pen kit £19.85 + VAT (software included)

Commotion

241 Green Street, Enfield EN3 7SJ. Tel: 01-804 1378

EARO

Backhill, Ely, Cambs CB7 4DA

ESM

Duke Street, Wisbech, Cambridge PE13 2AE. Tel: (0945) 63441

Fischertechnik

Economatics, Epic House, 9 Orgreave Road, Handsworth, Sheffield S13 9LQ. Tel: (0742) 690801

Pilot One

22 Campbell Road, Bedford MK40 3DD. Tel: (0234) 327688

Innovonics

147 Upland Road, East Dulwich, London SE22 0DF



a
a
v
a

v
s
d

-
f
p
y
a

n
t
a
c
V
N
r
S

CLIP THE COUPON
FOR DETAILS OF OUR
FREE
1ST QUARTER SUBSCRIPTION OFFER!

Nice Identity. Shame about the Password.

It's a unique combination.

Your Special Identity Number and Personal Password. The valuable key to huge databases teeming with activity, set on our Mainframes across the nation.

On Micronet 800, you're a valued individual, adding your own special flavour and personality to the database.

Take our exciting new "Gallery" - You control your personal screens for all to see. The intriguing "Chatline" public conversation service gives you freedom to express your views and meet some remarkable people.

All part of a tremendous Communications section that networks you to 60,000 Micronet and Prestel users across the country. Try Teleshopping, or interview celebrities live on "Celebrity Chatline" every Wednesday night.

And there's FREE (& instant) National Electronic Mail, plus International Telex, and the Contact and SwapShop bulletin boards.

Get computer news first on Micronet's daily (and controversial) "Newsflashes" and read up on the latest reviews and courses. Feast from our regularly changing menu of programs to download straight into your micro - absolutely free.

You also get access to Educational Computing's "School Link" and Prestel's huge 300,000 page database, including world news, business & share bulletins and optional homebanking. For only £16.50 per quarter, that's less than

the price of a daily paper!

The only accessory you need is a Modem, to get the best value for money around in micro communications.

Fill in the coupon for the full facts and send to Micronet 800, 8 Herbal Hill, London EC1R 5EJ. But be warned, Micronet 800 is a 'living' service with ever-expanding features. So maybe you'd be better to call in at your local Micronet 800 Action Station. There are thousands of Micronetters waiting to meet you!



To: MICRONET 800, Durrant House, 8 Herbal Hill,
London EC1R 5EJ. Telephone 01-278 3143.
Please send me the full facts about Micronet 800.

Name _____ Age _____

Make/Model of Micro _____

Address _____

Telephone _____

AU12

* For 98% of telephone users.
Prestel is a trademark of British Telecommunications plc.
On Prestel

SEE MICRONET 800 IN ACTION

At selected Boots, Laskys, John Lewis & your local computer store

AVON
Bath. Boots, 1 Marchants Passage, Southgate. Tel: 0225 64402.
Bristol. Boots, 59 Broadmead. Tel: 0272 293631.
Weston Super Mare. Peter Castell Ltd, 28 Orchard Street. Tel: 0934 24778.

BEDFORDSHIRE
Bedford. Boots, The Harpur Centre, Harpur Street. Tel: 0234 56231.
Bedford. Software Centre, 52a Bromham Road, Tel: 0234 44733.
Leighton Buzzard. DJ Computers, 17 Bridge Street, Tel: 0525 383929.
Luton. Boots, 82-86 Amdale Centre, Tel: 0582 20592.

BERKSHIRE
Slough. Boots, 178-184 High Street, Tel: 0753 27267.
Maidenhead. Boots, 54-58 High Street, Tel: 0628 27892.

BUCKINGHAMSHIRE
Milton Keynes. Boots, 18 Crown Walk, Secklow Gate West, Tel: 0908 607327.
Milton Keynes. Depson Business Systems, 65 Aylesbury Street, Bletchley. Tel: 0908 367446.
Aylesbury. Boots, 69-70 Friars Square, Tel: 0296 83661.
Chesham. Reed Photo & Computers, 113 High Street. Tel: 0494 783373.

CAMBRIDGESHIRE
Cambridge. Boots, 65-67 Sidney Street and 28 Petty Curry Street. Tel: 0223 350213
Cambridge. Cambridge Computer Store, 4 Emmanuel Street. Tel: 0223 358264
Peterborough. Boots, 40-42 Bridge Street. Tel: 0733 65352.
Peterborough. Logic Sales, Unit 6 Midgate Parade, Tel: 0733 49696.
St Neots. Compute, 3 Cross Keys. Tel: 0480 72013

CHESHIRE
Chester. Boots, 47-55 Foregate Street. Tel: 0244 28421
Chester. Computer Link, 21 St Werburgh Street. Tel: 0244 316516.
Crewe. Midshires Computer Centre, 57 Earle Street. Tel: 0270 589191.
Macclesfield. Computer Centre, 68 Chestergate. Tel: 0625 618827.
Warrington. Boots, 39-45 Bridge Street. Tel: 0925 2574825.

CLEVELAND
Middlesborough. Boots, 88-90 Linthorpe Road, The Cleveland Centre. Tel: 0642 249616.
Darlington. Darlington Computer Shop, 75 Bondgate. Tel: 0325 487478.

CORNWALL
St Austell. AB&C Computers, Duchy House, 6 Lower Aylmer Square, Tel: 0726 64463.
Bodmin. Microtest, 18 Normandy Way, Tel: 0208 3171/3182

CUMBRIA
Kendal. The Kendal Computer Centre, Stramongate. Tel: 0539 22559.
Whitehaven. PD Hendren, 15 King Street, Tel: 0946 2063.
Workington. Technology Store, 12 Finkle Street. Tel: 0900 66972.
Penrith. Penrith Communications, 14 Castlegate. Tel: 0768 67146.

DERBYSHIRE
Alfreton. Gordon Harwood, 69-71 High Street, Tel: 0773 836781.
Chesterfield. Boots, 35-37 Low Pavement, Market Place. Tel: 0246 203591.
Derby. Boots, 1 Devonshire Walk, Tel: 0332 45886.
Derby. First Byte Computers, 10 Main Centre, London Road. Tel: 0332 365280.

DEVON
Exeter. Boots, 251 High Street, Tel: 0392 32244.
Exeter. Open Channel, Central Station, Queen Street. Tel: 0392 218187.
Paignton. Computer Systems Ltd, 35 Hyde Road, Tel: 0803 524284.
Plymouth. Syntax, 76 Cornwall, Street. Tel: 0752 28705.
Plymouth. Computer Base, 21 Market Avenue, Tel: 0752 672128.
Plymouth. Boots, 2-6 New George Street, Tel: 0752 266271.
Seaton. Curtis Computer Services, Seaton Computer Shop, 51c Harbour Road, Tel: 0297 22347.
Tiverton. Actron Microcomputers, 37 Bampton Street, Tel: 0884 252854.

DORSET
Bournemouth. Lansdowne Computer Centre, 1 Lansdowne Crescent, Lansdowne. 0202 20165.

Dorchester. The Paper Shop, Kings Road, Tel: 0305 64564.
Poole. Lansdowne Computer Centre, 14 Armdale Centre, Tel: 0202 670901.

ESSEX
Basildon. Basildon Software Centre, 78-80 Liberty Shopping Hall, East Square, Tel: 0268 27922.
Braintree. Mirage Micros, 24 Bank Street, Tel: 0376 48321.
Chelmsford. Maxton Hayman, 5 Broomfield Road, Tel: 0245 354595.
Colchester. Boots, 5-6 Lion Walk, Tel: 0206 577303.
Colchester. Colchester Computer Centre, 3a Short Wyre Street, Tel: 0206 47242.
Grays. H. Reynolds, 79 Orsett Road, Tel: 0375 5948.
Harlow. Harlow Computer Centre, 17 Staple Tye, Tel: 0279 22846.
Hornchurch. Compel Computer Systems, 112a North Street, Tel: 0402 446741.
Ilford. Boots, 177-185 High Road, Tel: 01-553 2116.
Romford. Software Plus, 72 North Street, Tel: 70 65271.
Southend-on-Sea. Computerama, 88 London Road, Tel: 0702 335443.
Southend-on-Sea. Computer Centre, 336 London Road, Tel: 0702 337161.
Southend-on-Sea. Estuary Personal Computers, 318 Chartwell North, Victoria Circus Shopping Centre, Tel: 0702 614131.

GLOUCESTER
Cheltenham. Screen Scene, 144 St Georges Road, Tel: 0242 528979.
Gloucester. Boots, 38-46 Eastgate Street, Tel: 0452 423501.

HAMPSHIRE
Basingstoke. Boots, 15 Old Basing Mall, Tel: 0256 51611.
Bournemouth. Boots, 18-20 Commercial Road, Tel: 0202 21713.
Fareham. Electroneage, 36-38 West Street, Tel: 0329 230670.
Fareham. Boots, 21 Westbury Mall, Tel: 0329 232011
Portsmouth. Micro Choice, 159 Havant Road, Drayton, Tel: 0705 327591.
Portsmouth. RDS Electrical (Portsmouth) Ltd, 157-161 Kingston Road, Tel: 0705 812478.
Portsmouth. Boots, 194/204 Commercial Road, Tel: 0705 825248.
Southampton. Boots, 23-29 Above Bar Street, Tel: 0703 333983.
Waterloo. GB Microland, 7 Queens Parade, London Rd, Tel: 0705 259911.

HERTFORDSHIRE
Potters Bar. The Computer Shop, 197 High Street, Tel: 0707 44417.
Stevenage. DJ Computers, 11 Town Square, Tel: 0438 65501.
Watford. SRS Microsystems, 94 The Parade, High Street, Tel: 0923 26602.
Welwyn Garden City. DJ Computers, 40 Frertherne Road, Tel: 96 28444

HUMBERSIDE
Beverly. Computing World, 10 Swabys Yard, Dyer Lane, Tel: 0482 881831.
Grimsby. R.C. Johnson Ltd, 22 Friargate, River Head Centre, Tel: 0472 42031.
Hull. Boots, 48-58 Prospect Centre, Tel: 0482 22334.
Hull. Computer Centre, 26 Analby Road, Tel: 0482 26297.

ISLE OF MAN
Douglas. T.H. Colebourn, 57-61 Victoria Street, Tel: 0624 73482.

KENT
Ashford. DGH, 10 North Street, Tel: 0232 32597.
Beckenham. Supa Computers, 425 Croydon Road, Tel: 01-650 3569.
Bromley. Boots, 148-154 High Street, Tel: 01-460 6688.
Chatham. Boots, 30-34 Wilmott Square, Pentagon Centre, Tel: 0634 405471.
Gravesend. Gravesend Home Computers, 39 The Terrace, Tel: 0474 23871.
Folkstone. Boots, 24-26 Sandgate Road, Tel: 0303 54007.
Maidstone. Boots, 56-62 King Street, Tel: 0622 53912.
Maidstone. Kent Micros, 52 Union Street, Tel: 0622 52784.
Rainham. Microway Computers, 39 High Street, Tel: 0634 376702.
Sevenoaks. Ernest Fielder Computers, Dorset Street, Tel: 0732 456800.
Shortlands. The Village House of Computers, 87 Beckenham Lane, Tel: 01-460 7122.
Sittingbourne. Computer Plus, 65 High Street, Tel: 0795 25677.
Tunbridge Wells. Boots, 7-11 Calverley Road, Tel: 0892 26486.

Tunbridge Wells. Modata Computer Centre, 28-30 St. Johns Road, Tel: 0892 41555.

LANCASHIRE
Blackpool. Boots, 28-38 Bank Hey St & Victoria St, Tel: 0253 22276.
Blackpool. Blackpool Computer Store, 179 Church Street, Tel: 0535 20239.
Bolton. Computer World UK, 208 Chorley Old Road, Tel: 0204 494304
Burnley. IMO Computer Centre, 39-43 Standish Street, Tel: 0282 54299.
Lancaster. Northern Lights, 89 Scoforth Road, Tel: 0524 62634.
Preston. 4Mat Computing, 67 Friargate, Tel: 0772 561952.
Rochdale. Boots, 50 Market Way, Tel: 0706 53225.

LEICESTERSHIRE
Leicester. Boots, 30-36 Gallowtree Gate, Tel: 0533 21641.
Leicester. DA Computers, 104 London Road, Tel: 0533 549407.
Market Harborough. Harborough Home Computers, 7 Church Street, Tel: 0858 63056.

LONDON
W1. Computers of Wigmore Street, 104 Wigmore Street, Tel: 01-486 0373.
W1. Galaxy, 230 Tottenham Court Road, Tel: 01-636 6500.
W1. Sonic Foto Micro Centre, 256 Tottenham Court Road, Tel: 01-580 5826.
W1. Tomorrow's World Today, 27 Oxford Street, Tel: 01-439 7799.
WC1. Transam Micro Systems, 59-61 Theobalds Road, Tel: 01-405 5240.
W8. Boots, 127a Kensington High Street, Tel: 01-937 6882.
SE7. Vix Oddens Micros, 6 London Bridge Walk, Tel: 01-403 1988.
SE15. Castlehurst Ltd, 152 Rye Lane, Peckham, Tel: 01-639 2205.
EC2. Devron Computer Centre, 155 Moorway, Tel: 01-638 3339.
N14. Logic Sales, 19 The Bourne, The Broadway, Southgate, Tel: 01-882 4942.
N22. Boots, 38-40 High Road, Wood Green, Tel: 01-881 0101.
NW4. Davinci Computer Store, 112 Brent Street, Hendon, Tel: 01-202 2272.
NW4. Boots, Brent Cross Shopping Centre, Tel: 01-202 52567.
NW11. Computers Inc, 86 Golders Green, Tel: 01- 209 0401.

GREATER MANCHESTER
Altrincham. Boots, 13-17 George Street, Tel: 061-928 4471
Hyde. C. Tech Computers, 184 Market Street, Tel: 061-366 8223
Manchester. Boots, 32 Market Street, Tel: 061-832 6533.
Manchester. Mighty Micro, Sherwood Centre, 268 Wilmslow Road, Fallowfield, Tel: 061-224 8117.
Manchester. NSC Computer Shops, 29 Hanging Ditch, Tel: 061-832 2269.
Marple. Marple Computer Centre, 106 Church Lane, Tel: 061-449 9933.
Oldham. Home & Business Computers, 54 Yorkshire Street, Tel: 061-633 1608.
Oldham. Boots, 1 Town Square Shopping Centre, Tel: 061-624 2525
Stockport. National Micro Centres, 36 St Peters Gate, Tel: 061-429 8080

MERSEYSIDE
Liverpool. Hargreaves, 31-37 Warbreck Moor, Walton, Tel: 051-525 1782.
St Helens. Microman Computers, Rainford Industrial Estate, Mill Lane, Rainford, Tel: 0744 885242.
Southport. Boots, 31-39 Chapel Street, Tel: 0704 33907.
St Helens. Boots, 8 Church Street, 24 La Grange Arcade, Tel: 0744 25488.

MIDDLESEX
Harrow. Camera Arts, 42 St. Ann's Road, Tel: 01-427 5469.
Hounslow. Boots, 193-199 High Street, Tel: 01-570 0156.
Southall. Twilstar Computers Ltd, 7 Regina Road, Tel: 01-574 5271.
Teddington. Andrews, Broad Street, Tel: 01-977 4716.
Twickenham. Productive Computers Ltd, 72 Heath Road, Tel: 01-891 4991.
Uxbridge. JKL Computers, 7 Windsor Street, Tel: 0895 51815.

NORFOLK
Norwich. Adams, 125-129 King Street, Tel: 0603 22129.
Thetford. Thetford CB & Micros, 21 Guildhall Street, Tel: 0842 61645.

NOTTINGHAMSHIRE
Mansfield. Boots, 39 Four Seasons Shopping Centre, Tel: 0623 23089.

Nottingham. Boots, 11-19 Victoria Centre, Tel: 0602 470676.
Nottingham. Telstar, 280 Huntingdon Street, Tel: 0602 505585.
Worksop. Computer Graphix, 32 Bridge Street, Tel: 0909 472248.

NORTHAMPTONSHIRE
Kettering. Boots, 35 Gold Street, Tel: 0535 514675.
Northampton. Boots, 9 The Parade, Tel: 0604 22573

NORTHUMBRIA
Morpeth. Telerents (Northern) Ltd, 31 New Gate Street, Tel: 0607 513537.

OXFORDSHIRE
Abingdon. Ivor Fields Computers, 21 Stert Street, Tel: 0235 21207.
Banbury. Computer Plus, 2 Church Lane, Tel: 0295 55890.
Oxford. Science Studio, 7 Little Clarendon Street, Tel: 0865 54022.
Oxford. Absolute Sound and Video, 19 Old High Street, Headington, Tel: 0865 65661.

SCOTLAND
Aberdeen. Boots, 133-141 Union Street, Tel: 0224 585349.
Dundee. Boots, 49-53 High Street, Tel: 0382 21756.
Edinburgh. Boots, 101-103 Princes Street, Tel: 031-225 8331.
Edinburgh. Microworld Computer Group, 12 Leven Street, Tel: 031 228 1111
Edinburgh. Edinburgh Computers, 51-57 Lothian Road, Tel: 031 229 4418.
Edinburgh. Silicon Centre, 7 Antigua Street, Tel: 031 557 4546.
Glasgow. Boots, 200 Sauchiehall Street, Tel: 041 332 1925.
Glasgow. Microworld Computer Group, 11 Bath Street, Tel: 041 332 1116.
Glasgow. Boots, Union Street and Argyle Street, Tel: 041 248 7387.
Glasgow. Tom Dixon Cameras, 15-17 Queen Street, Tel: 041-204 0826.
Glasgow. Commscot Ltd, 30 Gordon Street, Tel: 041 226 4878.
East Kilbride. Boots, 33-37 The Plaza, Tel: 035 52 20629.
Falkirk. Boots, 79-91 High Street, Tel: 0324 20535.
Hamilton. Tom Dixon Cameras, 8 Cadzou Street, Tel: 0698 283193.
Peterhead. North East Computers, 1 Ellis Street, Tel: 0779 79900.

SHROPSHIRE
Shrewsbury. Computerama, 13 Castlegate, Tel: 0743 60528.
Telford. Computer Village, 2/3 Hazeldine House, Central Square, Tel: 0952 506771.
Telford. Telford Electronics, 38 Mall 4, Tel: 0952 504911.

SOMERSET
Taunton. Boots, 64-65 High Street, Tel: 0823 76061.

STAFFORDSHIRE
Newcastle-under-Lyme. Computer Cabin, 24 The Parade, Silverdale, Tel: 0782 636911.
Stoke on Trent. Town Computer Store, 30 Town Road, Hanley, Tel: 0782 287540.
Stoke on Trent. Boots, 3-5 Market Square, Hanley, Tel: 0782 23271.

SUFFOLK
Bury St. Edmunds. Boots, 11-13 Cornhill, Tel: 0284 701516.
Bury St. Edmunds. The Suffolk Computer Centre, 1-3 Garland Street, Tel: 0284 705503.
Ipswich. Computer Magic, 24 Crown Street, Tel: 0473 50965.

SURREY
South Croydon. Concise Computer Consultants, 1 Carlton Road, Tel: 01-681 6842.
Croydon. The Vision Store, 53-59 High Street, Tel: 01-686 6362.
Croydon. Boots, The Mall, 12-18 Whitgift Centre, Tel: 01-688 6021.
Epsom. The Micro Workshop, 12 Station Approach, Tel: 0372 721533.
Guildford. Guildford Computer Centre, 5 The Quadrant, Bridge Street, Tel: 0483 578848.
Wallington. Surrey Micro Systems, 53 Woodcote Road, Tel: 01-647 5636.
Woking. Harpers, 71-73 Commercial Way, Tel: 0486 225657.

SUSSEX
Brighton. Boots, 129 North Street, Tel: 0273 27088.
Brighton. Gamer, 71 East Street, Tel: 0273 728681.

Bognor Regis. Bits & Bytes, High Street, Tel: 0243 867143.
Eastbourne. Boots, 15 Eastbourne Armdale Centre, Tel: 0233 27742.
Horsham. Boots, 1 Swan Walk, Tel: 0403 53053.
Horsham. Orchard Computer Centre, 34 East Street, Tel: 0403 64884.
Worthing. Boots, 48-52 Montague Street, Tel: 0903 207106.

TYNE & WEAR
Newcastle-upon-Tyne. Boots, Eldon Square, Tel: 0632 329844.
Newcastle-upon-Tyne. RE Computing, Parkview House, Front Street, 4 Lane Ends, Tel: 091 2701740.
Sunderland. Business Micro Communications Ltd, Refuge Assurance Buildings, Saint Thomas Street, West Sunnside, Tel: 0783 654916.

WALES
Aberdare. Inkey Computer Services, 70 Mill Street, The Square, Treconyn, Tel: 0685 881828.
Aberystwyth. Aberdara at Galloways, 23 Pier Street, Tel: 0970 615522.
Cardiff. Boots, 36 Queens Street & 105 Frederick Street, Tel: 0222 31291.
Cardiff. The Computer Shop, 41 The Hayes, Tel: 0222 26666.
Cardiff. Cardiff Microcomputers, 46 Charles Street, Tel: 0222 373072.
Newport. Gwent Computers, 92 Chepstow Road, Tel: 0633 841760.
Newport. Boots, 155-156 Commercial Street, Tel: 0633 51212.
Swansea. Boots, 17 St. Marys Arcade, The Quadrant Shopping Centre, Tel: 0792 43461.
Swansea. The Micro Store, 35-36 Singleton Street, Tel: 0792 46980.

WARWICKSHIRE
Coventry. Boots, 38-42 Corporation Street, Tel: 0203 26561.
Leamington Spa. Boots, 31 Parade, Tel: 0926 24945.
Leamington Spa. Leamington Hobby Centre, 121 Regent Street, Tel: 0926 29211.
Nuneaton. Micro City, 1a Queens Road, Tel: 0203 382049.
Rugby. O.E.M., 9-11 Regent Street, Tel: 0788 70522.

WEST MIDLANDS
Birmingham. Boots, City Centre House, 16-17 New Street, Tel: 021-643 7582.
Dudley. Central Computers, 35 Churchill Precinct, Tel: 0384 238169.
Stourbridge. Walters Computer Systems, 12 Hagley Road, Tel: 0384 370811.
Walsall. New Horizon, 1 Goodall Street, Tel: 0922 24821.

WILTSHIRE
Trowbridge. West Wiltshire Micros, Whitechear Yard, Tel: 02214 67259.

YORKSHIRE
Bradford. Boots, 11 Darley Street, Tel: 0274 390891.
Doncaster. Boots, 13-15 French Gate, Tel: 0302 62238.
Barnsley. Boots, 34-40 Cheapside, Tel: 0226 82616.
Huddersfield. Micro World Computers, 1006-1010 Manchester Road, Linthwaite, Tel: 0484 846117.
Huddersfield. Boots, 22 King Street, Tel: 0484 21756.
Leeds. Boots, 19 Albion Arcade, Bond Street Centre, Tel: 0532 33551.
Leeds. Micro Power, Northwood House, North Street, Tel: 0532 458800.
Sheffield. PIP Micro Communications, 9 Taptown Crescent, Broomhill, Tel: 0742 661096.
Sheffield. Boots, 4-6 High Street, Tel: 0742 78333.
Wakefield. Boots, 26-28 Upper Kirkgate, Tel: 0924 376181.
York. York Computer Centre, 7 Stonegate Arcade, Tel: 0904 641862.




Phone 01-278 3143 for your free information pack now!
Micronet 800, 8 Herbal Hill, London EC1.

New from Pace

Nightingale Accessory Board

This new accessory for Nightingale offers three new facilities on a single card. The auto-dialler now means that you can dial any number without using the telephone. Software designed for use with Commstar will dial a specified number or sequence of numbers once or more until a connection is established, each call being optionally monitored through a loud speaker. Any number of directories can be created and for each telephone number in a directory you may specify a series of attributes which allow Commstar to configure itself automatically for that particular system. Nothing could be easier. Any baud rate may be configured under software control including two new operating speeds 1200 and 600 half duplex which were not previously available. Finally, if you hope to set up your own database or bulletin board, the accessory board includes auto-answering. Nightingale and accessory board, a complete solution.

Accessory Board £49 plus VAT
Dialing Software £10 plus VAT

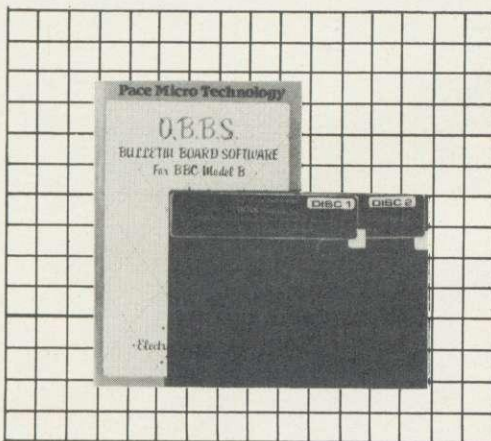

OBBS Colour Bulletin Board Software

Transform your BBC Micro into a unique bulletin board, be your own sysop. If you already own a Nightingale modem fitted with the accessory board or indeed if you intend buying this combination, with OBBS coloured Bulletin Board Software, you can run your own bulletin board. The entry level system includes many features normally only found on systems costing ten times as much. Full message searching and XMODEM uploading and downloading of software are provided along with unique colour teletext graphics and text facility.

£21 plus VAT


Independent Power Supply

We have designed this Independent Power Supply for those of you who use disc drives powered from the BBC power supply and are concerned that with the addition of Sideways ROM boards etc., the psu is being overloaded. The Pace independent power supply unit plugs directly into the mains and has four power output sockets of the type used on the BBC. This means that you can plug your unpowered disc drives, buggies etc., directly into this unit thus removing the strain from the BBC power supply.

Technically speaking, the Pace Independent PSU takes 240V AC mains and gives out regulated +5V & +12V DC ($\pm 2\%$) and 0V power through 4 parallel sockets. These sockets are of the same type as provided at the Auxilliary power output socket of the BBC microcomputer. Push connectors are also provided for all three voltage levels.

The unit is capable of supplying two single disc drives or one dual disc drive plus one or two other devices, such as Eprom programmers, which draw less current. The maximum current available is approximately **1.5A @ +5V** and **1.2A @ +12V**.

£39 plus VAT

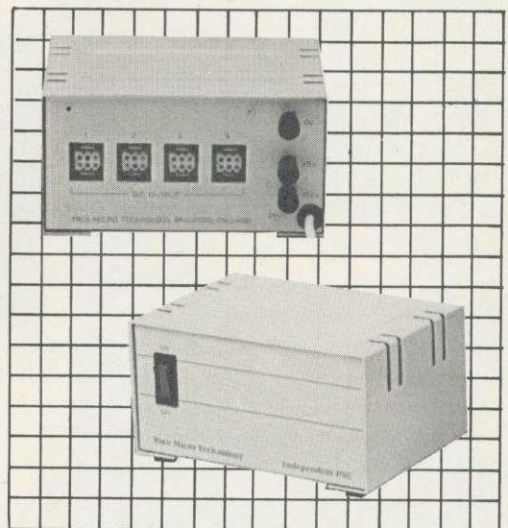

All the above are available from good quality dealers throughout the country or direct from Pace. Payment accepted by cheque, Access or Visa.

Pace Micro Technology Ltd.





Juniper View, Allerton Road, Bradford BD15 7AG.

Tel. 0274 488211 Telex 51564

Telecom Gold mailbox No. PCE 001 Prestel Mailbox No. 274729306



CHALLENGER

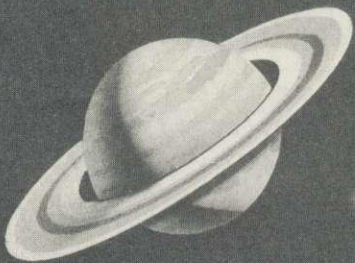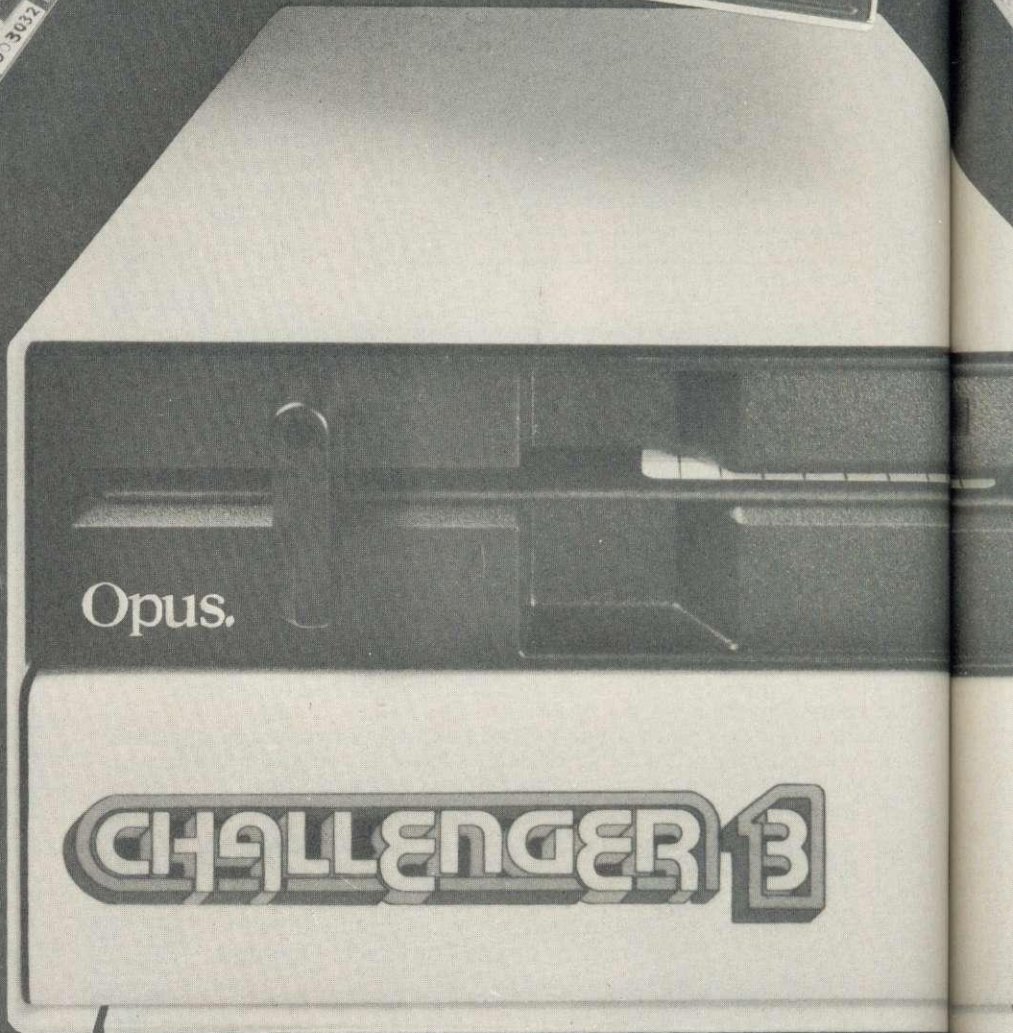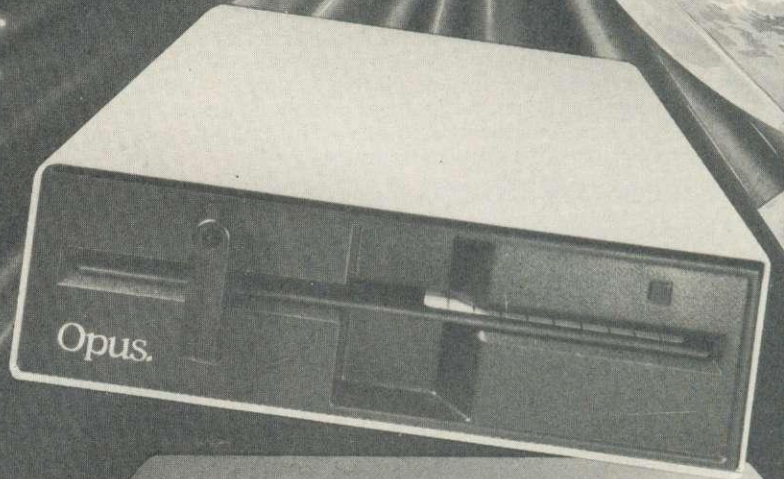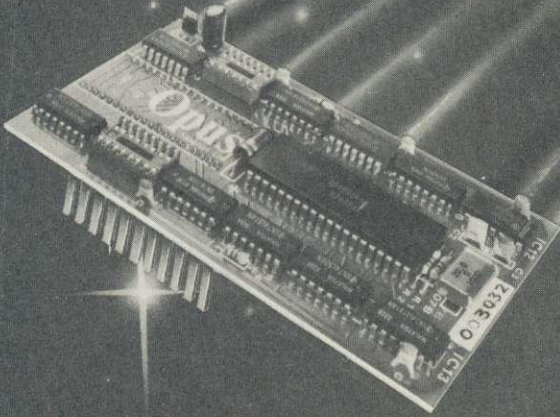

Simply light years ahead of the opposition

Opus announce the biggest disc drive breakthrough for years – CHALLENGER. It could make every other disc system for the BBC micro outdated overnight.

An amazing 3-in-1 design has produced Britain's first complete plug-in disc system for the BBC computer. No more complicated interface connections, soldering or track cutting, Challenger is an all-in-one disc system ready to plug straight into your computer. It's the simplest disc link-up ever and a winning combination that no other system can match.

5¼" DOUBLE-SIDED 40/80 TRACK DISC DRIVE

DOUBLE DENSITY DISC INTERFACE

SUPER FAST SOLID STATE RAM DISC – Up to 20 times faster than disc drive and providing a massive 256 K of RAM

ALL THIS IN A SINGLE UNIT FOR AN AMAZING £249.95

And just look at the storage capacity of this remarkable stand-alone system.

Our 5¼" disc drive and built in double-density disc interface – an extended version of the highly praised Opus DDOS, voted fastest system by 'Acorn User' and favourite choice of 'A & B Computing' – combine to give you a powerful 1 Megabyte system. But Challenger has a third dimension, a super fast Solid State RAM DISC for instant access to an additional 256 K of RAM. Effectively a lightning fast second disc drive which can be upgraded to ½ Megabyte capacity for only £49.95. It makes Challenger superior to a dual disc drive, giving faster access and less wear and tear on your drive.

Challenger uses the same disc controller chip as the new BBC B+ computer making it compatible with all leading software titles. Call us for our full compatibility listing.

We've provided a selection of utilities on ROM and Challenger's disc drive is 40/80 track switchable. The extended DDOS takes no User RAM, PAGE, the position at which BASIC programs load, is left unchanged, normally staying at &OE00, and Challenger dynamically moves files on the disc to overcome the 'can't extend' problem.

Challenger's price of £249.95 includes our unbeatable two year warranty, a full operating manual, VAT and free delivery. Call us now on 0737-65080 for details of our nationwide dealer network or simply post the coupon below.

OPUS SUPPLIES THE DRIVE

The Opus disc drive range has few rivals for quality, reliability, and sheer value for money. We've taken the best in Japanese disc drive technology and backed it with Britain's longest guarantee – an amazing two years. For full details of our extensive range of half-height 5¼" disc drives together with information on your nearest stockist, 'phone 0737-65080.

OPUS – BRITAIN'S LEADERS IN DISC DRIVE INNOVATION

To: Opus Supplies Limited, 55 Ormside Way, Holmethorpe Industrial Estate, Redhill, Surrey.
Please rush me the following: (PRICES INCLUDE VAT AND CARRIAGE)

Challenger Unit(s) £249.95 each

RAM DISC upgrade(s) to 512K at £49.95 each

I enclose a cheque for £ _____ or please debit my credit card

account with the amount of £ _____


My Access Barclaycard no. is:

NAME _____

ADDRESS _____

TELEPHONE _____

Opus.
Opus Supplies Ltd.

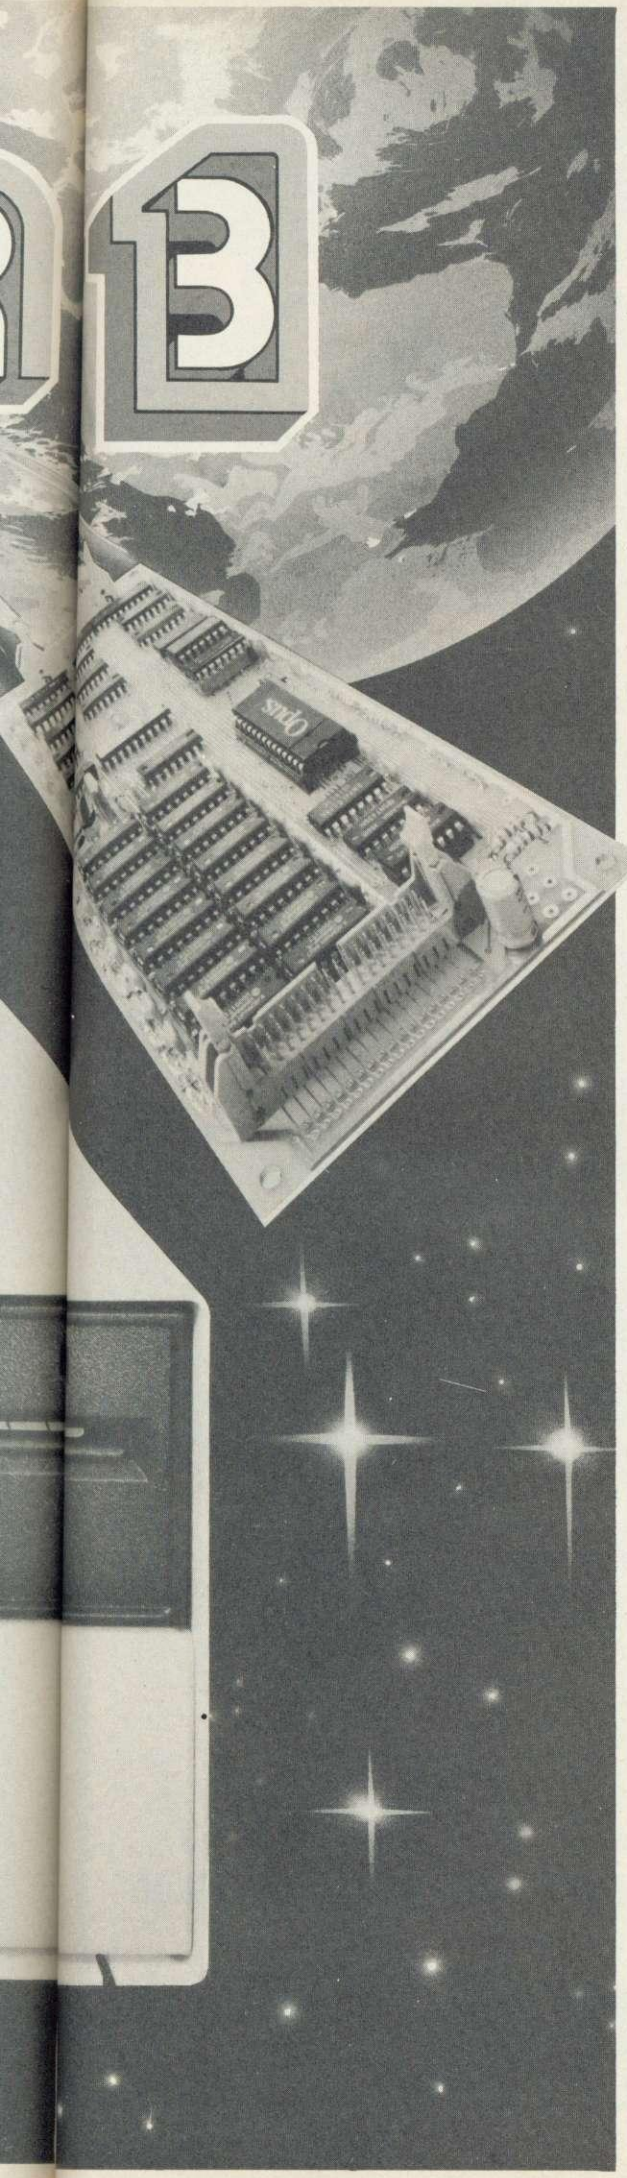

Electronequip

(Authorised BBC Micro Dealer, and Econet service centre)

SOFTWARE SALE


most **ACORNSOFT** £2.99 inc VAT

most **OTHERS** £1.99 inc VAT

Catalogue available

NORDMENDE

14" TV/Monitor
£199.00 inc VAT




Remote version £229.95 inc VAT

Offer includes RGB/BBC cable


12" GREEN SCREEN £69.00 inc VAT

Buy this superb TV/Monitor from the original distributors (since Sept '82)



SIDEWISE

SIDEWISE FITTED



A
T
P
L

A
T
P
L

"SIDEWAYS" rom board for BBC Micro.
No soldering required £39.33 inc VAT

BBC MICRO SPARES

Keyboard	49.95	Keystrip	1.99	Speaker	2.99
Power Supply	49.95	Case	19.99	Keyswitch	2.30

All inc VAT

NEW

40/80 TRACK DRIVE SWITCH

Plugs into disc interface, converts most 80 track drives into 40/80 track units. No more disc errors for wrong discs.

Introductory price **19.95 inc VAT**

100% BBC COMPATIBLE HIGH QUALITY, HALF-HEIGHT DISK DRIVES

Double sided 800k (2 x 400k) 40/80 track switchable.....	£329 inc
Double sided 400k (single) 40/80 track switchable.....	£149 inc
Single sided 100k (40 track).....	£99 inc
1 Box DS/DD 96 TPI.....	£23.69 inc
1 Box SS/SD 48 TPI.....	£18.63 inc
5 1/4" Disk cleaning kit	£5.99 inc

BRANCHES

MAIL ORDER: 36-38 WEST STREET
FAREHAM, HANTS. (0329) 230670

SHOP/TECHNICAL: 59 WEST STREET
FAREHAM, HANTS. (0329) 230671

KINGS LYNN: 17 TENNYSON AVE. (0553) 3782


VOLTMACE JOYSTICKS

*10% off list prices



Discounted price inc VAT

BJVOLT 14	Voltmace Delta 14B Joysticks	13.46
BJVOLTAD	Voltmace 14B/1 Adaptor Box	13.36
BJVOLT3T	Voltmace Delta 3B Twin Joysticks	17.99
BJVOLT3S	Voltmace Delta 3B Single Joystick	11.95



DISC BOXES

30 Disc Box..... 6.90
40 Disc Box... 13.80

DUST COVERS

RX80 F/T ... 5.24
FX80..... 5.29
KP810..... 4.60
BBC Micro... 4.14
Microvitec... 6.10
PW 1080A ... 4.60

EPROMS

2764.....2.49
27128.....3.85

LISTING PAPER

11 x 9.5" with micro
perf's 7.50 per 1000

PRINTERS


KAGA KP810
£289.00 inc VAT



EPSON FX 80 **377.20 inc**
BROTHER HR-15 **399.00 inc**
SEIKOSHA SP-1000 **249.00 inc**

Printer price **includes** paper and BBC interface cable.
Screen dump rom available for **£11.50 inc VAT**

Just a selection. Phone for full details of full range



3 COLOUR PLOTTER
with
utilities **£299.50**



MARCONI AMX
TRACKERBALL MOUSE
59.50 89.99

ALL PRICES INCLUSIVE OF VAT.

Prices subject to variation without prior notification

All Offers subject to availability
TRADE, EDUCATIONAL & HMG ORDERS
(Phone for discounts)

Large Stocks - 24 Hour Despatch

Securicor £4.90 (per parcel) inc VAT.
Postage 46p (per item) inc VAT.

Phone for comprehensive catalogue

MAIL ORDER ENQUIRIES TO BELOW OFFICE



Electronequip




TORCH
BBC




36-38 West Street, Fareham, Hants (0329) 230670

THE NEW WIZARD SIDEWINDER

£39.⁹⁵
R.R.P.

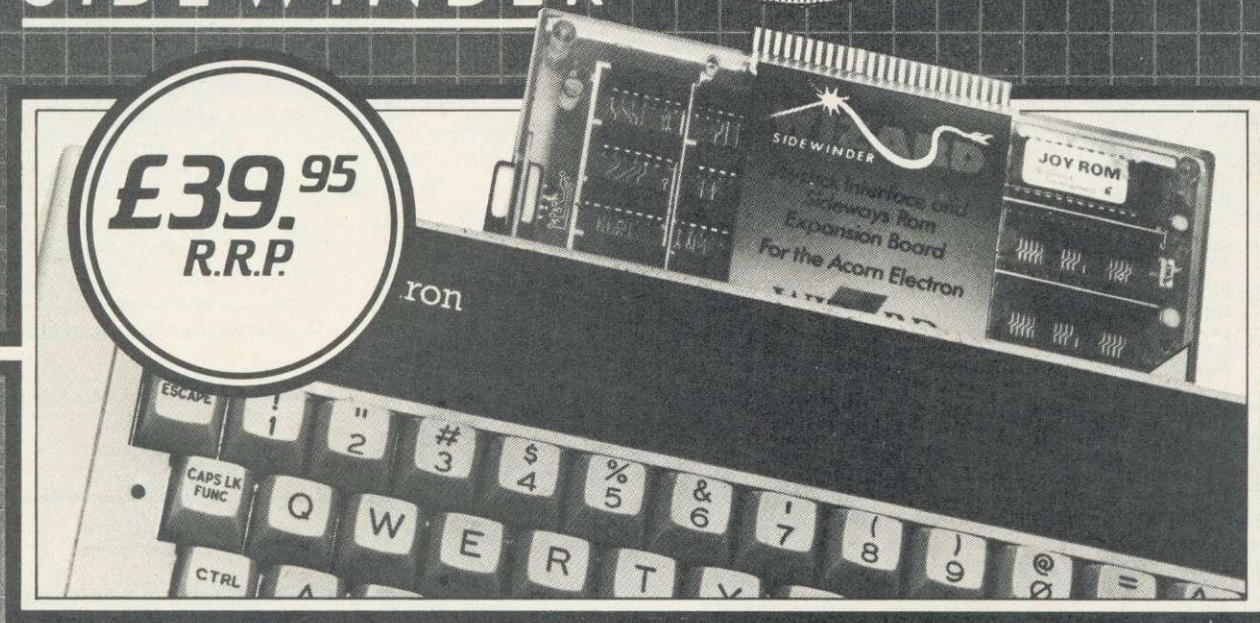

Sidewinder Expansion Board

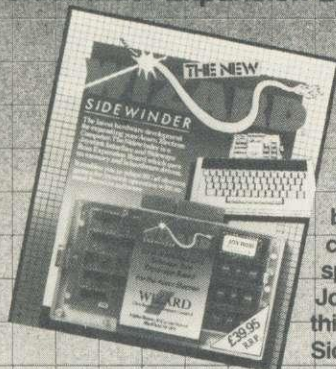

The very latest hardware development from Wizard, Sidewinder expands the potential of your Acorn Electron! Now you can enjoy your Electron games to the full by using Sidewinder in conjunction with the special Wizard Joy Rom. Joystick crashes become a thing of the past with Sidewinder!

Full through bus connection, exclusive to Sidewinder, allows other peripherals such as Plus 1 and disc drives to be used simultaneously, converting the Electron into a word processor! The additional Rom sockets provided by Sidewinder extend the user's choice to include all the latest Rom developments.

BBC Joy Stick Interface



The interface plugs directly into the existing analogue joystick port, converting the port to accept two Atari type joysticks. Now you can play all joystick compatible software.

£14.⁹⁵
R.R.P.

BBC Joy Rom

The Wizard Joy Rom allows the user to programme any game to be played with a joystick. All instructions are displayed in an easy to follow sequence on the monitor.

- 99% of commercial BBC software can now be used with any BBC compatible joystick!
- Joy Rom eliminates keyboard damage!
- Flight simulator games, or games that previously required an analogue joystick will now work with a switched joystick!
- Programmes requiring more than 5 keys can now be worked with a pair of joysticks!
- Unlike cassette based joystick programmes, Joy Rom resides in the computer, allowing instant access!
- High skill one player games can now be played by two people, creating hilarious situations!



£17.⁵⁰
R.R.P.

WIZARD

Development Company Limited

Computer Hardware and Software
Alpha House, 10 Carver Street, Sheffield S1 4FS.
Telephone: (0742) 752912

Distribution by Euromax Electronics Limited, Pinfold Lane, Bridlington, North Humberside. YO16 5XR.

Please rush me the following items:

B.B.C. Joy Rom, at £17.50 per item

B.B.C. Joy Stick Interface, £14.95 per item

Sidewinder Expansion Board, at £39.95 per item

Your Name _____

Address _____

Post Code _____

Make your cheque or postal order Payable to:
Wizard Development Co. Ltd

ALL SOFTWARE
NOW AVAILABLE
ON 3" DISKS



ASK ABOUT B+
COMPATIBILITY

the SCYTHE

THE SCYTHE TOOLKIT

If you can't see the wood for the trees, get the **Scythe** and **Hack** your way through! This ROM contains 26 useful commands, and has the added bonus of accepting HEX, DECIMAL, BINARY and resident INTEGER variable entry. The ROM commands can all be preceded with a "Y" and there are inbuilt ROM management routines to help avoid conflict with other ROMs. Supplied with comprehensive manual.

- | | | | |
|-----------------|---|------------------|--|
| MDIS: | A fast Up/Down scrolling disassembler which will examine all paged ROMs. Will work in any 40 or 80 column mode. | XLIST: | Will search a Basic program for any VDU codes (which may for instance be used to make the program unlistable) and replace them with a " ". |
| SDIS: | Will spool disassembler code in a form compatible with the BASIC 2 assembler as data is represented with EQUBs. | BAD: | Will attempt to repair a bad program. |
| MEDIT: | Memory editor with hex/ascii display. Up/Down scrolling with paged ROM/RAM access. Will work in any 40 or 80 column mode. | MRELOC: | Will add a relocating program to a machine code file so that it will automatically download and run. |
| KLIST: | Expands soft key definitions and presents them so they can be easily edited, all codes are expanded so that Wordwise type definitions can be changed. | SLOW: | Will slow down operation of the BBC (over a variable range) to allow easier playing on many games, and the analysis of operation of graphics, etc. |
| BASE: | Will accept a number and display its Hex, Decimal & Binary equivalents. | TDISK: | Comprehensive file transfer utility allowing you to transfer files between filing systems (i.e. ROM, Net, Disk, Tape & Tape 3). Many features including: locking/unlocking programs, any length of file. |
| ROMLIST: | Displays what ROMs are present in your machine and the ROM size. | VECTOR: | Will produce a menu of the programs on a Vector 1 program disk, and run them, this utility will cope with some forms of protection which cannot be handled by any disk based product. |
| ROMSAVE: | Will save any sideways ROM to the current filing system. | ROFF: | Will switch off a particular ROM so that it cannot be accessed. Even Scythe can be switched off! |
| FORMAT: | Formats a disk to any number of tracks, from any track. | RON: | Will reactivate a particular ROM, or all ROMs. |
| VERIFY: | Verifies a disk, shows up bad tracks, and displays an error count. | SECTLOAD: | Load sectors from disk ignoring errors. |
| FREE: | Displays an analysis of the free space available on a disk. | SECTSAVE: | Save sectors to disk. |
| SFIND: | Search memory for the occurrence of a specified string. | MSHIFT: | Move memory including paged ROMs. |
| BFIND: | Search memory for the occurrence of any sequence of bytes. | MSWAP: | Swap memory including paged ROMs. |

PRICE £24 INCLUSIVE

FREE UTILITY/DEMONSTRATION DISK NOW INCLUDED!

ROM MASTER

A new utility ROM from Chalice Software to help control your BBC. The **MASTER** allows you to switch off ROMs even through <CTRL> <BREAK> avoiding any conflicts which prevent you accessing a command in another ROM or which stop you playing your favourite game! **ROM MASTER** contains over 20 commands which apart from ROM management include a sophisticated disassembler, memory editor, file scrambler/unscrambler, function key lister, base converter and many other useful features.

Using **ROM MASTER** couldn't be easier. Numbers can be entered in DECIMAL, HEX, BINARY or the resident INTEGER variables. ROMs can be specified by their socket numbers, their title or an abbreviation of the ROM title. All commands where relevant will accept lists, so for example you could switch off several ROMs in one command, perhaps mixing socket numbers, titles and abbreviations all on the same line.

PRICE £16.00 INCLUSIVE

Orders to:
CHALICE SOFTWARE, Dept.AC
3 Merlin Way,
Covingham,
Swindon SN3 5AN.

*All Enquiries Please Ring:
0793-615026
Dealer Enquiries are
Welcome*

■ VECTOR 1 TAPE TO DISK UTILITY

Features

- + Once only purchase
 - + Can save to any disk
 - + Very user friendly, help pages on disk
 - + 40/80 Format
 - + No awkward ROMs, can be used on any machine
 - + Can load to all available RAM &400-&7FFF
 - = Simply the best tape to disk utility available
- Vector 1 double density versions compatible with Opus, Cumana, UDM and Watford DDFS.

■ VECTOR 2 DISK UTILITY

Features:

- + 40/80 Format
- + User friendly, menu driven
- + Contains powerful features such as a disk sector editor, Disk Compare, format, verify and track repair
- = The most powerful disk utility available

Prices: £12.00 each for Vector 1 or Vector 2

£23 for both.

Dataware

Slide Master: Specialised database for the photographer tailored for perfect cataloguing of a photographic collection. Comes complete with comprehensive manual. (Disk Only) **£16.00**

MAM: Write your own adventure and test it on the Beeb. Requires Acornsoft Lisp to operate. Eliza is also included on the disk. You write the rules to suit your requirements. **£16.00**

All software £15.00 if bought with any other product. (Please specify 40/80 tracks) Disk only.

EPROMS

2764 (250 ns) Each **£3.00**
27128 (250 ns) Each **£4.20**

All prices shown include VAT and p&p. Please add £3.00 per disk if you require 3" disks and specify when ordering.

CLARES NO.1 IN UTILITY SOFTWARE!

REPLICA III £15.00



The all new improved REPLICA III is now available and it's better than ever. Just look at the features below and place your order now by ACCESS or cheque.

- *DISC BASED - No ROM sockets required
- *ONE TIME PURCHASE ONLY
- *AS MANY DISCS AS YOU LIKE
- *COMPATIBLE WITH MOST DFS & DDFS
- *B+ COMPATIBLE
- *SIDEWAYS RAM COMPATIBLE - uses sideways RAM, including that in the B+, if it is there and so enables the transfer of many more programs.

As a thank you to our 30,000 REPLICA II users you may return your REPLICA II for upgrade to REPLICA III for just £12.

Enhanced BETA-BASE £25



WHAT IS DATABASE?

It is a FILE containing RECORDS, each record consists of a number of FIELDS containing the information - an analogy can be drawn with a card index in which a box of cards is the file, each card is a record and each line on the card is a field.

SPECIFICATION

- | | |
|------------------|--|
| 1) Random Access | - disc based, single or dual drives |
| 2) File Size | - max 65,000 records |
| 3) Record Size | - up to 2048 characters and 200 fields |
| 4) Field Size | - up to 254 characters |
| 5) Holds | - approx 1200 ADDRESS records per 100k |
| 6) Search | - 5 search fields using powerful options |
| 7) Sort | - 500 records on 3 fields in 60 seconds. |

SYSTEM FEATURES

- *CALCULATE - using any valid expression
 - *PRINTOUT - Powerful options
 - *REDEFINE - Titles, fields etc.
 - *TRANSFER - From one file to another
 - *GLOBAL ENTRY - of repetitive data
 - *SEARCH LISTS - Allow creation of sub Databases within main Database
 - *SPOOLER - enables you to create spooled files that are compatible with Wordwise, View etc.
 - *INPUT - is a routine included on the disc which will allow you to write your own utilities for accessing your data. Many of the programs on the utilities disc were written using this procedure
 - *TUBE - compatible with the 6502 second processor
 - *Comprehensive manual and tutorial.
 - "We use Beta-Base ourselves"
 - Mike Bibby Editor of MICRO USER
 - "Beta-base is a joy to use" BEEBUG March 85
 - "Excellent value for money"
 - A & B Computing OCT 84
 - "Rated best value for money"
 - ACORN USER Dec 84
- Ask for our data sheet if you need to know more.

New! BETA-ACCOUNTS INVOICE & DELIVERY NOTE MODULE £25.00



- *INTEGRATED ACCOUNTS and DATABASE
- *MULTIPLE VAT rates
- *SCREEN EDITING with insert and overwrite
- *AUTOMATIC DELIVERY NOTES
- *INVOICE COMMENTS
- *ACCOUNT HOLDERS details inserted automatically
- *MAILING LIST generated automatically
- *LEDGER SHEET printed automatically
- *VAT sales returns prepared
- *TRANSACTION FILE generated
- *Beta-Base compatible

This is the first module in an integrated accounting suite of programs written to be used and not simply to please an accountant. This module contains an INVOICE and DELIVERY NOTE program with 80 column input and screen editing, you see what will be printed before committing yourself. Customer details can be automatically placed in a Beta-Base compatible file for use as a mailing list.

VAT details are generated at the end of the VAT period and the YEAR TO DATE figures can be viewed at any time. Provision is made for multiple VAT rates including standard, zero, export and exempt.

A transaction file is generated for account customers for use with the STATEMENT and ACCOUNTS RECEIVABLE module.

Future modules will be STATEMENT and ACCOUNTS RECEIVABLE, STOCK CONTROL, ACCOUNTS PAYABLE and NOMINAL LEDGER. All relative files are compatible with CLARES Beta-Base which can be used to manipulate the files as required. The Beta-Base Utilities Disc provides Mail-Merge facilities using the customer list.

This program was written for our own use and is used to prepare hundreds of invoices per week. We have made life as easy as possible for ourselves, so why not take advantage of our efforts.

Requires double sided single drive for minimum configuration - no stock control or customer database. Double sided twin drives will enable a full integrated system to be used.



BETA-BASE UTILITIES £12.00



Extend the power of Beta-Base with the extra facilities provided on this disc.

- *MAIL MERGE
- *LABEL PRINTER
- *DISC SORT
- *EXTENDED SEARCH
- *FREE FORMAT TRANSFER
- *FAST PACK
- *STATUS

The MAIL MERGE alone is worth £12 so you get a real bargain with this disc. The features are so numerous that we cannot mention them all here.

Ask for our UTILITIES DATA SHEET if you want more information.



- DISC
- 40 _____ 40 TRACK
- 80 _____ 80 TRACK
- 3 _____ 3" DISC - ADD £3
- EPROM

Send for detailed newsletter.
All prices inclusive of VAT & Carriage -
NO EXTRAS! Please state 40 or 80 track disc
and state D.F.S. you use.

clares
MICRO SUPPLIES

DEPT AU12
98 Middlewich Rd.,
Northwich, Cheshire CW9 7DA.
Tel: 0606 48511
Open 9-5pm Monday-Friday
LUNCH 12.30-1.30

OUTSTANDING OFFER

from Viglen



THE SUPERB SHUGART Model 465

Made in Japan by PANASONIC



At Viglen's rock bottom prices, everyone can afford to replace inefficient cassette tape units and obtain all the advantages of changing up to discs.

All offers include:

Utilities Disk includes formatting, verifying, BASIC program comparator, disassembler, Epson screen dump, dual catalogue (giving 62 files), large printing and many other features.

Comprehensive Manual - a fact-filled, 56 page document, includes techniques of loading from cassette to disk. Not available elsewhere.

Carriage: Add £12 in each case. Orders usually despatched next day. Price covers courier delivery and VAT.

Prices correct at time of going to press. Offer subject to availability.

Single Drives 40/80 400K

Single Drive..... **£99**

Drive + Acorn DFS (DNFS).. **£158**

Prices include VAT

Dual Drives 40/80 800K

Dual Drives **£198**

Dual Drive + Acorn DFS (DNFS).. **£257**

Integral PSU for Dual Drive **£22**

Prices include VAT

12 Months Guarantee

Call in at our showrooms for Free Fitting of DFS.

Unit 7, Trumpers Way, off Boston Road, Hanwell, W7 2QA.


Tel: 01-843 9903

Open Monday-Friday 9.30 - 5.30
Saturday 9.30 - 4.00



free parking

Unit 7, Trumpers Way, Hanwell W7 2QA.



The best partners for your computer

Post to: Viglen Computer Supplies, Unit 7, Trumpers Way, Hanwell W7 2QA.

Please send me (specify all items)

I enclose Cheque/P.O. for £
Cheques payable to Viglen Computer Supplies.

Name

Address

I prefer to pay by ACCESS/BARCLAY CARD
(Delete whichever is not applicable)

Card No.

Signature
AU12/1
Credit Cards valid only if signed by card holder. Address must be the same as card holder.


The Great Little 80 column Printer from Viglen at a price everyone can afford

ONLY
£159

(INCLUDING VAT)


with interface cable

- All printers come standard with both serial and parallel interface
- 12cps near letter quality mode
- Normal 50cps draft printing
- Tractor and friction feed as standard
- Uses normal A4 sheet paper or continuous stationery
- Original plus 2 copies
- Bidirectional logic seeking
- 48 International characters
- Subscripts, superscripts and underlining.
- Also available for IBM.

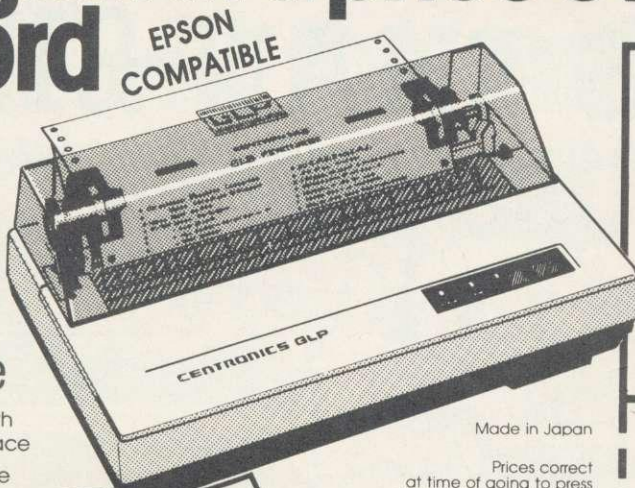

Made in Japan

Prices correct at time of going to press - offers subject to availability

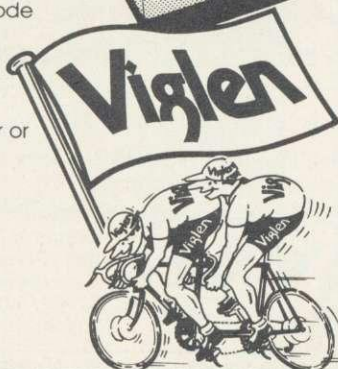

Post to:
Viglen Computer Supplies
Unit 7, Trumpers Way
Hanwell, W7 2QA
Tel: 01-843 9903

Showroom/factory open
Monday - Friday 9.30-5.30
Saturday 9.30 - 4.00

THE BEST PARTNERS FOR YOUR COMPUTERS

How to order by post - Simply fill in the coupon with your requirements. Enclose your Cheque/P.O. or use your Access/Barclaycard. Please make cheques payable to VIGLEN COMPUTER SUPPLIES and post to the address shown left. Allow seven days for delivery, add £8.00 carriage, packing and ins. on all items.

By telephone - Ring (01) 843 9903. Credit Card holders (Access/Barclaycard only) can purchase by telephone. Please give Card No., Name, Address and items required.

Credit cards valid if signed by card holder. Address on coupon must be same as card holder.



Please send me (state quantity)
_____ GLP printer(s)

I enclose Cheque/P.O. for £
add £8.00 carriage

State whether BBC, QL or IBM

Name

Address

I prefer to pay by ACCESS/BARCLAYCARD
(delete whichever is not applicable)

Card No


Signature

NEW!

from

Viglen

COMPUTER SUPPLIES

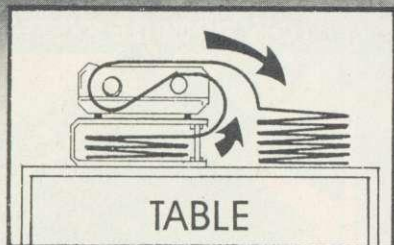


TABLE

Printer Stand

£16.95 INC. VAT

Carriage & Packing £3.00

A PRINTER STAND

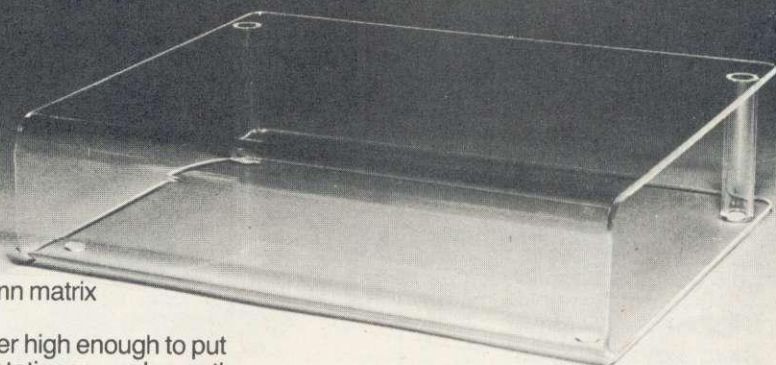

- For 80 column matrix printers
 - Raises printer high enough to put continuous stationery underneath
 - Beautifully finished in clear perspex ● Viglen quality every time
 - Will accept paper up to 12½" wide ● Non slip rubber pads
- Dimensions: 15" (380mm) wide (320mm) deep 4" (90mm) high
Also available 136 column stand @ £27 inc. VAT.

COME TO VIGLEN FOR A FAST, FRIENDLY, PERSONAL SERVICE

DEALER ENQUIRIES WELCOME

Orders welcomed from educational establishments and government departments

Prices subject to change without notice

Post to: VIGLEN COMPUTER SUPPLIES, UNIT 7, TRUMPERS WAY, HANWELL, LONDON W7 2QA.

Please send me _____ (qty) PRINTER STANDS at £19.95 each. I enclose Cheque/P.O. for £ _____ made out to

VIGLEN COMPUTER SUPPLIES or debit my ACCESS/BARCLAYCARD No. _____

Name _____ Signature _____


Address _____

AU12/2

DUAL DRIVES FOR LESS THAN £17?

Convert your single disc drives into duals for only £16.96 inc. VAT

- Specially designed circuitry eliminates the need for any tools
- Simply plug in for instant dualling
- No soldering
- No mess
- No need to take disc drives apart to change links

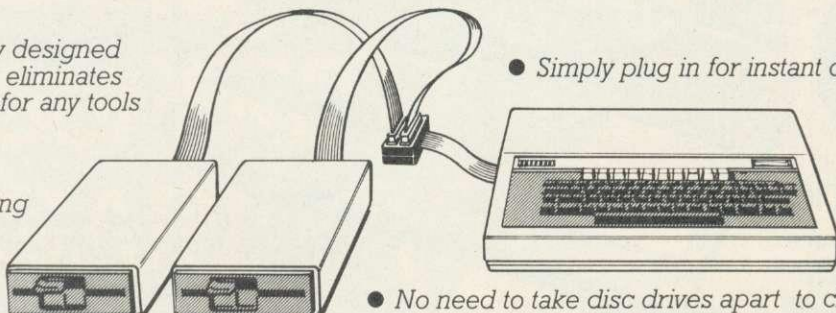

The Viglen DUCK (Dualling Up Connector Kit) can convert single drives to duals, instantly!

Just plug the **Viglen Duck** into the BBC micro and any two single disc drives to create a dual disc drive. Drives will be configured Drive 0 and Drive 1 automatically.

- Fast Back-Up
- Fast Copying of Files

The **Viglen Duck** will dual-up any make or type of single disc drives with PSU (power supply unit). If you have disc drives without built-in PSU, then you will require a dual power connector for the BBC micro - available from Viglen for only **£8.00** inc VAT.

- Postage and packing **£2.50** inc. VAT.
- Official Orders from Government and Educational Establishment welcomed.




Orders to: Viglen Computer Supplies
Unit 7, Trumpers Way, Hanwell W7

Credit Card holders may order by
telephone: **01-843 9903**

All prices correct at time of going to press



YOUR ROMS WOULD BE HAPPIER IN A VIGLEN ROM CARTRIDGE SYSTEM



Tel: 01-843 9903
ACCESS/BARCLAYCARD
Credit Card holders can purchase by telephone. Please give Card No., Name, Address, and items required.

The safest way to look after your growing collection of ROMs is to store them in Viglen's specially designed cartridge systems, this not only keeps them happy, but also removes the risk of damage to your BBC micro.

There are two systems - the 'Standard' and the 'Low Profile'. Viglen is the leading producer of both.

ADVANTAGES OF VIGLEN ROM CARTRIDGE SYSTEM

- All cartridges are gold-plated for durability and reliability, unlike others which are only silver plated.
- No need to switch machine off between cartridge changes.
- Insert and remove 'Wordwise' View 'Disc Doctor', etc., at will, from your micro in absolute safety.
- Low, low power consumption unlike other systems.
- Save on memory.

PRICE FOR COMPLETE KIT, including 1 cartridge, 1 Cable Assembly, 1 Blanking Off Plate (used if system is removed), 1 Socket Cover (used when no cartridges are resident), 1 Cartridge Storage Rack.

£15.95

Extra Cartridges: \$2.95 each, four for £11.00, ten for £26.50. Kit comes with 1 ROM Cartridge. All prices inc. VAT.



THE STANDARD SYSTEM



Over 40,000 sold

The Standard System used extensively in education is preferred, due to its robust construction and ease of use.

LOW PROFILE SYSTEM



With the sideways entry on the low profile system access to the escape and tab keys are slightly restricted. However Viglen betters its rivals in this respect by being 3mm lower.

Personal Callers
Mon - Fri 9.30-5.30pm Sat 9.30-4pm

Post to: VIGLEN Unit 7 Trumpers Way Hanwell W7 2QA

Please send me (state type and quantity) _____ Kit(s) _____ Cartridges

I enclose Cheque/P.O. for £ _____ Please add £2.50 for postage and packing (50p only for single cartridge)

I prefer to pay by ACCESS/BARCLAYCARD * (Delete whichever is not applicable).

Card No. _____ Signature _____

Name _____ Address _____

Credit Cards valid if signed by Cardholder. Address must be the same as card holder's.

AU12/3



the best partners for your computer




All the peripherals for your BBC Model B

the best service – the best value

Monitors
NEW

**PHILIPS
Colour TV/
Monitor
Model
1114**

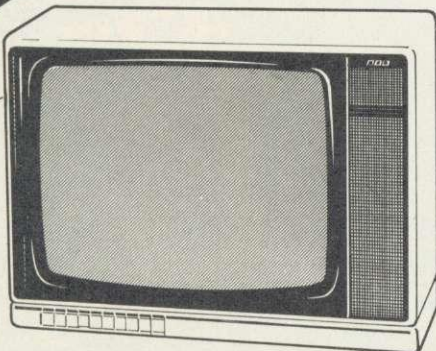

14" Tube (V34cm) Receiver/Monitor

- Light and compact finished in white with dark picture surround.
- In-line 14" picture tube provides a sparkling picture in seconds.
- Designed to give exceptional reliability and performance.
- 10 pre-select channel buttons.
- Headphone/tape recorder socket with separate loudspeaker mute switch.
- Loop aerial and main aerial connection.
- RF, CVBS and RGB inputs.



Price **£209** inc. VAT

**PHILIPS
Model BM7502
Green Screen
Mono**



From the highly successful 'Philips 80 Range', here is a monitor specially designed to display graphics and alphanumeric data with perfect clarity.

- 12" high resolution, 20MHz band width, anti-glare screen.
- Composite Video (CVBS) and Audio Input.
- 2000 character (80 x 25) display.
- Amber screen – £5 extra.
- Ideal low price for your BBC B.


**ONLY
£85
INC. VAT**

**PLEASE ENQUIRE ABOUT OUR EXTENSION
KEYBOARDS, KEY PADS & EPROM PROGRAMMER**

Discs

3M Scotch Discs
5 1/4" single-sided diskettes

10 DISCS
PER BOX



	1-2 boxes	3-9 boxes	10+ boxes
SS 40 TRACK	£15.00	£13.50	£13.00
DS 40 TRACK	£20.00	£18.40	£17.70
SS 80 TRACK	£23.00	£20.70	£20.00
DS 80 TRACK	£26.70	£24.00	£23.00


Prices include VAT

Please add £2 carriage

PHILIPS **NEW
Colour Monitors
Model CM8501**

- Std resolution.
- Grey glass screen.
- RGB – linear/TTL – inputs (SCART/8 Pin DIN).
- Audio input.
- Bandwidth 8 MHz.
- Adjustable foot.

Price **£199** INC. VAT



Model CM8533

- Med. resolution.
- Dark glass etched screen.
- Composite video input (phono).
- RGB – linear input (SCART).
- RGB/RGBI – TTL input (8 Pin DIN).
- Audio input.
- Green (Mono) switch.
- Bandwidth 12 MHz.
- Adjustable foot.

Price **£259** INC. VAT


Microvitec Monitors

Standard
£199

Med
£259


High
£395

Med & Pal
£295



Prices correct at time of going to press. Offers subject to availability.

Printers



Dot Matrix

Taxan Kaga KP810 **£269**
Canon PW1080A **£279**

Daisy Wheel

Juki 6100 **£329**
Quen Data **£229**
Epson DX100 **£359**

Please add £8 for 1 1/2 metre length printer lead for the BBC micro.

BBC Model B+ P.O.A.



Visit our showroom:
Open
9.30 – 5.30
Mon to Sat.
9.30-4.00
Saturdays

**Sales Hotline
01-843 9903**

Please call for latest prices, product details and to place credit card orders. Government and Educational Establishments enquiries welcome.




Microvitec Monitors

Standard
£199

Med
£259

High
£395

Med & Pal
£295



Prices correct at time of going to press. Offers subject to availability.

Post to: **VIGLEN COMPUTER SUPPLIES, UNIT 7, TRUMPERS WAY, HANWELL W7 2QA. Telephone: 01-843 9903.**

Please send me

Please add £8 carriage per item (except discs)

I prefer to pay by ACCESS/BARCLAYCARD

Card No

Signature

Name

Address



VIGLEN GET IT TOGETHER

Give your BBC Micro System the professional PC-look by replacing your existing lid with this smartly styled package. House your computer, monitor, disk drives & ROM cartridge system neatly in this strongly constructed, high impact ABS unit, colour matched to the BBC micro, and give yourself an outfit to impress all who see it.

This unit will support heavyweight monitors including 14" television sets.

Capable of accepting most internal expansion boards such as Solidisk, ATPL Sidewise, Midwich 16, RAMAMP 16+32k Exprom, Computer Village CVX16, HCR Sideways, 6502 2nd processor boards. Fully ventilated. Full fitting instructions. DEALER ENQUIRIES WELCOME

Package includes:

- Keyboard case
- Screened main unit casing including internal fittings
- 2.5 metre cable to connect main unit to keyboard
- Two blanking plates included if no disk drives to be added
- Keyboard labels

BASIC PRICE
£39
(INCLUDING VAT)

Optional Extras: (PRICES INC. VAT)

- 1 2.5 metre coiled cable **£8**
- 2 Dual-drive data cable **£15**
- 3 Dual-drive power cable **£5**
- 4 Special internal power supply kit capable of running two half-height drives. . . **£25**
- 5 Fan kit, only necessary in extreme cases . . . **£29**
- 6 Fitting available from **£15**



Free parking available

Telephone: 01-843 9903.

How to order:


By post -

Simply fill in the coupon. Enclose your Cheque/P.O. or use your Access/Barclaycard. Please make cheques payable to VIGLEN COMPUTER SUPPLIES and post to the address stated. Allow seven days for delivery. Add £8.00 carriage, packing and insurance.

Or telephone: 01-843 9903

Credit card holders (Access/Barclaycard only) can purchase by telephone. Please give Card No., name, address and items required.

Viglen are also major suppliers to educational and government establishments and welcome further enquiries and orders.

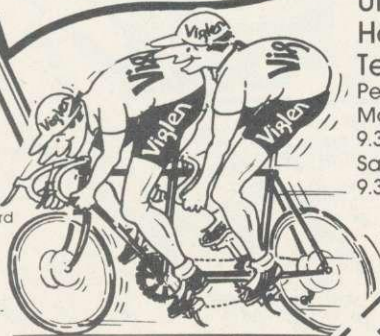

Unit 7, Trumplers Way
Hanwell W7 2QA
Tel: 01-843 9903
Personal callers
Monday - Friday
9.30 - 5.30pm
Saturday
9.30-4pm

Post to: VIGLEN COMPUTER SUPPLIES, UNIT 7, TRUMPERS WAY, HANWELL W7 2QA. Telephone: 01-843 9903.

Please send me _____ (Qty) VIGLEN PC Unit(s). Plus Optional Extras(s).
I enclose Cheque/P.O. for £ _____
I prefer to pay by ACCESS/BARCLAYCARD* Delete whichever is not applicable

Card No. _____
Signature _____
Name _____
Address _____


*Credit Card valid if signed by Cardholder. Address below must be the same as card holder's.

The Viglen Professional Console Unit

A VERY SPECIAL OFFER from Viglen

The Superb Mitsubishi 400K Model M4853 Double-sided 40/80 Track Disc Drive

LATEST

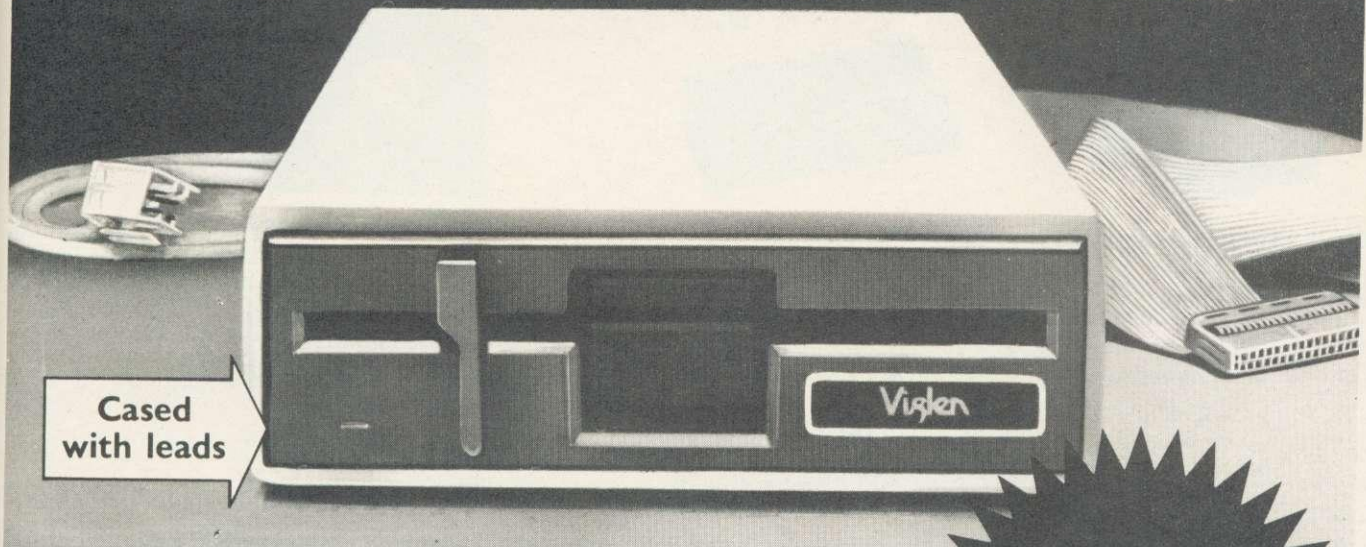

Cased
with leads

PLUS CHOICE OF DFS'S
Viglen DFS 1:2 fully Acorn Compatible

12 MONTH
WARRANTY
(Extended
2 year
warranty
available)

£109

400K 40/80 TRACK
DISC DRIVE
INC. VAT

- Features** ● Built in Formatting
Extras ● Built in verification ● Dual catalogue 60 files
● Double stepping reads and writes 40 track

OR latest Acorn 1:2 DFS (DNFS) Call at factory for free fitting.

Single Drives 40/80 400K

Single Drive	£109.00
Drive + Acorn DFS	£168.00
Drive + Viglen DFS	£168.00

Dual Drives 40/80 800K

Dual drives	£218.00
Dual drive + Viglen DFS	£277.00
Dual drive + Acorn DFS	£277.00
Integral PSU for Dual Drive	£22.00

All offers include

Utilities Disk includes formatting, verifying, BASIC program comparator, disassembler, Epson screen dump, dual catalogue (giving 62 files), large printing and many others.

Comprehensive Manual a fact-filled, 56 page document, includes techniques of loading from cassette to disk. Not available elsewhere



Carriage. Add £12 in each case. Usually despatched next day. Price covers courier-delivery and insurance. Prices include VAT. Prices correct at time of going to press - Offer subject to availability.

Sales Hotline 01-843 9903

Please call for latest prices, product details and to place credit card orders. Government & Educational Establishments enquiries welcome on this number.



After Sales Line 01-571 6313

For dispatch enquiries, invoice queries, service and all other enquiries.

Call in at our Showroom

Weekdays:
9.30 - 5.30
Saturdays:
9.30 - 4

Post to: Viglen Computer Supplies, Unit 7, Trummers Way, Hanwell W7 2QA.

Please send me (specify all items)
I enclose Cheque/P.O. for £
Cheques payable to Viglen Computer Supplies

Name

Address

I prefer to pay by ACCESS/BARCLAY CARD
(Date when payment is available)

Card No.

Add £12 carriage

Signature
AU12/6

TURBOBALL

Now add "go faster" goodies to your TRAK-BALL

The ATARI TRAK-BALL has a superb resolution when used with the BBC Micro's user port, but, in common with all trackerball and mouse devices, is slow when moving from one side of the screen to the other. With menu driven programs this can be annoying, but now with TURBOBALL you can zap at incredible speed to anywhere on the screen, while still retaining the same resolution when required. TURBOBALL also provides two extra button switches making the ATARI TRAK-BALL compatible with other 3 switch mouse and trackerball devices. In addition we have provided X HOLD and Y HOLD buttons which make vertical and horizontal alignment a dream.

- * Two auxiliary switches
- * X and Y freeze facility
- * Fully adjustable "fast" speed
- * Special deal on SPLASH! art program
- * Simple clip fitting - no alteration to your TRAK-BALL



ATARI TRAK-BALL £19.95 TURBOBALL Interface £29.95

SPLASH!

Superb art drawing program for the BBC Micro

Especially commissioned from Tecnation for the launch of our TURBOBALL interface, this Super-fast machine code program is packed with all the features you need to produce arty Mode 2 screen dumps that you can be really proud of. The on-screen menu makes it easy for even a pre-school child to get excellent pictures, yet the combination of commands available allow you to generate amazing results with no effort at all. Some of the "trick" GCOL effects just have to be seen to be believed.

Although intended for computer artistry this program contains enough geometric and "technical" drawing commands to make it a SPLASH! with every type of user.

- * Fully screen menu driven
- * Trackerball operation
- * Circles, ellipses, triangles, rectangles, etc.
- * Brush and line thickness control
- * Fast machine code program, a joy to use
- * Fast solid and pattern filling routines
- * Rotating pattern menu
- * "Trick" colour effects available on all commands
- * Superb multicolour text effects
- * Spray paint, solid or patterned
- * Full 16 colour operation




SPLASH! £13.95

(on disc only, specify 40T or 80T)

*Please note the **ATARI TRAK-BALL** will not run from the BBC Micro without an interface. We also sell a simple interface at £13.00, which is suitable for use with our **CIRKWIK Schematic Drawing Program**, but not with **SPLASH!***


SPECIAL OFFER ATARI TRAK-BALL TURBOBALL INTERFACE all 3 for **£56.00** (inc VAT)
SPLASH! software

CIRKWIK Schematic drawing on the BBC micro

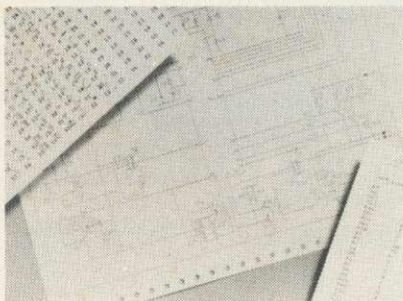

A lightpen or trackerball driven CAD package orientated to the production of schematic drawings, such as circuit diagrams, flow charts, power systems, pipework diagrams, fluid logic diagrams and many similar engineering applications.

- * Lightpen or trackerball driven
- * Virtual screen 8x the BBC's mode 4
- * Uses standard dot matrix printer in dual-density graphics mode to produce excellent quality diagrams
- * Automatic parts list generation
- * Up to 640 different symbols may be in use in any one drawing
- * Total symbol library unlimited in size
- * Create your own symbols on a highly magnified scale
- * Many electronic symbols already included in the package



Please send your cheque/P.O./Access No. to:
Dept. AU3 Datapen Microtechnology Ltd,
Kingsclere Road, Overton,
Hants. RG25 3JB. Tel: (0256 770488)
SAE FOR FURTHER DETAILS

A QUALITY LIGHT PEN

SUPERIOR PERFORMANCE

- * Absolutely insensitive to ambient lighting.
- * Responds to different colours and screen intensities without adjustment of TV or monitor.
- * Red LED readout showing that data is available.
- * Switch for program control (allows pen to approach the screen without erroneous data capture)
- * All features are Program accessible



SPECIAL CHRISTMAS OFFER!

BEEBPEN drawing program FREE with lightpen
Lightpen and Beebpen software only £25.00

PRICES

SPLASH! disc £13.95
CIRKWIK lightpen only disc £19.95
CIRKWIK trackerball/lightpen disc £24.95
CIRKWIK Grafpad/lightpen disc £24.95

Lightpen software

DEFINE Sprite Animator/Editor disc £11.95
DEFINE Sprite Animator/Editor cassette £9.95
BEEBPEN Colour Drawing Program cassette £11.95
TELETEXT Display Creator cassette £9.95

Hardware

DATAPEN Lightpen with BEEBPEN program **£25.00**
MARCONI Trackerball **£69.50**
ATARI TRAK-BALL **£19.95**
TURBOBALL Interface **£29.95**
MOUSE/TRACKERBALL Interface **£13.00**

ALL PRICES INC. VAT

Postage: Trackerball £2.50 Interface or software £1.00 MAX £2.50

CHARTS


Checkout where your favourite game is this month

TOP 20 BBC MICRO GAMES


	Title	Publisher	Cassette	Disc	Reviewed
1	Match Day	Ocean	£9.95	-	
2	Beach-Head	Access/US Gold	£9.95	-	December '85
3	Revs	Acornsoft	£14.95	£17.95	July '85
4	Combat Lynx	Durrell	£8.95	-	September '85
5	Elite	Acornsoft	£14.95	£17.95	October '85
6	Knight Lore	Ultimate	£9.95	-	November '85
7	Alien 8	Ultimate	£9.95	-	
8	Repton	Superior	£9.95	£11.95	September '85
9	Aric Atac	Ultimate	£7.95	-	
10	Brian Jacks Superstar Challenge	Martech	£7.95	-	August '85
11	Scrabble	Leisure Genius	£12.95	£14.95	July '85
12	Red Moon	Level 9	£6.95	-	
13	Hobbit	Melbourne House	£14.95	£17.95	December '85
14	Jump Jet	Anirog	£9.95	£11.95	
15	Death Star	Superior	£9.95	£11.95	
16	Wizadore	Imagine	£7.95	-	August '85
17	White Knight 2	BBC Soft	£9.95	£18.95	
18	Mr Freeze	Firebird	£1.99	-	
19	Boffin	Addictive	£9.95	-	November '85
20	Castle Quest	Micro Power	£12.95	£14.95	March '85



Beach-Head: no. 2 for the Beeb — tops on Electron

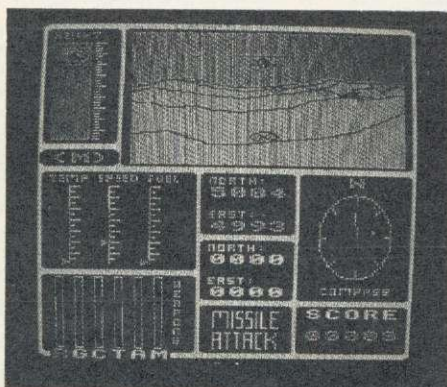

Combat Lynx: coming fourth in both charts

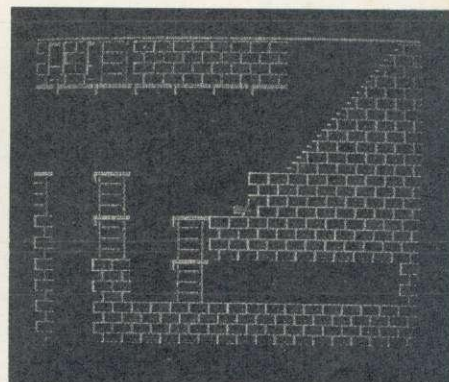

Castle Quest: losing its BBC micro power at no. 20?

TOP 10 ELECTRON GAMES

	Title	Publisher	Cassette	Reviewed
1	Beach-Head	Access/US Gold	£8.95	December '85
2	Elite	Acornsoft	£12.95	October '84
3	Gremlins	Adventure	£7.95	
4	Combat Lynx	Durrell	£8.95	September '85
5	Repton	Superior	£9.95	September '85
6	Bird Strike	Firebird	£1.99	June '85
7	Hacker	Firebird	£1.99	
8	Football Manager	Addictive	£8.95	March '85
9	Escape From Moonbase Alpha	Micro Power	£7.95	
10	Gauntlet	Micro Power	£6.95	

★ The FREE SOFTWARE HANDBOOK ★ PLUS ★ 70 CP/M PROGRAMS ON DISK ★

★ Something for Everyone – from Business User to Expert Hacker ★

★ From as little as £27.95 all inclusive ★



★ Your favourite Public Domain CP/M software – plus documentation

★ Basic games configured to run under Mallard Basic on the BBC

★ Cut your disk costs by as much as 40% with SQUEEZE!

★ Resurrect files erased in error with UNERA

To enhance this selection of 70 CP/M programs still further, The Free Software Handbook provides excellent documentation – the one factor often neglected in Public Domain software.

There are chapters on FAMILY FUN (games & learning), DIRECTORY ASSISTANCE (file management utilities), POTPOURRI (miscellaneous utilities), I WISH I HAD A PROGRAM TO . . . (general applications), DO I NEED A LIBRARY CARD? (libraries & catalogues), HELLO, ARE YOU THERE? (communications), and HACKER'S TOOLBOX (for mature audiences only).

The Free Software Handbook & Disk set is superb value for money – only £27.95 (incl) if you supply three preformatted disks – or £35 (incl) if we supply the software on formatted disks for you. The book is available separately at £18.95 (incl). Overseas orders – please add £5 for Air Mail postage and packing. Send cheque with order (plus preformatted disks if you wish) or VISA/ACCESS details to:

DAVIS RUBIN ASSOCIATES LTD

1 Canonbourne, Weston Subedge, Glos GL55 6QH

VISA/ACCESS orders: Telephone 0386 841181.

Stop Press: Pocket WordStar: £119 (incl) Full implementation of WordStar and MailMerge for the BBC Z80 DRA has other interesting CP/M products available for the BBC micro

★★★★ SEND FOR OUR FULL LIST ★★★★★

AA14



TIGER SOFTWARE

Suppliers of software and hardware – to the Home & Business Micro user.

CHRISTMAS SPECIAL OFFERS!

BBC MICRO SOFTWARE CLEARANCE BARGAINS! *cassettes only*

'SPACE ACE' (frustrating.....) –weave through the red enemy and try to achieve Space Ace status!

'THE BLUE PATH' (rapid decisions.....) – find the hidden blue path, before the time runs out! – try and reach the maximum score!

These Games Only... £1.50 each including vat & post & packing!

Games Subject To Availability.....

	£Ex.VAT	£Inc.VAT		£Ex.VAT	£Inc.VAT
Printers Dot Matrix			Cumana drives		
Epson P40	78.00	89.70	CSX 100M new	72.50	83.38
Brother HR5	82.60	94.99	CDX 200M models	139.00	159.85
Epson P80	130.39	149.95	CSX 400S	95.61	109.95
Brother M-1009	151.50	174.23	CDX 800S	170.00	195.50
New Epson LX-80 (NLQ) accessories LX-80	199.95	229.94	Other Cumana drives and equipment - phone.	All Goods fully guaranteed	
Tractor Feed	19.00	21.85	Cumana Double Density Disk Interfaces		
Spare Ribbon Cartridges	3.90	4.49	QFS for BBC	63.00	72.45
Colour Printer			Electron (plug-in)	90.13	103.65
Epson JX80	434.74	499.95	Modems		
Printers Daisywheel			Pace Nightingale +		
Epson DX100	309.00	355.35	Commstar (BBC)	118.25	135.99
Brother HR15	308.80	355.12	Miracle WS2000	128.00	147.20
Printer - Typewriter			3M Floppy Disks - 5.25"		
Brother EP 44 (serial) cable-BBC Serial	188.00	216.20	SS-DD box of 10	13.04	15.00
Plotters 4 pen Colour			DS-DD box of 10	17.39	20.00
Epson HI-80 A4	321.70	369.95	Strong Disk Mailers		
Hitachi 672 A3-A4	390.40	448.96	Quantities of 10	2.50	2.88
Parallel Cable			...greater quantities on application.		
	7.00	8.05			


Carriage:-
add Printers, etc. £6 -- Disk Drives & Modems £4
Accessories £2 -- Floppy Disks..... £1

TIGER SOFTWARE,
6, NORTH HILL WAY,
BRIDPORT, DORSET, DT6 4JT.
Tel. 0308 23655

REVIEWS

SOFTWARE

MASSIVE COMPLICATIONS

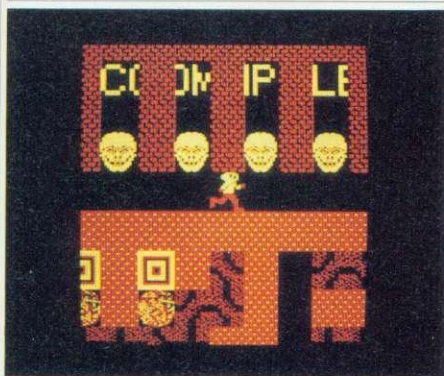

'Repton 2', Superior Software, BBC B and Electron, £9.95 (cassette), £11.95 (disc - BBC micro only)

You know, you can get to hate software houses. I've never been that great at games; in fact, *Elite* still reckons that I'm 'harmless'. But things were improving: I'd just reached screen H on *Repton*, then those superior people drop this one on me - *Repton 2*.

The idea is much the same as before but a million times more complicated - no, make that 10 million times more complicated!

The object is to get rid of all the earth, collect all the diamonds, solve all the puzzles and avoid the monsters. So what? Might not sound too difficult but then I've still to tell you that there are (deep breath) 4804 lumps of earth, 1652 diamonds, 42 puzzles and 18 monsters.

All this is spread over 16 screens, though you're never quite sure which one you're on. You start off on screen 0 and to get on to the next screen you must transport yourself there by touching a transporter button - a sort of 'beam me up Scotty' effect.

The aim of the game is to collect all 42 puzzle pieces and join them together at the bottom of screen 0 to form the final message. You can then take a photograph and enter the Superior Software competition.

I'm told the puzzles are very clever - they must be as I haven't solved one yet! I swear that they're impossible in some cases . . .

Luckily there's no time limit to the overall game, though some puzzles do invoke one. The graphics and mazes are better than before, and I'm most impressed with the way the

sprites and maze scroll so smoothly. As with *Repton*, I'll stick my neck out and say that *Repton 2* is better than anything I've played on the BBC micro or Electron. Brilliant!

Bruce Smith

GOLDEN FLEECE?



'Nightworld', Alligata, BBC B and Electron, £7.95

I wonder if anyone has told the software houses that run-of-the-mill platform games have gone out of fashion. It seems not.

The scenario is the standard collection of platform-filled rooms, each of which appears to be very much like the last, perhaps because it is. The object is to find the Golden Fleece, another shining example of the game's complete lack of originality.

The graphics are nothing special. Clearly there hasn't been much thought put into the designs of the characters or scenery - with the exception of the demon at the top of the screen who is very impressive. Using a sort of slide-rule, this happy fellow displays your energy levels with a sly glint in his eye.


Another disappointment was the tune - in the absence of a sound on/off key I was forced to take drastic action and disconnect the micro's loudspeaker.

I have one final complaint about *Nightworld* which is that the walls very often do not behave as they should. Call me old-fashioned, but when I encounter a wall I like to be met with a reassuring thud.

If you're looking for a game for Christmas, *Nightworld* will disappoint you - try and find something better.

David Acton

LOADS OF CHALLENGES

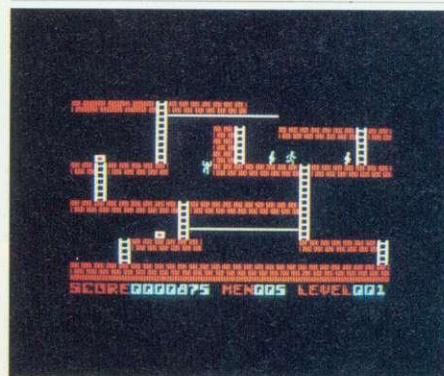

'Lode Runner', Software Projects, BBC B, £9.95

At first sight, this game doesn't offer much for its above-average price tag. Your character ambles around platforms and ladders, but there are no moving escalators or conveyor belts to make his journey more exciting. There are no useful or belligerent things for him to pick up, only a few gold bars to collect. There are no damsels to rescue and only one sort of nasty to avoid. But don't stop reading here.

For once you get into it, this is a very challenging game indeed. The animation is smooth and fast, and for once our hero and his antagonists actually look and move like human beings instead of cartoon mutants. Moreover, the blue meanies interact with the hero in a semi-intelligent way.


Apart from moving left and right and climbing up and down, you can't do anything except drill holes in the brickwork with your laser - but this turns out to be a vital tactic, both to reach gold hidden in cellars and to dig traps for your adversaries.

Finally, there's no end of variety. The game comes complete with a staggering 160 screens and some are decidedly devious (number 16 is a humdinger!). What's more, you can build your own screens with a simple editing routine and save them for future use.

Lode Runner may appear to be just another variation on a well-worn theme, but in fact it's a superb example of the platform game, with no gimmicky extras; just fast and frustrating fun, with scope for infinite expansion.

Jeffery Pike

PUT YOUR MICRO ON THE PHONE

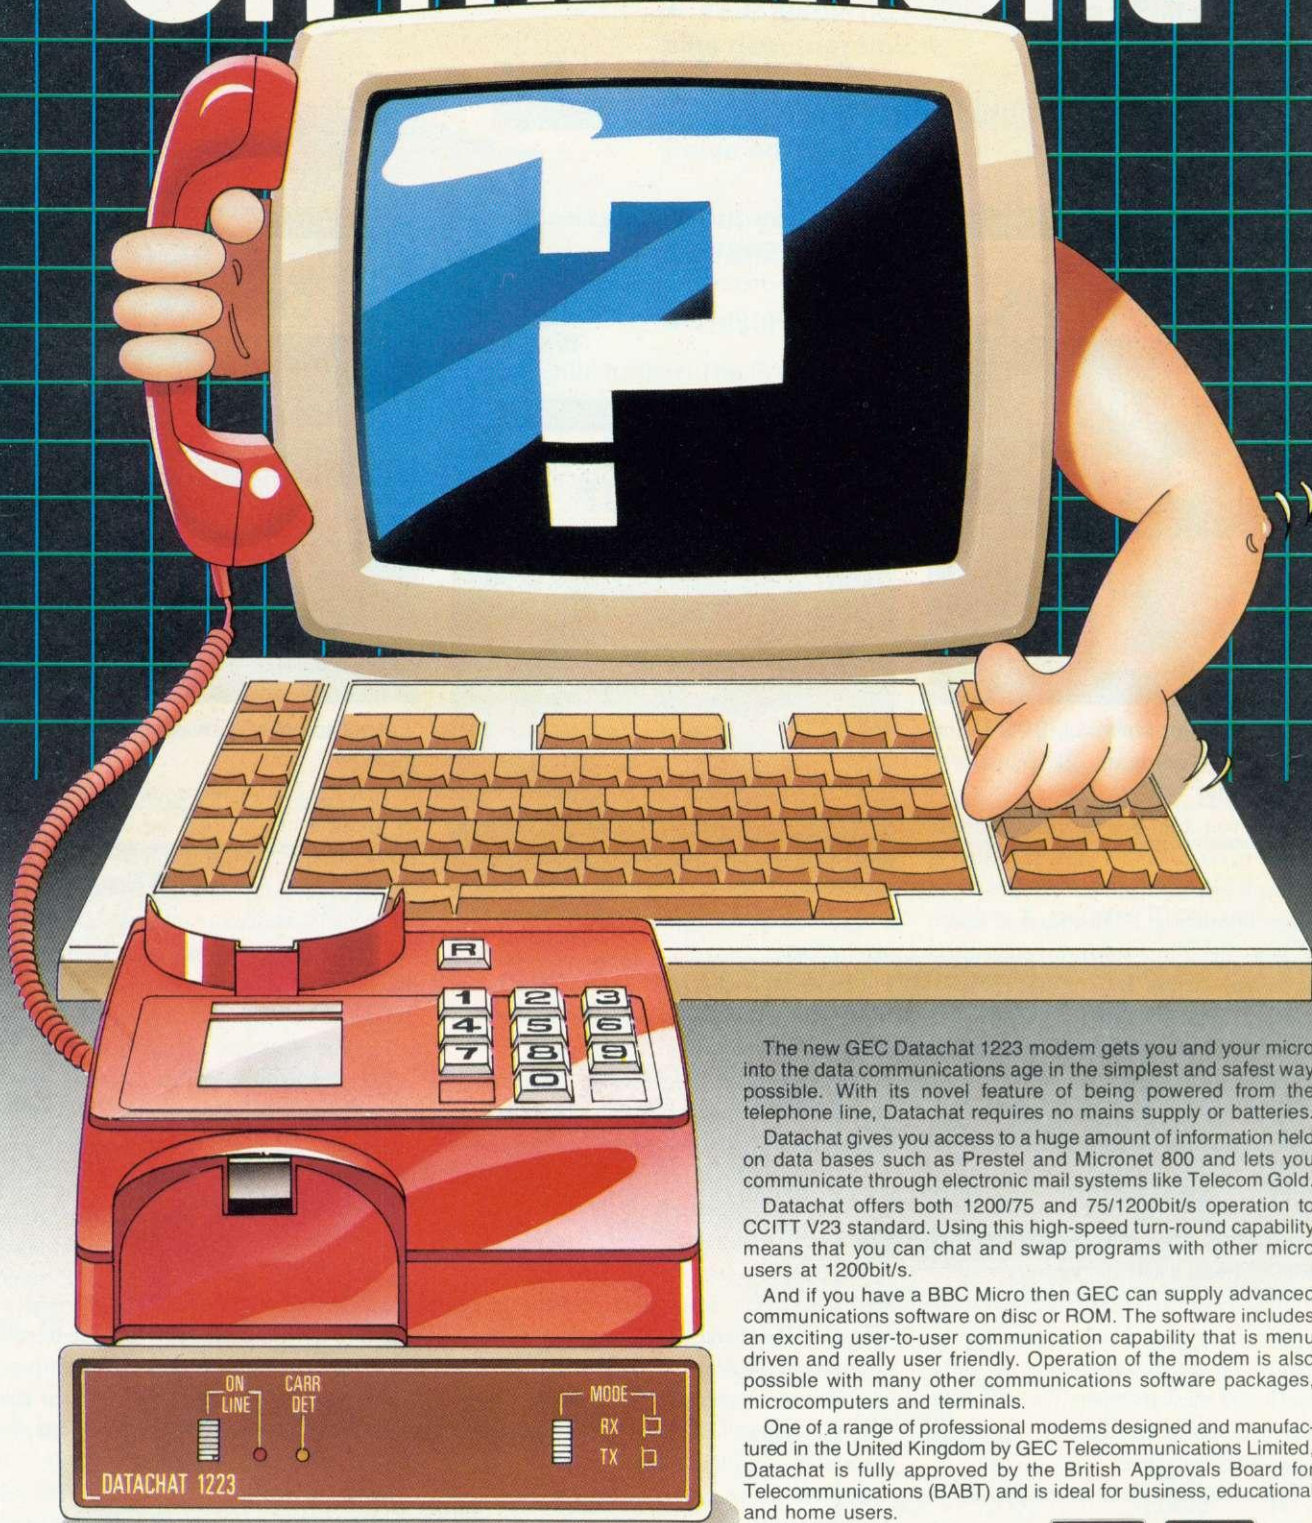

The new GEC Datachat 1223 modem gets you and your micro into the data communications age in the simplest and safest way possible. With its novel feature of being powered from the telephone line, Datachat requires no mains supply or batteries.

Datachat gives you access to a huge amount of information held on data bases such as Prestel and Micronet 800 and lets you communicate through electronic mail systems like Telecom Gold.

Datachat offers both 1200/75 and 75/1200bit/s operation to CCITT V23 standard. Using this high-speed turn-round capability means that you can chat and swap programs with other micro users at 1200bit/s.

And if you have a BBC Micro then GEC can supply advanced communications software on disc or ROM. The software includes an exciting user-to-user communication capability that is menu driven and really user friendly. Operation of the modem is also possible with many other communications software packages, microcomputers and terminals.

One of a range of professional modems designed and manufactured in the United Kingdom by GEC Telecommunications Limited, Datachat is fully approved by the British Approvals Board for Telecommunications (BABT) and is ideal for business, educational and home users.

DATACHAT is a GEC Trade Mark. UK Patent Application Number 8501455

£89.95 inc. VAT for modem only

£99.95 inc. VAT for modem with leads and ROM or disc software for BBC Micro.

Datachat can be obtained from selected dealers or direct from:



Modem Division Sales Telephone: 0203 446331
Transmission Group, GEC Telecommunications Limited,
P O Box 53, Coventry CV3 1HJ
Telex: 31361 (GECTEL G) Fax: 0203 448416



DATACHAT MODEM 1223



REVIEWS

SOFTWARE

STAR WARS REVISITED



'3D Space Ranger', Microbyte Software, BBC B, £4.95

I hope George Lucas isn't listening, because the scenario of this space-fight game is a rip-off of the first *Star Wars* movie. The mission is to penetrate the defences of the Death Star which is threatening Earth, fight off alien craft, zoom along a narrow trench and drop a photon charge in the exhaust ports leading to the main reactors. Sound familiar?

All this is explained at great length in the title pages, which also allow definition of which keys you want to steer the ship, fire the lasers, etc – although the game is slightly more fun if the joystick option is chosen. When the game is run the first thing that happens is nothing. Bits of space dust whizz past your ship, over which you have no control yet. After a while the ship's computer (the equivalent of R2-D2) tells you 'Aliens attacking', and a load of jam sandwiches hove into view.

You can choose whether to shoot them (pretty easy) or avoid them (even easier). The trick, as with most alien-zapping games, is not to move around too much and don't shoot until you see the greens of their eyes. After a while, everything freezes again and you lose control while R2-D2 gives an 'Asteroid warning'. Then little plates of rice pudding start scudding past in all directions. There's not much option except try to avoid them, and this is easily achieved by hiding in the corner of the screen.


At last you're told to 'Stand by to descend', but there's nothing to do because a flat blue landscape suddenly appears and you just keep on flying and zapping. Then it's 'Entering trench', so you zoom along that for a bit, letting the computer keep the ship on course. When the target is reached, you don't even get

the thrill of releasing your photon charges: old R2-D2 does it for you.

The mode 2 graphics are fairly clumsy and the 3D animation is positively crude compared to, say, *Elite*. Most irritating of all is the way the action keeps stopping between episodes. Value for money? You'd probably have a better time going to the cinema to see *Star Wars* again.

Jeffery Pike

A CHARM OF HOBBITS



'The Hobbit', Melbourne House, BBC B, £14.95 (book and cassette), £17.95 (disc – no book supplied)

The adventure-game world was taken by storm when *The Hobbit* made its appearance on the Spectrum some time ago. Although the graphics have been lost during its conversion to run on the Beeb, the novelty and charm of the game have been preserved.

The Hobbit is, of course, an adventure game based on the book by J R R Tolkien. You play the role of Bilbo, the hobbit, and your task is to recover the treasure from the evil dragon, Smaug. He lives far away on the other side of Middle Earth, the enchanted land which is your home.

Because *The Hobbit* is based on a novel, the characters and plot are of a much higher standard than in most adventure games. No one character is fixed to any one location – all move around the land intelligently.

The computer understands a large vocabulary and complex instructions can be issued to the other characters. Even a few adverbs can be thrown in – a welcome change from the typical 'take sword' type of adventure.

A slightly annoying feature of the game is the necessity to load some data from tape whenever you restart the game.

This is a trivial point, however, and is heavily outweighed by those on the positive side. Adventure addicts will adore *The Hobbit*, but even those who, like myself, are very choosy when it comes to adventures, will enjoy it thoroughly. And, of course, if you tire of the game you can always read the book – supplied with the cassette.

David Acton

HERSHEY BARS UNDER NAVARONE



'Beach-Head', US Gold, BBC B and Electron, £9.95

This is a program in the John Wayne tradition. The objective is to disable the enemy, make a landing on their beach head, and then plough inland and assault the fortress of Kuhn Lin.

The first screen shows an aerial view of the coastline under attack. You move a crosshair cursor to select the route you're going to take. A head-on assault will find the enemy forces at full strength, while a trip through the 'secret passage' will catch them off-guard.

Once through the passage, you engage the enemy navy, who launch waves of fighter-bombers – so pot them off with your Ack-Ack guns before they destroy your fleet. Where is your own air support? All below deck chewing Hershey bars, for all I know!

After the aircraft have dropped their loads, the ships start on you. Now bring out your guns and try to get the elevation right to drop one on each of three ships. The aircraft carrier which did the damage in the previous screen tries to slip away unnoticed – extra points for sinking this.

If you destroy the enemy fleet before they obliterate your forces, you can land tanks to make an assault on the fortress.

After dodging the enemy land forces to get into a good position for bombarding the castle, you'll need to make it through with several tanks at least.

The final assault means hitting targets on the fortress before their Navarone-style gun lines up on you.


This game was one of the big successes on the C64 and Spectrum, but I didn't find the action or the graphics particularly impressive. Will I buy it? You have got to be joking.

Simon Williams

REVIEWS

SOFTWARE

CLEVER SOUNDING OFF

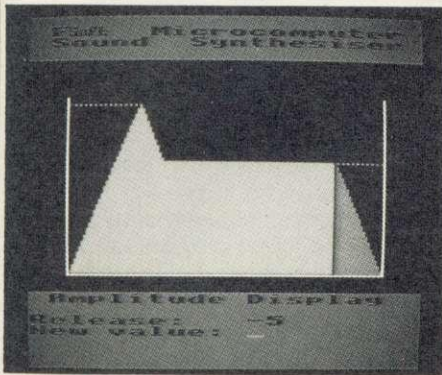

'Music Maker', FSoft, BBC B, £9 (cassette), £12 (disc)

This is not one but two sophisticated programs in one package. It's not possible to jump back and forth between the two, so you need to make the most of the first, 'The Sound', and to save the data you generate with it, before moving on to the second, 'The Player'.

'The Sound' is an attractive envelope generator program. It supplies 16 preset envelope shapes and allows you to fiddle around with them or invent new ones. You fiddle using the function keys (a clear, detailed key strip is provided), the cursor keys and Copy. As you change various parameters, the new values are displayed numerically and an excellent four-colour graph shows just what's happening to your envelope shape. (For clarity, there are two graphs, one for the pitch parameters, another for amplitude.)

For anyone still struggling to understand exactly what the Beeb's 14 envelope parameters actually *do*, this program gives as clear an idea as anything I've seen, for not only are the envelope shapes displayed graphically, you can play the note you've created using your Beeb as a sort of synthesiser keyboard: white notes on the keys from Caps Lock to Return, black notes between Tab and £. It's polyphonic, too, using all three tone generators to enable you to play chords and another row of keys (Z to .) for noises from channel 0.

The menu allows you to store your new envelope in any one of the remaining 15 locations, to summon up one of the others, to save envelopes you've created on tape or disc, to load new ones, and finally to jump to the second program, 'The Player'. But don't jump until you're ready. It's impossible to get back into 'The Sound' without reloading from the

beginning – which is particularly tedious when using cassette.

Once you've set yourself up with 16 delightful envelopes (and yours couldn't be any worse than the 16 supplied with the software), you're ready to make music with them. 'The Player' retains the synthesiser keyboard effect, but this time as you play notes, they appear displayed on two musical staves (treble and bass clefs), romping across the screen from right to left. The speed at which they travel is adjustable, and you can play with or without a metronome ticking out the tempo.

You can still play polyphonic chords and choose between the 16 envelopes you have on board. In fact, you can use two at the same time by 'splitting' the keyboard at the note of your choice – for example, anything you play above middle C is envelope 12. The bottom row of keys still operate channel 0, so various percussive effects can be thrown in for good measure.


It's not easy to play satisfactory music 'live' (qwerty keyboards weren't designed for that), but it's only a short step from playing music to 'recording' it with the Sequencer. This allows you to store tunes of considerable length (up to 1024 beats of the metronome), one channel at a time, then to record another 'track' as the first one plays back, then another on top of that – plus a percussion track on channel 0 if you wish. If you make a mistake, individual notes on individual channels can be deleted, inserted, or altered for pitch or duration. Finally, when you've created a 1024-beat, four-voice masterpiece, you can save the whole sequence on tape or disc.

If that sounds like a lot of complicated operations, it is. But writing polyphonic music is a complicated operation however you do it and the Beeb's sound facilities wouldn't be so interesting if they weren't so complex. Of all the current software designed to 'record' three- or four-channel music on the BBC micro, this program is perhaps aimed particularly at the musician. Not only do you enter your notes by 'playing' the keyboard, rather than digitally, you also see something like the written melody on the screen, which helps if you're familiar with written music.

Congratulations to the author, Geraint Wiggins, for two clever and practical programs, a clear and informative instruction booklet – and a quite brilliant example piece for the Sequencer, to demonstrate just what is possible.

Jeffery Pike

TEACHING COULD BE BETTER

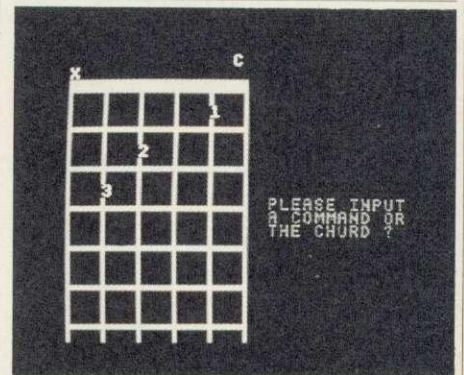

'Guitar Chord Tutor', P R Adby Associates Ltd, BBC A/B and Electron, £14.95 cassette only, transferable to disc

A rather neat idea, this, but not executed as well as it might have been. The program draws a guitar fingerboard (the first six frets anyway) and invites you to enter a chord, using letters A to G and the function keys to represent the conventional chord symbols – C7, A flat m6, etc. It then displays the finger positions for your chosen chord on the fretboard and plays it as an arpeggio.


Full use isn't made of the Beeb's three sound channels: the notes ping out in sequence, without a bit of overlap which would give a better impression of a chord being played. Worse still, they actually sound an octave higher than they should on the guitar (perhaps Kevin Rogers, who wrote the program, forgot that guitar music is written an octave higher than it sounds). This elementary blunder is repeated when tuning your guitar. It's easy to summon up your E, B, G, etc – but they all come out an octave higher than the true pitch of the guitar's open strings.

Finally, there are a variety of pre-programmed chord progressions available (the booklet claims 98 but it must mean 96). You choose your starting chord (which must be a major), decide how many chords you want in the sequence, from two to five, and your micro does the rest: the chords are displayed on the fingerboard and played (an octave too high, needless to say) through your speaker.

The instruction booklet, by Paul Adby, is clear and accurate; the graphics, such as they are, are rudimentary but quite adequate; only the sound lets it down – which is rather a pity in a program which is all about making sound!

Jeffery Pike

JOYSTICKS— THE COMPLETE SOLUTION

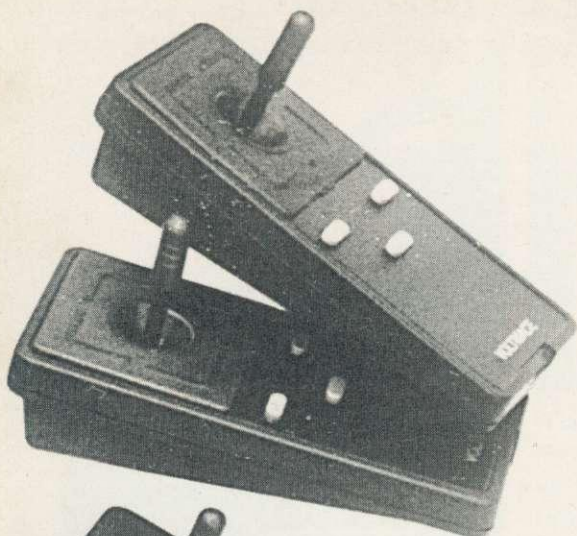


Delta 3B Twin



Delta 14B

Delta 14B/1

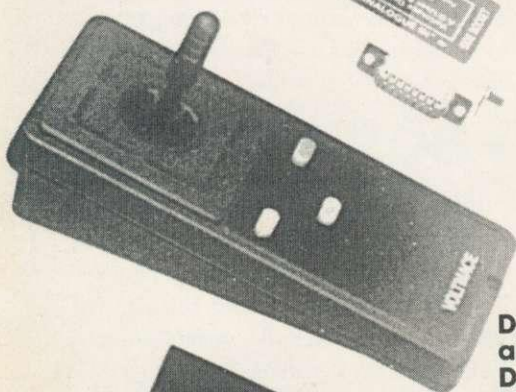

Delta 3S
and
Delta 3B
Single



Datapad 16B

DELTA 3B TWIN—BBC B or ELECTRON PLUS 1 £19.95

A direct but improved alternative for the original ACORN joysticks, with 2 joysticks wired to one plug. As with all our joysticks they have the fast action sprung to centre return of the steel shafted nylon covered joystick. The light action makes them ideal to hold and the 3 fire buttons allow left or right-handed use.

DELTA 3B SINGLE—BBC B or ELECTRON PLUS 1 £12.00

A single joystick that in some ways can act as two. The custom made special "low noise" potentiometers are wired so that it will work as a left hand or right hand joystick. It can even run some programs written for two joysticks and has the fire buttons of both.

DELTA 14B—BBC B £14.95

Our original ACORN/BBC handset. The same super light joystick, but the long life buttons, which have been video game tested for many years, increased to 14 in number. A DELTA 14B/1 is needed to run the keypad but a 14B on its own will work as a joystick and fire buttons, so you can always add the 14B/1 to it later.

DELTA 14B/1 for use with 1 or 2 DELTA 14Bs £14.85

DELTA DRIVER CASSETTE £5.95

The A/D/USER PORT interface box. This gives simultaneous access to both the analogue port, for the joystick part and the user port, for the keypad. Two handsets can be plugged into the box giving a total of 24 user definable keys.

Full instructions are provided to include the keypad in your own programs even in BASIC or for the non-programmer a DELTA DRIVER cassette is available with keyboard to joystick/keypad conversions and keypad set up programs.

DELTA 3S—ELECTRON with switch joystick interface £12.00

For an ELECTRON with a switched joystick interface (Not a PLUS 1) this gives you the same delightful light, fast action of the DELTA joysticks but fitted with a 9 way D plug as per Atari, Commodore, etc. and will run on First Byte interface or similar.

DELTA ASC not illustrated £9.95

This little box plugs in series with your analogue joystick to alter its characteristics simply by using a switch. In one set up the joystick will act like a switched joystick, i.e. a slight movement will act as if the joystick has been pushed hard over. In the other mode the joystick only covers the centre half of the A/D converter so that it takes twice as much movement to give the same effect. This makes it much easier to make delicate adjustments to programs like flight simulators.

DATAPAD 16B £39.95

A commercial spec. 16 way keypad. Full travel mechanical keys with double shot moulded keycaps mounted in a low profile metal case. The keys are marked with calculator legend, but the software included allows the pad to be defined as any keys, including function keys or single byte VDU commands such as PRINTER ON/OFF. No tampering with the computer as it fits onto the user port.



Available from your dealer
or direct from us




Voltmace Limited

Park Drive
Baldock
Herts
SG7 6EV
Telephone (0462) 894410

ACORN USER DECEMBER 1985

REVIEWS

SOFTWARE

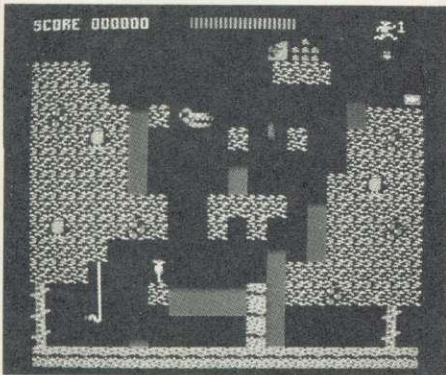TARZAN
TAKES OVER!

'A Fist Full of Fun', Alligata, BBC B, £9.95 (cassette), £13.95 (disc)

This is a five-game package with three oldies: *Bugblaster*, *Uncle Claude* and *Tarzan*; bundled with two new titles: *3D Space Raiders* and *Growing Pains* – all on one tape, and at the bargain price of £9.95 for the lot.

How do you review a package such as this? Five games like these for a tenner has got to be good value, and any self-respecting alien-zapping Beeb owner would love to see more cut-price combinations following in the footsteps of this multi-game package.

Considering the price of each game (at £2 each, even less than *Firebird!*), any comments that I might make about slight shortfalls in playability/graphics/sound, and so on, just don't seem relevant, since the two-quid game is a whole new yardstick to measure game value against.

The three oldies should already be known to a lot of readers (*Bugblaster* was reviewed in *Acorn User* October '84) and the two new games are certainly not trailblazers. But they're better than many.

Dealing with them as they're presented on the cassette, the first is *3D Space Raiders*. It's the old Atari *Star Raiders* theme, with 15 keys giving access to a galactic map, a front 'cockpit' view with stars shooting past, rear view, hyperspace, shields, fuel, etc – all the functions you'd expect.

Find the aliens on the Galactic map, and go into battle – *Elite* it certainly isn't, but it's very good value.

After blasting your way through space, it's back to earth with a thump, finding yourself in the jungle with *Tarzan* (pictured above). It's a bright, colourful scene, with snakes, cheetahs, monkeys, alligatas and, of course, Jane. There

are four screens of jungle to run and jump through – a couple with rivers, others with moving lifts; and you've got to follow the arrows to get to Jane. Four screens isn't really a limitation, as the difficulty of the game means it's likely to be a while before you can complete them all.

Growing Pains comes next, with you taking the role of a gardener who has to wander around the maze-like screen, watering plants, avoiding snails and spraying the bees with insect spray. If you get stung in this game, you don't die immediately, but you have to rush to the garden shed for first-aid before you die of a heart attack. Graphics and sound aren't brilliant; however, I'm just going to have one last attempt at clearing the first screen . . .

Uncle Claude is the best game on the tape – it may be a bit old, the graphics a bit shaky, and the sound a bit weak, but it's *very* addictive, great fun, and it's got that hint of originality which is the secret ingredient of all the best micro games.


You (Micro Mickey!) have got to push various items (such as computers, cassettes, monitors, etc) that are scattered around and load them onto the constantly moving conveyor or belt at the bottom of the screen. The twist is that you're constantly harrassed in your attempts by Uncle Claude (who may be better known to you as Uncle Clive – red beard, high forehead, glasses, etc) and not only is he chasing you, but he's chucking Spectrums (or QLs?) at you.

There are also the odd Orics and Electrons flying around. Uncle Claude can be floored by hitting him on the head with whatever you happen to be pushing, but if you miss, or if you get hit by any of the flying hardware, then you drop to the bottom of the screen to be carried away by an ambulance. Great stuff!

The final game is the oldest and most familiar – *Bugblaster* – an adequate version of the arcade classic, *Centipede*. Fast, colourful graphics of spiders, snails and caterpillars, all having to be shot down as they bounce, drop or slither towards you through a field of mushrooms. If you don't already have a version, this one's a must.

Conclusions? If you haven't got any of the games on this tape, then buy it! Even if you've already got a couple, it's still worth having, considering it's only going to set you back a tenner. Who knows, if it's a success, you may be encouraging other software houses to follow suit.

David Keel

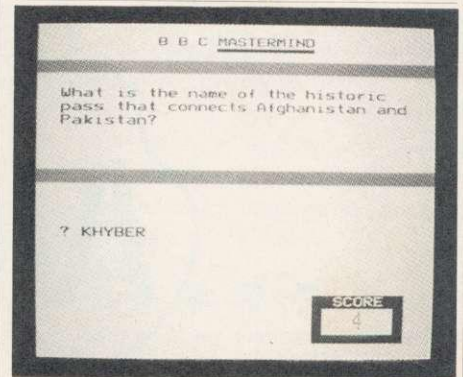MASTERFUL
MAGNUS

'BBC Mastermind', Mirrorsoft/Ivan Berg Software, BBC B, £9.95 (cassette)

This is a simulation of the BBC TV programme of the same name chaired by Magnus Magnusson. The computer is the quizmaster and you, with up to three others, are the contender competing for the Mastermind title.

Once the main program has loaded the computer asks how many people are going to take part.

It then requests the name and occupation of the first contender before asking what specialist subject he or she wants – the choice is films and TV or sport and games.


The first contender has two minutes in which to answer questions on this specialist subject. When one participant finishes his/her questions the next must enter name, occupation and specialist subject. If the subject chosen is the same as that of the previous contender then the questions do not have to be reloaded (nor are they repeated), so it's better to sort out who wants which specialised subject before you begin.

When everyone has finished this section, general knowledge follows. There is a choice of sets of questions, but only one can be used in each round.

A problem is that, because of pauses, it's too slow at times – such as when all the rounds have been completed – and too quick when the 'passed' questions are displayed together with the answers.

Overall, if the few drawbacks were ironed out, the program would be even more addictive and offer greater value for money. Anyone who wants to learn something and enjoy themselves at the same time could do a lot worse than buy it.

Steven Howe

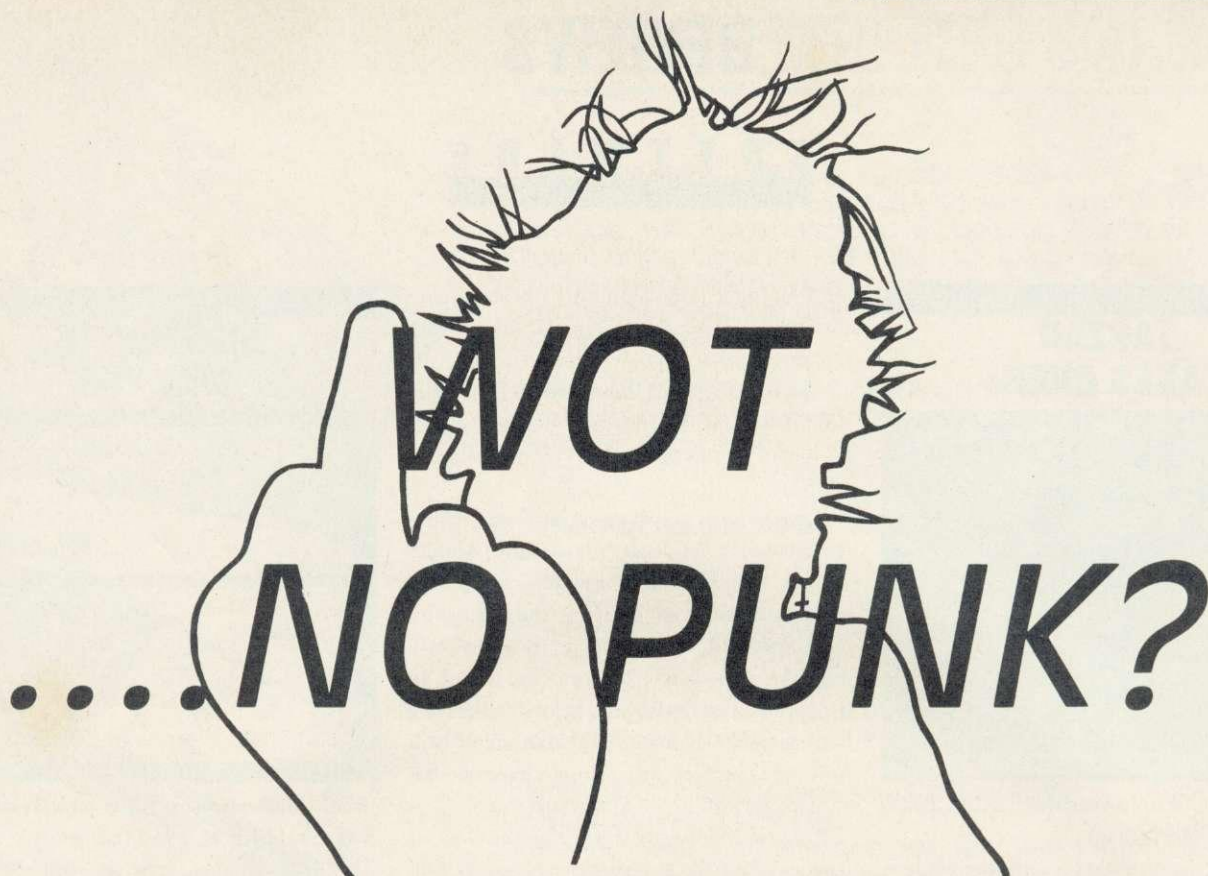


The Music System is now available for everyone toddlers to grannies bathroom virtuosos to budding Beethovens.

The Music System is the most advanced micro based music program for the BBC microcomputer.

It features unparalleled facilities for creating, editing, playing and printing tunes whilst still being simplicity itself to use.

The Song and Sound Library gives you a good start and the acclaimed Instruction Manual leaves little to the imagination.

So there's no need to wait until your hair turns green and spiky use ALL your fingers and brain. Buy one today.

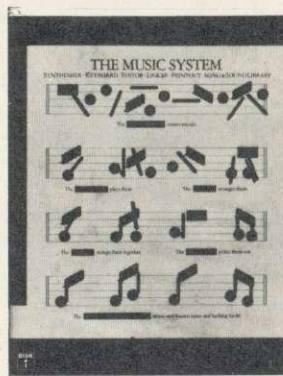

DISC PACK: EDITOR · SYNTHESISER · KEYBOARD · LINKER · PRINTOUT · SONG AND SOUND LIBRARY · £29.95 INC VAT. CASSETTE 1: KEYBOARD · SYNTHESISER · SOUND LIBRARY · £14.95 INC VAT. CASSETTE 2: EDITOR · PRINTOUT · SONG AND SOUND LIBRARY · £14.95 INC VAT. PLEASE ADD £1.25 P&P PER ORDER.

ADDITIONAL SONG LIBRARY DISCS: 2 TOCCATA AND CAROLS · 3 400 YEARS OF MUSIC · 4 MAINLY BACH · 5 IAN WAUGH ORIGINALS · £4 EACH INC VAT · POSTAGE FREE.

ORDERS TO: SYSTEM, DEPT. P.A., 12 COLLEGIATE CRESCENT, SHEFFIELD S10 2BA.



(0742) 682321


DEALER ENQUIRIES WELCOME.



REVIEWS

SOFTWARE

SPRITES SPRING INTO LIFE

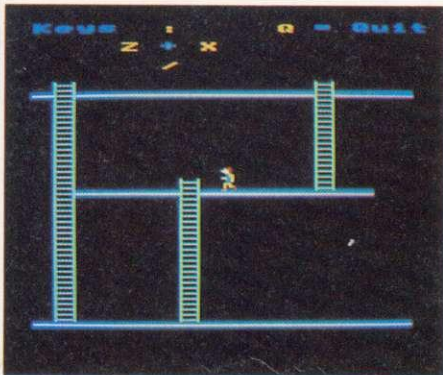

'Gamemaker 2', Holly Computers Ltd, PO Box 17, Bingley, West Yorkshire BD16 3JQ

Gamemaker 2 is unusual in having been written especially for the Electron, and should therefore have taken account of the slower clock rate to keep the final speed up.

This package is something of a departure from other sprite programs in being entirely menu-driven, a good thing as it makes the program easy to use.

The only problem with the package is the limited memory available, which necessitated the use of sub-menus in more than one of the sections of the program. This means occasionally that options are displayed that are not actually available – though it's something you soon get used to, however.

Apart from the sprite designer and your own games programs themselves, all work is carried out in mode 4, which makes for easy reading. Six options are available from the main menu:

- Image maker,
- Sprite viewer,
- Input tape-file,
- Output tape-file,
- Game-user 2 and
- Prompts (on).

Image maker handles the definition of images and not that of sprites, an important distinction, as two different images may be assigned to a single sprite, allowing simple animation. Up to 48 images may be created, of the standard 8 × 8 pixel size. A maximum image size of 16 × 24 is also possible, but with fewer images available.

This makes the system very flexible and it will cope with most of the sprite shapes you might want to design.

The Sprite view allows you to assign your

defined images to a total of 32 sprites (less if they are large). An interesting facility within this section of the program is the ability to view both images assigned to any sprite and alternate between them via the keyboard, thus stimulating the animation you will be able to provide in your own program.

Files of sprites may be stored on tape and recalled later for use by the second program within the package, by selecting the appropriate options from the menu.

The prompts provided on-screen may be turned off once you become totally familiar with the system.

The second part of the package is User2. This is the machine code control program which gives life to the sprites you created with Maker2 and resides at &1B00, leaving only about 6k for your program.


However, a lot of facilities are provided by the package, so that collision detection, and so on, will require very little extra Basic. All the sprite control commands take the general form *GMts (.). The first lower-case character gives the type of command, the second the number of the sprite to which it refers and the optional comma indicates that further parameters will follow. It's a very economical and easy to use format.

The *Gamemaker 2* manual is well written and comprehensive and, all in all, the package is highly recommended.

As far as I can see, it works perfectly on the model B as well!

Simon Williams

CREATE YOUR OWN GAMES

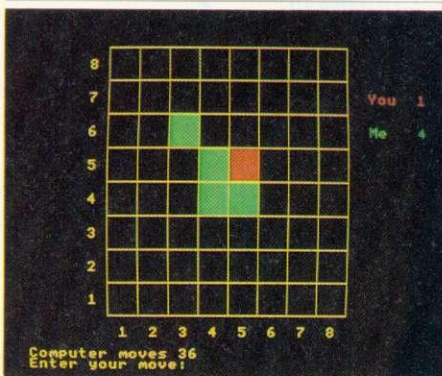

'Game Core', BBC Soft, BBC B, £10.95.

Game Core is not a program that is easy to review in a short period of time. With a utility intended for arcade games, like a sprite utility

package, it is possible to set up characters and test out the movement routines without having to go into the intricacies of programming a full game.

Not so with this program, which provides the 'tree searching' routines incorporated in most strategy and board games.

Everything from noughts and crosses to chess falls into the general category of game that can be programmed with *Game Core*. The governing rules are listed in the 36 page manual as follows:

- there are exactly two opposing players;
- the players play alternately (or pass);
- the number of possible moves in any position is finite;

there is no randomness (such as the roll of a die);

both players have full information about the game.

In the same way as with sprite utilities, however, there is a large part of the programming work that still needs to be done by the programmer.

So much so that, when asked, BBC Publications said there were no restrictions on the commercial sale of games using the core, only that they would be grateful for an acknowledgement.

The *Game Core* package consists of one complete example game, *Reversi*, two others supplied as a set of procedures which can be easily combined with the machine code core routines (*3D OXO* and *Pentagon*) and a tutorial example, *Don't Be Greedy*.

All the games play well, but none are visually exciting – but of course that is one of the areas left to the programmer. Also included are a simple character generator, a boot file for conversion of the programs to disc (why can't more software houses follow the BBC's lead?) and source and object listings of the core routines themselves.


The manual is very comprehensive and attempts to be a textbook on strategy game creation as well as detailing the use of the tape. However, anyone intending to make full use of *Game Core* who is not already experienced in this kind of work would need one of the several game books on the market in addition to this manual.

If you're prepared to put a lot of effort into programming a game of strategy, *Game Core* will enable you to create the guts of it much more quickly. A very valuable utility.

Simon Williams

THE WAY TO CONTROL...

...switching, relays, heat, temperature, flow, alarm systems, lift control systems, management systems, refrigeration plants, kilns, furnaces, boilers, spray driers, production lines, bakery control systems, energy management, process control, banking systems, plant & machinery, analysis, data acquisition ...

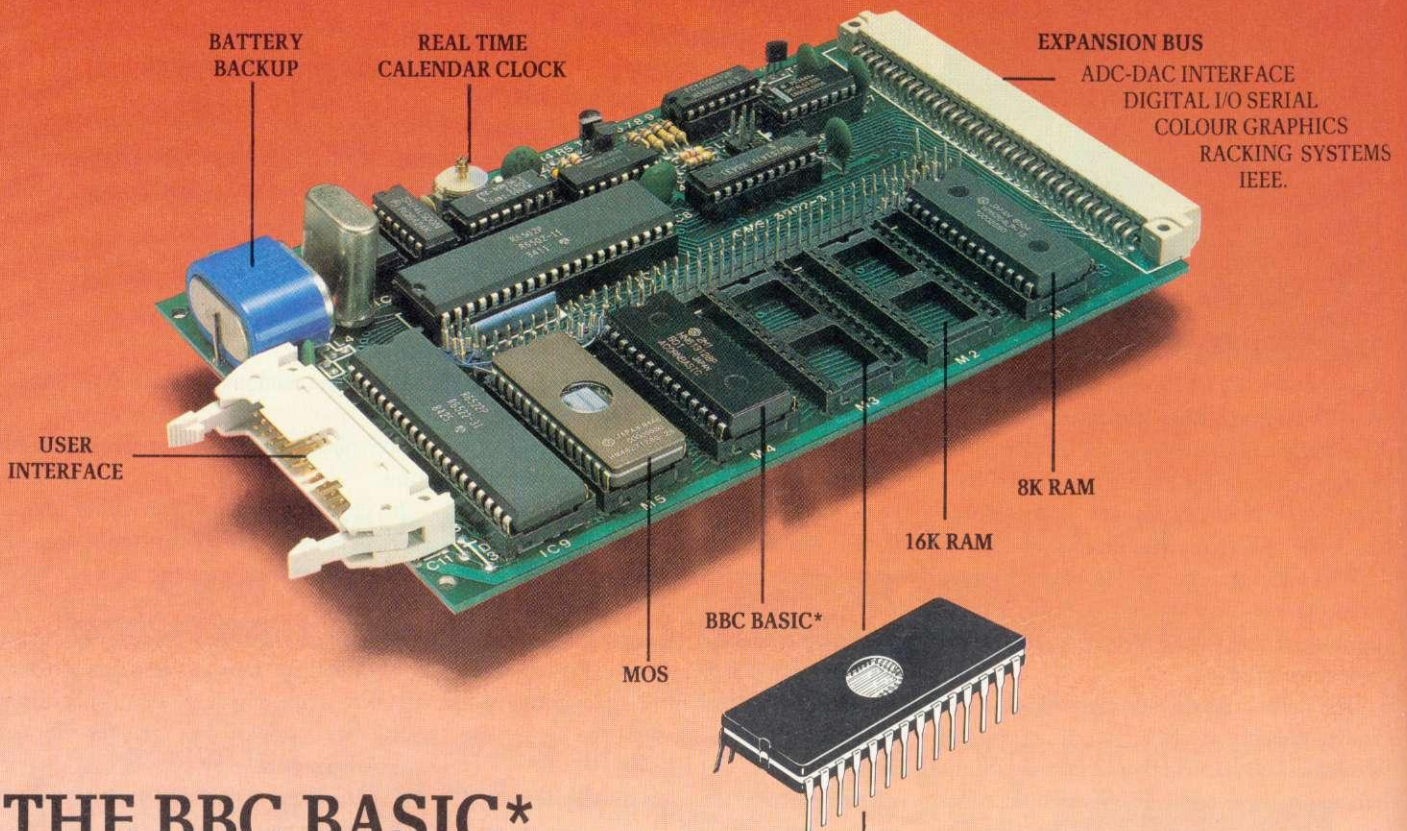

THE BBC BASIC* INDUSTRIAL CONTROLLER

- Robust INDUSTRIAL NETWORK.
- Single Eurocard—can stand alone and run BBC BASIC programs.
- Program control applications in BBC BASIC, MULTIBASIC, FORTH, PASCAL or any other language ROM.
- Adds I/O expansion to your BBC via the 6502 Bus connector.
- Tube Interface for fast development.
- Runs BASIC programs in ROM or from battery backed up RAM.
- Battery backed up Real Time calendar clock.
- A full range of Eurocards for use in target applications.
- Ideal for industry, education, research and commerce.
- Fully BUS compatible.

BMS Cambridge
Microprocessor
Systems Limited

44a Hobson Street, Cambridge CB1 1NL. ☎ 0223-324141



MULTI BASIC


- The real time multi-tasking ROM
- ENABLE EVERY.
- ENABLE WHENEVER.
- Full MULTI-TASKING with up to 8 background tasks running concurrent with the main program.
- BBC BASIC CONTROL FEATURES powerfully enhanced.
- The ability to run REAL TIME PROGRAMS.
- Control of PHYSICAL INPUT/OUTPUT.
- Five real-time COUNTER/TIMERS.
- Eight real-time TASK INTERVAL TIMERS.
- 19 Industrial Network Commands.
- Also available for the BBC Micro.

* Licenced by Acorn Computers Limited.

REVIEWS

F I R M W A R E

GREAT FOR GRAPHICS

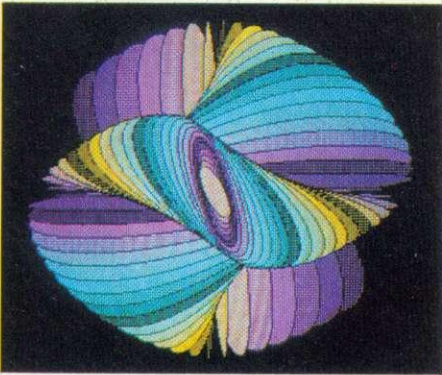

Graphics Extension ROM Acornsoft, £29.95.

Acornsoft's long-awaited Graphics Extension ROM has now been released and those who have been waiting are not likely to be disappointed. It is effectively a 16k extension to the operating system of the BBC micro and the facilities offered fall into two categories. First, and probably of most interest to serious graphics programmers, it offers enhanced shape plotting, flood-fillings and the ability to move or copy part of the screen. Second, there is a substantial sprite package with which, it is claimed, arcade-style games can be programmed in Basic.

Apart from a few * commands, the ROM makes use of many of the previously unassigned PLOT codes, VDU codes and GCOL statements. These have the advantage over the * commands generally used to access sideways ROMs in that parameters can be passed to them from Basic in the form of numbers, variables, expressions or functions. Access to the ROM is also possible from any other language which supports graphics and from Assembler via the OSWRCH vector. The manual states that the ROM is compatible with all current Acorn second processors.

I was struck by the speed at which it operates. If you've seen an Acorn Bitstik drawing system in operation you'll have some idea of the speed shown in the flood-fill, circle, arc and other shape plotting operations. This ROM has the advantage over Bitstik that it will work in any of the graphics modes.

The ROM is, by default, inactive until called with the command, *GXR. This command also reserves the three pages of memory that it normally requires for workspace. In other words, if you have a standard BBC micro with

an Acorn disc filing system, you'll find that PAGE is reset to & 1C00. Flood-filling uses two of these pages and, if this facility is not required, they can be reclaimed with the command *NOFLOOD. *FLOOD restores it.

The general method of using the new shape plotting commands involves MOVEing to either one or two key locations followed by a PLOT, with the appropriate code, to a further location. To draw a circle, you MOVE to the centre and then PLOT a point on the circumference.

Ellipses are defined by three locations: the centre point, the outermost point (left or right) at the same height as the centre, and the highest or lowest point of the ellipse. This allows ellipses to be drawn at any angle.

Any of the filled shapes can be drawn either with the normal solid colours available in the current graphics mode or with a predefined pattern of pixels. New colours can be generated by 'dithering' combinations of different coloured pixels; for example red and magenta give a deep pink.

There are four pixel patterns immediately available at any time, selected by GCOL16, GCOL32, GCOL48, GCOL64. If the second parameter in the GCOL statement is between 0 a 127 it defines a foreground pattern; 128 to 255 defines a background. As well as four patterns available by default, new pixel patterns can be defined using VDU23, <2-5> followed by eight bytes. The eight bytes required to produce a particular pattern in a given graphics mode theoretically requires a knowledge of the way in which the colours are stored in that mode. This is explained in some detail in the manual but the task is greatly simplified by a pattern editor program supplied on the cassette. Lines can also be drawn using these colour patterns, the exact effect being dependent upon the angle of the line. The same patterns can be used by the flood-fill commands to fill any enclosed outline shape.

PLOT codes &10 to &1F and &30 to &3F expand upon the simple dotted lines offered by the standard operating system by drawing lines in a predefined dot-dash pattern. VDU23,6 followed by eight bytes sets up a dot-dash pattern and the particular PLOT code used defines how the line will be drawn - whether the first and last points are drawn or omitted and whether the pattern is continued or restarted at the beginning of a new line.

The move and copy facility allows a rectangular region of the screen, defined by two

MOVEs, to be either moved or copied to elsewhere on the screen. Again the speed is impressive and will be much appreciated by anyone who has used conventional routines to redraw part of the screen pixel by pixel. In fact the speed is sufficient to allow these commands to be used as a form of animation; a large area of screen can be repeatedly repositioned quickly and smoothly.

The manual supplied was only a provisional version but shows evidence of the normal high standard of documentation associated with Acornsoft products. Each type of command is carefully explained and examples of its use are given. A cassette containing program examples and demonstrations accompanies the package. It also has a drawing program which makes good use of the new commands.

Sprites, when required, make a further demand on memory to store their definitions. *SSPACE n reserves n pages of sprite memory. *SEdit N then calls the sprite editor so that sprite number N can be designed or, if it already exists, modified. The editor's facilities are fairly extensive, including horizontal and vertical mirroring and the ability to flood a row or column with colour.

An interesting alternative way of creating sprites allows any rectangular area of screen to be captured and henceforth used as a sprite. Examples of the many ways of using sprites for animation are included in the manual and on the cassette.


Altogether this is one of the more impressive of the many sideways ROMs currently available. Inevitably there are facilities not included that some people would find desirable. For my own part, I would be prepared to sacrifice the sprites for general scaling and rotation commands. Nevertheless it does vastly increase the graphics potential of the BBC micro. Apart from offering speed that would be difficult to match and despite its workspace requirements, it should free more programming memory in the higher resolution graphics modes on a standard machine, since procedures for primitive functions such as circles and filling will no longer be required.

The manual received does not mention whether the ROM is compatible with the shadow screen memory of the B+, although it does imply that it will work with an Aries B20 board.

If you're into graphics and can find room for one more ROM, this has got to be the one.

Malcolm Banthorpe

Leonardo Da Vinci, Isambard Kingdom Brunel, Guglielmo Marconi, Albert Einstein, Jack Kilbey, Touch Pad...and your imagination.

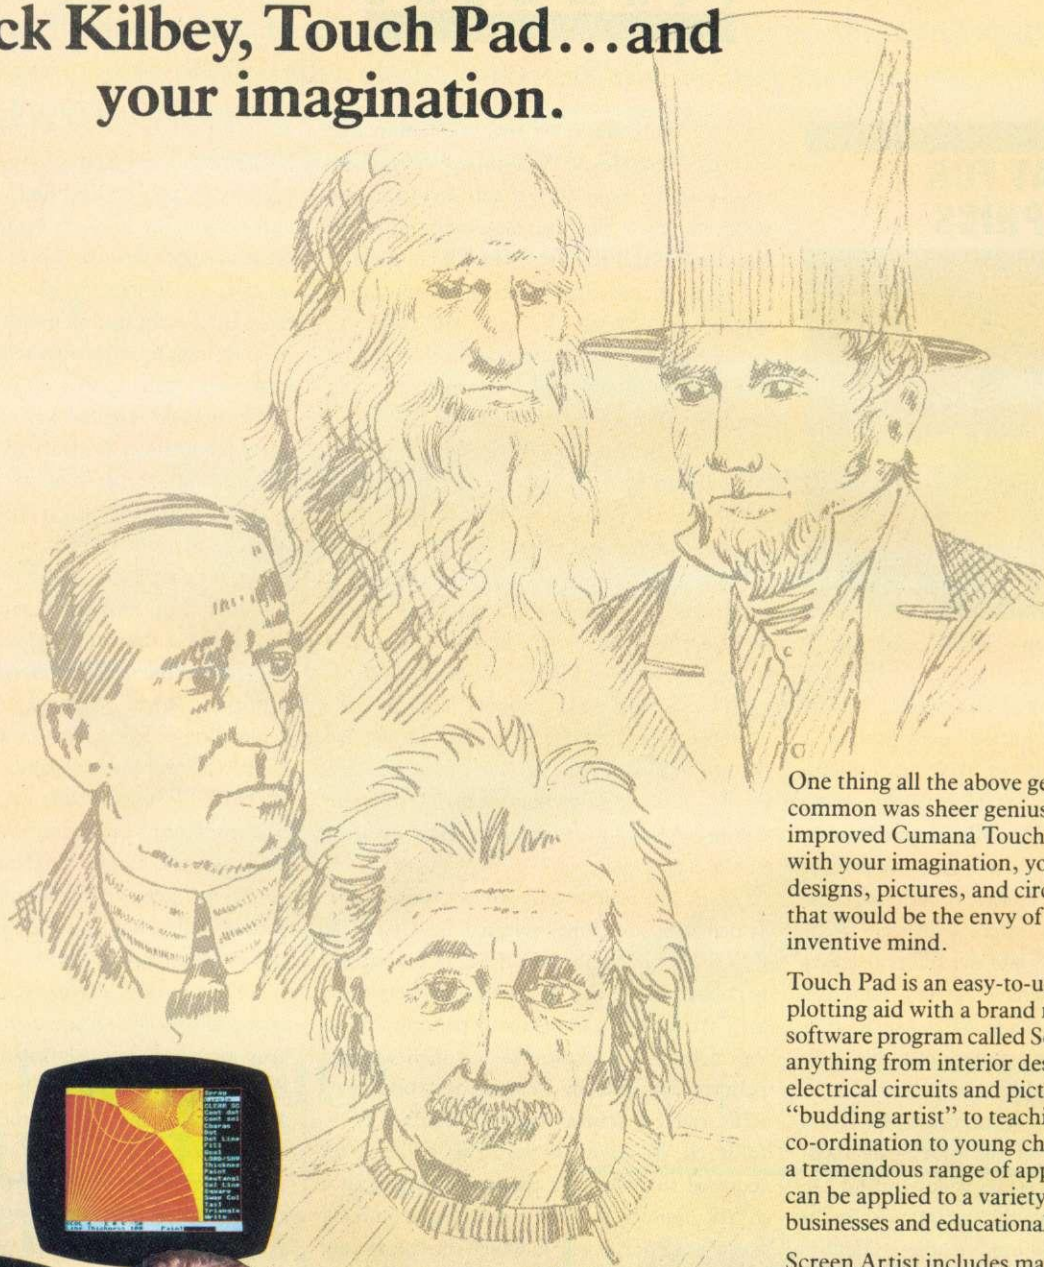

One thing all the above gentlemen had in common was sheer genius. With the new, improved Cumana Touch Pad, together with your imagination, you can produce designs, pictures, and circuit diagrams that would be the envy of the most inventive mind.

Touch Pad is an easy-to-use graphics plotting aid with a brand new powerful software program called Screen Artist, for anything from interior design, designing electrical circuits and pictures for the "budding artist" to teaching handwriting co-ordination to young children. There is a tremendous range of applications which can be applied to a variety of home users, businesses and educational establishments.

Screen Artist includes many features as standard - circle, square, rectangle and triangle sizes are easily varied and, at a touch of a button, can be outline or solid. Writing can be drawn at any angle or size on the screen with an added feature "tail" to give a 3D effect.

By the way, in case you're wondering, Jack Kilbey invented the integrated circuit!




Cumana Ltd, Pines Trading Estate,
Broad Street, Guildford, Surrey
GU3 3BG. Tel: (0483) 503121.

*Software developed by Microdraw Ltd.

REVIEWS

SOFTWARE

THREE FOR THE BUSINESS USER

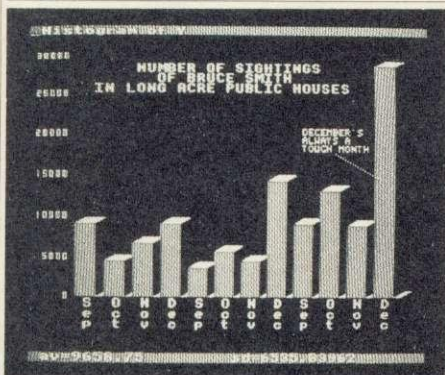

'DDD Base', 'DDD Calc', 'DDD Plot', £29.95 each or £69.95 for the suite, Gemini Marketing, Gemini House, Concorde Road, Exmouth, Devon EX8 4RS. Tel: (0395) 265165

The main difference between the average business computer and the BBC micro is, of course, the Beeb's small memory space. You would expect an integrated package for the Beeb to run out of space, so how do Gemini's programs manage?

All the modules of the suite make extensive use of disc filing, with the advantage that the size of the application is then governed by the capacity of the discs, and not by the size of the micro's memory. Against this, frequent disc accesses slow the programs down, compared with similar programs working entirely in memory. The DDD programs can make use of up to two disc surfaces, or a maximum of 400k (800k double-density).

Rather than designing the suite as a set of memory overlays on one set of data, Gemini has chosen to make the disc files completely compatible, so the same file can be transferred from one application to another, simply by loading the new application and reloading the file. Although a little more cumbersome, it allows you to run each program independently, so you're not obliged to buy the suite.

DDD Base

DDD Base is a simplified version of *DataGem*, both in the facilities it offers and in its ease of use. When you load the program you are shown a short mode 7 menu of the initial options (all three programs work primarily in mode 7), including Escape which presents you with a blank 'card' for you to format as needed.

You can enter fields at any point on the card you like, by positioning the cursor and press-

ing CTRL-F. You then select a number of formatting options and the field is locked in position. Headings are even easier to enter; simply position the cursor and type. The format of the card can be modified at any stage, but new fields can't be added once data has been entered into it.

To help with the entry of data, *DDD Base* provides 10 user variables which may be assigned formulae and used as the contents of fields. In addition, there are five system variables, which govern things such as the file title and the setting of the interrupt-driven clock, which is a feature of *Base* and *Calc*.

Like Gemini's *DataGem* (a chip-based database), *DDD Base* makes use of a 'browse' mode which allows you to call up records, edit, search or sort them, and add fresh ones. Browsing is noticeably slower than with *DataGem*, because each record is loaded in turn from the disc.

To edit a record, you move the cursor to the required field and overtype or edit the entry. The record scrolls left and right through its maximum 79 columns and the cursor moves up and down to cover its 26 rows.

In addition to the normal search facility, which offers a number of different search criteria, *DDD Base* has a 'key' search, which will match an entry in a key field in about five seconds. Sorting can also be based on a key field, and both keys may be changed from within the program. The result of the normal search will be put in a subset, which can be accessed independently of the main file.

You can only print out records as they stand. There's no facility to set up a secondary print format, or to print file statistics.

DDD Calc

This spreadsheet can handle an extremely large sheet. Up to 52,000 cells may be defined, and because the sheet is disc rather than memory-based, all may be filled at once. It takes a long time to move from one section to another.

The *DDD Calc* sheet is divided into 'pages', with a maximum size of 26 columns by 20 rows, and to move from one to another takes about 25 seconds. This will appear very slow if you've used a memory-based sheet, which allows you to scroll at will through RAM. To speed things up, Gemini uses an intelligent load and save algorithm, which will only transfer rows of cells containing alterations. It also advises careful thought on the positioning of different values, to ensure the minimum number of page swaps during recalculation.

As with *DDD Base*, entry of data into the cells is very straightforward. There are three different types of entry. A straight number will be entered as it stands, any string preceded by '"' will be entered as text, and anything else is taken as a formula. A formula may contain a Basic mathematical function, and sum, maximum, minimum and average. Ten user variables are again available and may be used on their own in cells, or combined with other cells or variables in formulae.

Column widths may be set up individually and strings may overrun more than one column if the succeeding columns are blank. Each cell can be formatted independently and locked to prevent accidental overwriting. All the normal features of spreadsheets are provided, including replication of cells into blocks.

Instruction to the program can either be by Escape or CTRL sequence, using the same command letters in either case. Thus Escape will bring down a menu over the sheet and you can select a function from this, or you can call the same function directly by typing CTRL and the command letter.

DDD Plot

DDD Plot provides business graphics, using data from either of the other two programs. The graphics are produced in mode 1 in four colours, and may be histograms, pie charts, line or scatter graphs.

You can select the type of graph and manipulate the axes, legends and scales in a number of ways, or accept the default settings.

A particularly nice feature of the program is a graphic screen editor which allows you to type notes on top of the graphs and charts, in two sizes of text (see screenshot above).

The completed graph can be printed out, either by using the built-in Epson screen dump, or by inserting your own call to a screen-dump ROM or disc-based routine. Completed graphs can also be saved to disc and loaded again independently of *DDD Plot*.

Conclusion

In conclusion, each module is designed to use the others' data files with little difficulty and to bring its own 'expertise' to bear. It's a shame, though, that data still has to be spooled out to be used in a wordprocessor.

Each package can handle a very large data set and, although the speed (particularly of the spreadsheet) is slow compared with more conventional products, the trio of programs is sound and is very good value for money.


Simon Williams

PINEAPPLE SOFTWARE

Programs for the BBC model 'B' with disc drive with FREE updating service on all software

ARE YOU GETTING THE MOST FROM YOUR DOT MATRIX PRINTER AND DISC DRIVE?

DIAGRAM is a new program which really exploits the full potential of the BBC micro and will enable you to obtain printouts of a size and quality previously unobtainable from your system.

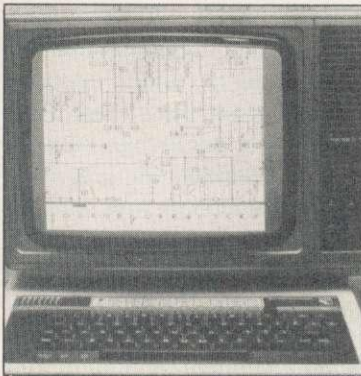

Originally designed for producing large circuit diagrams, DIAGRAM has now been improved to the point where it is invaluable for anyone who wishes to produce large areas of mixed graphics and text, and has many of the features normally found only in very expensive text/graphics processors.

DIAGRAM utilises a unique method of storing information on disc which allows not only very large diagrams to be created, but also allows rapid 'scrolling' of the screen both horizontally and vertically over the full area of the diagram.

The hard copy printout options available with DIAGRAM are second to none, and use is again made of the unique disc storage techniques to produce both horizontal and vertical printouts in various sizes down to probably the smallest high definition printing you have ever seen from your printer - a full 3*6 (18 mode 0 screen) diagram printed in a single print run onto an A4 sheet!

FEATURES

- Diagrams may consist of up to 39 mode 0 screens, defined in any aspect ratio, e.g. 3 screens across by 13 screens down, 10 screens * 3 screens etc.
- Up to 128 icons may be used by any one diagram, and may be predefined in full mode 0 definition with a maximum size of 32 x 24 pixels. An unlimited size library of icons may be built up allowing rapid transfer of icons from the library to a new diagram.
- Editing of diagrams can be achieved at any time during 'scrolling' around the screen, and edit features include:- Comprehensive horizontal and vertical line drawing routines with automatic 'perfect joins' at corners and T junctions. Entry of text characters and icons at any time by a single key press. Also, any size rectangular area of the screen may be predefined, and this area may then be deleted, moved anywhere on the screen, or copied to a different point on the screen.
- Other features include selectable display colours, TAB settings, index names, and many more.
- Diagram is compatible with most dot matrix printers (specify type when ordering), and printouts can be obtained of any specified section of the diagram, in varying sizes and in either horizontal or vertical print mode. With an FX80 type printer up to three screens may be printed across the width of the carriage, and there is no limitation (apart from the diagram size) to the number of screens that can be printed in the vertical direction - up to six mode 0 screens will fit vertically on an A4 sheet.
- The latest version of DIAGRAM is now fully compatible with Marconi Tracker Ball, which allows 'scrolling' of the screen and many of the editing features to be carried out using the tracker ball.
- DIAGRAM is supplied in an attractive hard backed disc wallet with keystrip and comprehensive instruction manual.

£25 supplied only on disc 40/80T. Please specify printer type when ordering
+VAT p&p free

MARCONI TRACKER BALL **£51.50**
+VAT p&p £1.75

All orders sent by return of post

Many of our customers have said they think that DIAGRAM is worth twice the price, so order now before we put the price up!

39 Brownlea Gardens, Seven Kings, Ilford, Essex IG3 9NL. ☎ Tel:01-599 1476.



ELECTRON PRODUCTS

The SLOGGER ROMBOX - compatible with PLUS1 and PLUS3	£44.95
ROMBOX -P- ROMBOX with built-in Printer Interface AND FREE Printer ROM (over £20.00 on its own)	£69.95
STARWORD - Word Processor, does everything VIEW does plus MUCH MORE (16k ROM)	£34.50
STARSTORE - Database - fully compatible with Starword for mailmerging	£29.95
STARSTORE 2 Allows up to 65535 very large (18000 chars.) records	£44.95
ELKMAN - Rom Manager	£17.50
STARMON - Machine Code Monitor	£22.50
PDG - Printer Driver Generator for STARWORD	Cassette £7.95 Rom £9.95
T2P3 - Tape to Disk Rom	£19.95
STARGRAPH - Graphics Rom	£21.95
PRINTER ROM - All printing requirements	£24.95

BBC PRODUCTS

STARWORD - sophisticated wordprocessor	£34.50
STARSTORE - Database	£29.95
STARSTORE 2 very powerful database	£44.95
BEEBMAN - Rom Manager	£17.50
STARMON - Impressive Machine Code Monitor	£24.95
PDG - Printer Driver Generator for STARWORD	£9.95
TREK - ROM disassembler with a difference	£22.95
STARGRAPH - colourful graphics Rom	£21.95
PRINTER ROM - For all printing requirements	£24.95
T2C3 - Tape to disk rom for Challenger	£24.95
DOUBLE DENSITY CP/M for "OPUS DDOS" giving 784K disk space 256 files, 25% speed increase and utilities	£49.50
DISK EDITOR for "OPUS DDOS" The only single AND double density Sector Editor. Restores Bad Sectors	£9.95

ALSO AVAILABLE

PAGE E00 DDOS and Comprehensive OPUS DDOS USERS BOOK

All prices include VAT P&P (UK)

Contact **SLOGGER LTD**

107 Richmond Road, Gillingham, Kent ME7 1LX
Tel: (0634) 52303 2 Lines

REVIEWS

BOOKS

THE BEGINNING OF AN ADVENTURE



'Adventure Games for the Electron', A J Bradbury, Granada, £6.95

The Electron is designed as a high-resolution graphics micro, not for text display, and so adventure games are not the first thing one would think of for the 'baby brother'. But adventures have been written for 8k and 16k machines, so why not for the 32k Elk using its 8k mode 6?

Electron owners are just as likely to graduate to adventures as owners of QLs or IBMs. So it has come about.

This is a highly readable introduction to the art of amateur adventure creation. Like most other books in the category, it restricts itself to Basic, though the general principles mapped out here do in fact pass over into machine code if you are really aiming high.

All the main issues involved in the adventure trade are given a pretty thorough airing, as one might expect from an author who is both a computer studies teacher and an adventure addict. In some ways the book is more suitable for someone who knows a bit about the adventure world and can appreciate Mr Bradbury's subtle insights.

He suggests that the sophisticated parsers of *The Hobbit* and *Zork* may be unnecessarily complicating and actually hamper the adventure game – a heresy with more than an atom of truth in it.

Nevertheless you will have to be a very persistent reader and programmer to write an adventure with the help of this book. If you have already started, got some way, and perhaps got stuck on some point, you might find the answer here.

Unlike some other guides, this one does have a complete short mini-adventure listing in an appendix. The points made in the preceding chapters do not refer to this listing but give examples of procedures that could be used to do certain jobs in any game.


Text compression, so vital for the Electron, is dealt with thoroughly and helpfully, with program listings included.

I have been enjoying adventure games for nearly as long as Mr Bradbury, but he managed

to give me plenty to think about, particularly on 'brainstorming'. This is a worthwhile book for the serious game-creator, and a good read for those who are very experienced or just mildly interested.

Peter Voke

SEE AND HEAR WHAT THE ELK CAN DO



'Electron Graphics and Sound', Steve Money, Granada Publishing, 188 pages, £6.95

Anyone starting to tire of playing ready-made games on a newly-acquired home computer and wondering how to answer the inevitable enquiries of 'Yes, but what else can you actually do with it?', is likely to find that graphics and sound are among the most attractive areas for initial attempts at writing programs. This book, while not specifically setting out to teach general programming techniques, could provide a starting point for Electron owners who have little other programming experience, as well as being a source of reference for more established programmers who want to find out more about the areas of graphics and sound.

As far as the graphics aspect is concerned, the book starts from scratch by explaining their potential use and how the video display is produced. Line and point plotting, colour, character graphics, graphs and charts, animation and elementary three-dimensional plotting are covered in subsequent chapters.

Simple trigonometrical theory is introduced where it's necessary.

The first of two chapters devoted to sound covers the SOUND and ENVELOPE commands and demonstrates how they may be used to generate sound effects. The second contains some elementary music theory and shows how the Electron can be programmed to generate tunes and chords, and be turned into a simple keyboard instrument.

There are plenty of program listings throughout to demonstrate the points made in the text. They are clearly laid out and amply commented on so that they may not only be typed in and run but also understood by the inexperienced programmer.

I was glad to see that the programs in this

book, on the whole, make good use of BBC Basic in that, although some use GOSUBs, procedures and local variables are introduced in the second chapter.

As a minor grumble, it was disappointing to find that a sketching program in the first chapter is terminated by jumping prematurely out of a FOR...NEXT loop. The technique will work in this particular case, but is definitely not to be recommended.

In general, the book succeeds as a useful introduction to its subjects while demanding no great degree of previous programming experience.

Malcolm Banthorpe

A POCKETFUL OF ELECTRON HELP



'Electron Micro Guide', Peter Morse and Brian Hancock, Century, £1.99

When I bought my first computer, I spent a lot of time looking through the user guide trying to find programming commands that I knew were mentioned there. After several very frustrating searches, I resolved to make my own notes for those parts of the manual that I needed most.

It appears that Professor Peter Morse and Brian Hancock have found the same problem, but their solution goes one stage further as they've written this short book. A small hardbound pocket-sized reference guide for the Electron user, it is good value at £1.99. The 40 pages contain a summary of the essential information needed – covering the Basic commands, sound, graphics, colour, input/output instructions, numeric string and trigonometric functions, logical operators, error handling codes and messages, operating system commands and *FX calls.

The book contains no information that cannot be found in the full user guide, but the information is easy to find, it's carefully laid out and the print quality is high. The language is clear and concise, yet does not rely on jargon, and the guide covers all aspects of the machine needed by the Electron enthusiast. Certainly a book worth looking for.

Martin Phillips

CLARES NO.1 IN UTILITY SOFTWARE!

FONTWISE £12.00



Now you can have PROPORTIONAL and JUSTIFIED text by using FONTWISE. Not only that but you can have it in 10 different fonts, all in the same document if required.

- *PROPORTIONAL
- *JUSTIFIED
- *10 FONTS
- *CONDENSED or NORMAL
- *PAGINATION
- *Plus many more features

Ask for a sample printout and you will be amazed at the quality that your printer can produce. Compatible with most printers that have a bit image mode yet it is as fast as NLQ when printing. You have got to see this to believe it.

Send for your sample printout today or just give us a ring.

BROM



£34.50



£27.50

THE NUMBER ONE TOOLKIT ROM FROM CLARES

*EDIT is a FULL SCREEN EDITOR, which means that you can scroll your program up and down just like WORDWISE does with text, do not confuse this powerful editor with the line editor used in other toolkit ROMs. The EDITOR allows insertion and deletion of lines and insert and overwrite within a line. This is the editor that the BBC micro should have had.

*ERROR ON will trap errors in a program and enter the EDITOR at the statement generating the error, no more wading through multi statement lines trying to identify the error.

Commands pioneered by BROM are:

*ROMON & ROMOFF which enable you to turn on/off sideways ROMs so that they stay off even after CTRL/BREAK. This also allows the DFS to be switched off and PAGE reverts to &E00 automatically.

*CASE which forces input into upper or lower case irrespective of caps/shift lock.

*FLIST which lists a program one statement to a line but more importantly it will even list 'BAD PROGRAMS'.

*ONEKEY is a single key entry option but you can also define your own strings to any ASCII key, just like an extra 48 function keys.

*FIND, *CHANGE & *SCHANG provide selective or global SEARCH and REPLACE facilities. These commands work with strings and keywords or a mixture of both e.g. *FIND PROChelp T', will list the full line containing PROChelp, the 'T' simply tokenizes any keywords.

Yet another group of commands allow lines to be moved or copied to a new location.

The other commands provide function key editor, 'BAD PROGRAM' cure, variable lister, integer variable flush, program compacter etc.

This is a genuine useful ROM that no user should be without. Be warned, once used you will not be able to live without it!

"This is the best BASIC screen editor I have so far used." MICRO USER August 85.

"...this is the best On-Screen BASIC Editor I have ever used; it is far superior to BEEBUGSOFTS TOOLKIT." Viewfax Tubelink



DISC

40 _____ 40 TRACK

80 _____ 80 TRACK

3 _____ 3" DISC - ADD £3

EPROM

Send for detailed newsletter.

All prices inclusive of VAT & Carriage - NO EXTRAS! Please state 40 or 80 track disc and state D.F.S. you use.

FUN HOUSE £10.00



FUN HOUSE is a highly original suite of educational programs suitable for ages 3 to 13. The program is designed to encourage children to spell words which relate to objects found around the home. Animation and music are used to good effect and some highly original ideas are incorporated. Each room exercise is terminated with a warning item e.g. the lounge finishes with 'FIRE' which goes on to engulf the whole lounge. Tests with a newly hired 4 year old resulted in us having to prise him away from the keyboard after 2 hours. In that time he had gone from never having used a keyboard to finding the location of all the keys very quickly and entering the correct answer. He had thus started on the path to learning spelling and familiarised himself with the keyboard including the use of DELETE to correct his mistakes. Can you afford not to give your children the same start?

"there is nothing of the quality of this suite of programs" EDUCATIONAL COMPUTING

New! PROFILE £12.00



A PROCEDURE LIBRARY MANAGEMENT SYSTEM

Now you can start the procedure library that you always promised yourself. PROFILE allows you to store, list, merge and grab procedures without any of the headaches. Automatic alteration of LINE NUMBERS and resident variables such as TOP, LOMEM etc. release you from the tedious chore of setting and resetting, checking and rechecking. PROFILE leaves you free to create your programs without disturbing your chain of thoughts.

- *100 Procedures can be stored on each disc (disc space allowing)
- *NO LIMIT to the number of procedure discs used
- *MERGE Procedures into your programs easily
- *LIST Procedures from disc to check suitability etc.
- *RENAME Procedures on disc
- *GRAB new Procedures from existing programs
- *NESTED Procedures can also be grabbed automatically

A Procedure can be a FUNCTION, a BASIC program or part of it or a PROCEDURE.

With PROFILE you will quickly amass a wealth of procedures which will enable you to write programs quickly and easily. Simply write the controlling program containing the procedure calls and PROFILE will merge the procedure for you.

PROFILE in effect provides you with a MACRO BASIC in which you only have to define the procedure once and it can be re-used automatically thereafter.

Make life easier for yourself and order PROFILE today.



clares
MICRO SUPPLIES

DEPT AU12
98 Middlewich Rd.,
Northwich, Cheshire CW9 7DA.
Tel: 0606 48511
Open 9—5pm Monday—Friday
LUNCH 12.30—1.30

REVIEWS

R O M S / B O O K

SEMI-TAILORED TOOLKITS

'Probe 2', £49, and 'Enigma Disc Imager', £49, Altra ROMs, 209 North Street, Leeds LS7 2AA.

There seem to be more and more toolkit ROMs available for the BBC micro as the months go by. Nobody has yet hit on my ideal selection of routines, but even if they did, it's unlikely they would suit every Tom, Dick, Harry and Bruce. Two further attempts at satisfying all requirements are on offer from Altra ROMs – one aimed primarily at the Basic programmer and the other concentrating on disc utilities.

Probe 2 is a revamped version of an earlier toolkit, *Super Utility IV*, in a 16k ROM. Its main claim to fame is a versatile Basic editor. While this isn't a full-screen editor, it does provide many useful facilities. It includes a comprehensive search and replace facility, a cross-reference lister which will display the line numbers of any lines containing pre-defined variables, and a packing routine.

This last utility offers options to remove spaces and comments, to concatenate lines where possible and to automatically rename variables, functions and procedures with one or two letter names. If you choose all the packing options, there can be a considerable reduction in the length of your program.

Also included in the Basic editor is a formatter which will split multi-statement lines and indent loops and conditional statements properly.

As well as the Basic editor, *Probe 2* contains a disassembler, a memory editor, a disc sector editor and an assembler formatter. The first three of these are pretty much as you'd expect. The formatter is a bit more unusual as it takes an existing assembler listing and sets it out in an easily readable form, with addresses, mnemonics, operands and comments all very nicely tabulated.

Other shorter routines cover function key editing and ROM management, and there are several disc utilities (to format, verify, repair and examine discs). There's a simple, full-screen graphics dump for Epson and NEC printers, which I mention only because I own an NEC and was interested to find that someone else does too. A separate routine is included to set up various printer features directly on the NEC, but every time I issued one of these commands, the printer did a form-

feed, followed by a reverse form-feed – something I wasn't aware it could do!

The *Enigma Disc Imager* is another 16k ROM, providing a lot of useful aids for those using discs. As well as a formatter, which is slow but can format any number of tracks, can do both sides of a disc in one go and format a dual (60 name) catalogue, the ROM provides comprehensive read and write facilities for oddly configured discs. Add to this a copying routine which will cope with quite a few 'mean tricks' on the part of software producers, disc sector and ID editors, and tape to disc transfer routines, and you can see that there are few things (from a technical standpoint) that *Enigma* can't be persuaded to do.


Several of the commands in *Enigma* have interesting extensions. For instance, the *ROMID command will normally list any sideways ROMs in your micro, with their sideways page numbers, titles and copyright strings, but if you add the page number to the command, the ROM will be copied into RAM automatically. If, instead, you add a drive number, the currently selected disc will be searched for ROM images and you will be prompted to load one of them. Similarly, the *VERIFY command will verify the current disc – all you have to do is just add the appropriate parameters.

Enigma is intended for more specialist use than *Probe 2*, but still contains quite a few facilities in common with the other chip. There are, in fact, nine routines shared by the two ROMs, including the disc formatter, memory and disc editors, disassembler and block move routines. While each of these utilities is valuable in its own right, I do feel that this amount of overlap between products is unfair to the user. If you look at Altra's other ROMs, you will find that *Probe 2* is also available in two parts – the Basic editor and the rest. The routines themselves are well up to scratch but, apart from one or two high spots, offer nothing exceptional. The price asked seems steep, even allowing for 16k of code.

If this idea of selling different combinations of routines in EPROM is taken to its logical conclusion, you come to the custom EPROM toolkit. Under this system, the user would select a combination of routines (by length of code or price) and the supplier would blow them into an EPROM, thus tailoring the product exactly to the customer. Then I could have the complete set of programming aids I really want. And so could Bruce . . .

Simon Williams

A RUN AROUND THE ROM



'The BBC Micro ROM Book', Bruce Smith, Collins, £9.95.

This is a unique book which I'm sure many users of the BBC micro will find invaluable as it covers, almost completely, how the sideways ROM system works. It will appeal both to those who like to know how their micro works and to those who wish to write their own sideways ROM software.

Writing your own software is not that difficult and now that EPROM programmers are becoming cheaper (or through the use of sideways RAM) I'm sure many will want to have a go. For the practical types a simple circuit, plus software, for an EPROM programmer is given in the book.

The book is in four main parts. First the operating system routines which control the sideways ROMs are discussed; all the service calls (including those for the ROM filing systems) are described.

Unfortunately there is one error – Acorn DFS does not allocate &E00 to &1900 as absolute workspace; &1700 to &1900 is its private workspace. One omission is how utility ROMs can generate error messages which can be read by language ROMs. The usual system is to put them at the very bottom of the stack (&100 upwards).

The book goes on to a very useful and detailed examination of two commercial ROMs and one developed within the book. This should give ample information and ideas on writing your own ROM software.

The third section has a look at the range of commercial utility ROMs which are available, especially Basic toolkits and machine code monitors. It's unfortunate that the picture of Beebug's new *Help ROM* shows a mistake in the ROM.

Finally there is a section containing bar code listings of all the major programs within the book – very useful, as I'm sure this form of software distribution will quickly catch on. For those who prefer, the programs are also available on disc.

In summary, then, apart from a couple of minor omissions, a most useful book.

Richard Harris

If you think the front looks good — you should see the back.



Once again Mushroom has answered a special need of all BBC computer users with their new WORKSTATION — no more untidy wiring, no more pulled plugs, transforms your system into a handsome console unit.

Features include:—

- * ADVANCED CABLE MANAGEMENT
- * TWIN 400K MITSUBISHI SLIM LINE DRIVES SWITCHABLE FROM 40 TO 80 TRACK WITH STATUS INDICATOR LED'S
- * ON BOARD REGULATED 4 AMP POWER SUPPLY WITH OVERLOAD PROTECTION
- * MAINS INPUT FILTER FOR CLEAN POWER SUPPLY
- * FILTERED POWER TO THE 3 TAKE-OFF SOCKETS AT REAR FOR MICRO, MONITOR AND PRINTER

The WORKSTATION is manufactured to the highest safety specifications from lightweight aluminium attractively finished in oatmeal with orange trim. When not in use the computer is stored underneath, affording useful protection from accidental knocks or spillage.



The WORKSTATION, complete with twin disc drives, is suitable for all Areas of use — Domestic, Schools, Local Authorities, Commercial and Industrial.

This is a must for every user at only £399.00 Exc. VAT.

Those people already owning disc drives can have them fitted into the WORKSTATION. Prices on request.

Available direct from:
 Broadway Electronics, 55 Tavistock Street, Bedford, MK40 2RF
 Telephone: (0234) 58303. Telex: 826112 MUSCOM G, and selected computer dealers nationwide.



Mushroom


COMPUTERS LIMITED

Another Mushroom product from Broadway Electronics.
 Patents pending.

REVIEWS

F I R M W A R E

UNDER NEW MANAGEMENT

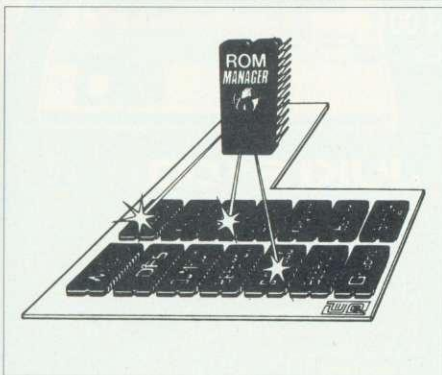

'ROM Manager', Watford Electronics, £25.30

ROM Manager has been designed to help those who use sideways ROM software on their Beeb, whether or not they have one of the many expansion boards available. For ROM development work, user RAM can be set up to act as if it were a ROM, thus saving the extra cost of sideways RAM. Also provided is a help text for the first few *FX commands.

The chip requires only five bytes of user memory (which appear to be unused by the OS) so no problems should arise.

On to the commands. *CHECKSUM generates a standard checksum, as used by the tape system. If you think a ROM may be faulty, this can be used to check the data.

*DIRECT and *VECTOR are equivalent commands which are used to send the given command to a certain ROM. This alleviates the problems associated with ROMs which may have the same command names. There are two names in case one clashes with itself!

*EXAMINE is next. This produces a colourful mode 7 dump of the contents of the required ROM, displaying the bytes in hex and ASCII, plus full instructions for use.

*EXPLAINFX is a help text for the first 22 FX commands. Although it can prove very useful, it looks rather like a space-filler.

*FILE is provided to pass commands to the active filing system (not to tape). This is in case a sideways ROM intercepts the command that should go to the filing system for action.

*INCLUDE is the command to allow the use of normal user RAM as a sideways ROM emulator. *REMOVE stops this action; *RAM sends commands directly to it.

A memory editor, invoked by *MODIFY, is similar to *EXAMINE in format, displaying

in hex and ASCII. *NAMES provides a list of the different ROM software you have available, along with its socket number, and whether it is enabled (*START/*STOP are used for enable/disable).

*STATUS will let you have information about a given ROM in more detail – where and what it is, its length, status, and which entries it has (language or service). *VALUES will tell you what may affect ROM Manager, as well as displaying the active filing system, and whether the RAM option is being used.

Finally, you can specify a default ROM, to which *DEFAULT will send commands.

All this may sound a little confusing at first, but a reading of the manual, which is good, will have you talking to ROM Manager like an old friend, which it may soon become. If you have a lot of ROMs (or a large sideways RAM unit) you will have to consider ROM Manager, because of the features it provides. Some of the contents are provided elsewhere but at £25.30, it is fairly good value. **Stuart Menges**

DESIGNS ON SCREENS

'Screen Handler ROM', Microsolve (Bolton), 60 Birches Road, Turton, Bolton BL7 0DX, £29.95

One of the less frivolous uses to which home computers can be put is the storage and maintenance of small databases, such as lists of names and telephone numbers, gramophone records and books. Many commercial databases exist for this purpose but are always something of a compromise, as on the whole they will have been designed to have as wide an application as possible.

In any particular situation, they will almost inevitably lack some facilities the user would like while offering others he doesn't need, but which complicate the use of the database. If keeping a record is the main requirement and no elaborate manipulation of the data is required, then there will be some people who are happy to write their own storage programs. The use of commercial programs will also be precluded, generally, where there is a requirement to vary the screen mode to modify the form of the screen display input screens once the database has been set up.

Just about any program which requires data to be typed in will benefit from a well-designed screen. This will allow information to be

displayed and entered unambiguously rather than involving just a series of repeated prompts on a screen that scrolls upwards every time the return key is pressed.

The Microsolve *Screen Handler* is a ROM-based utility which can handle text input and output on the screen of the BBC model B. It is designed to facilitate the design of data input/display screens and since the routines are in ROM there will be some saving in memory. It takes advantage of the fact that it is possible for a sideways ROM to have both language and service entry points. Screen design is treated as a language and can thus benefit from a 6502 second processor's speed, if fitted. Subsequent screen display is controlled by service calls to the ROM which can therefore be incorporated into the user's own programs in Basic or any other language.


The ROM is straightforward – there are just five * commands which permit the design of screens and the input and display of data.

*SCR1 prompts for the screen mode to be used and allows a screen to be designed simply by moving the text cursor keys and typing in the words required. Screen positions for the display of variable data such as record numbers are marked at this stage with a string of ~s, fields for data entry are marked with a string of ^s. A completed screen may also be edited while in this mode, using the function keys to insert and delete lines. The completed screen is then saved on tape or disc, ready to be incorporated in the user's own programs.

The remaining commands, *SCR2 to *SCR5, are accessible within the user's program, to display a screen, display data, accept data and highlight individual fields. A sample program, included in the documentation, makes clear how each command is used – for instance, the highlighting feature can be called to indicate invalid inputs. Some memory must be allocated for the storage of the skeleton screen and for temporary storage of input data and display data. The instructions do not make it absolutely clear how much memory to reserve – I assume that it will depend on the amount of text on the screen. About 300 bytes was adequate for the examples I tried.

The *Screen Handler ROM* certainly makes light work of designing data input and output displays, but while many programmers could use its facilities from time to time, the price is likely to deter all but those who frequently need to design different data screens.

Malcolm Banthorpe

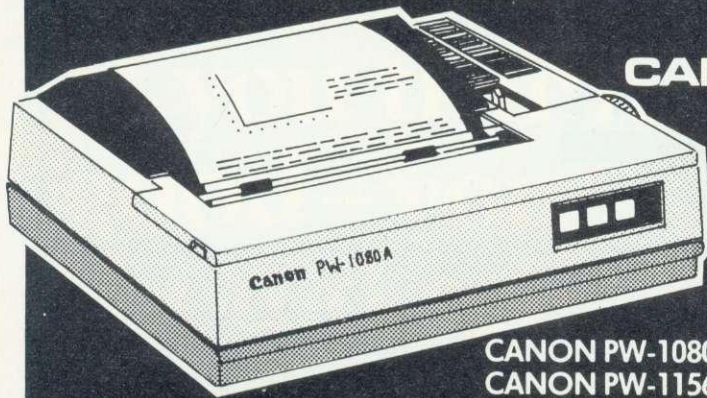

CANON PW-1080A


OR KAGA TAXAN KP810
NEAR LETTER QUALITY PRINTER
 NLQ Mode 23 x 18 Matrix: 27 cps
 Draft Mode 11 x 9 Matrix: 160 cps
 Full range of Epson FX 80 Print Codes
 Friction & Tractor Feed
 Centronics Interface Standard
 CANON PW-1156A Available
 (Accepts 17" Paper)

CANON PW-1080A £265.22 + VAT = £305.00
 CANON PW-1156A £360.00 + VAT = £414.00

See below for Printerpack prices

**JUKI
 SPECIAL
 NOW
 FROM
 £329
 inc. VAT.**

RING FOR DETAILS.

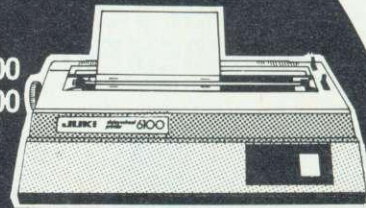

JUKI 6100

One Year Warranty
 20 CPS: BiDirectional & Logic Seeking
 10, 12, 15 & Proportional Spacing
 Wordstar Compatible
 2K Buffer; 13 Inch Platen
 Underline; Backspace + Lots more
 Centronics Interface Standard
 RS 232 Interface £54.00 + VAT Extra
 Tractor Feed £119 + VAT Extra
 Single Sheet Feeder £199 + VAT Extra

JUKI 6100 £330.43 + VAT = £380.00

See left for Printerpack prices

C.J.E. MICRO'S BBC PRINTERPACKS


For Star, Canon & Juki Printers include:

1. The Printer
2. Next Working Day Delivery
3. Cable to the BBC 1.25 Metres
4. Screen Dump Program (W/C Source)
5. Text Dump Program
6. Function Key set up Program.
7. Function Key Label Printing Program.
8. VIEW Printer Driver
9. 100 Sheets of Paper
10. Mains Plug with 3 Amp Fuse
11. Booklet giving details of using the printer with a BBC
12. Character Defining Program for Downloadable-character-set (draft mode)

CANON PW-1080A BBC PRINTER PACK £330 inc VAT
 CANON PW-1156A BBC PRINTER PACK £439 inc VAT
 JUKI 6100 BBC PRINTER PACK £400 inc VAT
 STAR SG10 BBC PRINTER PACK £295 inc VAT

Low Prices

**OFFICIAL
 ACORN
 APPROVED
 DEALER**

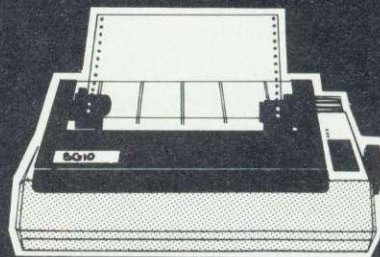

STAR SG10 NEAR LETTER QUALITY

NLQ Mode 17 x 11 Matrix
 True Descenders 9 x 9 Matrix
 120 CPS Bidirectional & Logic Seeking
 40, 48, 68, 80, 96, 136 cpl
 Italics, Emphasized, Double strike
 Super & Sub Scripts
 Downloadable Character Set
 Hi-Resolution & Block Graphics
 Friction or Tractor Feed
 10" Carriage

Centronics Interface
 Standard RS232 Int.
 £58.00 + Vat Extra

STAR SG10
 £270.00
 inc. VAT

See above for Printerpack prices

**RING FOR SAMPLE PRINTOUT,
 FULL SPECIFICATIONS
 & LATEST PRICES**

Top Service

FONTAID

NLQ Designer for Canon and Taxan Kaga
 NLQ Printers.

Design your own NLQ fonts or 'download' one of our
 20+ predefined fonts. The FONTAID disk includes the
 following type styles:

Square, Outline, Gothic, Computer Type Style, Bold,
 Shadow, and Broadway.

Additional Disk 'A' includes:

Greek/Maths, Script, Proportional Spacing, Plain,
 Handwriting and 2 styles of (Elite, Condensed, Super
 Condensed).

FONTAID requires 6264 RAM Chip in printer.

FONTAID (BBC) £30.00

FONTAID (BBC) with 6264 RAM £36.00

FONTAID Additional Disk 'A' £15.00

Please state 40 or 80 track when ordering.

ROMS of individual fonts are available and can be
 used with any computer.

FONT ROMS £18.00 each

P & P on FONTAID £1.00

Please phone for FONTAID leaflet and demonstration
 print out.

Coming Soon MULT-FONT NLQ printing for
 Epson MX/RX/FX/LX and Epson compatibles.

Design your own font or use supplied predefined font.

Please phone for latest details.

EXPORT ORDERS WELCOME

VAT INCLUDED WHERE APPLICABLE
 PHONE/CREDIT CARD ORDERS WELCOME

Postage 50p per order or as stated

Next day Delivery for Printers/Disk Drives £8.00

FULL RANGE OF CONNECTORS & CABLES AVAILABLE
 PRICE LIST ON REQUEST

CJEmicros

Dept AU12, 78 Brighton Road, Worthing
 W. Sussex BN11 2EN (0903) 213900

**WIN A
 PORSCHE
 924S
 when you
 buy a
 STAR SG10
 from**

CJE

Written details on request.

**PRINT
 QUALITY**

REVIEWS

R O M S

A SLAVE TO THE SLAVE

Slave, A & F Software, £49.95

Slave is not the first toolkit ROM to appear for the BBC micro – indeed, in recent months there seem to have been a plethora of them. What makes it a bit different, however, is the fact that it's in a 16k EPROM, rather than the more common 8k variety. This should offer scope for a larger range of utilities than normal and, if A & F has done its job right, should mean you can dispense with two other 8k chips, one for Basic routines and the other for machine-code. So does *Slave* achieve this?

Slave provides 31 new 'star' commands, divided about equally between Basic and machine-code routines.

Perhaps the most valuable Basic routine is the dynamic editor. This is a proper screen editor, which allows you to scroll backwards and forwards through your program (rather slowly) and edit it on screen. Each edit must be completed with <RETURN>, but as long as you remember this, you should find that the editor speeds program development.

In addition to the editor, there is a search and replace facility which will change variable names and the like intelligently within your program, and a cross-reference routine which shows you where you've used them before.

Slave includes the obligatory *BAD 'Bad program' cure, but this time with an *EXTEND command, which will tack any lines of Basic existing in memory onto the end of your current program. Useful if you find you've NEWed a program by mistake, and started to type over it.

You also get an envelope definer, a key definer, a user character display and a machine code sort which you can call in and use on your Basic arrays. It will handle single dimension arrays of integer or real numbers, or strings, and works pretty quickly. The *TRON command traces your program, but confines its output to the top left-hand corner of the screen. It also single-steps your program for you. *PAGE will shift a Basic program to another page boundary, and is useful for relocating long Basic programs from disc. *Slave* allows you to auto-run them after relocation.

Finally among the Basic utilities is a program packer. This will remove unwanted spaces and comments, but doesn't abbreviate variable names like some similar routines.

On the machine-code front, *Slave* sticks mainly to the 'biggies', though implements them well. There's a hex dump, a monitor (including a disassembler) and a debugger. Each of these makes use of colour highlights to distinguish the various parts of the display. You can scroll backwards and forwards through any of the displays, including the disassembler. This is because *Slave* can disassemble backwards which is pretty rare!

These three routines provide a pretty comprehensive machine-code development package, and you can in fact move directly between the hex dump, monitor and debugger. You can also direct a disassembly to screen or printer.

Other machine-code facilities include *SLOW which slows the processor down. The manual provides the novel idea of using the command to make impossible games playable. *GET will find a given string of bytes and *MOVE – you've guessed it – will move a section of memory to another address. *REL will relocate a piece of machine-code, changing internal addresses to suit, but leaving external ones alone.

As well as the memory manipulating routines, there are a few disc utilities included in the chip. A disc sector editor allows the usual editing of information on disc, but is unusual in displaying in mode 3, thus showing more information than some similar packages. *DGET does on disc what *GET does in memory and *SPACE tells you what room is left on your disc.

A & F even provides a simple ROM management display, although unfortunately it is just a display. There's no means of disabling a ROM from within *Slave*, which is a shame – perhaps there wasn't room. There certainly seems to be plenty going on in *Slave's* 16k of code.

The 'Slave Driver's Guide' is a 70-page affair which details all the routines well, giving a fair amount of technical information where it's needed. It's organised roughly by function, although I didn't find it particularly easy to work my way around. The whole thing is printed in brown on white, and includes a number of helpful examples of the use of *Slave*.

So will *Slave* do what two other toolkit ROMS will do? It certainly provides the main routines you might expect in a machine-code development package, and the inclusion of the full-screen Basic editor makes it attractive. I think I'll find *Slave* very useful.

Simon Williams

A ROM TO REMEMBER

'The Buffer and Backup ROM', Watford Electronics, £22 + vat

This ROM has some rather useful functions which BBC micros owners with printers and, to a lesser extent, disc systems could use.

The 'buffer' part of the title refers to a Centronics-only printer buffer, for those with 'sideways' RAM fitted. The buffer can be up to 15.5k, depending on the amount of RAM present. *FX5,3 is used to select the small routine, which is placed in the RAM. This saves the cost of a printer buffer, which could be rather expensive. Now, you are able to get on with important work while your listings are printed for you. Output may be stopped at any time by pressing Break which also tells you how much space there is left in the buffer area. (*HELP BUFFER also does this.)

The other commands available are of less importance, but can also save time and effort. *VAR lists all variables in use, with arrays displayed as sizes only. *TCOPY is a tape to tape or tape to disc copier, which is quite effective. Whether tape duplication should be encouraged is another matter, but Watford does state that the command should not be used for illegal copying.

Like *TCOPY, the other utilities provided are Basic files run under the ROM filing system, which is booted using Space-Shift-Break. A menu appears quickly, offering *ROMLOOK, *D-TAPE, and DSKMENU.

*ROMLOOK will copy the contents of a selected ROM socket to user RAM, from &3000 upwards, listing the contents in hex and ASCII. Unfortunately, single hex digits are not padded with leading zeros, so the display becomes ragged and looks rather messy. *D-TAPE is a disc to tape copier. You build up a list of the files to be duplicated, and then you copy them. Fairly straightforward.

Finally, a disc menu is provided, for use on each disc you have. This is quite good, but could be expanded to allow more than just Basic files to be run.

Altogether, this is a useful ROM if you need such routines. It contains nothing unique, but all the commands can make life easier for you and it is good value. As with all Watford manuals, the documentation is well produced and easy to understand, even if you are a beginner.

Stuart Menges

INFORMATION PROCESSING ON YOUR BBC COMPUTER!

WHY SHOULD THE BIG BOYS GET ALL THE INTEGRATED SOFTWARE?

For serious users of the BBC computer. Disc machines only.

What the reviewers say:-

DATASCRIBE IS BRILLIANT VALUE FOR MONEY —

John Vogler, A & B Computing, Sept 1985.

I SHALL USE SCRIBE FOR MOST OF MY WRITING —

John Dawson, Your Computer, Feb 1985.



SCRIBE £59.95

THE PROFESSIONAL WORD PROCESSOR designed for the serious user
 * All operations fully prompted * No special knowledge of the computer system necessary * Document size NOT limited by computer memory * Automatic disc buffering ensures text is moved between disc and computer memory without user

intervention * Up to 255 pages in a single document * 80 column display * On screen underline and right justify * See it as it will be printed. SCRIBE comes in a chip with 5 minute fitting instructions, utilities disc and manual. Integrates with Database.



DATABASE £49.95

A superb record keeping system with an incredible operating speed. 96 fields per record * One record 2 Kb max * One field 900 characters max * 4000 records per database * 16 level conditional search * Record match * 8 automatic sub indexes * Total flexibility of output via report writer with ability to write back to the database * Maths


pack * Semi programming language plus compiler. Integrates with Scribe to give conditional search with MAIL MERGE and high powered report formatting. Comes in ROM.

DATASCRIBE £95

Scribe & Database in a single chip! Contains all the features of both products and with an attractive saving on price and ROM space.



DOUBLE-DOS £59.95



Double density disc interface. A high capacity database or word processor is enhanced even further with this state of the art disc interface. The many features include * 720 Kb of CONTINUOUS file space on a standard 80 track disc drive * Automatically read standard Acorn files * Compensate for discs formatted in single density * Provide up to

159 files IN ONE DIRECTORY * Automatically read, write and format double sided drives to appear as one disc surface * Allow maximum use of MERTEC Scribe and Database. Very easy fitting — no soldering — full instructions provided.

SCRIBECHEC £24.95


TYPING/SPELLING CHECKER.

The fastest typing checker available. * 7200 word base dictionary in ROM plus room for your own 15,000 (approx) word dictionary on disc * Any number of dictionaries * Maintenance includes add and delete, list words between alpha limits and many more features * Check speed 1500 words per minute! * Any document length. Also available for wordwise & view.



IMPORTANT NOTE: Please check with us if you decide to use any other disc interface than Acorn or Double-Dos with Scribe or Database.

DATASTAG £59.95 (COMING SOON)



STATISTICS AND GRAPHICS PACKAGE. (ROM BASED)

Coming soon. A highly professional system which integrates with Database. Allows you to store your data in any format and, using Database, present all or selected items of data for graphing and statistical analysis * Graphs include Pie, bar, histograms, line plot, scatter plot * Display between one and four graphs simultaneously * Automatic scaling and direct digital readout of graph co-ordinates * Statistics include all standard tests plus linear regression and correlation etc * seven non-parametric tests * Epson screen dump included with facility to add your own printer dump.

SCRIBE ASSEMBLER £24.95

Use Scribe as a super editor for the assembler. A powerful and professional package that will assemble standard 6502 source code plus many of the non-standard mnemonics from the BBC Basic's own assembler. NOTE — Scribe is required to use the assembler.

MINI ROM BOARD £14.95

Provides four extra ROM sockets. Easy fitting and without any of the overheating and space problems associated with large expansion boards.

SPECIAL COMBINED PACKAGE OFFER

Datastag & Database (in one chip) ①	£95.00
Datascribe & Double-Dos ②	£139.00
Datascribe & Scribechec & Datastag — fitted to the Mini ROM Board ③	£165.00

Prices include VAT. Add 60p post and packing to your order.

Dealer and education enquiries welcome.



MERLIN COMPUTER PRODUCTS

Purchasers of MCP software are provided with a free update service and an unmatched level of technical support. (Updates subject to postal charge.)

Please supply the following products/information. Please tick box.

SCRIBE <input type="checkbox"/>	QTY _____	£ _____
DATABASE <input type="checkbox"/>	QTY _____	£ _____
DATASCRIBE <input type="checkbox"/>	QTY _____	£ _____
DOUBLE DOS <input type="checkbox"/>	QTY _____	£ _____
SCRIBECHEC <input type="checkbox"/>	QTY _____	£ _____
DATASTAG <input type="checkbox"/>	QTY _____	£ _____
SCRIBE ASSEMBLER <input type="checkbox"/>	QTY _____	£ _____
MINI ROM BOARD <input type="checkbox"/>	QTY _____	£ _____
SPECIAL COMBINED PACKAGE ① ② ③	QTY _____	£ _____
TOTAL		£ _____

I enclose £ _____ Inc P&P
 My credit card No. is _____
 Visa Access Tick which

Name _____

Address _____

To: **MERLIN COMPUTER PRODUCTS**
 33/36 Singleton Street, Swansea SA1 3QN. Tel: 0792 467980

Synergy Software

'PROFESSIONAL Software for the BBC Micro'

RAPID READER

★★ NEW ★★

IF YOU CAN READ THE FOLLOWING PASSAGE OF TEXT IN UNDER 15 SECONDS . . . YOU NEED READ NO FURTHER! . . . START TIMING NOW.

In line with our reputation for producing ORIGINAL and USEFUL software we have created a package designed to teach you to read at speeds you never thought possible. RAPID READER is a comprehensive, flexible and powerful speedreading course which employs a variety of reading enhancement techniques and simulates sophisticated mechanical reading aids (eg Tachistoscopes, Pacers, Reading Machines etc), at a fraction of the price! In addition, RAPID READER has been designed to enable teachers and parents to devise their own training courses, using Wordwise or View wordprocessor ROM's, to teach good reading techniques to their pupils or children. Each two disk RAPID READER package can provide separate individually tailored courses for up to 40 participants and will maintain and chart 'progress reports' for each individual.


STOP TIMING - Check your rating:

40 seconds = slow, 35 seconds = average, 20 seconds = fast, 15 seconds = very fast.

Whichever rating you achieved we would expect the average user to read at least 50% faster by the end of the course. A LIFETIME INVESTMENT AT £27.95. WRITE FOR DETAILS.

BIOGRAM

'This original and imaginative package is excellent value for money. . . it provides the user with a very cheap near equivalent of a dedicated professional system costing many times its purchase price.' A&B Computing (JUNE 85). "GOOD VALUE FOR MONEY" MICRO USER (NOV' 85)

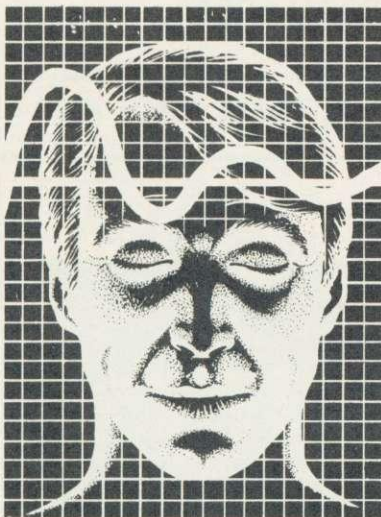

BIOGRAM is a new concept in computer software and provides you with the tools to control your state of relaxation and response to stress.

BIOGRAM uses proven biofeedback techniques to provide you with audio/visual impressions of your physiological and psychological state.

Your stress level is detected by two electrodes and is converted and relayed to the computer by the electronic BIO-MODULE. The BIOGRAM software translates this signal into a form that will enable the user to learn to influence his own state of mind.

BIOGRAM is FUN and EASY to use, just plug in the module, attach the electrodes and choose your program. Ready to run in seconds.

EASI PLOT

"a very good program" A + B Computing
"excellent" Which? Software Guide

Easiplot is a sophisticated and user friendly BUSINESS and EDUCATIONAL graph package. Voted the 14th best educational program, Easiplot has come to be regarded as an outstanding business package and excellent value for money.

COMPREHENSIVE FACILITIES INCLUDE:

- ★ Line, Bar, Pie, Scatter and Data charts
- ★ 5 line or bar merging
- ★ Bar/Line conversion option
- ★ Auto or manual scaling
- ★ Comprehensive label and edit facilities
- ★ Screendump for Epson compatible printers
- ★ Save/Load options on single or dual drives
- ★ Provides easy access to screendump ROM's
- ★ Grid and screensave facilities
- ★ 56 page USER MANUAL

The BIOGRAM system comprises an electronic bio-module fitted with plugs and electrodes and a suite of programs on disk or cassette. The bio-module is supplied in two versions:
BIOGRAM I - a standard, medium sensitivity unit
BIOGRAM II - a high sensitivity unit with a three-way sensitivity booster switch.

The BIOGRAM software package includes:

- ★ RELAXOGRAM - a multi-level relaxation trainer and progress tester.
- ★ LIE DETECTOR - a graphical lie detector with an automatic interrogation facility.
- ★ P.REDUCER - a programmable phobia identifier and reducer.

The comprehensive user Manual provides many examples of biofeedback applications and experiments to try.

HARNESS THE POWER OF BIOFEEDBACK - LEARN TO CONTROL YOUR FEARS, PHOBIAS and STATE OF TENSION. AN INVESTMENT FOR THE WHOLE FAMILY.

SHARE ANALYSER

'an excellent program' Micro User - Jan 85
'an invaluable aid' Northern Echo
'very highly recommended' Which? Software Guide
'Excellent investment' Luton News

Share Analyser is a comprehensive reporting, analysis and charting package for the BBC Micro. Transaction and share price databases are built up for each share name and a variety of report and analysis facilities can be instantly accessed. Reports can be produced on any printer. Share Analyser is easy to use and is supplied with a comprehensive Operating Manual.

FACILITIES INCLUDE:

- ★ Up to 20 share names per portfolio per disk.
- ★ Use as many disks as you require
- ★ Capacity per disk - 20,000 whole number share prices and 320 purchase/sale/dividend records
- ★ Reports include Valuation, Profit Statements, Movement Analysis, Transaction Reports etc
- ★ Graphics facilities include Moving Averages, Rise and Fall, Superimpose, Magnification, Grid, Screenwrite, Screendump for Epson compatible printers.
- ★ Adjusts for scrip issues etc.
- ★ Provides access to screendumping ROM's



All Easiplot and Share Analyser specifications are for the disk version. FULL DETAILS OF ALL OUR PRODUCTS ARE AVAILABLE ON REQUEST.

Prices include p + p etc - no extras	PRICE
Biogram 1 (cassette or disk). .BBC B & B +	£37.95
Biogram 2 (cassette or disk). .BBC B & B +	£47.95
Easiplot (cassette). .BBC B, B + & Electron	£15.95
Easiplot (including Dataplotter - disk). .BBC B & B +	£24.95
Rapid Reader (disk only). .BBC B & B +	£27.95
Share Analyser (cassette). .BBC B, B + & Electron	£17.95
Share Analyser (disk). .BBC B & B +	£24.95

Disk orders . . state 40 or 80 track (add £3 for overseas orders - Biogram £5)
Write or telephone for further details (05827) 2977 (Ansaphone Service).
ALL PROGRAMS ARE NORMALLY DESPATCHED BY FIRST CLASS POST WITHIN 24 HOURS AND ARE GUARANTEED FOR 12 MONTHS. Available MAIL ORDER only.


Send cheques/PO etc to Synergy Software, Dept A 7 Hillside Road, Harpenden, Herts AL5 4BS

Softlife


LOGIC ANALYSER

Used with the BBC Micro and Disc Drive for test and repair, development, education etc, etc, etc.

- 8 MHz 8 channel
- Selectable trigger and trigger position
- Diagnostic capabilities
- TTL or CMOS inputs
- Complete with operating software probes and comprehensive documentation
- High-quality equipment with full specification at £250.00 + VAT inc P&P

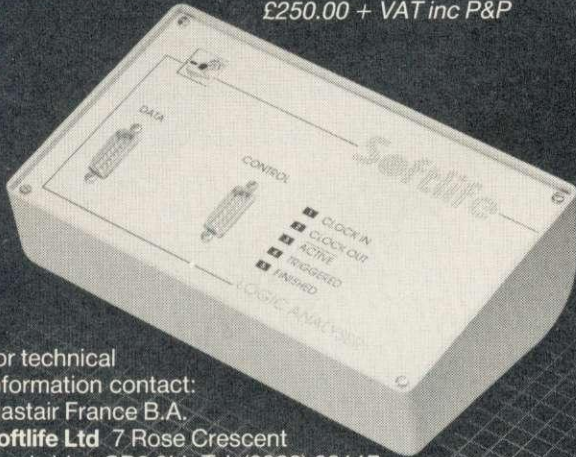

For technical information contact:
Alastair France B.A.
Softlife Ltd 7 Rose Crescent
Cambridge CB2 3LL Tel: (0223) 62117

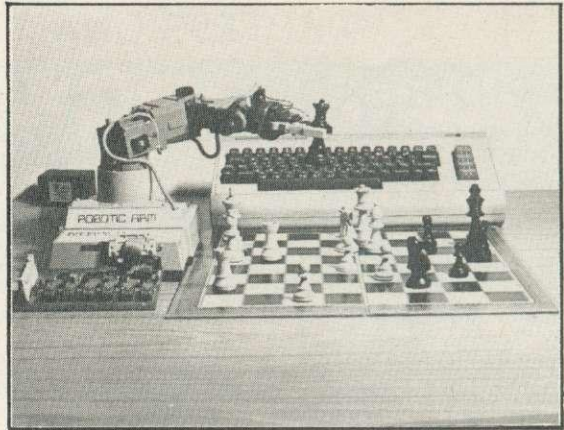

Memoco Electron Robotic Arm

12 Axis of movement. Arm raise and lower. 270 degree rotation left or right. 90 degree Elbow movement left or right. 90 degree wrist movement either side of centre. 270 degree wrist rotation in either direction. Claw open and close. Fitted with motor control circuit. Switched from 5 volt TTL. Controlled by computer. Separate motor drive power supply.

With position feedback	£129.95	Spectrum Interface card	£79.00
BBC B Interface card	£49.00	Commodore 64 Interface card	£49.00

15 WINDSOR STREET
DEPT. AU
MELTON MOWBRAY, LEICS
TEL: (0664) 63544

MEMOCO ELECTRON

FOOD FOR THOUGHT

COMP -U- CATER

plans meals from over 200 recipes — enter your own if you prefer

calculates quantities from 2 up to 48 portions and prints the results

works out the whole shopping list then prints it — and the menu

Thinks

if only it could wash up as well
it would be —

WORTH A FORTUNE!

Nevertheless it's a GREAT PROGRAM — for BBC Model B disc users


40Track £24.95 80Track £26.95
add 50p postage & packing

SHUMWARI ASSOCIATES

(Dept B) 12 MarlIn Court Marlow Bucks SL7 2AJ
Tel: 06284 5751

INTERACTIVE 3D

BBC B
OS 1.2

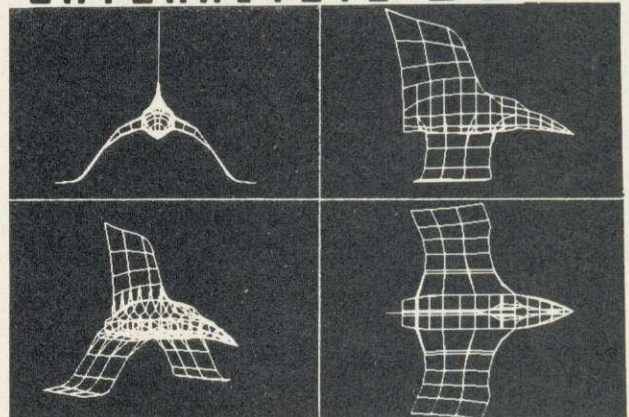

INTERACTIVE 3D is a unique program that actually allows you to create a design directly in a 3D view. And you can zoom, rotate, change viewpoint and perspective **during** the design process to visualise the effects of changes. A novel technique relates the 2D cursor to the position and movement of points on the full perspective view of the wire-frame model. The perspective view can be used on its own or in conjunction with plan, side and end orthographic views (these can also be shown individually).

All design operations occur directly on the screen under cursor control — there is no need to input **any** numerical data (but co-ordinates can be output continuously if required). Full editing facilities allow you to create and delete points and lines, move points with attached lines at any time in any direction, and align points automatically. Symmetrical forms can be created by reflections. Models can be saved to tape/disc and reloaded later to continue the design. Screen dump to an Epson FX80 printer is built in. Altogether, nearly 50 operations are included.

This is a powerful, high quality software package written by a professional engineer, and made available at a very low price. It is of immense value in **engineering design, graphic arts, technical drawing, visual displays, co-ordinate geometry, and simply "3D sketching"**.

£8.95 cassette £12.95 disc (state 40 or 80 track)

PO/cheque to DESIGN DYNAMICS, 8 Meadow Way, Ampthill, Bedford MK45 2QX

DESIGN DYNAMICS

REVIEWS

HARDWARE

JOE'S JOTTINGS ON PLOTTINGS

Joe Telford helps you choose the best plotter for your needs

Two firms are plotting to part you from your money for their plotters, so I thought I'd put you in the picture about their products.

First to the Penman plotter. The package contains the plotter, cables, power supply unit (PSU) and pens; user manual; utilities disc and manual; paper and platten.

The Penman is a plotter with a difference. As well as performing as a straightforward plotter, it can also be used as a robot, a Logo turtle or a mouse, depending on the task you wish to perform. A problem is finding room for the Penman, as it's platten for A3 paper, base unit and connecting leads need much table-space.

Following the Red section of the user manual, I set up Penman. The first stage is to run a self-test, and this should be done each day on power-up, or after temporary disconnection.

The Penman unit separates into a mobile robot head which performs all the plotting, and a base unit which handles the passage of instructions between robot and BBC micro. The base unit is remarkably 'smart', as it contains its own microprocessor, ROM, RAM and I/O devices.

There are three pen-wells at the front of Penman. The package contained four sets of pens (two with 0.3mm tips and two with 0.7mm tips) which included the colours black, red, blue and green, and 50 sheets each of A4 and A3 sized paper.

Penman incorporates a simple self test facility when it draws three coloured circles on a sheet of white paper. Once this is completed the unit is ready to be connected to the Beeb.

This requires a Green Card to help with



Penman: 'an ideal introduction to communications and robotics as well as plotting'

orientation of the RS423 connector. Unfortunately there is no immediate way for a new user to actually test the lead, other than by referring to the software pack configured for the Beeb. This software is on a 40-track utility disc, and the first thing you should do is back it up. There is also a utility disc guide which explains the function of all the software quite well.

To check the operation of Penman, I decided to go for a program called PENTLTK, which allowed me to use the BBC micro as a dumb terminal to talk to Penman.

Having ascertained that all was working properly I turned to the green section of the user manual. The introductory tour shows that it can swivel its body while drawing a perfectly

straight line, can draw perfect circles from a single command, and just as you think it is about to choke on its umbilical ribbon, it unwraps the cable and speeds off on its way.


One frustrating facet is that Penman must repeatedly align itself with the edges of the paper. This is called homing and takes about 20 seconds each time.

If one wishes to become an expert 'Penowner', then one must understand how Pentalk (my name for the language which Penman understands operates. Penman returns a comment on everything the user sends - commands which it obeys successfully are flagged by a <CR> <LF> <!> string being returned, while problems are flagged by a <?> <BEL> <!> string.

Penman detects the baud rate which you use for communication, and responds at the same rate. One problem is that it is easy to send a string of characters to Penman which causes it to hang up, plaintively beeping. The solution here is to reinitialise with <I> <CR> then start again.

For most people, the aim of the game is to get Penman to produce neatly drawn screen plots on paper, and Penman Products oblige by producing a 10k library program which the user can merge into a graphics program to draw the graphics required, but I found this package hard to use. It's very large and cumbersome, and I was unable to use modes 0, 1 or 2. Also, it is written in Microsoft Basic, and converted with much redundancy into BBC Basic. I appreciated the fact that the utility disc listing is in the original Microsoft Basic and so understandability of listings is maintained.

The third problem with talking to Penman


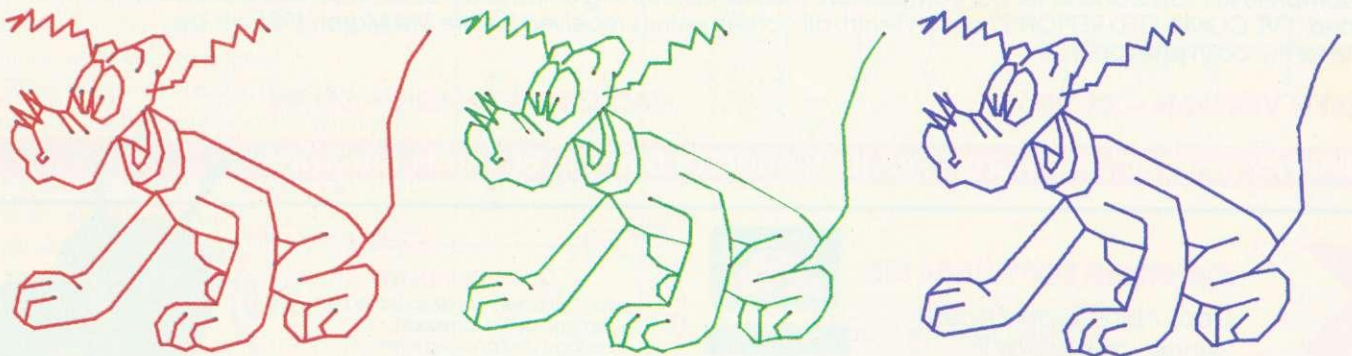


This colourful trio of cartoon dogs was plotted by Penman. As well as functioning as a plotter, Penman can also be used as a robot, a Logo turtle or a mouse


MORE THAN JUST A SEQUEL. A NEW EXPERIENCE

REPTON


2

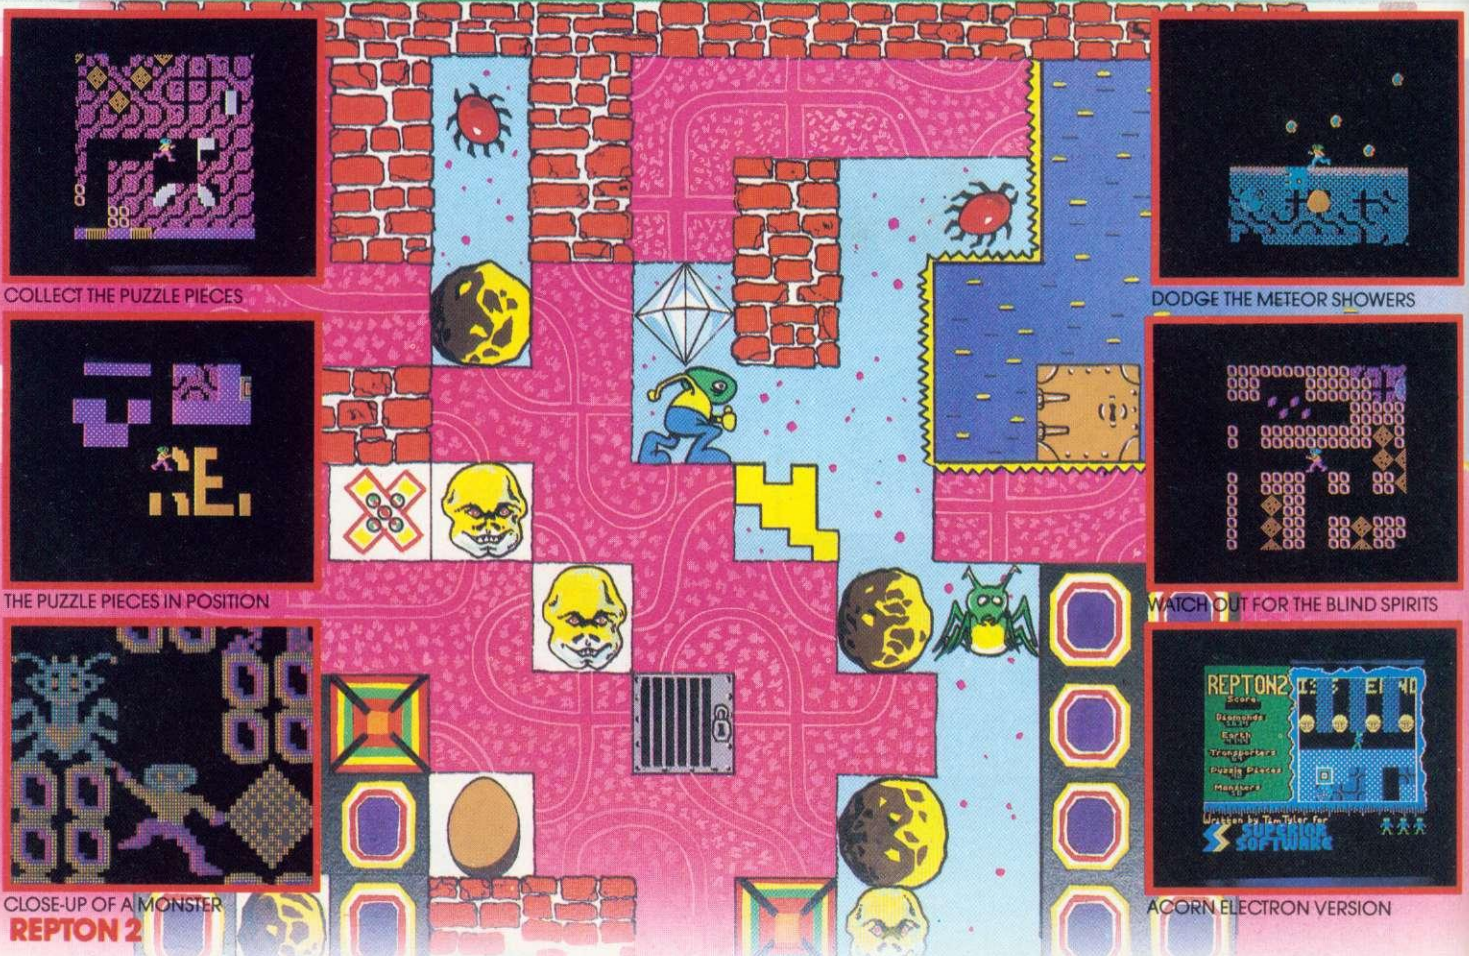


COLLECT THE PUZZLE PIECES




THE PUZZLE PIECES IN POSITION




CLOSE-UP OF A MONSTER



DODGE THE METEOR SHOWERS



WATCH OUT FOR THE BLIND SPIRITS



ACORN ELECTRON VERSION

REPTON 2

REPTON met with unanimous acclaim from games players and reviewers alike. Now, totally redesigned and rewritten, we bring you a new experience... REPTON 2 — a challenge even for hardened REPTON addicts! Not only must you collect all the diamonds (more than a thousand in total), you must also find the 42 jigsaw puzzle pieces which have been strewn throughout the 16 levels. The levels of play, each 16 times the size of the TV screen, are connected by a series of transporters which propel you backwards and forwards between the different scenarios — but each transporter can only be used once. Each level has its own characteristics: brave the meteor storms at the planetary surface; entice the haunting spirits into their cages by strategically positioning the boulders; avoid the eerie skulls of past explorers; unlock the safes with hidden keys; and crush the fearsome monsters which hatch from giant eggs. Can **you** complete REPTON 2?



MORE PRIZES!

Complete REPTON 2 and enter our competition. The first 100 winning entrants will each receive a beautifully designed "I'VE COMPLETED REPTON 2" cotton T-shirt; all correct entries received before 31st March 1986 will be eligible for the cash prize of **£200**

CASSETTE VERSION — £9.95

BBC DISC VERSION — £11.95

WE PAY UP TO 20% ROYALTIES FOR HIGH QUALITY BBC & ELECTRON PROGRAMS



SUPERIOR SOFTWARE LTD.
Dept. AU12, Regent House,
Skinner Lane, Leeds 7.
Tel: 0532 459453.




OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately.



REVIEWS

HARDWARE

via the Basic procedure library is that I still needed to work in Pentalk, so all my concise Basic for ever-so-clever graphics had to be rewritten to output strings to the serial port.

The user manual also explains the robotics mode of Penman, by which direct control is gained of the pens and motors.

The turtle graphics extension included with the review version of Penman was intended for Acornsoft Logo, although Logotron and LSL versions are in the pipeline. Following the getting started information seemed easy enough, except that you are told to LOAD "PENDRIVE which can't be a disc filename as it is eight characters long. Worse still, there wasn't anything like PENDRIVE on my review disc. I plumped for LOAD "BBCLOGO and sure enough - success! Actually, a short while later I found a reference card with the correct instructions.

My success was accompanied by a slight complication, which was caused by the method used by Penman Products to integrate their drivers into the Acornsoft Logo environment. They seem to have rewritten some Logo primitives in Logo itself, resulting in not much Logo workspace being left available in a standard BBC micro.

Although there is a central penwell, the Logo software provided accesses the three main pens, and changes between these are accomplished by the Logo command SETPC n. The commands are explained in detail in the well-written utility guide which accompanies the disc.

The end result of Logo plotting with Penman is well worth the small effort involved in setting up the environment. It is an ideal and enjoyable way of producing plottings, extremely easy to use, and is the place for new Penman users to start controlling their plotter.

The mouse utility could be the first one seen by a user, because on booting the utility disc, the mouse menu appears, and all the other options can be selected from it.

When in Penmouse mode, the screen cursor moves up and down the screen in response to Penman being pushed forward or backward. To make the cursor move left and right, Penman must be rotated like a tuning dial, clockwise for right and anti-clockwise for left.

The whole thing is pretty impressive, but users should remember that Penman is less manoeuvrable than a small mouse and doesn't have buttons, so you need to practise before becoming an adept Penmouse driver.

Also included in the pack is a CAD (Computer Aided Design) software suite called MICAD published by Ellis Horwood. It is configured for the Penman plotter, and comes on two 40-track discs and is simple to use. It can produce good quality technical drawings for demonstration, education or preliminary proof drafting.

I was impressed by the customer support, documentation, and completeness of the package. In these hard times a package which covers the applications of several peripherals must be good value for money, especially as a CAD package is bundled with it.

On the minus side, the method of setting up and maintaining accuracy by repeatedly homing was quite tedious, and the inaccuracies in pure plotting without using this were very noticeable indeed.

I was also concerned that I would never manage to drive/understand the beast from BBC Basic. The approach used and the listings provided are quite confusing, particularly because of the relationship to Microsoft Basic.

At an in-depth level the idea of curve-drawing instructions is excellent, but users must work on the idea of Binary Angular Measure (BAM) which is scattered through the user manual.

Plotmate

The Plotmate plotter consists of an A4 sized plotter, mains and connection cable, a 40-track

software disc, a demonstration disc, an A5 ring-binder user guide, two sets of pens plus a pack of paper and some overhead projector (OHP) transparencies.


The user guide is extremely readable, and explains everything clearly, in stages, and related exactly to what is loaded from disc and seen on screen. Linear Graphics has aimed this manual at the naive user who wishes to become an expert 'plotmater'.

Unlike Penman, Plotmate's pen is moved in x and y directions over the paper by a two-dimensional mechanism using an arm which protrudes from the body. The paper is held by two magnetic strips which are firm enough to hold the paper without slippage. Linear Graphics also warns that the strip is sufficiently magnetic to upset floppy discs, and so shouldn't be used to hold them in place!

Plotmate has one pen-well compared to Penman's three, and consequently only one pen can be used at a time - not a disadvantage because of the very fast plotting speeds.

Plotmate connects to the BBC micro via the user port connector, although a parallel port version is available. Once powered up, Plotmate remains inert until driven by its system disc which contains three sets of programs, one set of demonstration programs, and two slightly different sets of Plotmate driving programs.

Once the backed-up system disc is booted,

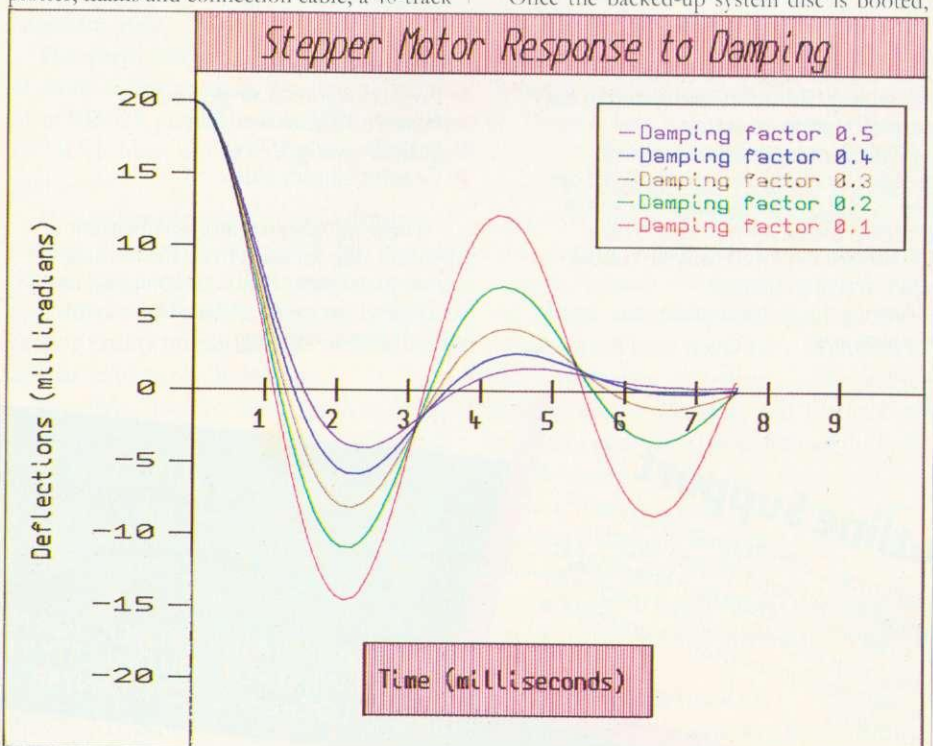

Plotmate comes with a set of programs to demonstrate its high quality output, which includes this graph

New Robo Bitstik 2 tunes in to the BBC...

At last a full Computer Aided Drafting System
for your BBC Model B Micro.



Introducing Bitstik 2, the first system to bring sophisticated CAD techniques to the desk of the BBC Model B user.

Bitstik 2 is the affordable solution to your technical drafting problems. Designed to take full advantage of your BBC's powerful graphics facility, the system is easy to learn and fast to operate.

Bitstik 2 incorporates a range of impressive functions, clearly displayed on-screen as Menus and Palettes. These are selected via the Bitstik hand controller, which also controls the dynamic 'rubber-banded' drawing cursors.

Among the system's impressive list of capabilities are:

- ▶ Auto Dimensioning
- ▶ Adjustable Curves
- ▶ Precision Grids & Angle Locks
- ▶ Powerful Zoom And Pan
- ▶ Scale Drawing & Text
- ▶ Graphic Library Index

These advanced features represent a significant step forward from the existing and very successful Bitstik Graphics System. Yet Bitstik 1 users can obtain Bitstik 2 at a Special Upgrade Price.

Bitstik 2 is produced in the UK by Robocom, the people behind the best-selling Robosystem family of CAD packages for the Apple II (+ or e) micro. To run Bitstik 2 you will need a BBC Model B with 6502 Secondary Processor, Twin Disk Drives and colour or monochrome monitor. Quality hard copy can be produced from a wide range of supported plotters.



So whether you need to produce complex architectural plans, detailed circuit diagrams or simply teach CAD on a fully implemented CAD set-up (with scope for advanced project work) you ought to be tuning into Bitstik 2 for your BBC...

Hotline Support

What's more, with Robo, advice doesn't stop when you've purchased a system. A small yearly subscription ensures that lifting your phone puts you in touch with expert help on any drawing or technical problem.

Test draw a Bitstik

See for yourself how the Bitstik 2 system can make your drafting projects easier. Just try it out, with no obligation to buy. Ask your local Robocad Centre for details of our free Test Draw a Bitstik Offer.

DIAL 100 AND ASK THE OPERATOR FOR FREEPHONE ROBO. WE'LL PUT YOU DIRECTLY IN TOUCH WITH YOUR LOCAL ROBOCAD CENTRE.



Robocom, Clifton House, Clifton Terrace, London N4 3TB.
Telephone 01-263 8585/272 8417. Telex 297137 ROBO G

REVIEWS

HARDWARE

by pressing Shift-Break, the Plotmate menu appears on screen and Plotmate can be controlled directly from the function keys.

There are two versions of the Plotware, prefixed with directory extensions H (high) and L (low). The H.PLTMATE program sits in mode 4 screen memory, and allows only mode 7 to function, while L.PLTMATE sits just below mode 4 memory, allowing modes 4,5,6 and 7 to be used. The design philosophy is simply that while plotting there is no need to have simultaneous display on screen and paper, so it uses the memory normally allocated to screen to house the Plotmate drivers.

Also, with the exception of simple commands like enable, disable, penup, pendown, parkpen, homepen and follow cursor keys, all the graphics commands for drawing already live inside the BBC micro and are interpreted in any graphics-using language to strings of bytes which are sent to VDU drivers. As these bytes are intercepted and decoded for Plotmate, then user software rewrites are minimal, Plotmate can be driven from any language and it can interface directly to almost any application program. I cannot stress how important this is. Plotmate can do almost anything the BBC micro can do in terms of graphics, without special programming!


Before I examine the range of facilities available on Plotmate, here's a list of what it can't do: plot flashing colours, plot light colours over dark ones effectively, and change background colour (it takes hours to fill an A4 sheet). User-defined characters need special attention and the Graphics Extension ROM is currently unsupported.

Plotmate can decode many of the Basic graphics facilities, and their Logo and Pascal relatives as follows:

Draw x, y Plotmate's A4 page is mapped to a maximum co-ordinate system of 2854,1948 but this can be scaled to plot from a command like DRAW 1280,1023. If scaling is in effect, then the A4 paper must either have extra space in the x axis or less space in the y axis, because the aspect ratio of A4 paper does not match a TV screen.

Move x, y Move is interpreted as Draw but with the pen up.

GCOL When a GCOL statement is met, Plotmate prompts the user for a new pen. There is a slight discrepancy between pen colours and screen colours, but there are six available, and recent experiments with refilling used pens with other coloured inks extends the

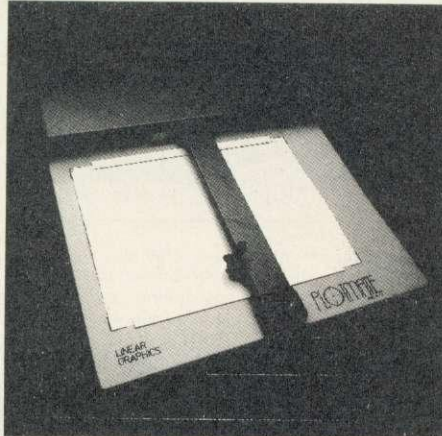

Plotmate: 'for first time success, speed, precision and plotter facilities it's a good buy'

range further. It is possible to switch off the GCOL prompt if required.

Plot Plot is decoded in a variety of ways depending on the first Plot parameter. Move absolute or relative, draw relative or absolute, draw with dotted line, single point plotting, and, amazingly, triangle shading are all decoded correctly.

Print Text, etc, is only plotted if the graphics cursor is joined to the text cursor (VDU5). The text can be scaled, inverted, and italicised, as you wish.

VDU codes Most are decoded in the same way as on the BBC micro.

Setting any byte to 0 tells Plotmate not to change that byte - I'll just look at two very important bytes.

The special function byte handles a number of switches, for example, disabling the block fill of VDU24, plotting upside down, disabling GCOL facilities, and resetting other Plotmate parameters.

The shading parameter gives 15 densities of shading for triangle and block fill, plus 15 dotted line patterns. They can be used in conjunction to give 255 shading patterns. The shading facility on the Plotmate is remarkable and has to be seen to be believed.

Incredibly, despite complex graphics, almost any program can be configured for Plotmate by adding just three lines.

The Plotmate driver for Logo is virtually the same as that for Basic. In Logotron Logo and Acornsoft Logo, I simply typed two procedures called PLOTMATE and PLOTEND (16 lines in total and provided in the manual) and my screen turtle vanished until the plotter had finished. I had to type PLOTEND before using the Logo Editor, because it displays in the space where the

Plotware lives. If the Plotware is not disabled, it could crash the Logo system.

In Logo as in Basic, Plotmate performed faultlessly, provided the two driver procedures were written correctly.

I had four minor niggles with Plotmate. The hardware needs an 'on' light which would instantly identify where the problem lies if the software is trying to do something and the hardware isn't moving.

An A3 version would be wonderful - A4 is just not large enough for some plots, but it is possible to plot in A3 by performing two A4 plots on the same A3 sheet, and carefully lining up the two halves.

Some means of user redefinition of the character set would be valuable, and should be possible as the character set must be somewhere in the software. I also have a feeling that most of the software could sit comfortably in sideways ROM - it's certainly small enough for a 16k chip.

The three things that I like most in a computing system are simplicity, integration, and reliability, and this package has all three in abundance.

The quality of plotting, even on very long drawings, was always spot-on, and the end result was most impressive, despite long shading times. Plotmate's construction is robust, and the plotter has a solid feel which encourages me to expect it to give years of trouble-free plotting.

Conclusion

So which should you choose? The two plotters are aimed at very different markets - Penman will be mainly attractive to school and college computing departments, Technical Vocational Education Initiative (TVEI) organisations and other training schemes, and a few hobbyists, whereas Plotmate will appeal to art and craft, and design and technology faculties, small businesses and some home users. Penman is an ideal introduction to communications and robotics as well as plotting, and much of my enjoyment came from learning about the product. Plotmate's emphasis is on plotting an end-product, and for first time success, speed precision and plotter facilities is a good buy.

Penman Plotter £249 (ex VAT)

Penman Products, 8 Hazlewood Close, Dominion Way, Worthing, W Sussex BN14 8NP. Tel: (0903) 209081.

Plotmate Plotter £299 (ex VAT)

Linear Graphics, 28 Purdeys Way, Rochford, Essex SS4 1NE. Tel: (0702) 541664.

A powerful 6502 single board computer for laboratory, control and training applications.

The 6502 single board computer will find widespread applications in industrial and laboratory control.

The resident monitor program and optional Hex keyboard and display also make it ideal for education and training programmes.

£155

High quality Z.I.F. socket for RAM/EPROM battery backed CMOS RAM can be supplied.

6502 Processor

2K CMOS RAM

Resident monitor in 4K ROM. Gives usual keyboard/display and de-bugging facilities plus serial communication routines.

On board 5V regulator — no need for special power supplies.

Power supply connector

Bi-directional RS423 serial link. Programs and data can be transferred to and from the BBC 'B' Microcomputer. Professional assembler available.

Full expansion connector also for optional Hex keyboard and display.

6522 P.I.A.
2 user ports — pin-for-pin compatible with BBC 'B's user port

CONTROL INTERFACE BOARDS — for use with user ports of a wide range of popular microcomputers.

DATA harvest


For free brochures write or phone:

Data Harvest Limited
28 Lake Street
Leighton Buzzard
Beds. LU7 8RX

Telephone:
Leighton Buzzard
(0525) 373666

8 bit digital to analog converter with power amplifier output stage driving up to 1 amp into load. Switch selected unipolar/bipolar operation.

£60.00

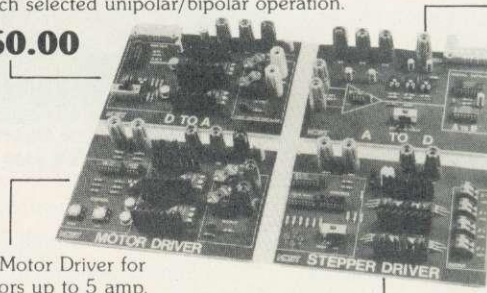

DC Motor Driver for motors up to 5 amp. Forward/backward and off. Manual over-ride facility.

£52.00

8 bit, 10 microsecond analog to digital converter; switched input ranges $\pm 25V$, $\pm 2.5V$, $\pm 250mV$. Connector compatible with BBC 'B' user port.

£41.00



Stepper Driver for 4 phase motors up to 3 amp/phase. Onboard PROM contains code sequence for single, dual, and single/dual modes.

£47.00

Prices exclude VAT and carriage.

THINKING OF EXPANDING YOUR MEMORY OR UPGRADING TO DISKS?

WHY NOT DO BOTH AT ONCE!



We will exchange your old BBC B Board with a new, guaranteed BBC+ Board, thereby affectively giving you a new computer.

The BBC B+ has 64K of Memory, expandable to 128K, a built in Disk Interface, two extra ROM Expansion Sockets, and additional Disk and ROM Management Commands. The B+ is, therefore, a significant improvement over your current BBC B.

By taking advantage of this offer, you can be sure that your system remains 100% compatible with Acorn's Software and Peripherals, and that there are no fiddly 'piggy-back' boards or 'flying leads' to degrade reliability.

See the table opposite for details on how much you can expect to pay for this upgrade.

This offer means that Compshop has a number of second hand BBC's for sale, both with and without Disk Interface, all with new cases, power supplies and keyboards, and all with 3 months warranty.

If you want a BBC but can't afford a new one, phone us for prices and availability of second hand stock.

DETAILS OF YOUR MACHINE

	MORE THAN TWO YEARS OLD	TWO OR LESS YEARS OLD
WITHOUT ACORN DISK INTERFACE	£225	£150
WITH ACORN DISK INTERFACE	£175	£100

PLEASE ADD 15% VAT

COMP SHOP PRICE PROMISE
— We guarantee to match the price on equipment offered from stock through any other supplier.

Educational enquiries and orders welcome. Quotations given. One year warranty on all products.

COMP SHOP was established in 1978 and has continually offered the best in micro computers to discerning customers.

We sell only computers and peripherals, and therefore can offer the support many other shops cannot.

All prices quoted are exclusive of VAT.

COMP SHOP



14 Station Road, New Barnet, Hertfordshire, EN5 1QW
(Close to New Barnet BR Station - Moorgate Line)

Telephone: 01-441 2922 (Sales) 01-449 6596 Telex: 298755 TELCOM G
OPEN (BARNET) - 10am - 7pm - Monday to Saturday

BBC COMPUTERS

BBC B+ 64K _____ **389.00**
BBC B+ 128K _____ **425.00**
SECOND HAND BBCS FROM _____ **£200**

CUMANA DISK SYSTEMS

CSX100L _____ **69.00**
CSX400 _____ **89.00**
CS100L _____ **89.00**
CS100 _____ **98.00**
CS400 _____ **105.00**
CD200L _____ **164.00**
CD200 _____ **184.00**
CD800S _____ **198.00**

PRINTERS

CANON PW1080A _____ **249.00**
EPSON LX80 _____ **199.00**
EPSON FX80 _____ **299.00**
EPSON JX80 _____ **449.00**
JUKI 6100 _____ **299.00**

MONITORS

MICROVITEC 1431 _____ **179.00**
1451 _____ **219.00**
1441 _____ **375.00**
PHILIPS 7501 _____ **69.00**
KAGA/TAXAN 1201 _____ **99.00**
FURGUSSON MC01 _____ **199.00**

REVIEWS

BOOKS

DIFFERENCES MADE CLEAR

ALLAN SCOTT, MIKE SCOTT ROHAN
AND PHILIP GARDNER
**THE BBC MICRO
ADD-ON GUIDE**



'The BBC Micro Add-on Guide', by Allan Scott, Mike Scott Rohan and Phil Gardner, Collins Professional and Technical Books, £6.95.

In a phrase I wish I'd thought of myself, the authors of this book describe the BBC micro as 'the Peter Pan of the computer world' because it had been designed never to grow old. This 'infinite expandability' was well illustrated by the series of ads on the TV with an impressive row of peripherals stretching off into the distance.

Those shown were from the Acorn range only, but there are many other add-ons available as well – in fact the Beeb is the second best supported micro (after the Spectrum) in the UK and the *Add-on guide* is a useful introduction to most of them, including those we usually take for granted, like printers, visual display units, and even keyboards.

Probably the most useful chapters are the one on extra storage – covering floppy tape and disc systems mainly, but also including some useful tips on getting the best results from cassette – and the one dealing with ROM/RAM expansions.

Other more exotic products discussed include robotics and control hardware; light pens, digitisers and graphics tablets; sound and speech systems; and joysticks and alternative keyboards. Communications – modems and networking – rates a chapter to itself, which also serves as a concise and worthwhile introduction to the subject.

Of course the problem with any book of add-ons is that it will quickly fall out of date: for the moment though, this one is pretty well up with the current range. What's more, much of the advice given here, such as the importance of adequate documentation and the warning note about connecting add-ons, will always apply.

Most importantly, comments on products available now will give the reader a good general idea of what to look for in the future – specific product information may date quickly, but sensible advice is timeless!


This book won't answer all your questions

about add-ons – in fact you'll probably have more by the time you finish – but at least you'll know what to ask the dealer when you set off to buy a peripheral.

In fact about the only point on which the *Add-on Guide* is not helpful is where do you put all those gadgets after you've bought them? We don't all have desks 10 feet long. I do, as it happens, but not the money to buy all the goodies!

Ron Keeley

PERIPHERAL ADVICE



'Get more from the Epson printer', Susan Curran, Collins, £7.95

'Epson Printer User's Handbook', Weber Systems Inc Staff, Century, £9.95

These books are aimed at very different markets – the first sets out to be a guide to an Epson printer plus any micro, while the second is almost without reference to particular micros, and is really an extended Epson user manual.

Neither is the ideal guide to the Epson printers. Susan Curran has attempted to write a book which can be used by beginners, but has fallen into the trap of trying to be all things to all micros owners. There is really very little to interest the BBC owner in the packages and techniques needed for the QL and vice versa.

Further, the book is poorly illustrated, and manages to cover descriptions of seven printers, explain interfacing (in a rather muddled way) and connecting up, coding and controlling the printer without using a single diagram or program listing!

The programs provided seem pretty banal. Since the Epson printers are now produced with comprehensive and comprehensible user guides, full of program examples, there is little point in publishing listings which don't add anything new. The only exception is that the programs do include translations from Microsoft Basic into various dialects, including BBC Basic.

The coverage of packages is confused and not very helpful. Clearly the author's version of *Wordstar* is patched by an entirely different mechanism from mine and that in the *Epson Printer User's Handbook*, and her discussion of *SuperBase* adds nothing that the manual does not already say.

Ms Curran is not too knowledgeable about graphics dumps. Discussion of 'pattern dumps' is vague, and all the examples are printed using a utility ROM on the BBC micro – quite how this helps the Commodore 64 or QL owner is far from clear! There is an awful blunder in the mention of the JX80 colour printer (reviewed in October), where the suggestion of changing on a 'bit-by-bit rather than line-by-line basis' is recommended. Even on a line-by-line basis my original dump using this advice took over 10 minutes *per line* and changing colour as suggested would have at least doubled this.

I do not think that the average BBC owner will find much of interest in this book.

The *Epson Printer User's Handbook* is American in origin. It extends many of the explanations in the printer manuals, and has a section on customising various software packages, including *Wordstar*, *dBASEII*, *Lotus 1-2-3* and *Symphony*. This may not be of great interest to the average BBC micro owner, but is very important to small businesses without professional computer support teams.

The remainder of the book is a thorough, though sometimes wordy, amplification of the printer manual. The text is presented in a logical order with chapters covering well-defined areas of interest such as pitch modes, weight modes, formatting output on the page and combining text modes.

There is a good section on bit image graphics, though I cannot imagine typing the 124-line program recommended to produce a simple graph! The authors have restricted their discussion of download characters to a short chapter emphasising the planning stages not well covered in the manual, but have not produced extensive programs involving them.

All programs are in Microsoft Basic (ie, LPRINT terms), but there is a brief explanation in the preface on how to convert from LPRINT to *FX3 or VDU1.

Don't believe the cover, where it states that this book encompasses printer maintenance – it doesn't. Nor does it mention the JX80 at all.

Overall, a good meaty book and a useful adjunct to the Epson manual.

George Hill



NUMBER

A MEGABYTE MARVEL OFFER FROM OPUS

ONLY **£199.95**



MANY FANTASTIC CHRISTMAS OFFERS
MINI MARVEL 250K DISC DRIVE + DDOS JUST £129.95 - RING 0737 65080 FOR FULL DETAILS

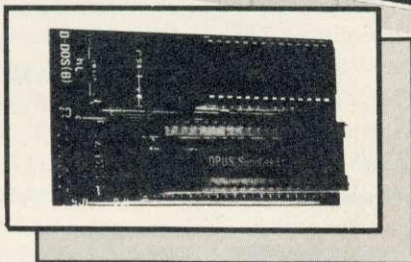

Here's a great opportunity to own Britain's number one disc upgrade for the BBC micro, a 'Megabyte Marvel' combining double density interface and powerful 5 1/4" disc drive for only £199.95.

In the latest major test of five leading disc interface systems for the BBC computer, the Opus DDOS won the honours yet again. A & B Computing magazine placed it ahead of all the rival interface offerings. As the reviewer explained:

"My personal choice is still the Opus DDOS, basically for its flexible catalogue system and the additional commands which go with it."

Now you can share in our success with a super value sale offer featuring our DDOS and a 5 1/4" double sided 80/40 track, hardware switchable disc drive to give you a one megabyte system* for an amazingly low £199.95.

The Opus DDOS provides utilities on ROM including format and verify, offers tape to disc transfer, automatic 40/80 track selection, automatic density selection, has a unique mass copy routine and powerful machine code operating system giving up to 248 files, and it's 80% faster than single density. It's compatible with Clares 'Replica II', 'Mini-office', 'Elite', 'View', 'Wordwise' and 'Wordwise+' and with most sideways ROM cards.

To order your Megabyte* system - DDOS and Opus 5802 disc drive - just post the coupon or call us on 0737-65080 quoting your credit card number.

**OPUS SUPPLIES -
BRITAIN'S LEADERS
IN DISC DRIVE INNOVATION**

OPUS SUPPLIES THE DRIVE

The Opus disc drive range has few rivals for quality, reliability and sheer value for money. We've taken the best in Japanese disc drive technology and backed it with Britain's longest guarantee - an amazing two years. Now as part of our super value sale you can buy our highly praised DDOS for just £49.95 when you purchase any Opus 5 1/4" disc drive. Our drives are all half-height and they're available from our nationwide dealer network.

For full details of our extensive disc drive range and your nearest dealer call us on 0737-65080.

GENEROUS EDUCATION DISCOUNTS AVAILABLE.

To: Opus Supplies Ltd,
55 Ormside Way, Holmethorpe Industrial Estate, Redhill, Surrey.

Please rush me the following: (PRICES INCLUDE VAT AND CARRIAGE)

___ Megabyte Marvel(s) - DDOS+5802 Disc Drive at £199.95 each
___ Dual Megabyte offer - DDOS+5802DB Dual Drive at £399.95 each

I enclose a cheque for £_____ or please debit my credit card account with the amount of £_____

My Access Barclaycard no. is:

Name _____

Address _____

Telephone _____

Opus.
Opus Supplies Ltd.

REVIEWS

PRINTERS

YOUR TYPE OF PRINTER

George Hill, Tony Quinn and Bruce Smith spend your money

Printers are the cause of more letters to *Acorn User* pleading for help than just about any other type of hardware. The problem is usually finding a graphics screen dump or getting the printer to work with a particular wordprocessor. So, although we hate to say it, it's best to stick to a standard type and force whoever is selling it to demonstrate it doing exactly what you want. It really is not worth the hassle to save even £50 if you get a printer and then spend months persuading it to work.

This survey will help you cut down the options, and unless you have a good reason for not doing so, stick to our guidelines.

Let's go through the choices and the jargon first. There are two interfaces which printers connect to on the BBC micro – serial (RS232) and Centronics parallel (printer port). The Plus 1 interface for the Electron has the parallel printer port fitted. The Acorn operating system assumes you are using a parallel printer unless you tell it otherwise, and they are more widely available and cheaper. Stick to parallel unless you want the printer in another room.

There are five different print mechanisms around under £1000 – dot matrix (or dot-wire), daisywheel, thermal, ink-jet and plotter. When choosing between these it's very much a case of 'horses for courses', but average users should stick to dot matrix.

Dot matrix

Cost is obviously an important factor, but you are unlikely to remain satisfied for long with any printer costing less than £200; quality, versatility and speed improve considerably as you approach the £400 mark.

What should you look for in a dot matrix printer? First make sure it can print 'near letter quality' (NLQ). This function is an attempt to copy the look of an expensive daisywheel printer while keeping some of the speed and versatility of the dot matrix. It works to a degree, but the style of the letters is very much a matter of taste.

The other factor governing the appearance of the characters is connected with the number of dot-wires in the printing head which forms the letters. Attractive characters are not possible if the matrix is less than nine deep by six wide, including dots below the line to form the

'descenders' (eg, j,g,y). The best 'letter quality' printers have an 18 × 12 matrix or larger, often printed in two passes.


Dot matrix printers are all fairly fast, but if the speed is quoted at less than 80 characters per second (cps) you are likely to find it irritating at times. The speed in use will work out at something like two-thirds of the advertised maximum, so a typical dot matrix will have a quoted speed of about 100 cps, or about 66 cps in practice. The average English word has six characters, which works out to 11 words a second, and a page business letter will take half a minute. If you use the NLQ mode the printing speed will be halved.

Closely connected to effective speed is the size of the on-board printer 'buffer'. A large buffer can allow you to carry on using the computer while the printer gets on with a time-consuming printing job. Many printers come with at least 2k (about a page of text), which can be expanded. Also, sideways RAM can be used as a print buffer.

When it comes to printing graphics, be careful. A printer may have a good graphics facility, but if it is not the standard 'Epson' type, you may have a hard time finding a satisfactory screen dump, and writing your own, while instructive and fun, is time-consuming. Look for the 'double density graphics' function using the control code Escape L n1 n2. Most dumps published in magazines at present use this. See the explanation on page 18.

Many people are used to the sound of a typewriter, but a good typist only does 50 words a minute, while your printer will handle 600 in that time – and that makes the noise come in very concentrated bursts. If you're doing a lot of printing it can drown out conversations, especially if you're on the phone. So listen to the printer doing its boldest face for minute or two before buying.

In theory, feeding in paper should be no more difficult than on a typewriter, but some devious minds have been employed to ensure this is sometimes not so (one of the classic

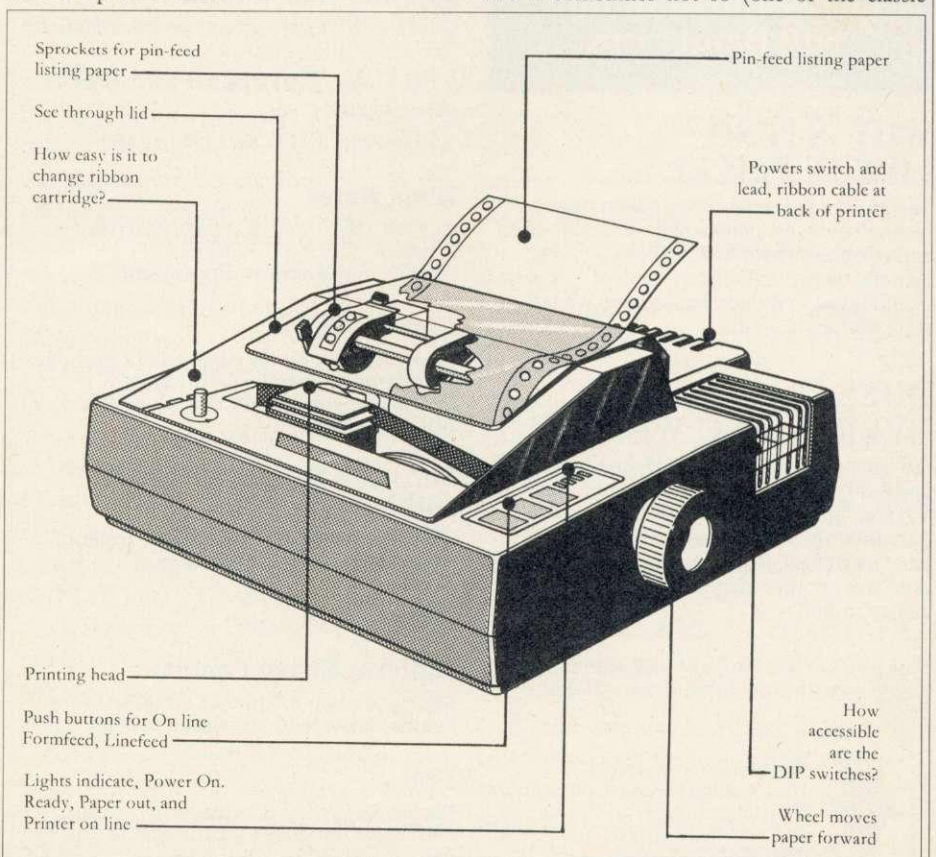


Fully automatic
modem at a
fiendishly low price of

£59.95

plus VAT + p & p

The DEMON modem

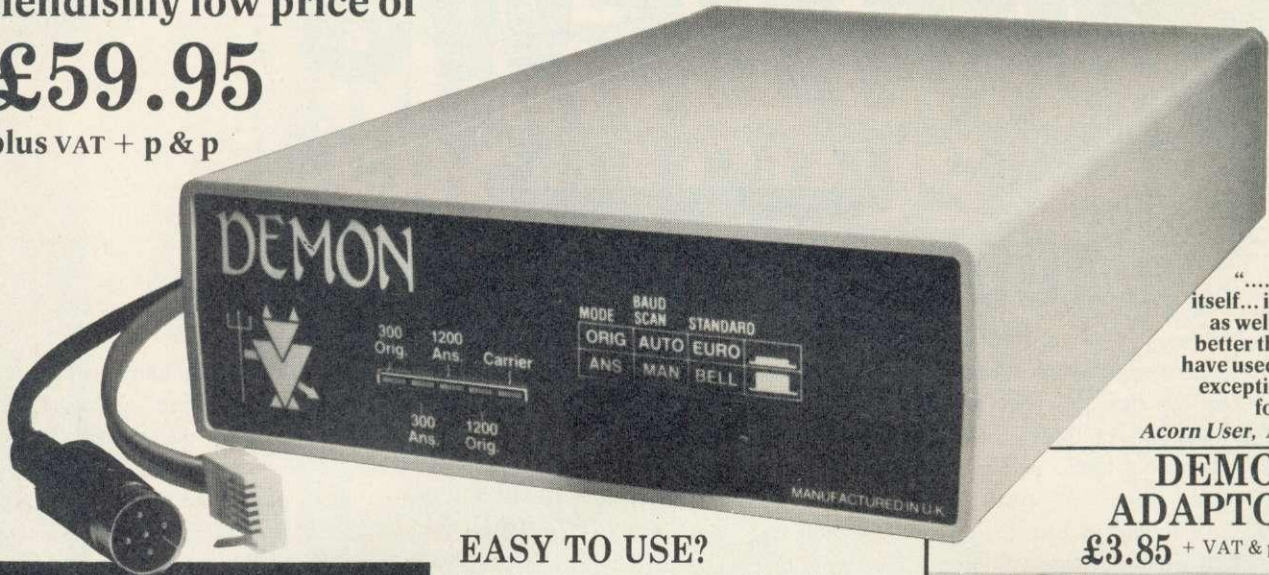

"... simplicity
itself... it performs
as well as - if not
better than - any I
have used... all-in -
exceptional value
for money."

Acorn User, April 1985

DEMON ADAPTOR

£3.85 + VAT & p & p



Two way split adaptor allows you
to plug your phone & modem into
the same socket.

DEVILISHLY CLEVER FEATURES

- * Auto Dial
- * Auto Redial
- * Auto Answer
- * Full and half duplex
- * European and U.S.A. standards
- * Complete with Power Supply, Leads and Manual
- * Full Baud rates.

WHY IS IT SO LOW IN PRICE?

The answer is simple, we've taken existing technology and components, no R + D costs and combined them with modern manufacturing and quality control techniques to produce an inexpensive but state of the art product.

DOES IT DO EVERYTHING WE SAY?

We've bought BT approved components, and approval for the unit is being applied for. We are also giving a 6 month 'no quibble' guarantee. In the unlikely event that you have a problem, simply let us know and we'll send you another machine or refund your money in full.

This product has recently been purchased by and is now manufactured and available from:



Walkbury Consultants
Unit 1, Alfric Square,
Woodston Industrial Estate
Peterborough PE2 0JA
0733 235187

EASY TO USE?

You don't need to know anything about baud rates or protocol or 'handshaking' simply plug it in and talk to the world.

FEATURES OF THE MODEM

Auto Answer

The Demon answers, then uploads or downloads data into your micro and printer just like a telex.

Auto Baud Rate Scan

When receiving, the modem can scan the incoming data and select the correct baud rate to receive.

Full and Half Duplex

One or two way simultaneous transmission.

Full U.K., European and U.S.A. standards

V21 and 23, CCITT, Bell 103 and 202.

Baud Rates

300/300, 1200/75 75/1200 1200/1200 (Half Duplex).
Suitable for Micronet, Prestel, etc.

Easy to Use

Complete with power supply and telephone lead for computers using RS 232/423 interfaces. Also a 5 pin DIN plug for the BBC computer.

Software Features on ROM (BBC only)

Electron, Amstrad, Commodore, Dragon, Sinclair and IBM PC to follow.

Auto Dial

Bulletin Board Facility

Start your own or contact all information boards throughout the world.

PSS

Packet Switching Service lets you dial worldwide databases for the cost of a local call.

Printer Routines

Allows use of printer while on line, recording data in and out.

Reliable File Transmission

Popular error correct protocol means you can send, store and receive files with no transmission errors.

Software Commands

☆Host enables you or your friends to dial and upload and download your programs or data from other modems.
☆Timeout allows you to set time limits to callers of your micro.
☆Prestel and ☆Terminal allow Glass Teletype and Prestel terminal facilities.
All software commands and full control of baud rates can be incorporated into your own software.

To Walkbury Consultants, Unit 1,
Alfric Square, Woodston Industrial
Estate, Peterborough PE2 0JA.
Please send me:
_____ (Qty) Demon Modems at
£72.39 (includes VAT and p & p)
_____ (Qty) Demon BBC Rom's
at £24 (includes VAT and p & p)
_____ (Qty) Demon Dial Disks at
£4.95 (includes VAT and p & p)
State 40 _____ or 80 _____
track.
_____ (Qty) Demon Adaptors at
£5.25 (includes VAT and p & p)

I enclose cheque to the value of £

Signature _____

Name _____

Address _____

Postcode _____ (Please print)

AA37

REVIEWS

PRINTERS

examples being the Epson FX80). Also, some printers are prone to paper going through and then being taken back in which results in a messy jam. So, see how accessible jammed paper is and be careful when you leave the printer unattended.

Make sure your choice has a tractor mechanism for fan-folded paper with holes down the side for listings, etc, and friction feed for single sheets. Feeders are only necessary for specialised uses. The tractor feed should be fully adjustable for paper widths from 3 to 8.5in (standard A4 with 40 characters per line). Wider printers are available, but remember that most printers can squeeze up to 120 characters across an A4 page by using a condensed typeface. If you have standard stationery, test it out on any printer you are considering buying.

After a month of heavy use, the type will start becoming less dense as the ribbon wears out. So find out how easy ribbons are to find, fit and how much they cost.

Other choices

You should look at printer mechanisms other than dot matrix under the following circumstances. First, if your printer must produce output which looks as if it has been typed, or it must produce several perfect carbon copies. This indicates that you need a daisywheel. Beware though, the cheap ones are desperately slow (up to two minutes for a page), and cannot cope with graphics. Some thermal printers have very attractive near letter quality print available. These too are normally slow, but are usually quiet in operation.

If the main use for your printer is for graphics, with text as a very minor part of your work, then ink-jet technology is superior to dot matrix.

If colour is a necessity then an ink-jet printer or a plotter should be considered, though dot-wire colour printers are available.

If you buy a plotter – whatever it was called in the advertisement – it will remain a plotter at heart, and will not be satisfactory either as a graphics printer or as a character printer.

A point to note is that although there is a bewildering variety of makes of printer on the market, many of them use common mechanisms. There is, for instance, a whole family of printers using the CP80 mechanism. Most look the same, except for the labels, and they may actually be identical. There may be minor differences in the details of the control codes, but these will rarely be readily apparent, and are unlikely to be very important.

10 Point Plan

Buying a printer? Then let our 10 point plan provide you with the questions you should put to the dealer!

1 Centronics

The BBC micro and Electron have a Centronics printer interface. A printer must have one to enable you to use the printer port, if it does not then don't even contemplate purchasing it.

Some printers can be used in conjunction with the RS423 port. The only indication of this is when you wish to locate the printer some distance from your micro, eg, in the next room. As there is no RS423 port on the Electron this option is not available.

A centronics printer lead can cost an extra £17 to £24, so check to see if one is included.

2 Traction

Standard continuous listing paper is traction fed using holes in the side of the paper. Installing paper in this fashion is difficult on some printers so try it out. Check that paper is not re-fed through the printer feed.

Friction feed is a must if you wish to print on your own stationery, so take it along and see how the printer copes with it.

3 Ease of use

Consider the points above, and another question is how easy are the buttons to use?

Printers, like typewriters require a ribbon, you should find out if they are readily available, how easy they are to replace (try doing it yourself) and how much they cost. If you plan to use a wordprocessor, can the printer driver generator work the printer?

Do you need to use a wide paper (eg, to print spreadsheets) or print labels? If so, ensure that the printer can cope.

4 Dip switches

Get the dealer to show you how to use these to configure your printer for its mode of operation. Get him to explain how they work and then tell him to set them for you.

5 Print styles

Don't even contemplate buying a dot matrix printer that cannot produce near letter quality (NLQ) print. If you need to use italics, check the quality of those produced by the printer. This can vary a great deal, but because of the printing technique used by dot matrix printers it will never be very good.

Daisywheel printers can produce most typefaces but you'll normally have to change the daisywheels over at the appropriate point

– get the dealer to show you how. This can become a time consuming operation, and it's expensive as you'll need to buy them.

Many printers also have a facility that allows you to define your own character set. This is useful if you wish to print characters from languages such as Greek.

6 Printing effects

How easy is it for the printer to perform printing effects such as emphasised print and underlined print? If you are using it for statistical or scientific applications then can it print super- and subscript characters?

7 Graphics

Dot matrix printers can reproduce a copy of your screen using a graphics dump program, but this is not possible with daisywheel printers. Most printers come with a dumping program – check that this is the case. If not, take a program of your own, eg, George Hill's All Mode dump, *AU* December 1983 or the UserDump ROM (see page 102), and a disc or tape containing a suitable saved screen that you can dump and compare to other printers. If a screen dump program is supplied with the printer is it capable of producing a truly round circle?

8 Noise

All printers make a noise, but some are louder than others. The standard length of printer cable is about one metre, so you'll be close to the printer at all times, and if you envisage long print runs and frequent use of a telephone, noise is a major consideration. A lid will often dampen a large portion of the sound, as will a rubber printer mat.

9 Speed

Slow printers are infuriating. Check the quoted speed of the printer which is given in characters per second (cps). In practice the actual speed is 60 per cent of that quoted. The actual speed will be half this again when NLQ, emphasised or double strike printing.

A printer buffer is a must. You need not buy this as an extra, as most printers have an adequate one fitted – ensure that this is so.

10 Manual


Nine times out of ten you can judge the printer by its manual. The most popular printers are Japanese and so the manuals will have been translated into English. Read the first few pages in the shop – if the introduction doesn't make sense you are unlikely to follow the more technical details.

CARE ELECTRONICS

UNIT 14, PEERGLow INDUSTRIAL ESTATE, OLD'S APPROACH, TOLPITS LANE, WATFORD, HERTS.

TELEPHONE: 0923 777155


PHILIPS MONITORS AND TV MONITORS

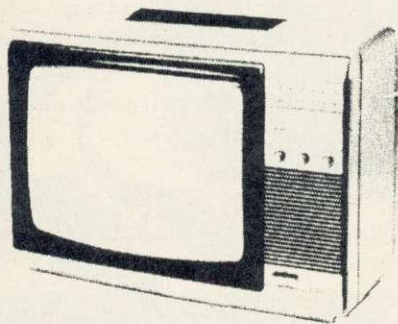

80/85
CHARACTERS
PER LINE

★★ FREE

LEADS SUPPLIED
FOR USE WITH BBC



MONO HIGH RESOLUTION
ANTI-GLARE SCREEN
GREEN MODEL BM7502
@ £82.80a Inc VAT
AMBER MODEL BM7522
@ 82.80a Inc VAT
COLOUR/GREEN MONITOR
CM8524
adjustable tilt/turn pedestal
+ LCD clock
@ £264.50 Inc VAT

MEDIUM RESOLUTION TV/MONITOR

PUSH BUTTON VERSION
14" MODEL 14CT2006 £230.00a Inc. VAT
REMOTE CONTROL
14" MODEL 14CT2206 £258.06a Inc. VAT
16" MODEL 16CT2216 £302.45a Inc. VAT
We can supply up to 26" TV/Monitors - please ring for details.

HAVE YOUR 14" & 16" PHILIPS, PYE or FERGUSON TX
COLOUR TV CONVERTED TO A TV/MONITOR
RGB CONVERSION KIT
@ £46.00d

- ★ Resolution better than 585 x 450 pixels.
- ★ Image clarity comparable to leading monitors.
- ★ Includes RGB lead for connecting with BBC.

READYMADE LEADS:

RGB 6 pin DIN @ 2.99 c Inc
RGB 6 pin to 7 pin DIN @ 4.14c Inc
RGB 6 pin to SCART @ 7.82c Inc


REMOTE AND STANDARD TV'S MODIFIED IN OUR FACTORY
@ £59.80a

Changing Leads is a thing of the Past!

USER PORT SWITCHER
THREE SWITCHED POSITIONS

*20pin as BBC
*1 micro to 2 user port units


STANDARD VERSION
@ 32.20d inc VAT
DELUXE VERSION
@ 37.95d inc VAT



THE CARE LOW PROFILE ROM MODULE SYSTEM

FOR THE BBC MICRO

DEALERS
ENQUIRIES
WELCOME

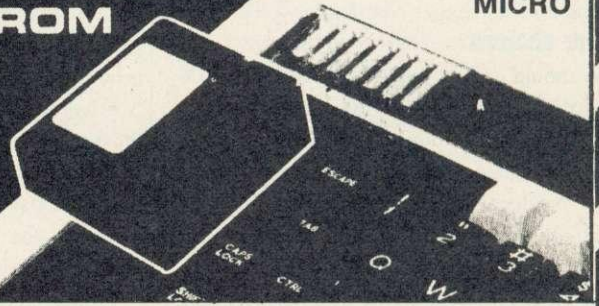


COMPONENTS! WIDE RANGE AVAILABLE

Acorn Disc Interface @ 69.00c Inc VAT
Eprom 2764 250ns @ 2.30c Inc VAT
Eprom 27128 250ns @ 4.14c Inc VAT

COMPUTER/PRINTER SELECTOR 'T' SWITCHER

★ 26 pin as BBC ★ 2 printers to 1 micro
★ 1 printer to 2 micros
STANDARD VERSION
@ 32.20d inc VAT
DELUXE VERSION
@ 37.95d inc VAT

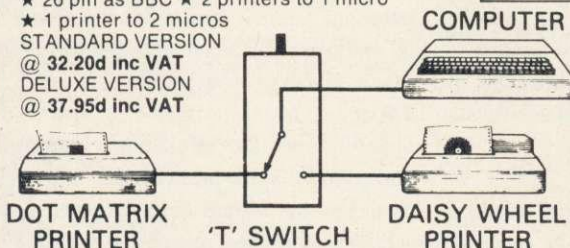

Dual Power Supply Units for Disc Drives

- ★ Colour finished to match BBC Micro.
- ★ Comes complete with moulded mains lead
- ★ 6 pin BBC Outlet or Dual power leads for disc drives. (Please specify when ordering).

High Rated @ 33.35b Inc VAT

Prestel no. ★5995007
Viewdata no. 0923 777155

Don't run the risk of damaging your ROMS/EPROMS or your BBC Micro. ROMS/EPROMS in our specially designed cartridges. The CARE LOW PROFILE MODULE SYSTEM has been designed not to take any power from your BBC Micro and allows you unlimited ROMS/EPROMS.

★ Unlike other systems:

- ★ Won't get in the way when using the Keyboard.
- ★ Stops damage caused by shortcircuit due to metal objects e.g. paperclips falling inside.
- ★ Prevents damage caused by dust.
- ★ Edge Card Socket which takes all the wear, Gold Plated for extended life.

★ FOR THE AMATEUR AND PROFESSIONAL USER
★ MANUFACTURED ENTIRELY IN THE UK.

★ Each System Contains:

- ★ 1 Low Profile Assy. ★ 1 ROM Cartridge.
- ★ 1 Library Rack 6 way. ★ 5 Blank Labels.

★ Prices including VAT.

- ★ Complete Module System @ £15.87d
- ★ Spare Cartridge @ £2.99c
- ★ Library Rack to store 6 Cartridge @ £1.84c
- ★ 5 Cartridges @ £13.80c ★ 10 Cartridges @ £25.30c

HOW TO ORDER:

By Post. Enclose your Cheque/P.O. made payable to CARE Electronics.
Or use your ACCESS. Allow 7 days for delivery. Please add carriage.

OPEN

9am-5pm MON-THUR
9am-4pm FRI/SAT

a) @ 10.00 c) @ 1.00
b) @ 5.00 d) @ 2.00



TEL: 0923 777155

CARE ELECTRONICS

REVIEWS

PRINTERS

Star

Star Micronics offers a wide range of dot matrix printers, including the SD, SG and SR series which are available in 10in and 15in paper width formats. All come supplied with a Centronics and serial interface as standard. Near Letter Quality (NLQ) is also a feature of



each, and all offer Epson compatibility.

They are also compatible with one another, the only difference between them being the print speed. The SG10 and SG15 print at 120 cps; the SD10 (above) and SD15 at 160 cps; and the SR10 and SR15 (above) at 200 cps.

An on-board printer buffer ensures that your printer frees your computer as soon as possible. Installing paper is simple and the manuals are comprehensive and well written. Recommended retail prices including VAT are: SG10 £297.85; SG15 £447.35; SD10 £447.35; SD15 £562.35; SR10 £562.35 and SR15 £677.35.

Star Micronics, Craven House, 40 Uxbridge Road, London W5 2BS. Tel: 01-840 1800.

Epson FX80

The Epson FX80 dot matrix printer has become the unofficial standard for the BBC



micro and Electron. It does not support NLQ print. At 160 cps it is comparable in speed to the Star SD range, but in practice it tends to have a slower carriage return.

There is little adjustment for paper width – less than half an inch in fact – so using smaller tractor feed paper or labels is impossible.

The FX80 (above) is supplied with a Centronics interface, but a serial interface is available at an additional cost. Fitting printer paper is diabolically difficult. The recommend-

ed retail price for the FX80 is £442.75.

The LX80 printer is the latest from Epson and is intended to replace the RX series.

Standard print speed is 100 cps, which falls drastically to 18 cps when in NLQ mode. A nice touch is that fonts such as emphasised, double strike, condensed and elite are also available in NLQ mode. A fully adjustable tractor that caters for smaller width paper and labels is available as an optional extra, at about £23. The price of the LX80 is £258.75 including VAT.


Epson, Dorland House, 388 High Road, Wembley, Middlesex. Tel: 01-902 8892.

Canon PW1080A/Kaga Taxan KP810

These two printers are virtually identical though the claimed speeds are slightly different at 160 and 140 cps respectively. Both support NLQ printing at 25 and 21 cps and this can be selected via a switch on the front of the printer.

A Centronics parallel interface is standard in both, with the serial interface an optional extra.

The Canon printer is the more expensive of

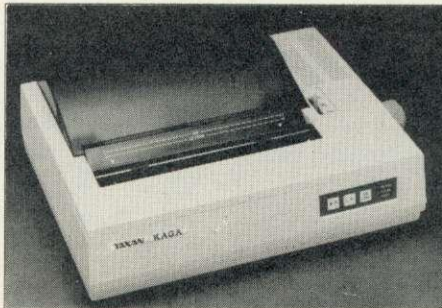

the two, and although prices vary, expect to pay about £400. You should shop around for the Kaga (above) – Technomatics price, for example, is £270.25 inclusive of VAT.

Canon, Canon House, Manor Road, Wallington, Surrey. Tel: 01-773 3173.

Kaga Taxan, distributors: DDL, 5 Kingsride Park, Ascot, Berks SL5 8BP. Tel: (0990) 28921.

Brother


The M1009 (top right), the HR5 and the 2024L are all suitable for the BBC micro and Electron. They offer Epson compatibility, and are available with either Centronics, parallel or serial interfaces only.

At the bottom of the range is the HR5. This accepts either plain paper or thermal paper – both are supplied on rolls and are not standard. The 30 cps speed is rather slow, although the battery operation facility might be of interest. It costs around £177 including VAT.

The M1009 will take standard fan-fold paper but requires an additional pin-feed carrier costing about £20. A dual Centronics

and serial interface is supplied as standard, and it runs at 50 cps. It is priced at about £230.

The 2024L comes with either Centronics or serial interface and prints at 160 cps. In addition to being Epson compatible, the flick of a switch gives a Diablo compatible mode. This is only available in 132 column mode.

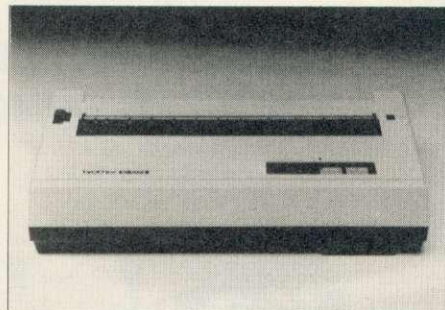

A letter quality print is available, although it in fact seems to be an elite font. At about £1150 the 2024L is rather overpriced.

Brother Office Equipment Division, Jones & Brother, Shepley Street, Guide Bridge, Audenshaw, Manchester. Tel: 061-330 6531.

Mannesmann Tally

The MT85 is a useful printer. It is Epson compatible and has a print speed of 180 cps in standard mode, reducing to 45 cps in NLQ mode. The printer is very quiet.

Both Centronics and serial interfaces must be bought as extras, at about £23 each. Variable width friction and traction feed are available as standard. Special font cartridges can also be bought for about £21 each, thus giving you access to different types of print.

The MT85 will set you back about £400, plus an extra £23 for the Centronics interface.



The MT86 is the wider carriage partner to the MT85. It offers the same facilities but with a 136 column width for £516.

The MT290 is the latest printer from Mannesmann Tally. It offers a 132 column print width at 200 cps. As with the MT85 it is quiet in operation and accepts the printer font cartridges. Supplied with Centronics interface as standard, the MT290 costs £799.

Mannesmann Tally, Molly Millars Lane, Wokingham, Berks. Tel: (0734) 788711.

IMPORTANT NOTICE

From October 1985, H.C.R. Electronics will be moving to larger premises at:

H.C.R. HOUSE
Bakers Lane,
Ingatstone
ESSEX CM4 0B2
Tel: (0277) 355407/8



ELECTRONIC SERVICES



EDUCATIONAL DISCOUNTS GIVEN PLEASE PHONE

Still available are:

EPROM PROGRAMMER

Plugs into user Port, £46.50
 Fast easy to use, £6.98 VAT
 complete with software £1.00 Post
£54.48 Total

EXTERNAL ROM/RAM

Capability of 28 £75.00 16 sockets
 Sockets for ROM/RAM £11.25 VAT
 own power supply, £3.00 Post
 Write protect
 switch for RAM, easy
 plug in fit (as
 reviewed Acorn User
 September) £89.25 Total
£29.00 + VAT

INTERNAL ROM/RAM

Capability of 16 £32.00
 Sockets, allows 16K £4.80 VAT
 RAM (as reviewed Acorn
 User September) £1.00 Post
£37.80 Total

RAM CARD (Sideways)

Available 16K or 32K £31.50
 Easy to fit, Write £4.72 VAT
 protect switch, can be
 address direct with
 #8000, Software
 available (Reviewed
 Acorn User November) £1.00
£37.22 Total
(32K £10 extra + VAT)

SAVE 50% ON FLOPPY DISKS WITH FLIPPY DISKS AND DISK NIBBLER

FLIPPY DISKS are the most versatile 5 1/4" soft sectored disks available. They are double sided, double density, and specially designed to allow both sides to be used, either on a double or single sided drive. Single sided drive users will require the use of a **DISK NIBBLER** to enable them to write to the flip-side. The end user can now save up to 50% on disks and disk storage boxes.

ORDER NOW AND TAKE ADVANTAGE OF OUR LAUNCH "SPECIAL OFFER"

(SAVE £4.30) £2.00 off Disk Nibbler plus free Flippy Disk.

(SAVE £13.00) £3.45 off box of 10 Flippy Disks plus free Nibbler

And single sided drive users still get 100% more storage

Just return the order below, enclosing your cheque/p.o./m.o. and post to Computatill Ltd., Freeport, Oldham, OL9 6BR (no stamp required) or ring 061 652 8006 with your Barclaycard/Access details.

TRADE AND BULK ORDERS PLEASE RING 061 652 8006



To Computatill Ltd., Freeport, Oldham, OL9 6BR

I would like to take advantage of your launch "Special Offer"


Please send Qty. DISK NIBBLER/S at ~~£9.95~~ £7.95 = £ _____
 plus FREE FLIPPY DISK (one per Nibbler)

Please send BOX/ES (10) FLIPPY DISKS at ~~£23.00~~ £19.95 = £ _____
 plus FREE DISK NIBBLER/S (one per box of 10 Flippy Disks)

I enclose cheque/p.o./m.o. for TOTAL = £ _____

NAME _____

ADDRESS _____

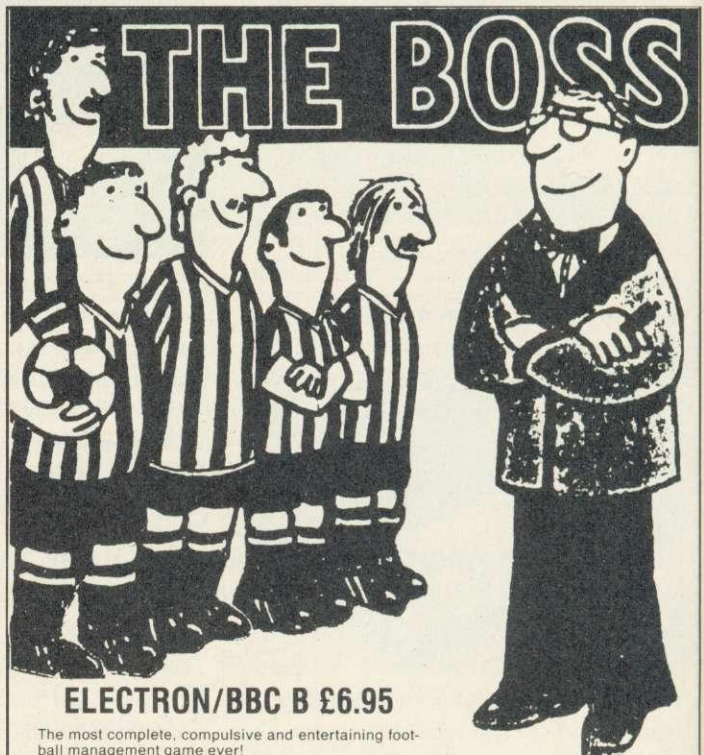

ELECTRON/BBC B £6.95

The most complete, compulsive and entertaining football management game ever!

*4 divisions *FA Cup *European Cup *European Cup-Winners' Cup *Promotion/Relegation *Transfers *Suspensions *Injuries *Name team *Team selection *Choose/change team formation *Full league tables *Goal-scorers table *Fixtures chart *Reserve squad *Save game

Check with your retailer, phone your Access/Visa number, or just note your name, address, computer and game required on the back of your cheque or PO. AA2



PEAKSOFT

48 QUEEN STREET, BALDERTON, NEWARK, NOTTS.
Tel: 0636 705230 (24 hour answering)

REVIEWS

HARDWARE

WORKING ON THE SIDE

Chris Drage brings you the latest on sideways RAM boards

There are four main reasons why you might consider purchasing a sideways RAM board in preference to a ROM expansion board. (If you're unsure what sideways RAM is, see 'Tessie Revivis' article on page 53.)

First, software purchased initially in ROM form may be transferred to disc and subsequently loaded into sideways RAM – particularly useful for network users.

By using additional software, the sideways RAM may be configured as a printer buffer which will free the computer from being tied up during printing (see Richard Harris' articles in the June issue.)

Sideways RAM may be used to develop sideways ROM-type software. By using the BBC micro's own machine code assembler and loading the resulting machine code at &8000, it can be used immediately as if it were in EPROM. In the course of development and debugging, considerable time can be saved as EPROMs do not have to be erased to make minor alterations to the software.

Finally, to use the sideways RAM as DFS workspace – this enables 2.8k of memory to be reclaimed (as PAGE is reset to &E00).

There are advantages in adopting the sideways RAM approach. Many more programs can be kept on disc than can occupy a normal-capacity ROM expansion board. Conflicts between ROMs are avoided because only one or two are ever loaded at any one time.

Solidisk was probably the first company to exploit fully the sideways RAM potential of the BBC micro. It markets a range of boards from a 16k card up to a 128k version capable of being configured as a 'silicon disc'. A 64k version is now available which can be expanded to a massive 256k. HCR Electronics markets a 16k board which can be expanded to 32k at any time by simply adding two RAM chips. Ramamp Computers produces a single 16k board which is proving popular in stand-alone systems and network workstations.

As you might expect, by increasing the sideways RAM pages to two or more a number of ROM-image programs may be loaded and be on-line concurrently. More importantly, perhaps, multiple RAM slots allow useful combinations of transferring software from

ROM disc and use as a printbuffer. For example, a 16k printer buffer for use with *View* may be loaded.


When you buy a RAM board think also of future expansion possibilities. For example, you may wish to add an Aries B20 shadow RAM board at a later date, and it makes sense to purchase a sideways RAM board that permits a wide variety of expansion options.

Solidisk


Solidisk Technology was the leader in this field. As 32k/128k RAM boards aimed at the hobbyist end of the market have proved very popular. The package contains a base unit, a RAM card, a ROM carrier board, a 68-page

manual and disc-based software. The 32k board may be expanded to 128k at any time. The RAM board lies vertically beside the Beeb's RAM area and the case.

Installing the base unit is far from straightforward and not really a task for the inexperienced. The base unit plugs into the right hand ROM sockets, and it is so low that it's easy to position incorrectly or bend the ROM socket. There are also 11 leads to connect. Unfortunately, Solidisk fails to provide suitable sockets to simplify the task and unless you are experienced with the soldering iron you must resort to pushing the wires into the socketed legs of chips. The one socket that is provided is meant

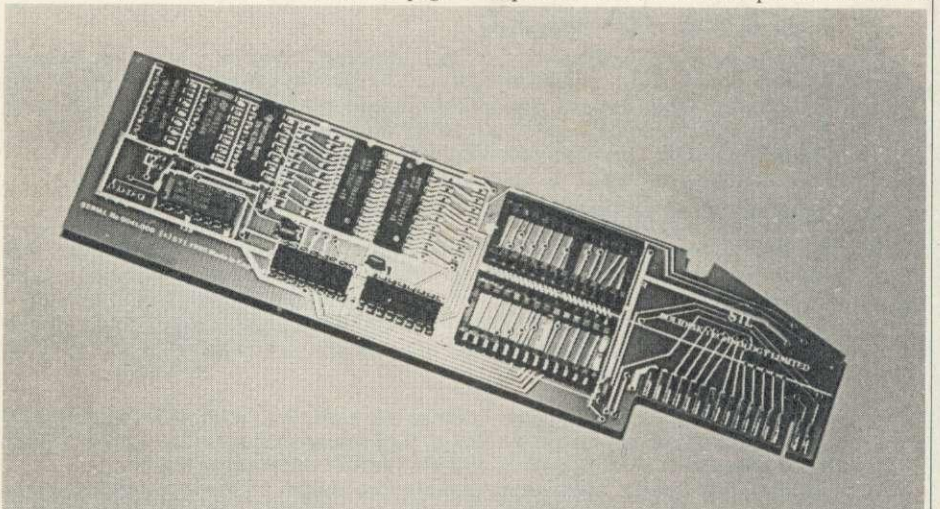

The Solidisk SWR64 features two ROM sockets. It can be upgraded to 128k, or even 256k with a piggy-back board

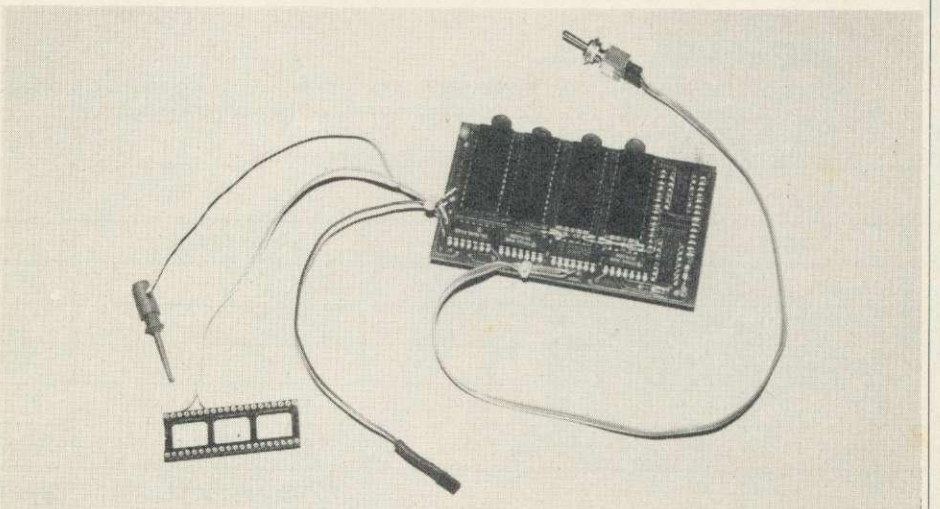

The HCR 32k sideways RAM board 'is simple to fit thanks to the design and use of high quality components'

Robico Software

3 Fairland Close, Llantrisant, Mid Glamorgan. CF7 8QH Tel (0443) 227354



Brilliant Games for the BBC B

THE NEW TEXT ONLY, DISC-BASED MEGA-ADVENTURE!

ENTHAR SEVEN

It is the distant future . . . You are on board a fragile Interplanetary Space Hopper which orbits a small, Earth-like planet known as Enthar Seven. Your task is to reach the planet's surface before the Hopper's orbit decays and the spacecraft spirals into oblivion!

Once on Enthar Seven, you must explore the planet and find and board an Escape Vessel.

Enthar Seven is written entirely in machine code and uses disc filing techniques to provide a massive scenario. The game has an advanced command interpreter which can understand complete sentences and multiple statements, and compresses the text stored on disc (using the same methods as in our acclaimed cassette based games) to approximately half its original length. When expanded there is well over 100K of text!

With 450 atmospherically described locations to visit, 80 objects to examine, an extensive vocabulary and approximately 1200 lengthy messages, we believe that Enthar Seven is the outstanding BBC adventure to date. The beautifully packed game costs £17.95 for the twin disc 40 track version and £16.95 for the single disc 80 track version.

ISLAND OF XAAN

Escape from the forbidding Island of Xaan by finding a disguise and enough treasure to pay your passage on a sailing ship. Machine code, text compression and about 180 locations make this a must for all adventurers.

P.C. Weekly: "Whatever else is true, Island of Xaan must be the only adventure to come with a freebie that is worth having (Note Book) . . . I suspect this could prove to be one of the best text adventures on the BBC."

A & B Computing: "Excellent game from Robico Software . . . write more!"

H.C.W.: "The game follows the same format as the Level 9 and Acornsoft classics."

RICK HANSON

As Rick Hanson, Special Agent, your mission is to assassinate an evil General and save the world from the final holocaust! Rick Hanson, a machine code, compressed text adventure, has 220 locations and an advanced sentence interpreter.

P.C. Weekly: "Good to see there are still a few programs around that make you envious of BBC owners."

A & B Computing: "A game as near to my ideal as any I have played . . . its mass of brilliantly written text has left enduring images on my mind . . . if you want to know how good an adventure can be, buy (Rick Hanson) and find out!"

BANJAX

Banjax is a machine code, arcade adventure with a massive 240 locations and brilliant MODE 1 graphics. These combine to give the "feel" of classic adventuring. Will Banjax the Bear enter the Inner Sanctum of the Golden Temple of the Land of Mystery?"

Your Computer: "Some of the best graphics in a BBC game since Frak."

Eagle & Tiger Comic: "The graphics are very good indeed . . . An interesting cross between Indiana Jones and Winnie the Pooh!"

A & B Computing: "The graphics are superb . . . There are some delightful characters in this game . . . All the locations are beautifully drawn and virtually every screen is different . . . I strongly urge you to buy this game."

Micro User: "Banjax contains some of the best Mode 1 graphics I have ever seen . . . A definite must for the kids that I recommend highly."

BEELINE

This is a fun, machine code arcade game with smooth, colourful graphics, 18 playing screens, a practice screen, choice of starting screen, monitor and T.V. modes and two levels of play at a giveaway price!

S.W. Echo: "I'll give it 10" (out of 10).

A & B Computing: "Nice graphics . . . an enjoyable game."

TITLE	CASSETTE	40 TRACK	80 TRACK	SUB TOTAL
BANJAX	£9.95	£11.95	£11.95	
BEELINE	£7.95	£9.95	£9.95	
ISLAND OF XAAN	£7.95	£9.95	£9.95	
RICK HANSON	£9.95	£11.95	£11.95	
ENTHAR SEVEN	NOT AVAILABLE	£17.95	£16.95	

Cheque or Postal Order to the value of:

REVIEWS

HARDWARE

to straddle IC76, but it's inadequate. The board proved frustrating and difficult to get working correctly. I had to cut a section out of the Beeb's lid strut (and out of the keyboard with the 128k), just to make the system physically fit! Without this modification the main board flexed alarmingly.

The new 64k card is a considerable improvement on the above boards as it consumes far less power and features two ROM sockets. These assume higher priority over the other three sockets available in the Beeb and will take 8k, 16k, or 32k ROMs/EPROMs. Four RAM banks are available. The 64k board can be upgraded to 128k, but this is rather messy as it involves cutting a link, soldering a wire and adding two RAM chips. To upgrade further to 256k, a piggy-back board must be installed.

Only one serious problem has emerged – it is somewhat slimmer than the previous 32k unit and failed to make proper contact with the existing base unit, which is more a problem for those wishing to upgrade their 32k system than for the first time buyer.

The software provided contains a delightful menu program which manages the system very well. The range and scope of the software is well documented in Solidisk's advertisements. Owners of the 128k board may configure their system as either eight banks of RAM or as a 100k silicon disc – very useful for the likes of high speed data sorting or spelling checking.

I admire Solidisk for the flair and imagination of its products, but I'm not a fan of the way it goes about it. I am sure most users would prefer to spend another £8-£10 for a reliable, plug-in-and-go product comprising high quality components.

HCR Electronics

The HCR Electronics RAM board is available in either 16k or 32k versions. The 100mm × 60mm board comprises two (or four) 8452 INMOS dynamic RAMs. If a 16k board is purchased initially it can be upgraded to the 32k version simply by adding the additional RAM chips.

The HCR board is simple to fit thanks to the design and the use of high quality components. The RAM card plugs into socket IC52; a 40-pin header plug with two soldered flying leads sits in the 6502 CPU socket; the processor piggy-backs on top; and a flying lead connects to link S-21. With the 32k unit, a further lead with a spring clip connects pin 11 of IC76.

A three position, write enable/disable switch provided may be fitted into the Beeb's 'ashtray' or at the rear of the computer. It allows either

Ram Board	Solidisk 32/64/128	HCR 16/32	Ramamp RAM 16	Acorn User UserRAM
Design	3	4	4	4
Construction	3	5	4	4
Ease of installation	1	4	4	5
Versatility	4	3	4	4
Software provided	3	–	4	4
Documentation	4	3	3	4
Value for money	3	4	4	3
Total (out of 35)	21	23	27	28

Key: 5 Excellent, 4 Good, 3 Satisfactory, 2 Poor, 1 Very Bad

How the boards scored on seven points and overall

RAM bank to be selected and write-protected and is useful if you want to develop your own sideways software. In use the HCR card performed faultlessly, and just as well when mounted on the HCR external ROM expansion board. This configuration looks untidy but does provide a total of 64k of sideways RAM (providing the board already contains


32k of CMOS RAM). However, I can't say whether this configuration is reliable when the ROM board is full.

The HCR RAM board is built to a high specification and the company has informed me that it is developing software which will use this excellent board to the full. For a basic, no-nonsense system at a sensible price, look no further than the HCR RAM board.

Ramamp

If you require a simple 16k of sideways RAM for network stations, then the Ramamp 16k Ram Expansion Board may be just the ticket. This neat, compact unit functions happily in any sideways ROM socket in the BBC micro, and it is capable of loading any utility into its 16k of dynamic RAM, that is addressed from &8000 to &BFFF. Naturally, it works equally well in stand-alone computers.

The 90mm × 55mm board comes with a disc of utility programs and four A4 sheets of instructions and software details. Fitting the board is straightforward. Apart from plugging in the board itself, there are two flying leads to connect – one goes to link S-21, the other to

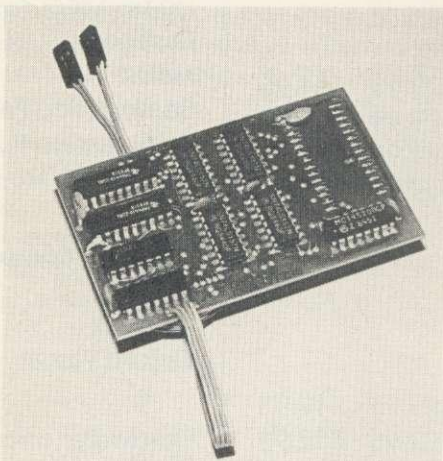

Ramamp 16k board may be ideal for network stations



Acorn User UserRAM: 'fully network compatible and so simple to install, it is a must for educational users'

THE 64 SOFTWARE CENTRE

1 Princeton Street, London WC1
01-430 0954

SERIOUS SOFTWARE FOR THE BBC MICRO (32K)

SALE of BBC MICRO (32K) SOFTWARE Limited Stock

	Usual RRP	Sale Price incl VAT
Gemini Integrated		
Accounting System (disk)		
40/80 track –		
Sales Ledger & Invoicing	£99.95	£39.95
Purchase Ledger	£99.95	£39.95
Nominal Ledger	£99.95	£39.95
Payroll	£99.95	£39.95
Stock Control	£99.95	£39.95
All 5 modules	£499.95	£175.55

Gemini DDD Integrated		
System (disk)		
DDDBase	£29.95	£14.95
DDDCalc	£29.95	£14.95
DDDPlot	£29.95	£14.95
All 3 modules	£69.95	£29.95

Gemini Software (disk)		
40 track –		
Database	£23.95	£12.95
BeebPlot	£23.95	£12.95
Easiledger	£23.95	£12.95
Invstat	£23.95	£12.95
Payroll	£39.95	£19.95
WordProcessor	£23.95	£12.95
Combination Pack No.1	£159.95	£49.95

	Usual RRP	Sale Price incl VAT
Gemini Software (rom)		
40/80 track –		
Datagem	£79.95	£39.95

Gemini Software (cassette)		
BeebPlot	£19.95	£9.95
Easiledger	£19.95	£9.95
Invstat	£19.95	£9.95
Payroll	£29.95	£9.95
WordProcessor	£19.95	£9.95
Stock Control	£19.95	£9.95
Home Accounts	£19.95	£9.95
Cashbook	£19.95	£9.95
Mailist	£19.95	£9.95
Combination Pack No.1	£159.95	£49.95
Combination Pack No.2	£79.95	£39.95
Home Pack No.2	£79.95	£39.95

Oxford Computer Systems		
(disk)		
40 track –		
Oxford Pascal	£57.50	£24.95

Hardware (one of each) (buyer collects)		
BBC 32K demo model		£99.95
Opus Twin Disk Drive, double sided – as new		£150.00
Microvitec Cub Colour Monitor (used demo)		£57.50

OPEN 10am-6pm INCLUDING SATURDAYS

MAIL ORDER: ADD £1 FOR ITEMS OVER £20, OTHERS FREE.

Credit Cards: Acces, Visa (Phone or Write). Immediate Despatch.

The 64 Software Centre, 1 Princeton Street, London WC1

Please supply the following items:

1 Qty @£.....
 2 Qty @£.....
 3 Qty @£.....
 4 Qty @£.....

TOTAL £
 POSTAGE £
 TOTAL £

Name.....

Address.....

.....

.....

Visa/Access Card No.....

Date Signature

AA36

REVIEWS

HARDWARE

two pins on the Tube connector. Second processor users will need to contact Ramamp regarding arrangements for this lead.

As no bits of the I/O port are used the Basic ROM can be fitted in a higher priority than the RAM board, which also means that all eight bits of the I/O port are yours. I was rather concerned with the large pins on the board, but closer inspection revealed that they have been machine tapered to a sensible cross-section. A link connector is provided on the board to enable a write-protect switch to be included.

The accompanying software comprises some useful utilities. A menu program makes the loading of ROM-image software fail-safe. There are two printer buffers – one transforms the RAM page into a 15k printer buffer, the other is very clever: it allows an 8k 'ROM' to be loaded, then places a 7k printer buffer in the otherwise wasted RAM above it. Two DFS patches are provided (to conform with Acorn's 0.9 and 1.2 versions). Each uses the sideways RAM as DFS workspace.

The system functions very well, particularly on a network where a Ramamp board is fitted to every machine except the fileserver, so that any utility can be loaded into all machines simultaneously for use by every student. Indeed any sideways software could be called from the fileserver by any station (see *Acorn User* October '85 pages 135-137).

UserRAM

On opening the box my first thought was: 'Where is it?' as this RAM card's so tiny. It comprises a board no larger than an EPROM, on which are mounted two 8k RAM chips and a flying lead with a spring clip. UserRAM certainly wins the prize for the quickest and easiest installation – a three minute job.

The UserRAM fits into any of the ROM

JARGON

Printer buffer – Memory used to hold data being sent to the printer, thereby 'freeing the micro' for other use.

EPROM – Erasable Programmable Read Only Memory. Used to hold commercial software.

Workspace – An area of memory used by a sideways ROM to perform its calculations and store data.

Silicon disc – Memory used as a filing system. Its advantage is its speed.

Shadow RAM – Memory used to display the screen, freeing the normal screen memory for programs. (See First Byte on page 53.)

sockets of the Beeb or B+ and may be doubled up with a second UserRAM in an adjoining socket or up to three with the B+. In practice, it is best inserted into IC88 in the model B.

The RAM board comes with a disc of ten utilities. Pack one contains a demonstration ROM image and software to manage the ROMs, ROM image software and the RAM in the computer. Pack two contains these and the *Acorn User* RAM utilities (see Richard Harris' articles in the June, July and August '85 issues), a suite of programs from the *BBC Micro ROM Book* by Bruce Smith, and the book is thrown in too. In all, an extremely useful compendium of supporting software. The only item missing is a comprehensive menu program like Solidisk's which would help manage ROM image software.

UserRAM works very well with the Viglen cartridge system and Micro Pulse Rombox, two expansion systems which should be popular with UserRAM owners. I did not test UserRAM with any ROM expansion boards, as the best option would be to use CMOS

(6264) RAM chips in this case. As UserRAM is fully network compatible and so simple to install, it is a must for educational users.

The depth and breadth of the supporting software make it very attractive to those wishing to develop firmware, albeit at a high price. However, the versatility of the software and the guarantee of further support from the magazine makes this particular board an attractive proposition.

In my opinion, *Acorn User* is to be congratulated for helping to gain wider acceptance of the concept of sideways RAM. It 'expands' the sideways ROM concept to the full, and it's now up to the software publishers to provide licences for their ROM image software.

Whether you decide on a purpose-built sideways RAM board or opt for the new Aries and Ramamp 32k shadow/sideways RAM boards is a purely personal choice, governed by available finances as much as anything. The versatility offered by supporting software is an important consideration and must be taken into account if you want to get the most from your new acquisition.

ADDRESSES

Solidisk Technology

17 Sweeney Avenue, Southend-on-Sea, Essex SS2 6JQ.
Tel: (0702) 354674.

HCR Electronic Services

HCR House, Bakers Lane, Inglestone, Essex CM4 0BZ.
Tel: (0277) 355407/8

Ramamp Computers

25 Avon Drive, Whetstone, Leicester. Tel: (0533) 864966

UserRAM

Acorn User, 68 Long Acre, London WC2E 9JH. Tel: 01-836 2441.


Board	Manufacturer	RAM option	RAM position(s)	RAM write protect	Installation	Cost	Software provided
SWR 32	Solidisk Technology	32k	15,14	No	Bared wires to	£58	5 discs
SWR 64		64k	15,14,13,12	No	push in (or	£85	5 discs
SWR 128		128k	15,14,13,12,11 10,9,8	No	solder) to legs of chips	£135	5 discs
HCR 16	HCR Electronics	16k	15 to 12	Yes	Plug in	£36.22	No
HCR 32		32k	15 to 12	Yes	Plug in	£47.72	No
RAM 16	Ramamp Computers	16k	15 to 12	Optional	Plug in	£32	8 utilities
UserRAM	Acorn User	16k	12,13	No	Plug in	Pack 1 – £45.50 Pack 2 – £62	10 utilities 27 utilities + book

What the boards have to offer

Today's Technology at Yesterday's Prices from Chase Data.

1

CANON SINGLE MDD 221A NO PSU
CANON 221A "SUPER SLIM" (33.5mm)
80 TRACK DOUBLE SIDED 400K
FLOPPY DISC DRIVE
(40/80 TRACK SWITCHING).

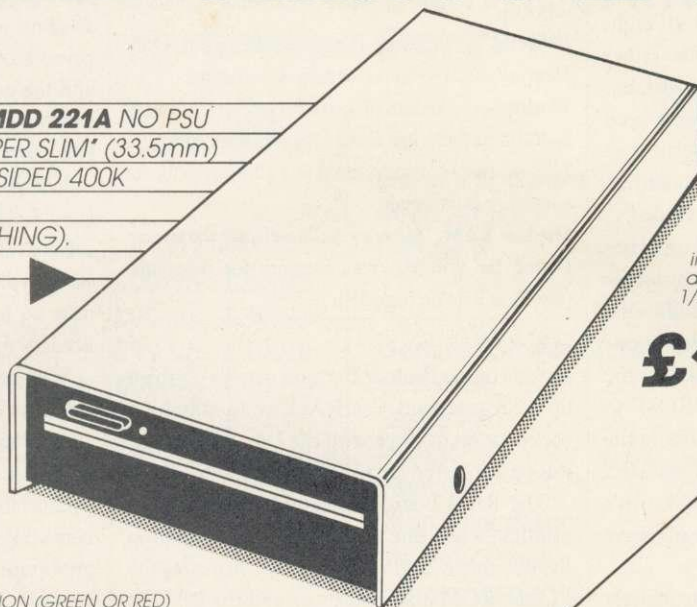

SPECIFICATIONS:

80 track double sided disc drive, 40/80 track switching with dual colour LED. Capacity 400K in single density, operates in double density. Direct drive, track to track access 3 ms in 96 TPI mode. Dimensions:- 1/3 standard height, only 33.5mm.


£125.00 INC

All Canon 40/80 switchable disc drives feature an on-board dual-colour LED on the front panel to show track mode selected. This is coupled with our own unique two-stage illumination. To give a clear operating status, as follows.

40 TRACK MODE: _____ LED GREEN
 80 TRACK MODE: _____ LED RED
 POWER ON: _____ HALF-ILLUMINATION (GREEN OR RED)
 DRIVE SELECTED: _____ FULL-ILLUMINATION (GREEN OR RED)

2

CANON DUAL MDD 221A
WITH PSU

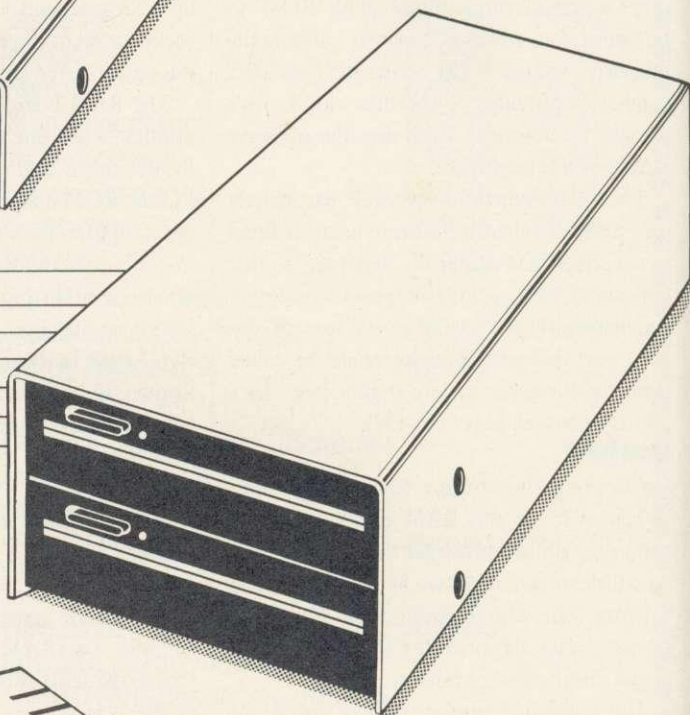

SPECIFICATIONS:

80 track double sided disc drive, 40/80 track switching with dual colour LED. Capacity 800K in single density, operates in double density. Direct drive, track to track access 3 ms in 96 TPI mode. Dimensions:- 1/3 standard height, only 33.5mm.


£279.00 INC

SPECIAL OFFER

(WHILE STOCKS LAST)

3

CANON SINGLE MDD220
80 TRACK DOUBLE SIDED 400K
FLOPPY DISC DRIVE
(40/80 TRACK SWITCHING)

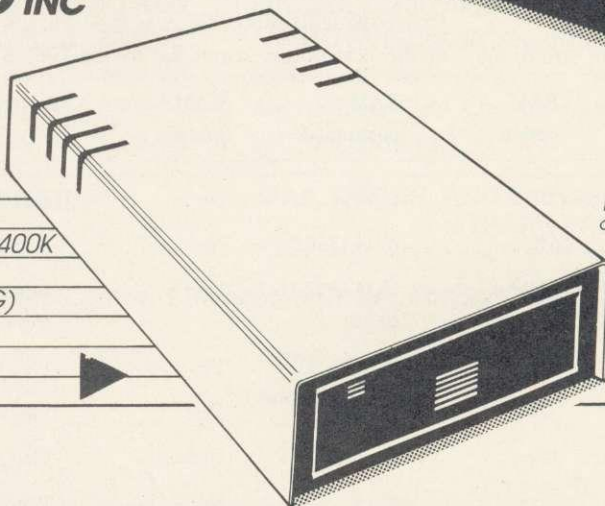

SPECIFICATIONS:

80 track double sided disc drive, 40/80 track switching with dual colour LED. Capacity 400K in single density, operates in double density. Direct drive, track to track access 3 ms in 96 TPI mode.

£95 INC

CHASE DATA LTD THE DISC DRIVE COMPANY WITH DIRECT PURCHASE FROM JAPAN AND A PROFESSIONAL AFTER SALES SERVICE.

4

CHASE DATA SOFTWARE
NOW COMPATIBLE WITH
UDM & OPUS DFS
PLEASE STATE
WHEN ORDERING




VECTOR 1 The ultimate tape to disc utility. Vector 1 allows you to transfer almost all your tape software to disc. Unlike others, you only need to buy 1 copy of Vector 1 since it transfers tapes to specially formatted program discs. This is easily the most powerful tape to disc utility available.

Vector 2 New 1.2 VER. Disc to disc utility. Vector 2 allows you to make backup copies of all your valuable disc software. It is the most advanced utility of its kind available. It is a condition of sale that neither of these products are used for infringement of copyright.

- Vector 1 **£16** On its own
£15 If purchased with disc drive
- Vector 2 **£16** On its own
£15 If purchased with disc drive
- Vector 1 & 2 **£30**

5

DISCUS



Test utility for testing your own disc drive, at regular intervals to avoid the dreaded flop of your floppy. Menu driven, easy to use, 40 or 80 track versions.

TESTS: Motor speed, read/write, steptest, alignment test, * step and read/write test, read only test.
£8.00 inc. £7.00 if purchased with disc drive.
*This test requires an oscilloscope and alignment disc.

EPROMS
QUALITY EPROMS BY 'HITACHI'

2764-250 NS	£3.00
27128-250 NS	£5.00

INCLUSIVE OF P&P & VAT

6

DIAGRAM
A PROGRAM WHICH ALLOWS YOU TO STORE VERY LARGE DIAGRAMS — UP TO 39 MODE 0 SCREENS — AND VIEW OR EDIT THEM BY SCROLLING THE COMPUTER SCREEN AROUND OVER ANY PART OF THE DIAGRAM

- FEATURES**
- Draw diagrams, schematics, plans etc., in any aspect ratio, e.g. 10*3, 2*12 screens.
 - Access any part of the diagram rapidly by entering an index name, e.g. TR6, R5 etc., to display a specific section of the diagram, and then scroll around to any other part of the diagram using the cursor keys.
 - Up to 128 icons may be predefined for each diagram,

- e.g. Transistors, resistors etc., in full mode 0 definition, up to 32 pixels horizontally by 24 vertically.
- Hard copy printouts in varying print sizes up to 9 mode 0 screens on an A4 size sheet, compatible with most dot matrix printers.
- Many other features including, selectable display colours, comprehensive line drawing facilities, TAB settings, etc.
- Disc contains sample diagrams and two versions of the program, one of which will work from a 16K sideways RAM.
- Comprehensive instruction manual.

£28.75 Including P&P & VAT Supplied only on disc 40T/80T compatible.

DON'T FORGET YOUR VECTOR 1 & 2 WHEN ORDERING.

All inclusive price list: This means: disc drive + case + all power & data cables + UK carriage + utilities disc & manual + VAT.

Model	CANON	210	220	221A	596D
Formatted Capacity per drive on BBC Micro:		200K	400K	400K	SANYO 400K
Single Drive & Case:		£75	£95	£125	£149
Single Drive & Case/PSU: *u/c = UPGRADEABLE		—	£124	£173*u/c	£174
Dual Drive & Case		—	£209	—	£279
Dual Drive & Case/PSU:		£185	£224	£279	£309

FUJI FLOPPY DISCS

	Per box 10	If purchased with disc drive
40 TK SS DD	£17.60	£15.60
40 TK DS DD	£24.50	£22.50
80 TK DS DD	£28.60	£26.60

These prices include VAT & P&P.


Support:
Warranty: All disc drives sold by Chase Data Ltd come with a full one-year warranty on parts & labour with optional extended warranty on all drives.

Extended Warranty
Your insurance of trouble free operation. When ordering your disc drive, ask about our second and third year extended warranty scheme. This covers ALL PARTS AND LABOUR and costs from as little as £15.00 on single drives and £23.00 on dual drives.

Payment:  
By Post:

Send your remittance (cheques only please) with your order to: Chase Data Limited, Unit 2, Crabtree Road, Thorpe Industrial Estate, Egham, Surrey TW20 8RN.
By Phone: **(Tel: 0784-38487)**. Allow up to 21 days for delivery.



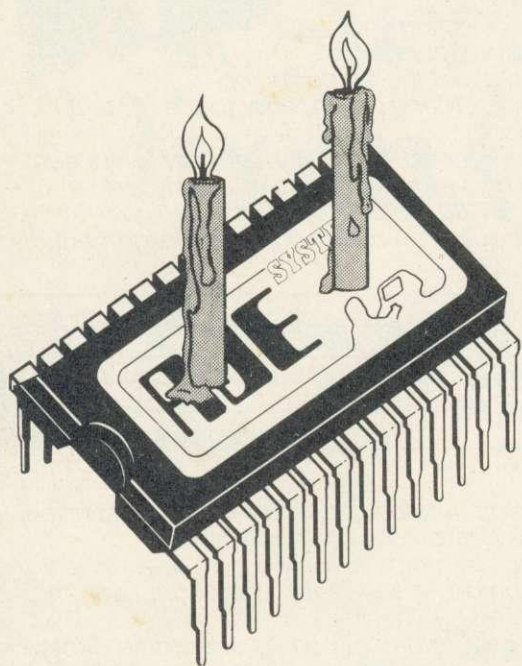

HAPPY BIRTHDAY ADE

The renowned Assembler - Debugger - Editor from SYSTEM software has now been on sale for 2 whole years a lifetime in computer terms! The industry standard macro assembler has stood unrivalled in facilities, speed, reliability and documentation. Excellent product backup and upgrade service has been a hallmark of success.

If you are developing machine code programs or want to start, isn't it time you got the real thing ?

Celebrate and buy one today!

ADE The complete m/c development ROM featuring the advanced 6502 macro assembler, front panel debugging monitor and full-feature macro editor/word processor. Complete with utilities disc (40 or 80T - please specify) and comprehensive manual.
£60 incl vat.

ASM The advanced 6502 macro assembler on its own ROM. Can be used with View or Wordwise. Complete with utilities disc (40 or 80T - please specify) and manual.
£35 incl vat.


SPY2 The ultimate m/c developer's debugging, disassembly and disc utility ROM. 2nd processor compatible. Why pay more for less ?
£30 incl vat.



(0742) 682321




SYSTEM software Dept A 12 Collegiate Crescent Sheffield S10 2BA




HIGH-RES GRAPHICS AT LOW-RES PRICE




FREE-HAND DRAWING
ICON SOFTWARE

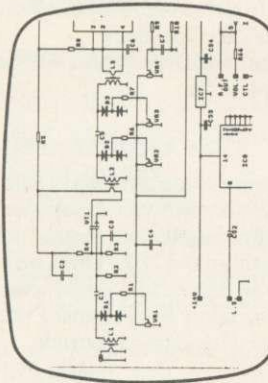

ELECTRONIC CIRCUIT
DESIGN WITH CIRKWIK

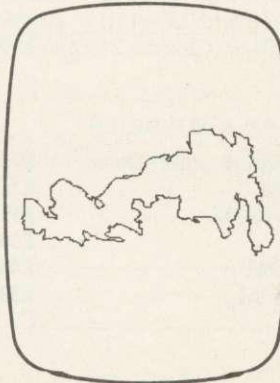

USING GRAFPAD
FOR TRACING

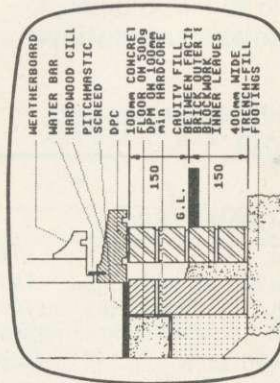

ARCHITECTURAL DESIGN
WITH DDX SOFTWARE

GRAFPAD II- THE ULTIMATE IN GRAPHIC INPUT DEVICES FOR THE BBC, COMMODORE AND AMSTRAD MICROS

The first low-cost graphic tablet to offer the performance and durability required for business, industrial, home and educational applications. It's small, accurate and reliable. Needs no adjustment or preventive maintenance. **GRAFPAD II** is a unique product that brings the power of modern technology under the control of the user.

GRAFPAD II:

- A brilliant British invention manufactured in Gt. Britain, unequaled in the world of graphics input.
- Ferranti's space age technology makes the Grafpad II unique in its digitising technique.
- The culmination of 3 years of advanced research to create a final graphical solution for the world computer market.

IT COMBINES IN ONE DEVICE ALL THE FACILITIES OF PREVIOUS ATTEMPTS AT INPUT DEVICES. THE APPLICATIONS ARE AS NUMEROUS AS THAT OTHER COMMONLY HELD DEVICE-A PEN!-AND INCLUDE:

- Option Selection ● Form Input ● Data Collection ● Logic Design ● Circuit Design
- Picture creation ● Picture storage
- Picture retrieval ● Construction design
- C.A.D. ● Text Illustration ● Games
- Pattern Design ● Education ● PCB Design

- A4 SIZE DRAWING AREA
- HIGH RESOLUTION COLOUR
- HOME AND BUSINESS USE
- VARIETY OF OPTIONAL PROGRAMMES
- FREE HAND DRAWING
- CIRCUIT DIAGRAMS

- C.A.D.
- PCB LAYOUTS
- EASY TO USE

SPECIFICATION	
Resolution:	1280 x 1024 pixels
Repeatability:	1 pixel
Output rate:	2000 co-ordinate pairs per sec.
Interface:	parallel
Origin:	LH corner or selectable
Dimensions:	350 x 260 x 12 mms.

EXPORT AND DEALER ENQUIRIES WELCOMED



FREE ICON DRAWING
SOFTWARE WITH EACH
GRAFPAD II (on disc)

£59.50 inc. VAT

Available from most Computer dealers or direct from Grafsales Ltd.

TO: GRAFSALES LTD.

Unit 8, Derby Works, Carey Place, Watford,
Herts, WD1 2LR. Tel: (0923)48222

Please supply _____ GRAFPAD(S) II for * _____ MICRO
at £59.50 plus £2.50 p&p
or £8 courier insured delivery.

*Please indicate for which machine.

NAME: _____

ADDRESS: _____

Cheque enclosed value £. _____
You can pay by credit card or telephone your order

Visa _____
Access _____

AU12

MICROWORLD

COMPUTER GROUP

stair 

The Power Behind the Printed Word


NEW SG-10 NLQ

Only £239
inclusive of VAT, BBC cable,
2 spare ribbons worth £15

VERY VERSATILE

Features

- 1) 120cps — bidirectional logic seeking
- 2) Near letter quality mode
- 3) Inexpensive ribbons
- 4) Epson and IBM compatible
- 5) Easily accessible dip-switches
- 6) Friction and Tractor feeds
- 7) Standard parallel Interface-free BBC cable
- 8) 12 months guarantee and our 7 day Money Back Guarantee.

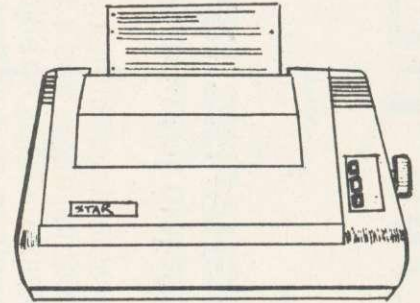

STAR SG-10 NLQ

**BRANCH NETWORK
THROUGHOUT THE UK**

Glasgow
11 Bath Street
Glasgow 041 332 1116



Edinburgh
12 Leven Street
Tollcross
Edinburgh 031 228 1111



Aberdeen
77 Holburn Street
Aberdeen 0224 571735



London
Park House
140 Battersea Park Road
London SW11 4NB
01 627 4840

IN THE MARKET?

We at Microworld believe that our price to end user and education cannot be beaten and accordingly we give you our

Price Promise

Phone now for quotation

(Subject to conditions)

DISK DRIVES

Cumana CSXM100 40T, Single, no psu **£79.95**
 Cumana CSX100 40T, single, no psu **£89.95**
 Cumana CSL200 80T, single, with psu **£119.95**
 Cumana CSX400 80T, single, no psu **£109.95**
 Cumana CSL100 40T, single, with psu **£109.95**
 Cumana CS100M40T, single with psu **£109.95**
 Cumana CS400 80T, single, with psu **£129.95**
 Cumana CD200 40T, dual, with psu **£239.00**
 Cumana CD400/S 80T, dual, with psu **£279.00**
 Cumana CD800/S 80T, dual, with psu **£249.95**
 Disk Interface with DNFS Rom **£89.00**
 Torch Z80 Disk Pack **£569.00**
 All Cumana Drives come with cables, manuals
 formatter disc

EDUCATIONAL SPECIALIST

Microworld are Scotland's sole Scottish based distributor with vast experience of Econet and can offer installation, service, advice and supply throughout the U.K. Our London office is now open to service the entire country. Please call for our latest Educational Prices or phone for our list of dealers nationwide.

SPECIAL PRINTER OFFERS

JUKI 6100 — Superb 18 c.p.s. Daisywheel Printer with 10, 12, 15 pitch and proportional spacing. Complete with free BBC cable
 Only **£339** incl VAT
 (Sheet Feeder £199)

Canon PW 1080A/NLQ — Superb near letter quality printer with draft speed of 160 c.p.s. and NLQ speed of 27 c.p.s. Fully Epson Software compatible and ideal for use with most computers: comes complete with free BBC cable.

Only **£299** incl. VAT
 (Serial Interface extra £85)

COMPUTERS

Acorn Electron **£79.95**
 Acorn Electron ALA01 with 5 Pack **£89.95**
 Acorn Electron YTV Starter Pack **£109.95**
 BBC Model B **£399.00**
 BBC Model B with DFS **£469.00**
 BBC B PLUS (64K RAM) **£499.00**
 (Free Cumana CSXL100 with B Plus)
 Z80 Second Processor with software **£369.00**
 6502 Second Processor **£195.00**
 Winchester 10MB with Level III **£1,699.00**
 Winchester 30MB with Level III **£2,499.00**
 Econet Starter Pack (Clock + 2 terms) **£99.95**

ROMs & SUNDRIES

AMX Mouse superb plus software **£75.95**
 Wordwise ROM **£36.95**
 Wordwise plus ROM **£52.00**
 View ROM **£50.00**
 View Sheet ROM **£48.00**
 Disc Doctor ROM **£33.95**

MICROWORLD



LONDON



CALL 01-627-4840



**24
Hours
Service**

Cumana CSXL 100

Disk Drive
& DFS Kit
only

£139.95

incl. VAT & Carriage

Cumana CSX 100 40 Track 100K Drive

only

£89.95

incl. VAT & Carriage

Cumana CD800/S 40/80 track switched

Dual Drive was £349.95

Sale price **£259.95**

incl. VAT

or with DFS

£309.95 incl. VAT

PRE-CHRISTMAS SALE OFFERS

Acorn Electron
only **£79.95!**

Acorn Electron
with £75 worth of software
only **£89.95!**

Acorn Electron
YTV Pack with cassette
recorder and software
£109.95!

VERY LIMITED OFFER

DFS KIT

A complete kit of parts with
DNFS ROM — Mail Order Only

£89.00 incl. VAT

Torch Z80 Disc Drive

comprising dual disc drive
(800K) and Z80 second processor
with £1,000 worth of free
software and free DFS kit

worth **£910.00**

Only £589.00

incl. VAT and Carriage

HOW TO ORDER

Orders by post welcomed: please mail coupon with payment.

Telephone orders welcome: call 01-627 4840(London) or 031-228 1111 (Edinburgh).

We also welcome Government and Educational orders.

All products supplied include our own 12 months guarantee backed by our own service centre staffed by fully qualified engineers.

Order with confidence, 7 days money back guarantee.

All charges include VAT and carriage charges by courier. Dealer enquiries and personal callers welcome. All offers stated here are available through any of Microworld's 50 dealers nationwide.

The right is reserved to alter prices without prior notice.

E.&O.E.

MAIL ORDER

To: Microworld Distribution, Dept. AU, Park House, 140 Battersea Park Road, London SW11 01-627 4840

Please send me _____

I enclose a cheque for £.....payable to Microworld Computer Systems Ltd.

Please debit my Access/Visa/American Express Account

NoSigned

Name _____ Address _____

New

32K RAM Board

£24.95 +1.50p&p

Sideways RAM for the BBC Micro from Cambridge Computer Store.

- Increases present sideways ROM memory from the current 4 × 16K ROM to 4 × 16K ROMs + 4 × 8K Static RAMs.
- Fitting requires no soldering.

6264 RAM chips not supplied



Mini ROM Board

- 8 ROM sockets
- Fully compatible
- Easy installation
- 12 month replacement guarantee
- Compatible with Aries B20
- Quick despatch

£12.00 +1.50p&p

BBC B+ **£380.00** +7.00p&p

6502 2nd Processor **£173.00** +2.50p&p

Acornsoft 6502 Development Package **£43.00** +1.00p&p

Acornsoft Viewstore **£52.00** +1.50p&p

Torch Z80 Disc Pack **£599.00** +10.00p&p


Torch Graduate **£999.00** +10.00p&p

Cumana DS/DD 80tk Discs with free library case **£17.50** +1.50p&p

6264 RAM chips 8K × 8 **£3.50** +0.50p&p

Please add VAT to all prices
Access or Visa welcome

while stocks last



Telephone orders:
Cambridge (0223) 61294 & 358264

Cambridge Computer Store


4 Emmanuel Street, Cambridge CB1 1NE

Crofton THE VIDEO SPECIALISTS

If you need a monochrome or colour monitor, digitiser, T.V. camera, or door entry system **Crofton** must be your first choice – here are a few reasons why!


THE CROFTON PM101

This 9 inch metal cased, monochrome monitor is incredible value at **ONLY £82.80**

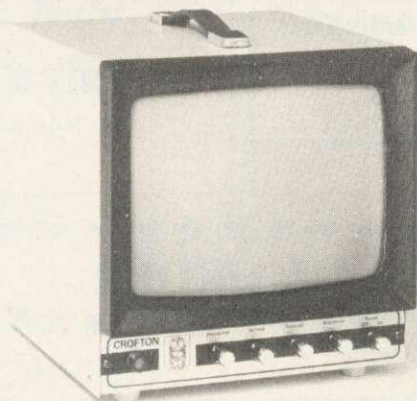

THE NOVEX 1414

This superb metal cased 14 inch RGB/COMPOSITE COMPUTER COLOUR MONITOR represents unbelievable value at **ONLY £185.15**

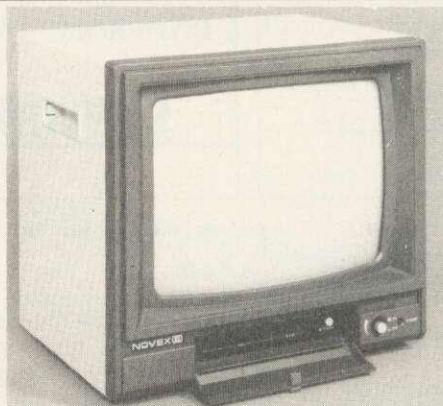

CCTV CAMERAS

Though not new these cameras have been completely refurbished to a high standard in our own workshops and come complete with a standard lens, ready to work

ONLY £69.00



THE CROFTON SPECIAL CCTV RANGE

The Crofton special CCTV package and door entry system (described in the "Security Buyers Guide" appearing in the September 1985 issue of Practical Electronics) are available at the following prices

SPECIAL CCTV PACKAGE	£193.00
DOOR ENTRY SYSTEM	£103.45

ALL THE ABOVE INCLUDE VAT, CARRIAGE & INSURANCE AND AT THESE PRICES OUR STOCKS CANNOT LAST LONG.

DON'T DELAY – PHONE YOUR ORDER TODAY!
MOST MAJOR CREDIT CARDS ACCEPTED

Be sure to request our free catalogue describing our range of T.V. cameras, fixed and zoom lenses, sequential switchers, special and general monitors (colour and b/w including the PHILIPS 7502, PHILIPS 7522 and PHILIPS 2007 plus the full IKGAMI range), video digitisers, light pens, eeprom erasers etc.

CROFTON ELECTRONICS ☎ 01-891 1923

35 GROSVENOR ROAD, TWICKENHAM, MIDDLESEX TW1 4AD

PRACTICAL PROGRAMS TO . . .

SOFTEN YOUR HARDWARE

For the BBC Micro Models
B & B+

MICRO ARTIST Enhanced Disc Version £12.95 Cassette £7.50
The much acclaimed mode 2 drawing program. Eight basic colours, 20 fixed commands including reflect, enlarge, rotate, text, triangles, ellipses, fill, rubber bands, x & y co-ordinates, continuous or dotted lines etc., plus 12 user re-definable brushes/characters. Requires an analogue joystick. "Is the best I have seen of a great number of similar packages ranging from £7 to £27 and the cheapest! - It is very good fun." (CADCAM International June '85) "A real joy to use . . . certainly the best drawing program I have yet tested on the BBC. Rating: Overall 100%." (A&B Computing April '85). The disc version allows SAVED screens to be flipped through sequentially. DISC UPGRADE available to customers who purchased the cassette version prior to 1 September 1985 for an additional £2.50.

WEATHER CHART Disc £12.00 Cassette £9.50
Prepares a high resolution map of the British Isles and adjoining Continental coasts and a weather chart for the Sea Areas from data obtained from the BBC Shipping Forecasts or from other sources available to the operator. Wind Force and Direction are plotted to the appropriate Sea Area and Pressure to the appropriate Coastal Station. Isobars can be drawn using an analogue joystick. Complete or intermediate Screens may be SAVED (on the disc version only). An Epson printer screen dump routine is included with provision for other dump routines to be added.

CIRCUIT DESIGNER Only on Disc £24.95
A specialist CAD application for draughting circuit diagrams in the highest available resolution (mode 0) using an analogue joystick or the keyboard. Requires BBC Model B 1.2 OS or Model B+ with single or twin disc drives. A library of 60 standard components is provided and an additional 18 operator designed symbols are available at any one time. Symbols can be directly accessed in any order, positioned by cursor, reflected and rotated. Integrated Dual In Line chips are resident in two widths from 6 to 48 pins lying vertically or horizontally. Vertical, horizontal, dotted line, rubber band, x & y co-ordinates and expandable rectangle functions. Text accepted in choices of height and width. Printer dump routines included for Epson and Seikosha GP 250 or a specific dump may be added.

MORSE TRANSLATOR Disc £10.50 Cassette £8.50
Sounds Morse Code signals received via a radio in the range 6-22 wpm and translates them into plain language on the screen. Allows plain language to be translated and sounded in Morse at a choice of speeds. Red function keys may be programmed for user's call sign and standard passages. Program requires either a CW or RTTY interface. (A CW interface has been designed for this program by G3LIV.)

TO ORDER Please send cheque/PO payable to PAEAN Systems. Specify 40 or 80 Track disc. Orders normally despatched by return at 1st Class rates.

OTHER TITLES Please send SAE for our full list.

PROGRAMMERS We are always interested to market original quality software for the BBC Micro on specialist subjects.



**LITTLE BEALINGS,
WOODBRIDGE
SUFFOLK IP13 6LT
Tel: 0473 623757**

AA11

PROFESSIONAL MUSIC FROM THE BBC MODEL B MUCH MORE THAN JUST A SYNTHESIZER . . .

- 32 Harmonically Programmable Oscillators
- 32 Programmable envelopes
- Five Octave Keyboard

The New Digital
CLEF CMS

Price **£495**
inc VAT & UK carriage

S.A.E. OR PHONE
FOR FURTHER
INFORMATION



- Up to 4 Osc/Evs per note
- Touch Sensitive Keyboard
- Programmable Stereo Sound
- Real-Time Polyphonic Sequencer

CLEF PRODUCTS (ELECTRONIC) LIMITED
(Dept Au12, 67 Thornway, Bramhall,
Stockport, Cheshire SK7 2AH. 061 485 4889)

S P I D E R REAL-TIME CONTROL FOR THE BBC MICRO


Look out for the SPIDER

A breakthrough in ease-of-use for all Control Applications

Here's what you get:

- Additional BASIC commands - which can be safely mixed with existing BASIC keywords.
- Invoke BASIC PROCs from function keys or by external events.
- Run up to 8 independent countdown timers.
- The SPIDER is a powerful combination of RAM and ROM mounted on a butterfly board - it leaves the Beeb's memory intact.
- It's easy to install with no soldering required - and a comprehensive manual is supplied.

SPIDER - stamps out I/O bugs



SEND NOW FOR OUR INFORMATIVE
LEAFLET - YOU'LL BE SURPRISED AT HOW
POWERFUL A SPIDER CAN BE!

Paul Fray Ltd
Willowcroft, Histon Road, Cambridge CB4 3JD
Telephone: (0223) 66529

£65.00 including VAT

FREE INTERFACE

WITH EVERY 'brother' TYPEWRITER
MODELS CE51, 60, 70, EM80, 100, 200
PURCHASED

AVAILABLE TO BBC,B USERS ONLY

THIS UNIQUE INTERFACE, INCORPORATING ITS OWN VIEW DRIVER, WILL ENABLE YOU TO USE THE BROTHER TYPEWRITERS AS LETTER QUALITY PRINTERS. ITS EASY TO INSTALL AND COMES COMPLETE WITH FULL DOCUMENTATION.

COMPARE THIS PRICE FOR A
LETTER QUALITY PRINTER


CE51 **£299** + VAT.
OR

PURCHASE THE INTERFACE ONLY FOR £75 INCL. VAT
BARCLAY - ACCESS AND CREDIT FACILITIES AVAILABLE


SEND SAE FOR FURTHER DETAILS

ABACUS BUSINESS MACHINES LTD,
961 CHRISTCHURCH ROAD, BOURNEMOUTH.
DORSET. BH7 6AZ. TEL (0202) 423204

TRADE ENQUIRIES WELCOME



ARIES-B32 £80 + VAT



Now ATPL Sidewise compatible!*

*Special adaptor required

ARIES-B32 gives your BBC Model B the enhanced RAM capacity of the Model B+ and more! Simple commands allow you to configure its 32K of RAM as:

- ★ 20K of shadow screen RAM and 12K of sideways RAM (like the B+), or
- ★ 16K of shadow RAM and 16K of sideways RAM, or
- ★ 32K of sideways RAM

Unlike the B+, **ARIES-B32** allows you to use sideways RAM for many purposes such as loading sideways ROM images from disc and as a printer buffer.

ARIES-B32 is just one member of a range of products for the BBC Micro: please call us for a special information pack on the complete system.

Aries Computers

Cambridge Science Park, Milton Park, Cambridge CB4 4GD. Telephone 0223 862614

AA6

CROSSWARE CROSS-ASSEMBLERS

HIGH SPEED DISC-TO-DISC ASSEMBLERS
FOR THE FOLLOWING TARGET PROCESSORS:

6800/6801/6802/6301 . . . 6303X,
6805/6305//146805
6809, Z80, 8080A/8085
68000/68008

LATEST RELEASE : HD 64180
ALL SOFTWARE NOW AVAILABLE ON ROM

CROSSWARE PRODUCTS
Melbourn, Royston, Herts SG8 8BA
Tel: 0763 60838



ELECTRONICS C•A•D "ANALYSER I & II"

PERFORMANCE ANALYSIS OF LINEAR CIRCUITS using the IBM
PC, BBC MODEL B AND SINCLAIR SPECTRUM 48K MICROS

Simulates Resistors, Capacitors, Inductors, Transformers, Bipolar and Field effect Transistors,
and Operational Amplifiers in any circuit configuration.

Performs FREQUENCY RESPONSE ANALYSIS on Circuits with up to 30 Nodes and 100
Components, for Phase and Gain, Loss, Input impedance and Output impedance.

Ideal for the analysis of ACTIVE and PASSIVE FILTERS, AUDIO, WIDEBAND and RF
AMPLIFIERS, LINEAR INTEGRATED CIRCUITS etc, etc . . .

"ANALYSER" can greatly reduce or even eliminate the need to breadboard new designs.


USED BY INDUSTRIAL AND UNIVERSITY R & D DEPARTMENTS WORLD WIDE.

Very easy to use. Prices from £20. Access or American Express welcome.

For further details write or phone
NUMBER ONE SYSTEMS LIMITED
Department AU, 9A Crown Street, St Ives
Huntingdon, Cambs UK, PE17 4EB
Tel: 0480 61778 Telex: 32339

B+/B+ TA+TEXPRO® = ELECTRONIC WP TYPEWRITER 12 month warranty

- Compatible with TA7020 and BBC B
- For Disk or Tape filing system
- Proportional spacing and 12 c.p.i.
- Full justification
- Shadow printing
- Auto underscore
- Versatile centring
- Right justification
- Decimal alignment

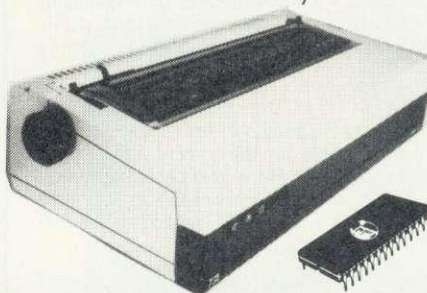

20 cps Triumph Adler Daisywheel Printer

Including 2 Printwheels, Ribbon & TEXPRO® WP ROM
Parallel Interface (serial available)

£395 inc VAT complete with full instructions
Carriage UK £10, Parallel Cable £7, Serial Cable £9.

TEXPRO® ROM (for 7020 only)

£39 incl instructions, postage

ORDER DESK 01-423 1933

Prices are strictly cheque with order
Sorry no credit cards
Allow 7-10 days order processing
Visits strictly by prior arrangement or
Contact your local BBC dealer with this ad



ComCo Engineers Limited
Biro House Stanley Road
Harrow Middlesex
HA2 8UW


DYNAMIC DISCS

TESTED BY BEEBUG

BEEBUG, the largest independent computer user group in the UK, offer 100% tested discs supplied by one of Britain's leading disc manufacturers.

10

FREE LIBRARY CASE

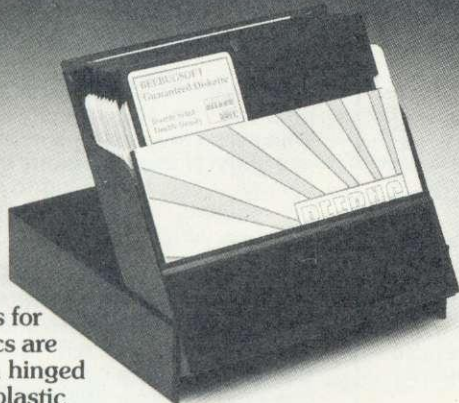

Orders for 10 discs are sent in hinged black plastic library cases.

25

FREE STORAGE BOX



Orders for 25 are delivered in strong plastic Storage box with 4 dividers.

50

FREE STORAGE BOX



Orders for 50 are delivered in strong plastic Storage box with 4 dividers.

COMPARE PRICES

4 Types of Disc To Meet Your Exact Requirement

48 TPI DOUBLE DENSITY			
10	S/S	D/D	£14.90
25	S/S	D/D	£34.90
50	S/S	D/D	£59.30
10	D/S	D/D	£20.50
25	D/S	D/D	£46.20
50	D/S	D/D	£82.40
96 TPI DOUBLE DENSITY			
10	S/S	D/D	£20.50
25	S/S	D/D	£46.20
50	S/S	D/D	£82.40
10	D/S	D/D	£21.90
25	D/S	D/D	£49.90
50	D/S	D/D	£93.50

All prices include Storage Box, VAT and delivery to your door (UK)

Suitable for BBC Micro and all other computers using 5 1/4 inch discs including Atari and Commodore.

Fully Guaranteed - Not only by Beebug but by one of the UK's top disc manufacturers.

ORDER FORM

Official orders welcome
Access/Barclaycard
24 hrs line 0494 816666
Further Information
on helpline 0727 40303

Please supply me

@ £

@ £

@ £


Total cheque enc. £

Name

Address

To Beebugsoft, PO Box 109, High Wycombe, Bucks. HP10 8NP

BEEBUG SOFT

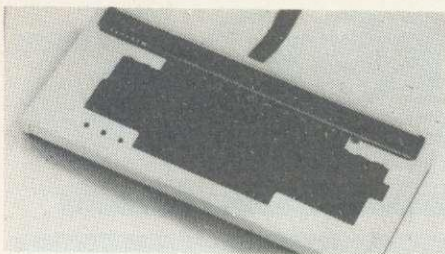

The Microtest BCASE

Are you fed up with your computer looking more like a junior construction set than a piece of High Tech equipment? Is your computer case made of flimsy plastic? Does it sag when you put a book on it?

Now is the time to do something about it!!!

The new compact MICROTEST BCASE has taken over 18 months to develop by our R & D section. We feel (probably with some bias) that

there is nothing currently on the market to compare to it!

The CPU housing is made from plated steel with an external acrylic bonded vinyl coating. So it's light, tough but good looking and just as important easily cleaned. It houses your BBC computer board (all issues of B and B+) and power supply, as well as single or twin 'half-height' disc drives if required. It maintains the use of standard BBC Computer connectors, and can if required be fitted with a 3" fan for additional cooling.


The BCK detached Low Profile Keyboard case is also made of steel and houses the existing BBC Computer keyboard. Inc. 600mm. cable.

The BCNK detached Low Profile Keyboard has a separate numeric pad for those of you that need fast and efficient numeric input. Inc. 600mm. cable and numeric pad. (A basic knowledge of soldering is required to fit the numeric keyboard and standard to this case option).

CPU Main board housing	£53.00
BCK Keyboard case	£32.00
BCNK Keyboard case	£44.00
3" Fan (Super Low Noise)	£20.00

80 Watt Switched Mode PSU inc switch, cable loom, etc £99.95

Carriage £4.00 for keyboards, £4.00 for CPU case or £6.00 for keyboard & CPU case. Units are priced individually so that users could run a detached keyboard from an existing BBC computer, please state when ordering. We will install your components into our case for £20.00 (including carriage packing and insurance back to you). PLEASE PHONE US FOR A RETURNS NUMBER BEFORE DESPATCHING ANY ITEMS OF EQUIPMENT TO US FOR FITTING.

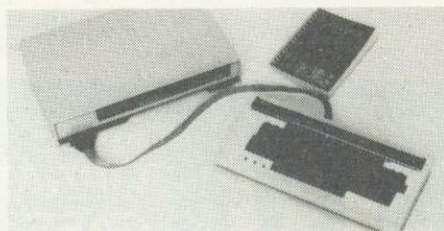

DisCat

DisCat creates disc labels and catalogues the files on all your discs, creating a wealth of information which can be accessed by DisCat's own built in database whenever you need to find a file or reference.

DisCat is easy to use and makes printing labels for your discs the simplest of tasks. Create labels for your whole collection of discs or just for one.

Additional information shows you the size of the disc (40 or 80 track, single or double density) and the amount of space used. Each disc is tagged with a volume number for easy identification. There is room for a comment on the label plus the data catalogued and the number of files present on the disc.

As each disc is catalogued you are given the opportunity not only to add comments to the disc label but to also make comments beside each file held on the disc. DisCat's built in database provides full database facilities allowing the resulting information to be searched for any filename or reference.

DisCat uses standard sized labels and comes with 50 labels to get you going. Plus a comprehensive manual.

```

Title: #DisCat * Vol: v123
No. of files 12 :Cataloged 20/06/85
-----
#.#BOOT #.#CatInit #.#CatLbl #.#Disk #.#DisCat
#.#DiscMan #.#Disk #.#Lid #.#Menu #.#System
#.#ViewCat #.#ViewCat
#.#Disc size 0400 Sectors, 0145 used.
Comments: Disc Catalogue Utility
Published by
M I C R O T E S T
    
```

Compatible with BBC B & B+ but must be an Acorn DFS

DISCAT - £14.95
Please add £1.00 P&P.

Microtest List Manager

A Data Filing System for the BBC Microcomputer

A disc-based database for the BBC model B on disc that is both sophisticated yet easy to use. LIST MANAGER has been specifically designed to introduce the newcomer to the concept of databases with friendly menus, command prompts, data entry and editing routines. With the aid of comprehensive and comprehensible documentation, the user is encouraged to make the most of the BBC's disc storage system and LIST MANAGER's data handling powers. Software features include the following:

LIST MANAGER is available from MICROTEST on disc with full manual at **£14.95** inc postage and packing. Please state 40 or 80 track when ordering.

Microtest DairyFile

If you have a BBC Micro and keep a dairy herd we are sure that you would like to run DairyFile.

DairyFile will let you save time and money by simplifying the record keeping and calculations relating to the dairy herd. Yield, feed, finance, breeding and illness details can be converted into graphs and print-outs for each cow, each monthly group, or the whole herd.

All old data is preserved - comparisons with previous years are easily made, for up to 200 lactating cows.

Please state 40 or 80 track and printer details when ordering DairyFile. (No printer needed for demo disc).

DairyFile £69.00 inc VAT plus £1.00 p&p
Demo Disc + Printouts £3.00 inc VAT
plus £1.00 p&p (deductable from purchase price)

Disc Menu ROM

Designed to save time and alleviate problems for the overworked user who needs to run programs from disc in a hurry. No need to worry about 31 files on a disc and trying to find the file required, hidden amongst other data files with similar names.

By simply pressing a number key in the range 0-3 and the BREAK KEY, the computer will 'auto menu' the drive number selected. Something that used to take a couple of minutes can now be done in as little as five seconds.

Also included in the ROM are many useful utilities, including:

CONCEAL REPAIR KILL
ROMS CLOSE EX LEX FORM
FREE MAP VERIFY LCAT
REVIVE DEAD HIDE
EXCLUDE REVEAL MENU.

Also included is REPAIR, an intelligent verify utility. So even if your disc does crash 'Menu ROM' can now try to repair it losing only a minimum of data.

A total of 17 EXTRA commands, at the very affordable price of **£12.95** INC VAT. P&P **£1.00.**

It's here, the New Issue 2+ Starstick ROM & Quickshot Joystick

Picture shows Starstick ROM, Patchlead and Quickshot Joystick (along with Acornsoft's Elite Package - by kind permission of Acornsoft)

This new release of the very popular Starstick & Quickshot programmable joystick offers new possibilities. Over 30 extra commands which include: *Elite, *Replica, *Sneaky, *Plonk, *Adval, *Prop, *Kill, *Revive, *Reset, *Repeat, *Map, *Ksave, *Kload, *Cursor and *Stick.

Fully help driven format with 20 page manual including full fitting instructions.

Not only is the package fully programmable, but it's response time is also user variable. Thus giving YOU the ability to tailor the joystick to YOUR requirements, as only YOU can.

The new issue software is fully compatible with Disc versions of Acornsoft's 'Elite', Acornsoft's 'Aviator' and Clares 'Replica'. It features relocatable workspace to enable it to work with many of the few games it would not work with before. As in the previous issue, the Starstick ROM is fully 'TUBE' compatible.

Specifically designed with the Disc user in mind, the software is not affected by any

combination of the BREAK, SHIFT, or CONTROL keys.

The self centring, rapid action Joystick plugs into the user port and is managed by the Starstick ROM. The ROM monitors O.S. calls and patches the joystick into games programs. The Starstick functions with most games and even those that are not designed to function with joysticks. IT IS VERY IMPORTANT HOWEVER THAT THE GAMES USE LEGAL OPERATING SYSTEM CALLS AS MOST DO.

The New prices are:

Starstick ROM (version 2+) and Quickshot II	£29.50
Starstick ROM (version 2+) and Patch lead	£25.30
Starstick ROM (version 2+) and Starstick ROM	£19.55


Reprogramming Charge £5.50

The Patch lead option allows you to plug any ATARI/SPECTRUM Style joystick into the BBC computer with the STARSTICK ROM.

PLEASE INCLUDE £1.00 for CARRIAGE and packing.

Also included in the package is a powerful ROM Manager to enable you to 'KILL' (temporarily) any ROMs that might cause you problems.

All commands in MICROTEST ROMs can be prefixed by 'M' should any other ROM try to intercept the same command name.

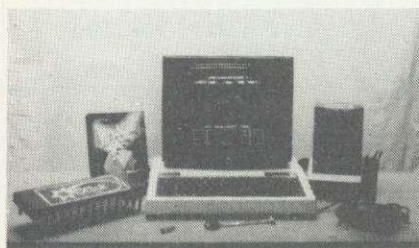

TUBE is a registered trade mark of ACORN COMPUTERS LTD. Screen shot is 'ELITE' by kind permission of ACORN SOFTWARE LTD.

MICROTEST LIMITED

18 Normandy Way, Bodmin,
Cornwall PL31 1EX

Tel: 0208 3812. Bulletin board
(Prestel compatible) 0208 77677.

Dealer and Export Enquiries Welcome





THE LEADERS IN
TAPE TO DISC TRANSFER
FOR THE BBC COMPUTER

See us at the
"MICRO USER"
Show



AN EXCITING NEW DISC UTILITY

100%
effective



A 'MUST'
for all
DISC USERS

THIS IS A UNIQUE HARDWARE/ROM-BASED SYSTEM

BBC 'B' Disc Drive Users - Do you want 100% TAPE TO DISC TRANSFER?

Have you heard about the REPLAY System from VINE MICROS? The *only* system around that can dump anything in the computer memory into disc . . . AND THAT'S NOT ALL! Just look at these extra features . . .

£35.00

inclusive of VAT
and post.

- * GAMES can be stopped and saved directly to disc at any time. This means that you can resume play from *where you left off* and don't need to work through earlier screens time after time.
- * STOPPED SCREENS can be re-loaded from disc and printed via a suitable routine, enabling a permanent record of those high scores!
- * GAME IMPROVEMENTS can be built in! Infinite lives - Hyperspeed - Extra gears - Different background colours - Edit your own improvements or work from the data sheets supplied by us.
- * PAUSE facility built in. * PLUS - most disc to disc transfer.

The REPLAY System will not turn you into a pirate! It solely provides a facility for an individual user.

Resulting discs are not recognised by a different computer.

* Consists of ROM with additional hardware * * Easy to fit with detailed instructions, no soldering *

FOR BBC 'B' with O.S. 1.20 - FITTED WITH THE FOLLOWING DFSs (State type).

Type R8271

Acorn DFS/DNFS Watford and Pace
Single Density

Type R1770

Opus 3.45 and Solidisk DFS.

Type R2791

Opus 3.15.

Type R2793

Opus 3.35.

N.B. If you have an extension ROM board, please make sure that there is still room on the MAIN computer board for the REPLAY ROM
£8.00 DISCOUNT offered for T.D. ROMs to those users wishing to up-grade to REPLAY. (Mail Order Only).

Available by post from:

VINE MICROS, MARSHBOROUGH, NR. SANDWICH, KENT CT13 OPG.

Telephone: (0304) 812276

(or your local Dealer)

VISA

Access

UDM NOW FOR CHALLENGER

Proxima

—Now even easier to use.

—Many extra features as a result of existing user-feedback.

—Supplied with a complete suite of utilities.

—Ideal for video titling, carousel displays, posters, etc.

—Works with most DFSs.

40 or 80 Track disc
£19.95

Upgrade to Beeb-Text Plus for £5.00 along with returned original Beeb-Text disc.



Available from
GRIFFEN COMPUTERS
CASTLE WALK, LOWER ST
STANSTED, ESSEX.
Tel: 0279 812295
TRADE ENQUIRIES WELCOME

SOFTWARE'S BEEB-TEXT PLUS

—THE Text display package for the BBC Micro.

Beeb-Text
plus

TALL WIDE

Style Style FX

Proportional italics
SPACING S P A C I N G

AT LAST!

THE ANSWER TO FINDING GOOD QUALITY SOFTWARE FOR YOUR BBC/ELECTRON



- MEMBERS RECEIVE:**
- ★ Discount prices on all Tapes & Discs
 - ★ Information & Advisory Service
 - ★ Regular Newsletter
 - ★ Free Postage on 3 or more Titles
 - ★ Rapid Delivery
 - ★ No Obligation to Purchase

ALL FOR ONLY £3.00 PER YEAR!

Send large SAE for Catalogue & full details

**THE BRAIN TRAIN CLUB
NORTHINGTON HOUSE
59 GRAY'S INN ROAD LONDON WC1X 8TL**

BCOMP BASIC Compiler £49.95

(Reviewed in November issue of Acorn User)
Powerful, easy to use compiler for the BBC B micro. Supports all BASIC keywords except the assembler, computed line numbers, limited use of EVAL and the second processor. Space saving and speed gain. Will compile programs in memory or from disk. Requires OS1.0 or later.

BSIDE Sideways BASIC Utility £14.95

Enables up to 20 compiled programs (depending on size) to be put in a sideways ROM/RAM image on disk. Each program is run using a '*' command.

DASM 6502 Symbolic Disassembler Disk £19.95 ROM £24.95

Disassembles programs in RAM, sideways ROM or disk files. Full labelling and formatting for use in listings.

Retail prices include P&P. Send cheque with order or SAE for details:



**Logik Engineers
84 Portnalls Road
Coulston, Surrey
CR3 3DE**

AA4

RSD CONNECTIONS LTD

MONITOR LEADS	RIBBON CABLE (Price per ft)	SPECTRUM EXTENSION LEADS
BBC to Microvitec £2.20 TV to Computer £1.25 Green Screen £2.95 BBC to Fidelity etc. £4.95 QL to Fidelity etc. £4.95 COMMODORE to Fidelity etc. £4.95 Phono to Phono £1.25 BBC to Ferguson £2.50 QL to Microvitec £2.50 QL to mono monitor £1.50 BBC to Sony/Kaga £5.95 BNC to BNC £2.95 COMMODORE to Ferguson £2.50 BBC to Hitachi £2.50 SONY to Fidelity etc. £6.50 MSX to Ferguson £2.50 QL to Ferguson £2.50	Grey Rainbow 9-way .13 .24 10-way .15 .28 14-way .18 .32 15-way .20 .36 16-way .22 .40 20-way .30 .50 24-way .36 .60 25-way .40 .65 26-way .45 .70 34-way .60 .80 37-way .65 .85 50-way .70 .90 50-way .95 £1.25 60-way £1.10 £1.40 64-way £1.15 £1.50	6 inch extension cable M to F £10.50 6 inch F to 2M's £14.75 12 inch extension cable M to F £10.75
IDC AMPHENOL	EDGE CONNECTORS	IDC SHROUDED HEADERS WITH EJECTING LOCKING ARMS
36-way plug £4.95 36-way socket £5.95 36-way plug (solder type) £4.95	2 x 23-way (ZX-81) £1.85 2 x 28-way (Spectrum) £2.10	Straight Right Angle 10-way .85 .90 14-way £1.00 £1.20 16-way £1.25 £1.45 20-way £1.40 £1.60 26-way £1.70 £1.95 34-way £2.00 £2.30 40-way £2.15 £2.45 50-way £2.30 £2.65 60-way £2.45 £2.85
DISK DRIVE LEADS	DOUBLE SIDED PLUG BOARDS	BBC MONITOR STAND
Dual disk drive power lead £4.50 Dual disk drive lead 1m £10.25 Single disk drive power lead £2.75 Single disk drive lead 1m £7.25 Disk drive extn. lead 1m £7.25 AMSTRAD 2nd DRIVE £6.95	ZX-81 23-way £1.35 Spectrum 28-way £1.50	Heavy-duty stand Vinyl covered in BBC colours to match. ONLY £11.95
CASSETTE LEADS	ADDITIONAL IDC	DISTRIBUTION SOCKET
BBC to cassette £2.25 DRAGON to cassette £2.20 SPECTRUM to cassette £1.25 BBC to Acorn cassette £2.25 AMSTRAD to cassette £2.20	56-way Card Edge for Extension Lead £4.25	4-WAY MAINS 4-way top quality mains trailing sockets. Supplied wired up with mains plug ready for use. Can be screwed to floor or wall if required. Very useful for tidying up all the mains leads from your peripherals. Allows the whole system to be switched on from one plug. ONLY £9.50
PRINTER LEADS	D CONNECTORS	SPECTRUM DRIVES
ALL 1 METRE LENGTH	Solder Bucket Male Female	RS232 WAFA lead 1m £10.50 Centronics WAFA lead 1m £10.50 Micro Extn. lead 12" £6.00
BBC £9.95 BBC serial £8.95 AMSTRAD £16.75 MEMOTECH £12.75 EINSTEIN £12.75 IBM PC £15.75	9-way .75 £1.00 15-way .95 £1.50 25-way £1.50 £1.90 37-way £2.40 £3.25	IDC D CONNECTORS
SPECTRUM interface £9.75 One to RS 232 £15.25 ATARI £13.95 MSX £15.20 APRICOT £9.95 DRAGON £9.95 QL £10.75	HOODS .95	9-way £2.70 £3.20 15-way £3.20 £3.70 25-way £3.80 £4.45 37-way £5.90 £6.80
ANY COMBINATION OF LEADS MADE TO ORDER	TELEPHONE CONNS	
	Surface master jack socket £3.75 Surface extn socket £2.50 Dual outlet adaptor £4.25 Line jack cord 3mtr £1.85 4 core cable per metre 15p All surface units shuttered BT approved.	

TRADE ENQUIRIES WELCOME
75p P&P IN UK. Access & Visa accepted. Add 15% VAT to all orders
Cheques made payable to
RSD Connections Ltd, Dept AC12.
PO Box 1, Ware, Herts.
Tel: 0920 5285/66284

PEARTREE COMPUTERS LIMITED

Peartree Computers Ltd.
Falcon House,
70c High Street,
Huntingdon,
Cambs, PE18 6SS

Telephone: (0480) 50595
Telex: 418265 Bourk G
Prestel MBX 480811573
Prestel Telex 295141TX Link
Quoting Reference MBX 480811573

ACORN DNFS KIT

Unlabelled discs — box 10 80tr d/s 96pi **£11.95**

ACORN 1770 DFS UPGRADE KIT

Kit comes complete with daughter board, chip set and software. Enables ADFS to be fitted. Includes many new commands e.g. *FORM *ROMS *FREE *MAP etc. **£46.95**

ACORN ADFS UPGRADE

A rom upgrade allowing unlimited file names and hierarchical directory structure. Treats each drive as one side increasing capacity to 1.28 Mbytes on dual 80tr d/s drives. **£27.95**

VIEW

Version 2.1 of Acorns wordprocessor. Allows 80 column editing, printing direct from memory etc. **£47.95**

VIEW 3.0

A version of View suitable for the BBC+. Comes with a cassette version of the Printer Driver Generator. **£79.95**

HI-VIEW

A disc based version of this popular word processor for the 6502 second processor giving 47k of user memory. **£44.95**

VIEWSHEET

Acorns spreadsheet rom giving 255 rows by 255 columns, multiple windows, works in any mode, wide use of function keys, fully compatible with View. **£47.95**

VIEWSTORE

Acorns new database rom. Works in any screen mode, many powerful sorting facilities, can be spreadsheet or user defined card layout. Max record size is 60k. Output can be sent to View and Viewsheet. Comes with comprehensive manual, utilities disc etc. **£54.95**

GRAPHICS ROM

Acorns new 16k graphics rom giving many new commands for extensive graphics. Circles, ellipses, arcs, rectangles, parallelograms, segments and sectors etc are all available. Comes with manual and utility cassette. State B or B+ version **£27.50**

BASIC EDITOR

Acorns new editor rom allowing all the normal wordprocessor facilities to be used on basic programs. Features include block copy, block move and use of labels. **£28.95**

TERMULATOR

A terminal emulation rom. Emulations provided are VT100, VT52, 4010, teletype, hardcopy and a special BBC terminal. Comes with user guide and a set of function key strips. **£31.95**

ISO-PASCAL

A full implementation of the ISO standard supplied on two roms with two comprehensive guides. 6502 disc version also supplied. **£59.95**

LOGO

A full implementation of the Logo language supplied on two roms. Comes with manuals, user guide, example disc and reference card. **£59.95**

COMAL

A full implementation of the International Standard for Comal. Comes with comprehensive manual. **£45.00**

Make your order today.

All prices inc. VAT @ 15% p & p Extra £1.50

0-60 IN 3 SECS



Midwich BBC compatible winchester disc drives, transfer data to and from the BBC micro at an astonishing speed! In just 3 seconds our drives transfer over 60,000 characters - that's 400% faster than your floppy disc system.

Available in capacities from 5 to 40 megabytes, Midwich winchester drives are ideal for all your storage needs, being fully compatible with Acorn's DFS, DNFS, CP/M, Level 2 and Level 3 Econet Software.

All systems are supplied complete with our own Winchester Filing System ROM (MWFS) which is totally compatible with Acorn's Filing System, but includes many new and powerful commands. A comprehensive users manual and utilities disc is also supplied.

Prices start at just £675.00 plus carriage and VAT for Educational orders - so don't delay. For a free test drive on your own system or simply for more information, telephone (0379) 4131 today.



MIDWICH
COMPUTER COMPANY LIMITED

GILRAY ROAD, DISS, NORFOLK, IP22 3EU. TELEPHONE: DISS (0379) 4131

● AVAILABLE EX-STOCK ● IDEAL FOR ECONET LEVEL 2 AND LEVEL 3 ● ACORN DFS, DNFS AND CP/M COMPATIBLE ● LOW PRICES ● STORAGE CAPACITIES FROM 5 TO 40 MEGABYTES ● SIMPLE INSTALLATION ● 12 MONTHS FULL WARRANTY

EPROMS & RAMS

Hitachi 250nS — the reliable ones — BBC compatible
Prices include VAT and UK post — normally by return

2718 1-2 pcs £3.50 3-9 pcs £3.25 10+ £3.00

2764 1-2 pcs £2.50 3-9 pcs £2.35 10+ £2.25

27256 (Hit/Tosh) 1-2 pcs £6.00 3+ £5.75

Hit. RAM 6264LP15 1-2 pcs £4.75 3+ £4.50

★ ★ If you see a lower price we will beat it! ★ ★

BB-PROM programmer £33.95 inclusive

ERASERS: 1 £21.95, D2 (15 min timer) £26.50

★ 20% off EPROMS ordered with BB-Prom or Eraser ★

Send UK cheques/Money Orders/ Official Orders to:

SILICON CITY, DEPT A

1 Milton Road, Cambridge CB4 1UY

ACCESS/VISA orders, telephone 0223 3312453

VANNIN SOFTWARE

LASER ATTACK. New game for 1 or 2 people shooting targets with a Laser Gun, 5 skill levels, Sound option, Target score for replay, Joystick option, Table of merit, High score. BBC(B) Tape £5.

SPIDER SPELLER. Exciting educational game involving collecting letters to spell words while avoiding giant spiders, 155 word vocabulary, Sound option, 2 skill levels, Joystick option, High score. BBC(B) Tape £5.

THE GOLDEN MAZE. Search the maze for the ten golden bars and the sword of Tigana while avoiding the snakes. Best time, Stopwatch, Joystick option, BBC(B) Tape £5.

DOUBLE TURN. A card game for 1 or 2 players requiring a good memory, skill and luck. Sound option, High score, Match scoreboard. BBC(B) Tape £5.

Mail order only.

Please write for more details.

VANNIN SOFTWARE, FREEPOST, York, YO1 1TJ. (No Stamp Required.)

Star Value

79p

5 1/4" disks

Prices per box of 10 (excl VAT)

	1-4	5-9	10-24	25-49
SS/DD 48 tpi	7.90	7.40	7.20	7.05
DS/DD 48 tpi	9.90	9.20	8.90	8.60
DS/QD 96 tpi	13.90	13.10	12.80	12.60

Add £7.95 for Economy 50 Storage Case

- * Unbranded, full specification disks
- * Well known manufacturers
- * Hub rings
- * Envelopes, labels, w/p tabs
- * Full no-quibble guarantee

3 1/2" disks

SS £2.20
DS £2.99

Prices per box of 10 (excl VAT)

	1-4	5-9	10-24	25-49
Single sided 135 tpi	22.90	21.50	20.80	19.90
Double sided 135 tpi	29.90	27.90	26.80	25.80

Add £1.99 per box if See10 Library Case is required

- * Recommended for BBC, IBM, Commodore, Apple etc
- * Double Density, suitable for single density use

Free Delivery

3" disks £2.99

Prices per box of 10 (excl VAT)

	1-4	5-9	10-24	25-49
CF2	29.90	28.90	27.90	26.90

Single disks **£3.50** each 5 off **£3.20** each

1. All prices include 2nd Class delivery (U.K. mainland) but exclude VAT. For urgent deliveries please telephone for delivery charges. Overseas add £5 per 100 disks or part thereof for air freight.
2. Telephone orders can be accepted from Government bodies, schools, etc. or with a VISA card.
3. Send cheque made payable to "IDS Computer Supplies", with order to the address below. Don't forget the VAT.



IDS Computer Supplies

Dept.S0 15 Darin Court Crownhill Milton Keynes MK8 0AD Telephone (0908) 569655

EPROMS, 8271

(Phone for quantity discounts)

	Ex VAT	Inc VAT
27128 Hitachi 250nS Eprom	2.83	3.25
2764 Hitachi 250n S Eprom	2.00	2.30
6264LP-15 8K x 8bit Ram	3.43	3.95
8271 Floppy Controller	37.39	43.00
Disc CMOS/TTL Chips	4.77	5.49
Acorn Disc Interface	58.26	67.00
View Wordprocessor Rom	40.87	47.00
Wordwise Plus Rom	38.70	44.50
Printmaster Rom	23.91	27.50
Inter-Sheet Rom	40.87	47.00

(Full range of Roms available)

Mitsubishi 400K 40/80 Track Drive (by Cumana) & Acorn DFS £149.95 Inc VAT

DISKETTES	13.90	15.99
10 in library case. D/S Q/D 96 tpi. Lifetime warranty (15% discount of quantities of 100+)		


BBC B, PLUS, 128

	Ex VAT	Inc VAT
BBC B & Acorn DFS	312.17	359.00
BBC B Plus	390.44	449.00
BBC B Plus 128K	416.52	479.00

DISC DRIVES/MONITORS

	Ex VAT	Inc VAT
CD800S 800K dual + PSU 40/80	210.43	242.00
CDSX800 800K dual No PSU 40/80	173.87	199.95
CS400 400K single + PSU 40/80	112.17	129.00
CSX400 400K single No PSU 40/80	93.91	108.00
Philips CT2007 TV/Monitor	173.04	199.00
Philips BM7502 Green Monitor	68.70	79.00
Philips BM7522 Amber Monitor	72.61	83.50

TAXAN KP810



with BBC cable & paper
£263.00 (£228.70 + VAT)
(Phone to check price)

	Ex VAT	Inc VAT
KP910 17" width printer	328.70	378.00
KP810 Paper roll	3.43	3.95
KP810 Dust Cover	4.00	4.60
KP810 Print ribbon	5.48	6.30

LX-80 (EPSON)	with BBC cable & paper £229.00 (£199.13 + VAT)
Tractor Unit	20.95 (18.22 + VAT)
Sheet Feeder	59.00 (51.30 + VAT)
Printer Ribbon	4.49 (3.90 + VAT)

SP-1000	with BBC cable & paper £215.00 (£186.96 + VAT)
---------	---

SP-10 (STAR)	with BBC cable & paper £249.00 (£216.52 + VAT)
--------------	---

Phone for our best price before placing your order
EDUCATIONAL & GOVERNMENT ORDERS WELCOME
All products have a 12 month no quibble guarantee
Prices subject to variation without prior notification
Carriage 46p (40p + VAT) Securicor £6.90 (£6.00 + VAT)

WeServe

Acorn Dept.
128 West Street,
Portchester, Hants.
PO16 9XE.
Tel: 0705 325354



AA25

0664 63617

Squirrel's Byte

Printers (a)

Shinwa CPA80	179.00	Daisy Junior	199.00	
Kaga KP810	235.00	Juki 6100	329.00	
Epson LX80	221.00	Brother HR15	339.00	
Ribbons eg Shinwa	3.45	Epson 80 series	2.95	
Kaga KP810	5.25	Epson 100 series	4.85	
Cables	1 metre	6.75	1.5 metre	7.75

DISK DRIVES (b) + INTERFACES

Cumana SS 40T	79.50	Dual SS 40T	139.50
DS 40/80T	99.95	Dual DS 40/80T	179.50
" 3.5" DS 80T	86.00	Dual DS 80T	159.00
PSUs: 5.25" single	19.00	dual	29.00
PSUs: 3.5" single	7.00	dual	10.00
Cumana QFS (BBC)	65.00	Opus DDOS	58.00
(Electron)	89.50	Acorn DNFS	65.00

MODEMS (c)

Miracle WS2000	129.95	Pace Nightingale	99.75
(inc. BBC lead)		Nightingale + Commstar	117.95

DISKETTES — POST FREE!

	Unlabelled (100% guarantee)	Verbatim Datalife	Dysan	Prices per box of 10 3.5" Datalife
SS DD 48 tpi	11.75	14.30	15.45	
DS DD 48 tpi	15.50	17.25	23.95	
SS DD 96 tpi	15.50	17.25	23.95	33.60
DS DD 96 tpi	17.60	22.25	29.95	42.90

DISK SERVICING/REPAIR

Rates for service/recalibration and minor repairs Inclusive of VAT and return
P&P: single £20, double—sided £23, dual single £25, dual double—sided £28.

Please add 15% VAT to all prices (inc. carriage)

Carriage rates: (a) £6.00 (b) £5.00 (c) £4.00

ribbons/interfaces etc 95p (any quantity)

Please telephone if you do not see the item you require.

Squirrel's Byte

7 Coniston Road, Melton Mowbray,
Leicestershire, LE13 0NE. Tel: (0664) 63617 AAB

CAREY ELECTRONICS

computing and communications

For The BBC Microcomputer System — computers
peripherals software

DISK DRIVES by Pace (latest prices) Mitsubishi & Cumana.	BBC Model B	369.00
SINGLE DRIVES (without P.S.U.):—	BBC Model B with DFS	429.00
40T. D/S. 200K	BBC Model B Plus	469.00
PSD 2	PRINTERS:	
MD 200 A	Juki 6100	382.38
40/80T. D/S. 400K.	Juki 6300	861.00
PSD 3 P	Canon PW-1080 A	329.19
MD 400 A	Integrex Colourjet 132, from	654.35
SINGLE DRIVES (all with P.S.U.):—	Epson RX-80	260.19
40/80. D/S. 400K	MONITORS (14" R. G. B.):	
PSD 3 P	Microvitec 1431 (Std. Res)	249.00
MD 400 B	Microvitec 1451 (Med. Res)	299.00
CS 400	Microvitec 1441 (Hi. Res)	506.00
DUAL DRIVES (all with P.S.U.):—	MODEMS:	
40T. D/S. 2 x 200K. (400K)	Pace Nightingale	136.85
PDD 2 P	Miracle WS 2000	149.44
MD 402 D	COMMUNICATIONS SOFTWARE:	
CD 400 D	Pace COMMSTAR	34.01
40/80T D/S. 2 x 400K. (800K)	Miracle DATABEEB	28.75
PDD 3 P	Aries-B32 RAM extension	92.00
MD 802 D	A.T.P.L. "SIDEWISE"	ROM
CD 800 S	board	43.70
All drives include cables, formatting disk & instructions.	A.T.P.L. SYMPHONY	143.75
	ACORN MUSIC 500	199.00
	G.C.C. STARdataBASE	77.30

PRICES INCLUDE V.A.T. PLEASE ADD P&P.
Printers & Computers £9.00. Drives & Modems £5.75. Software £1.15 (post free
with Modem).

MUCH MORE AVAILABLE, so if it isn't mentioned — we may still have it,
IF NOT WE CAN GET IT.

We are also able to supply: AUDIO & VIDEO TAPES & ACCESSORIES and
ELECTRONIC COMPONENTS for the COMPUTER ENTHUSIAST & RADIO
AMATEUR.

MAIL ORDERS TO: 7 Church Road, WALTON-ON-
NAZE, Essex CO14 8DF.
(Callers by appointment). Tel: Frinton-on-Sea
(02556) 6993.

AA5

DISC DRIVES FOR BBC

D80SMP	dual drive (2 x 400k) 40/80 switchable double-sided monitor stand PSU	£299 (b)
S80SP	single drive (400k) 40/80 switchable double-sided PSU	£120 (b)
S80S	single drive (400k) 40/80 switchable double sided	£99 (b)
D35	dual 3 1/2" drives (2 x 400k) 80 track double sided	£200 (b)
S35	single 3 1/2" drive (400k) 80 track double sided	£115 (b)
	Half-height 10meg CDC Winchester	£230 (b)
	Half height 80 track DS	£80 (b)
	3 1/2" 40-track	£55 (b)
	Full height 80-track D.S.	£60 (b)
ACORN INTERFACE		£50 (c)
ACORN DNFS		£69 (c)
1770 upgrade		£47 (a)
ADFS upgrade		£28 (a)
8271 £40(a)	27128 £3.50 (a)	
2764 £2.60(a)	6264LP £5(a)	

Quantity discounts available

SINGLE DUAL DISC CONVERSION SETS

Allows two single drive 0 to be automatically configured as DRVO and DRV1

Dual power lead converter

DISKETTES

from £10 per pack-excl: VAT. All discs guaranteed and have a lifetime warranty

	10 of	25 of	
40tk SSDD	£11	£25	Add £9 for a 50 capacity storage box with smoked perspex lid dividers and non-slip rubber feet.
80tk DSQuad	£13.50	£32	

	DATALIFE		
40tk SSDD	£14.25	3 1/2" SSDD	£32
40tk DSDD	£18	3 1/2" DSDD	£38
80tk DS Quad	£24	3" DS	£38

Carriage & VAT included, No more to pay

ACORN SOFTWARE

Viewstore	£55 (a)	Basic Editor	£29 (a)	Graphics rom	£28 (a)
Viewsheet	£48 (a)	View 2.1	£48 (a)	Logo	£60 (a)
Hi-view	£45 (a)	View printer drive	£11 (a)	Comal	£45 (a)
View 3.0	£80 (a)	Termulator	£32 (a)	Iso-Pascal	£60 (a)

Computer Concepts		Clares		Beebug	
Speech rom	£29 (a)	Brom	£30 (a)	Help rom	£22 (a)
Interchart	£32 (a)	Profile	£11 (a)	Spellcheck	£17 (a)
Intersheet	£48 (a)	Betabase	£11 (a)	Toolkit	£25 (a)
		Utils		Murom	£27 (a)
Accerator	£58 (a)	Replica II	£11 (a)	Sleuth	£27 (a)
Wordwise	£45 (a)	Betabase	£22 (a)	Spellcheck	£29 (a)
Plus		Beta accounts	£22 (a)	Exmon	£27 (a)
Printmaster	£28 (a)			Advanced disc tool kit	£33 (a)

SYSTEMS UTILITY FOR ACORN AND U.D.M. - you can: sector edit Acorn, Opus and UDM - enable/disable multiple roms, even across Break - list roms - check status of roms, even when disabled - peek and poke memory - display basic variables - automatically run a basic/mc file from disc and leave page at E00 - automatically down load cassette software from disc only £20 (a)

Case - slimline	£13.80 (c)	full height	£18.98 (c)
Cable - single data	£6.50 (a)	dual data	£10.50 (a)
single power	£3.50 (a)	dual power	£4.74 (a)

UDM 100% board	£17.50 (a)
UDM DDFS 3.1	£65.00 (a)
UDM Rom Ram expansion board	£55.00 (b)
UDM 3.1 upgrade (return old DFS rom to us)	£5.75 (a)

Carriage charges - (a): £1 (b): £10 (c): £2 All prices include VAT

CD CARSON DEVELOPMENTS (AU)
84 Highfield Road, Romford, Essex RM5 3RU
Telephone: 0708 27043

NEW "MICRO-STOCK" A LOW COST DISC BASED PROFESSIONAL ACCOUNTING PROGRAM For The BBC Computer

"Micro-Trader"

INTEGRATED SALES PURCHASE AND NOMINAL LEDGERS

Designed for business use by a business man. "Micro-Trader" is a fully integrated program in which all Sales and Purchase Ledger Transactions are automatically updated to the Nominal Ledger.

"Micro-Trader" offers full Sales and Purchase Ledger facilities including SALES INVOICE and STATEMENT PRINTING with a capacity of 450 accounts and 3000 transactions per month in each Ledger.

Normal Income, Expenditure, Assets, Liabilities & Journal Posting in the Nominal Ledger with full Reporting for individual accounts, Audit Trail, Trial Balance, Profit & Loss and Balance Sheet.

NEW "MICRO-STOCK"

Stock Control program, fully integrated with "Micro-Trader". 4000 Stock Items with user defined Codes. Invoice and Credit Notes and Cash Sales routine. Full Stock Held Reports.

£95.00 + V.A.T.



PHONE TODAY FOR A FREE FACT SHEET

MEADOW COMPUTERS

11, LONDON STREET, WHITCHURCH, HAMPSHIRE, RG28 7LH

Telephone: Whitchurch (025682) 2008

THE BROANS ARE HERE! BROANMAZE

A new, strategic action game with 3¹⁶⁸ different mazes, inhabited by deadly insectoid broans. Blow up as many as you can before they get you...

Game features: music while you play, redefinable keys, full-colour graphics, 'freeze game' option and high score table.

BBC 'B' ONLY CASSETTE £4.95 ALL INCLUSIVE
TRADE & DEALER ENQUIRIES WELCOME

SNT COMPUTING 39, BAKER STREET, POTTERS BAR, HERTS, EN6 2DZ.

CHALKSOFT * GARLAND * STORM * CAMBRIDGE * H&H * GOLEM

Looking for the RIGHT Software?

You need the newly published 72 page

EDUCATIONAL SOFTWARE DIRECTORY

- * Widest selection of programs - over 500 for the BBC and other computers
- * Full program descriptions with screen shots
- * Easy ordering and competitive prices

For your copy send £1 in stamps or cash (refundable against first order)

Rickitt Educational Media

Ilton • Ilminster • Somerset TA19 9HS • (04605) 5152

AKADIMIAS * FERNLEAF * BOURNE * SCISOFT * JACARANDA * SULIS


BBC PUBLICATIONS * SHERSTON * 4MATION

SELECTIVE * MACMILLAN * ASK * CLOUD 9

BBC Microcomputer in the NORTH

CTECH Computers Telephone: 061-366-8223/7794

Free Vouchers for up to £100 in Travellers Cheques on certain models

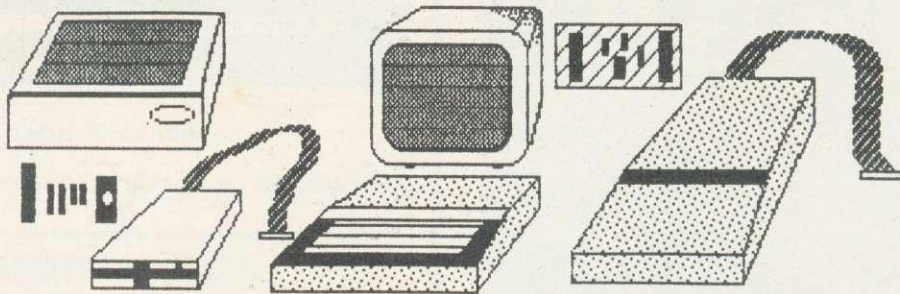

* Computers

BBC Model B
BBC Model B with DFS
BBC Model B + (64K)
BBC Model B + (128K)

£ p
277.39
339.00
CALL
CALL

*** BBC MODEL B + £399**

* Acorn Equipment

6502 2nd Processor
Z80A 2nd Processor
Acorn Music 500
32016 2nd Processor
Electron Plus One
Electron Plus Three

£ p
173.04
346.95
169.00
POA
47.78
199.00

All computers come with Free Cassette Lead.


Most add-ons include free fitting and installation

* Monitors

Ferguson Hi Res Green Screen
Ferguson High Res Amber Screen
Microvitec Medium Res
Microvitec Normal Res
Ferguson TV/Monitor

£ p
69.00
74.00
260.00
199.00
179.00

DISKETTES



Boxes of 10 diskettes
XIDEX s/s d/d £13.95
XIDEX d/s d/d £15.00

Storage boxes £2.17

Addons:

ATPL SIDEWISE ROM/RAM board
Nightingale modem
AMX Mouse
Ferguson Cassette Recorder
Acorn Speech Synth
Tracker Ball Atari
Brother M1009 Epson compatible Printer

38.00
109.00
P.O.A.
26.04
47.83
27.95
173.04

Light Pens and Joysticks

R. H. Electronics Light Pen
Joystick Pairs
Hi-Fi Extension Cable
Atari-type joystick for BBC
AMX Mouse

39.50
17.35
5.17
10.39
69.52

ROM Software

Wordwise Plus
Graphics ROM
Print Master
View 2.1
1.2 O.S.
Disk Doctor
Termi
Commstar
Viewsheet
Beebugsoft Toolkit
Spellcheck
ISO Pascal
Viewstore
Intersheet

49.00
28.65
28.65
52.09
10.00
28.65
28.65
30.39
52.09
23.48
17.35
60.78
52.09
49.00

Components and Cables

2764 Eprom
27128 Eprom
8271 Disk Controller
BBC to Centronics Printers 1/2m
BBC to serial printer
Disk Drives Datacable
Disk Drives Power Cable
R.G.B. Cable
BBC to Ferguson Monitor Cable
Cassette Leads
TV Leads

4.95
3.95
POA
11.26/13.00
13.00
8.65
2.57
3.44
3.44
4.78
2.57

Printer Ribbons

Epson FX80/RX80/MX80 £4.34
NEC/Imagewriter Ribbons £5.21
Canon PW 1080A/KP 810 £6.91
Brother HR15 Multi-Strike £4.34
Epson LX80 £4.30

THIS MONTH'S BEST BUYS AT C-TECH.

* 100k	40 TRACK SINGLE SIDED DISK DRIVE + ACORN DFS £139
* 400k	40/80 DOUBLE SIDED SWITCHABLE DISK DRIVE + ACORN DFS £199
* 1MB	40/80 DOUBLE SIDED SWITCHABLE DISK DRIVE + OPUS DOUBLE DENSITY DFS £173.04
* FERGUSON	MM02/MM06 26 MHZ BAND WIDTH GREEN/AMBER MONITOR £69/£74
* FERGUSON	14" COLOUR TV MONITOR £179
* STAR	SG10 PRINTER NEAR LETTER QUALITY, EPSON RX80FT IBM COMPATIBLE P.O.A. CUT SHEET FEEDER AVAILABLE SOON
* EPSON	NEW LX80 NEAR LETTER QUALITY PRINTER, OPTIONAL CUT SHEET FEEDER AVAILABLE P.O.A.

NO MAIL ORDER RISK WITH US (see below)

PRICES . . .

All our prices are constantly moving, so please ring us to check the latest price.

Some prices plus VAT

***FREE DELIVERY TODAY**
(Orders over £90)

If you are in Greater Manchester, Cheshire, Lancashire, Merseyside, West Yorkshire or South Yorkshire, if you ring us now we can send one of our highly trained staff to install your computer equipment today.

(Pay only when you receive your goods)

C ★ TECH


COMPUTERS
SUPADATA LIMITED

184 Market Street,
Hyde, Cheshire


SK14 1EX

061-366 7794

061-366 8223



MORLEY ELECTRONICS

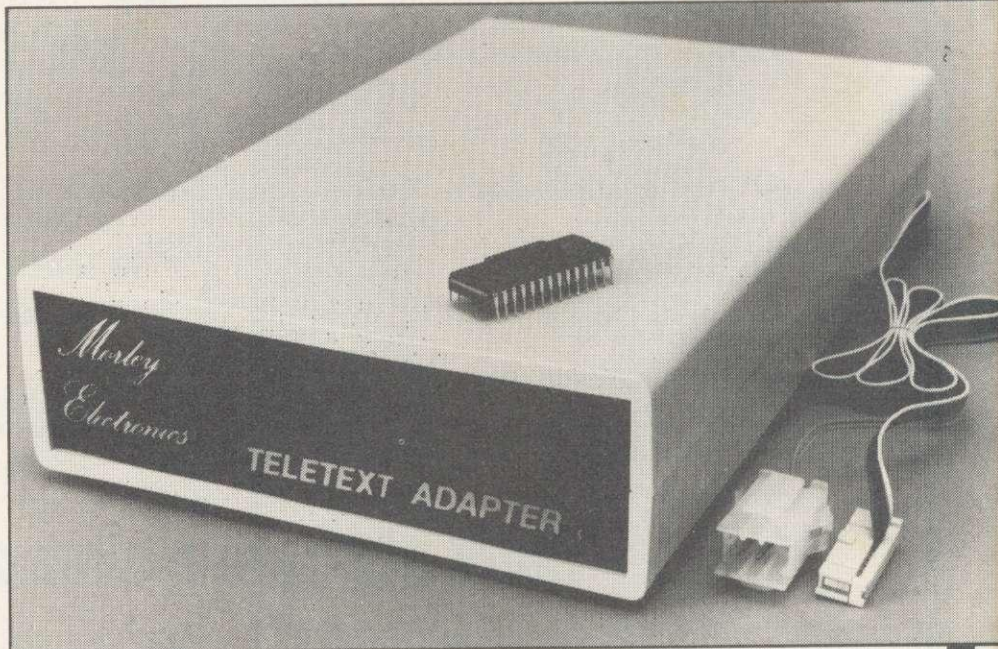

FEATURES

- Advanced design uses the latest technology will handle ANY future enhancements to the Teletext system eg: full field: 8 bit data transfer: 2k pages etc.
- Simply plugs into user port and power output.
- Low power consumption, less than 200ma. Optional power supply available.
- User friendly menu driven software including extended OSCLI and Oslowd commands for access from BASIC programs.
- No user-RAM required (PAGE remains at default value).
- FREE Telesoftware, no access charges. (at present updated weekly.)
- Save selected pages to disc/tape for later retrieval.
- Full access to all Teletext services and channels eg: CEEFAX, ORACLE, 4-Tel.
- Software available on ROM or sideways RAM format disc.
- Basic 1 & OS1.0 compatible.
- Gives you a real-time clock at your disposal (*TIME).
- Free software upgrades to allow for any enhancements to the teletext service. Eg: extra channels, full field data on cable & satellite systems etc.
- Easy to follow comprehensive user guide.

- No hardware limitations, it can for example receive virtually unlimited numbers of channels.
- Works with Solidisc SWR.
- Utilis disc available including printer drivers allows pages to be selected and dumped direct to a printer (no more TV or Radio Times to buy).

ELECTRON TELETEXT ADAPTER

Electron adapter now available, including emulated Mode 7 allowing you to run long Adventure type programs. Please ring for Details.

M/B software DESIGN 7

Easily the best value Mode 7 screen designer on the market today. Design any mode 7 screen, from simple MENU pages to full CEEFAX standard. This program is an invaluable aid. Designs can be saved to disc as automatically numbered files or the program will convert the screen into a BASIC Proc.

INTERFACES DIRECTLY WITH ADAPTER allowing CEEFAX-ORACLE pages to be selected and dropped into editor screen for alteration, saving, or conversion to BASIC. Allows channel change from within program.

The Morley Teletext adapter introduces you to the world of Teletext at a price that wont break the bank. Inside it you will find the latest in second generation Teletext chip technology, which unlike our rivals who are still using chips designed more than eight years ago, will be fully compatible with any future advances in the Teletext system.

With the Morley adapter you will get a unit that automatically tunes itself in to the required station (no more messing around with

screwdrivers in the back of the case), a user friendly menu driven program available on rom or disc, easy to follow instructions and a 12 month warranty. Add to this the free downloadable telesoftware and we are sure that you will agree that we are offering you one of the best bargains on the market today.

For technical details please ring Morley Electronics on Tyneside (091) 251 3883.

To order please fill in and send order form to: **MORLEY ELECTRONICS, 1 MORLEY PLACE, SHIREMOOR, TYNESIDE NE27 0QS.**

Please send me.

- Qty. Morley Teletext adapters
 Qty. Teletext software on Rom
 Qty. Teletext software on Disc
 Qty. M/B DESIGN7 screen designer
 Qty. Teletext utilities on Disc
 Qty. Optional PSU

- @ £74.45 inc. VAT & P&P.
 @ £24.95 inc. VAT & P&P.
 @ £23.95 inc. VAT & P&P.
 @ £8.95 inc. VAT & P&P.
 @ £5.95 inc. VAT & P&P.
 @ £9.95 inc. VAT & P&P.

Total £



Please delete 40/80

NAME _____ PHONE No. _____ CHEQUE No. _____

ADDRESS _____

POSTCODE _____

CV × 16-2 ROM/RAM



- * CAPACITY FOR 16 PAGED ROMS FULLY BUFFERED
- * OPTION FOR UP TO 16K PAGED RAM
- * SOFTWARE INITIATED WRITE PROTECT
- * BATTERY BACKUP INCLUDED
- * EASILY FITTED, PLUGS IN
- * FULL DOCUMENTATION

DOUBLE DENSITY DFS



- * COMPATIBLE WITH LATEST ACORN SOFTWARE
- * NEAT COMPACT DESIGN, SIMPLY PLUGS IN
- * COMPATIBLE WITH ACORN SECOND PROCESSOR
- * UTILITY SOFTWARE ON ROM
- * FACILITY TO ADD 8271 (ADAPTOR BOARD) IF DESIRED
- * FULL DOCUMENTATION

ROM MASTER ROM DEVELOPMENT UTILITY




- * POWERFUL 2 PASS LABELLING DISASSEMBLER
- * ROM BASED, 16 COMMANDS
- * FLEXIBLE DISK SAVE LOAD FACILITY
- * GRAPHIC DISPLAY FULLY EXPLOITS CVX16-2 FEATURES
- * SUITABLE FOR OTHER ROM BOARDS (SOME COMMANDS NOT APPLICABLE)
- * FULL DOCUMENTATION

BUY ALL THREE SAVE £15

COMPUTER VILLAGE
Hazeldine House, Central Square,
Telford, Shropshire TF3 4JL



SHOP: 0952 506771
MAIL
ORDER: 0952 583538



CVX 16-2 (£49.95) DDDFS (£44.95)
ROM MASTER (£19.45) ALL THREE (£99.85)
Post and packaging £2.00 on complete order.

Access/Visa/Cheque No

Name

Address

VACANCIES FOR TRAINEE COMPUTER OPERATORS

Have you any A levels? Are you interested in computers? If so why not take our aptitude test and become a trainee computer operator with an international financial organisation. Competitive salary with variety of fringe benefits. Please write with C.V. to
Mrs. C. A. Monaghan
Management Services Division
Bank of Credit & Commerce Int. S.A.
Licensed Deposit Taker
100 Leadenhall Street
London EC3A 3AD
(No agencies please)

GUARDIAN OF DOOMSDAY

A superb new text adventure for the BBC model B micro

Help – can you save the world? An evil old professor has constructed a deadly 'molecular balance reactor' to destroy the world after his death. He is now dead, and time is running out . . .

Find your way around a peaceful old English village, picking up whatever you think may be of use to you on your mission. Be polite to people along the way – they may be able to help you. Then explore the expanses of woodland, search farm buildings for clues, until finally – you must locate the old professor's castle and disarm the reactor. But beware – the castle's computer system will try to protect the building at all costs!

Features many well-described locations, text compression, interactive characters, an extensive vocabulary, and mind-boggling puzzles! Should keep even experienced adventurers puzzled for months. Send for your copy now – you won't regret it. This game is set to be a smash hit!


ONLY £5.95 (CASSETTE), £8.95 (40 TRACK DISK).
These prices include VAT, postage & packing.)

Make your cheque or PO payable to Quest Software, and send to

QUEST SOFTWARE

22 Springfield Road, Wickersley, Rotherham,
South Yorkshire S66 0DG.

AA1

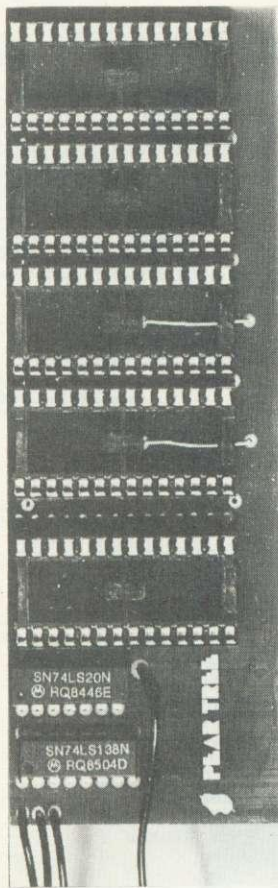

MR 2000 MINI ROM BOARD

GIVES 4 EXTRA ROM
SOCKETS ON BBC 'B'
PLUG IN - SWITCH ON
MEASURES 128 x 44 mm

ONLY **£14.95**
inc VAT/P&P

FULL INSTRUCTIONS
ENCLOSED

CHEQUE/P.O. PAYABLE TO
PEAR TREE COMPUTERS LTD
PEAR TREE MEADOW
ELLINGTON THORPE
HUNTINGDON CAMBS
PE18 0AW

SEE OUR COLOUR AD
SPECIAL LAUNCH OFFER



MICROMAN Computers



ACORN SPECIALIST COMPUTER CENTRE



BBC COMPUTERS:

BBC B Plus 64K	449.00
BBC B Plus 128K	
BBC B Plus Upgrade 64-128K	39.95
ADFS Upgrade	30.00
1770 Upgrade	49.95
Acorn DFS Upgrade inc DNFS	99.00

ACORN PERIPHERALS:

Teletext Receiver	149.00
Prestel Receiver	139.00
6502 2nd Processor	199.00
Z80 2nd Processor	399.00
IEEE Interface	325.00
Music 500	199.00

ECOMET SYSTEM:

Full Service Available

HARD DISCS:

Acorn 10MB Hard Disc + Level 3	1699.00
Acorn 30MB Hard Disc + Level 3	2499.00

ELECTRON COMPUTER:

Electron	79.00
Plus One Interface	59.95
Electron View	29.95
Electron Worksheet	29.95
Electron Database	19.95
Electron Logo	59.80

EXPANSION BOARDS:

ATPL Sidewise ROM Board	43.70
Aries B32 RAM Expansion Board	92.00
Aries B12 ROM Board	46.00
Aries B12c	5.75
Computer Village ROM Board	49.00

SOLIDISK PRODUCTS:

Solidisk 32K Sideways RAM	53.00
Solidisk 64K Sideways RAM	80.00
Solidisk 128K Sideways RAM	125.00
Solidisk DDFS 2.0 Interface	45.00
Solidisk ADFS 2.1 Interface	55.00
Solidisk CPU Case + Keyboard	33.00

EPROM PROGRAMMERS-ERASERS-I/CS

Eprom Programmer	20.95
Eprom Programmer + ZIF Socket	25.95
Eprom Eraser	20.95
Eprom Eraser with Timer	25.95
Eproms 2764 8K Mitsi/Hitachi	2.95
Eproms 27128 16K Hitachi/Fujit	3.95
RAM 6264LP-15 8K	4.95

MONITORS (inc cable):

Microvitec 1431 Standard	229.00
Microvitec 1451 Medium	229.00
Philips TV/Monitor/PAL CT2007	229.00
Philips Green 7502	89.00
Philips Amber 7522	94.00

MODEMS/BULLETIN BOARD S-WARE:

Pace Nightingale + Comstar	159.85
Pace AutoDial/AutoAnswer Board	56.35
Pace AutoDial Utilities Disc	11.50
Pace OBBS Bulletin B Software	25.00

BBC FIRMWARE:

View ROM	59.80
View 3 ROM-NEW-Viewsheet ROM	89.00
View Store ROM	59.80
Speech Synthesizer	55.00
BCPL ROM	59.80
ISO-Pascal ROM	69.00
LOGO ROM	69.00
COMAL ROM	49.85
Acorn Basic Editor ROM	29.90
Acorn Termulator ROM -NEW-Graphics Ext. ROM -NEW-Ultracalc 2 Spreadsheet ROM	34.50
Open Logo ROM	29.90
Logotron Logo ROM	79.50
Wordwise ROM	69.95
Wordwise Plus ROM	69.00
Graphics ROM	44.85
Disc Doctor ROM	56.35
Printmaster ROM (Epson/Star) Communicator ROM	33.35
Termi II Emulator ROM	69.00
Gremlin Debug ROM	33.35
Inter-Sheet ROM -NEW-Inter-Chart ROM -NEW-Accelerator ROM -NEW-The Speech ROM -NEW-Caretaker Basic Utility ROM	56.35
	44.85
	64.40
	33.35
	33.35

BBC FIRMWARE:

Commstar EPROM	34.00
System ADE ROM	60.00
System SPY ROM	30.00
Merlin Scribe ROM	59.95
Merlin Database ROM	49.00
Merlin Data Scribe ROM	95.00
Gemini Datagem Database ROM	79.95
Beebug: Full range	
Slave Plus ROM -NEW-Floppy-Wise Plus ROM -NEW-Basic Extension ROM	39.95
Vine TD ROM 8271 Version	29.95
Vine Replay 1770 Version	19.95
	18.00
	35.00

DISC DRIVES (NO PSU):

Pace PSD1 SS/40T/100K	99.00
Pace PSD1B (above in dual case)	121.90
Pace PSD3 DS/40T-80T/400K	114.95
Pace PSD3B (above in dual case)	134.55
Pace DD3 DS/40T-80T/800K	209.95
Cumana CSX100 SS/40T/100K	99.00
Cumana CSX400 DS/40T-80T/400K	114.95

DISC DRIVES (INC PSU):

Pace PSD3P DS/40T-80T/400K	135.95
Pace PSD3PB (above in dual case)	156.40
Pace PDD3P DS/40T-80T/800K	255.95
Cumana CS100 SS/40T/100K	129.95
Cumana CS400 DS/40T-80T/400K	135.95
Cumana CD800 DS/40T-80T/800K	255.95

OPUS PRODUCTS:

Opus Challenger	249.95
RAM Disc Upgrade to 512K	49.95
Opus DDOS Interface	99.00
Opus 5401 40T/100K Disc Drive	85.00

DISC UTILITIES/LANGUAGES:

Full range Acorn, Clares, Beebug etc

DISCS/STORAGE BOXES:

Mr Floppy 5.25" DS/DD/80T (10)	16.50
Wabash 5.25" DS/DD/80T (10)	16.50
70 Lockable Disc Storage Box	13.95
100 Lockable Disc Storage Box	15.95

CONTROL & GRAPHICS:

Commotion EV1 Camera	129.80
AMX Mouse inc SUPER ART	89.95
AMX Desk	24.95
AMX Utilities	14.95
AMX Paintpot	14.95
AMX Super Art ROM	49.95
AMX Pagemaker	49.95
AMX 3D Xicon	24.95
AMX Database	24.95
AMX Zam	24.95
Marconi Trackerball RB2	59.80
RB21 (Colour Icon Software)	69.50
Robin Light Pen (Standard)	29.90

PRINTERS:

Canon PW-1080A	289.00
Canon PW1156A	459.00
Star S610 NLQ	259.00
Star SG15 NLQ	389.00
Shinwa CPA80 Parallel	199.00
Shinwa CPA80 Serial	239.00
Epson LX80 NLQ	258.75
Juki 6100 Daisywheel	379.00
Juki 2200 Typewriter/Printer	299.00

JOYSTICKS:

Voltmace 14b Handset	14.95
Voltmace 3b Single	12.00
Voltmace 3b Dual	19.95

CAD SYSTEMS:

Bitstik 1	375.00
Bitstik Multi-plotter Driver	79.00
Bitstik 2	914.25
Bitstik 2 Upgrade	517.50

PLOTTERS:

Roland DXY-800 A3 Plotter	483.00
Roland DXY-880 A3 Plotter	943.00
Roland DXY-980 A3 Plotter	1380.00
Watanabe A3 Plotter (6 pen)	1026.52
Epson H180 Plotter (4 pen)	458.85
Hitachi A3 Plotter (4 pen)	569.25
Linear Graphics Plotmate	343.85
Penman Plotter	228.85
Penman Micad Special Pack	249.00
Penman Utilities Special Pack	249.00
Benson A3-A0 Plotters	P.O.A.

ACORN APPROVED SERVICE CENTRE

SHOP OPEN 9-6 Mon-Sat.

We stock a large range of books, educational and games software

EDUCATIONAL & INDUSTRIAL ENQUIRIES WELCOME

AA27

MACOB

SYSTEMS

DIRECT TO YOU AT WHOLESALE PRICES

COMPUTERS

BBC B Plus	£489
BBC-B	£329
BBC-BD	£419
DFS (Acorn)	£90
Z80 2nd Processor	£389
6502 2nd Processor	£189
CBM 64	Available for export
Sinclair	£700
Atari 520 SD	£700

PRINTERS

Canon PW1080A	£275
Canon PW1156A	£389
Kaga KP810	£279
Epson RX80F/T	£242
Quendata 20cps	£239
Juki 6100	£332
Star SG10	£259
Shinwa CP80A	£195

FIRMWARE

View	£48
Wordwise +	£48
Disc Doctor	£29
Printmaster	£29

DATA RECORDERS

Omega	£21
-------	-----

MONITORS

Microvitec 1431	£219
Microvitec 1451	£279
Philips BM7502	£ 83
Normende (Green)	£ 79

MODEMS

Pace Nightingale	£130
------------------	------

DISKS

D/S D/D 80T	£20 (box of 10)
(Fully guaranteed) box of 10	

DISK DRIVES

Cumana CSX100 SS 40T	£103
Cumana CSX400 DS 40/80T	£155
Cumana CD200 SS 40T + PSU	£242
Cumana CD800 DS 40/80T + PSU	£356
PSU	£20

BUSINESS SOFTWARE

We have a very extensive range ... P.O.A.

- Price includes VAT at 15% and delivery is FREE in the UK.
- To order just send a cheque or postal order to us and the goods reach you fast.
- Trade enquiries welcome.
- Remember, our name is our guarantee.

MACOB SYSTEMS

8 Lister Gardens, London N18 1HZ. Tel: 01-803 1622

Telex: 8954029 att.MACOB




MAIL ORDER SALES

NEXT DAY DELIVERY £8.00
SMALL ITEMS 1st CLASS POST £1.00
PRICES INCLUDE VAT



RAINFORD INDUSTRIAL ESTATE, MILL LANE,
RAINFORD, ST. HELENS, MERSEYSIDE
PHONE 074488 5242/5295

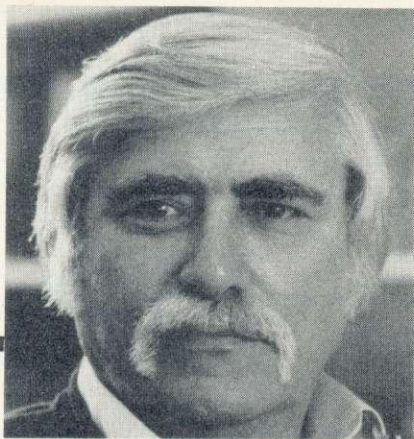

Harold Rules..OK?

When you call please don't disturb Harold — he broke 1000 on Snapper last week and hopes to crack 2000 soon. Mind you, there are other machines in the store that you can use to try out the software from our extensive range. Printers, disc drives and monitors too.

6 Chatterton Road, Bromley, Kent.
460 8991

Data Store

BBC/ELECTRON EDUCATIONAL SOFTWARE

Our educational software is used in thousands of schools and homes throughout Great Britain.

EDUCATIONAL 1 *BBC/ELECTRON* £6.95 £8.95
Tape £8.00 Disc £10.00
Hours of fun and learning for children aged five to nine years. Animated graphics will encourage children to enjoy counting, maths, spelling and telling the time. The tape includes six programs: MATH 1, MATH 2, CUBECOUNT, SHAPES, SPELL and CLOCK.
... "An excellent mixture of games" ... *Personal Software - Autumn 1983.*

EDUCATIONAL 2 *BBC/ELECTRON* £6.95 £8.95
Tape £8.00 Disc £10.00
Although similar to Educational 1 this tape is more advanced and aimed at seven to twelve year olds. The tape includes MATH 1, MATH 2, AREA, MEMORY, CUBECOUNT and SPELL.

FUN WITH NUMBERS *BBC/ELECTRON* £6.95 £8.95
Tape £8.00 Disc £10.00
These programs will teach and test basic counting, addition and subtraction skills for four to seven year olds. The tape includes COUNTING, ADDING, SUBTRACTION and an arcade type game called ROCKET MATHS which will exercise addition and subtraction. With sound and visual effects.

... "These are excellent programs which teachers on the project have no hesitation in recommending to other teachers." ... *Computers in the Classroom Project, Riley High School.*
FUN WITH WORDS *BBC/ELECTRON* £6.95 £8.95
Tape £8.00 Disc £10.00
Start your fun with alphabet puzzle, continue your play with VOWELS, learn the difference between THERE and THEIR, have games with SUFFIXES and reward yourself with a game of HANGMAN.
... "Very good indeed" ... *A&B Computing - Jan/Feb 1984*

JIGSAW AND SLIDING PUZZLES by P. Warner *BBC/ELECTRON* £6.95 £8.95
Tape £8.00 Disc £10.00
There are two jigsaw and four sliding puzzles on a 3 x 3 and 4 x 4 grid. Each program starts off at an easy level to ensure initial success but gradually becomes harder. It helps children to develop spatial imagination and in solving problems. The tape includes: OBLONG, JIGSAW, HOUSE, NUMBERS, CLOWN and LETTERS.

KON-TIKI by J. Amos *BBC* £11.95
Disc £12.95
Simulation program based on Thor Heyerdahl's KON-TIKI expedition. Enjoy a journey on the KON-TIKI recording on a map the raft's position and entering notes in the logbook on creatures found, unusual events etc. Inclusive of booklet, background information, maps and fully supportive illustrated data sheets.
... "A well thought-out package with a wide appeal" ... *Which Micro & Software Review - October 1984.*


★★SPECIAL OFFER★★
Buy three titles and deduct £4.00
Add 50p p&p per order. Please state BBC or ELECTRON or
40 or 80 track for discs.

Golem Ltd, Dept A, 77 Qualitas, Bracknell, Berks RG12 4QG. Tel: 0344 50720

Draw with the BBC micro and show the true potential of your machine

- Fill shapes in one of 23 colours (Mode I)
- Draw points, lines, rectangles ellipses and circles
- Smooth curves
- Wire frame diagrams
- Hidden line removal
- Draw in perspective
- Measure scaled distances
- Ekta sketch lines, Half tone facility
- Mirror images
- Repeat images, SS, enlarged, reduced, stretched
- Actual colour displayed
- Store up to 10 ellipses or circles in memory
- Redraw any one of these at cursor position
- Change any actual colour for one of 8 others
- Clear screen, load screen, save screen
- Print characters or numbers at any pixel point
- Error messages for incorrect input
- Fully comprehensive manual

35¢ 496 * □ ●●●
3

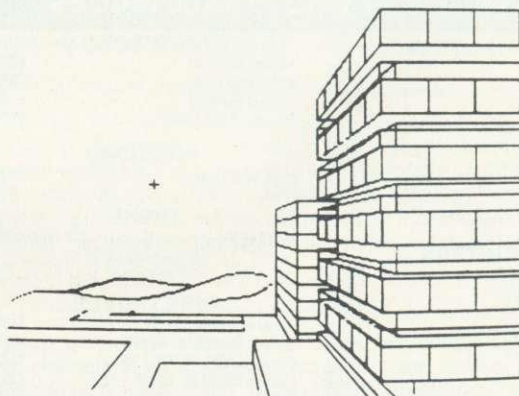

This programme has been purpose designed by professional Graphic Designers for simplicity and ease of use, and is undoubtedly the most versatile drawing programme on the market at this time. There is no need to input any numerical data, as all judgements are made visually. The BBC Micro is the finest drawing machine in its price range. Find out what it can do.

The A. B. Designs drawing programme costs only £36 for over 70 functions (model B). New AB2 Program, available on disc (price £61) and cassette (price £51). When ordering send Cheque/PO and VAT at 15%. Please include phone no. with all correspondence. For further information send SAE and phone no. to A. B. Designs, 81 Sutton Common Road, Sutton, Surrey. 01.644 6643 (closed all day Thursday).

Now you can . . .



EXPAND your Electron

. . . for much less than the price you'd normally pay!

How the Plus 1 helps you make the most of your Electron

With the Plus 1, you and your Electron enter a whole new computing dimension. The Plus 1 turns your Electron into a fully fledged micro capable of using printers, joysticks and cartridge ROMs – the software that comes on a chip. In addition, the Plus 1's analogue to digital port gives access to the outside world – while the slots for the ROM cartridges allow the Electron to take advantage of the latest, most exciting hardware developments yet to be released.

If you want to use your Electron to the full, then it's essential you get a Plus 1.

*Normal Price
£59.90*

**Special Electron
User Price**

£39.95

*Incl. FREE game
ROM cartridge*



EXPAND - with the Electron Workstation!

Now you can transform your Electron into a serious micro with the Electron Workstation. This package consists of a Plus 1 and the acclaimed View wordprocessor and Viewsheet spreadsheet, both on cartridge ROMs. The Workstation makes the Electron a hard-working yet inexpensive tool for home and office. From business letters to your first novel, from home economics to cash flow crises, it can take them all in its stride.

Normal price £119.80

Electron User price £69.95

EXPAND - with the Electron Data Manager!

Bring the speed of discs and the organised memory of a powerful database to your Electron with the Electron Data Manager. It consists of the Plus 3 interface and Acorn's official disc-based Database – a disc that allows you to keep track of things quickly, reliably and efficiently. Sophisticated, accurate and fast, the Data Manager is a must for all serious Electron applications.

Normal price £248.95

Electron User price £149.95



All these offers are available direct from Database Publications or in the latest issue of Electron User

**Database Publications Ltd,
Europa House, 68 Chester Road, Hazel Grove,
Stockport, SK7 5NY.**

POOLS

WITH

PREDICTOR

PLUS

**FREE
RACING
ANALYSER**

**14,000
MATCH
DATABASE**

After three successful seasons, we know a thing or two about successful pools prediction on home computers. Things like 7 powerful methods of analysing form. Like a massive database and easy data entry. Not forgetting tuning facilities to let you improve your forecasts as the season progresses. We've combined all of these and much more into the 1985/86 version of our renowned Football Pools Predictor Program. And to complete this outstanding punter's package, there is a free Racing Analyser Program to let you analyse any race using the racecard from your daily paper. Now beat that for value!

BOTH PROGRAMS
FOR ONLY

£8.99

**MAYDAY 181 Portland Crescent
SOFTWARE Stanmore, Middx. HA7 1LR**

BBC 'B'
&
Electron

PRINTERLAND

ORDERED TODAY -
DELIVERED TOMORROW



Free

WITH ALL PRINTERS: BBC USERS PRINTERS GUIDE -
Getting the best from your printer is not easy
We supply a free booklet with all printers which explains how to obtain all
the features available on your printer. Without this you could waste many
hours. Buy elsewhere and you'll pay far more and get far less.

Access and
Visa are
mail order
only

■ DOT MATRIX	EX VAT	INC VAT
SHINWA CP A80	£165-00	£189-75
EPSON FX80 F/T+	£314-00	£361-10
EPSON FX100 F/T+	£425-00	£488-75

■ DOT MATRIX PLUS NEAR LETTER QUALITY		
EPSON LX80 VERY SPECIAL OFFER	£195.00	£224.25
JUKI 5510 (colour option)	£249.00	£286.35
CANON 1080A VERY SPECIAL OFFER	£235.00	£270.25
CANON 1156	£335.00	£385.25

■ DAISY WHEEL		
QUENDATA 1120	£225-00	£258-75
EPSON DX100 SPECIAL OFFER	£356-00	£409-40

■ COLOUR PRINTERS		
EPSON JX-80 SPECIAL OFFER	£450-00	£517-50

■ PRINTER TYPEWRITER COMBINED		
JUKI 2200	£245-00	£281-75

■ ACCESSORIES		
WORDWISE +	£43-00	£49-45
BBC PRINTER CABLE	£8-00	£9-20


■ MONITORS		
PHILIPS 7502 GREEN	£75-00	£86-25

NOW ONLY 3 MINUTES FROM JUNCTION 23 M62
(MANCHESTER 25 MINUTES/LEEDS 20 MINUTES)
NB: FROM EAST USE JUNCTION 24

**156 LONGWOOD GATE, LONGWOOD
HUDDERSFIELD
Tel 0484 646048/9**

SUPERB HARD COVERS for your BBC Micro & Electron

- Engineered in top quality high impact ABS - very tough.
- Super textured finish in cream to tone with your BBC Micro.
- Looks good in the home.
- Gives excellent protection.
- Ideal for schools and colleges.



BBC Cover: **£10.95** (+£1.55 p&p)
Electron Cover: **£8.95** (+£1 p&p)

Send cheque/PO to:
Dept. AU
Grange Close
Sandbach
Ches. CW11 9ET
Tel: (09367) 3098

tekform

Turn your Model B into a quality

SPECTRUM ANALYSER

Analysis of data read from disc based on fast and accurate machine code FFT routine.

- * Graphical display
- * Log/lin scaling, calibration, etc.
- * Spectrum comparison, insertion loss measurement
- * Digital readout of peaks
- * Other professional features

The complete package including machine code ROM chip, BASIC software on disc and comprehensive documentation costs **£120**

Further details from:
STRUCTURED SOFTWARE
15 Athelstan Close, Bromborough, Wirral, Merseyside L62 2EX

HOT NEWS

Wordwise Plus

THE ULTIMATE

Word Processor

**EXTRA
VALUE**

£45.95

SEND CASH WITH ORDER FOR
RETURN OF POST SERVICE TO:

Syntaxsoft

UNIT 109,
GLENFIELD PARK, GLENFIELD ROAD,
NELSON BB10 1AR 0282 698849

EXPANDABLE CONSOLE FOR BBC MICRO


As supplied to Universities, Colleges, Schools, business & home users

A professional console to house disc drives/2nd processor/Torch dual drives/teletext, etc. All untidy wiring out of sight in the strong aluminium console in a matching textured colour. AVAILABLE NOW a bolt on extra module for extra expansions.

Also available a matching printer stand, yes stack your paper under the printer.

ALSO VDU STANDS AVAILABLE

Torch version available



STOCK TAKE SALE

ELECTRON CONSOLES

The console houses the electron and will safely support the expansion interfaces which plug into the rear of the micro, supports the VDU and tidies up all wiring, allows expansion to disc at a later date.

PRICES

Special Torch Version £39.99 + £4 p/p
BBC Console £39.99 + £4 p/p
Bolt on expansion £12.99 + £2 p/p
VDU/Printer Stand £12.99 + £2 p/p
Electron Console P.O.A.

Please add VAT @ 15% to all prices

For further information enclose sae or send cheque to,

Mail Order Only

Silent 01-801 3014
COMPUTERS

New Address
73 Lansdowne Rd
London N17 0NN

Viewing by arrangement

Please allow 28 days for delivery

24 hour ansaphone

ACORN USER ADVERTISEMENT PAGES - DECEMBER ISSUE

64 Software Centre	212	Mayday Software	236
A B Designs	234	Meadow Computing	229
Abacus Business Machines	221	Medstat	148
Acornsoft	6/143	Memoco Electron	194
Addictive Games	27	Mertec	192
Akhter Computer Group	12, 13, 14	Micro-Media	75
Ancom	146	Microman Computers	233
AMS	28/29	Micronet	152-154
Aries Computers	222	Micropacs	33
BCC	232	Micropower	79
Beebugsoft	IFC/1/86/161/223	Microtest	224
Bel Tech	92	Microworld	218/219
Brian Train Club	226	Midwich Computer Co.	227
Broadway Electronics	188	Minerva	98
C & C Co.	238	Mirrorsoft	6/19
C-Tech	230	Morley Electronics	231
Cambridge Micro Centre	77	Mud	IBC
Cambridge Computer Store	220	No. 1 Systems	222
Care Electronics	206	Oak	132
Carey	228	Ocean Software	10/21
Carson Developments	229	Opus	156/157/202
Chalice Software	122	Pace	26/155
Chase Data	214/215	Paeaan Systems	221
Cheetah Marketing	84	Paul Fray	221
CJE Micros	190	Peaksoft	208
Clares Micro Supplies	160/186	Peartree Computers	138/226/233
Clef Products	221	Pineapple Software	184
Clwyd Technics	148	Printerland	236
CMS	146/180	Quest	232
Comco Engineers	222	Rickitt Educational Media	229
Compshop	200	Robico Software	210
Computer Concepts	144/145	Robocom	198
Computer Village	232	RSD Connections	226
Computatill	208	Seiko	BC
Contex Computing	98	Shards Software	174
Crofton Electronics	220	Shurwari Associates	194
Crossware Products	222	Silent Computers	238
Cumana	32/33/88/182	Silicon City	227
Database Publications	96/97/235	Slogger Software	184
Datavarvest	200	SNT	229
Datapan	168	Softlife	194
Datastar Systems	134	Solidisk	34-40
Datastore	234	SP Electronics	238
Davis Rubin Associates	170	Speedysoft	78
Design Dynamics	194	Squirrels Byte	228
Discotechnology	52	Store Stock Systems	98
Edilton Scheme	20	Structured Software	236
Educational Software Company	174	Superior Software	8/196
Electro-Music Research	33	Synergy Software	193
Electronequip	158	Syntax Software	236
Ferguson	4-5	Systems	178/216
G.C.C. (Cambridge)	128/129	Tandata Marketing	58/59
GEC (Telecomm)	172	Technomatic	41-47
Gemini Marketing	22-25	Tekform Products	236
Golem	234	Tiger Software	170
Grafsales	217	Torch	90/126
Griffen Computers	54/225	Twilstar	30-31
HCR Electronics	208	US Gold	60-61
IDS Computer Supplies	227	Vannin Software	227
Interface Electronics	76	Viglen Computer Suppliers	162-167
Kenda Electronic Systems	130	Vine Micros	225
LCL	148	Voltmace	176
Linear Graphics	50	Walkbury Consultants	204
Logik Engineers	226	Watford Electronics	62-72
M M Microwave	84	We-serve	228
Macob Systems	233	Wizard Development	159
Marbury Planning	33		

MONKEY

AS SEEN ON T.V.

Monkey is full of fun and magic
Monkey provides the basis for whole-class project
Monkey encourages class activities
For children age 7 +

The package includes:

- A two-part adventure program + story
- An illustrated story book
- A comprehensive teacher manual + a lot of suggestions for class activities
- A Monkey poster

西遊記



BBC B Version now available
£16 + VAT for Disc (price includes P&P)
£15 + VAT for Tape (price includes P&P)
RML and Commodore 64 versions in preparation
C & C Co.

9 Ettrick Place, Ayr KA8 9HH.
Tel: (0292) 289470 or 74241

We also welcome official government or school orders
Mail order please fill in coupon with your remittance

To: C & C Co. 9 Ettrick Place, Ayr KA8 9HH

Please send me _____ copies of Monkey Disc Package at £16 + VAT (£18.40)

Please send me _____ copies of Monkey Tape Package at £15 + VAT (£17.25)

I enclose a cheque/postal order for £ _____

Name _____

Address _____

P. Code _____

Signed _____ Date _____

AU12

AMSTRAD IN EDUCATION + AMSTRAD NETWORK SYSTEM

- * LATEST AMSTRAD COMPUTER MODELS.
- * SUBSTANTIAL DISCOUNT AND EDUCATION SOFTWARE.
- * 1 YEAR FREE EDUCATION SERVICE CONTRACT.
- * £200 EDUCATION SOFTWARE PRIMER PACK SUPPLIED FREE WITH EACH DISC SYSTEM.
- * AMSTRAD EDUCATION SOFTWARE CONSORTIUM DETAILS.
- * AMSTRAD HARD DISC SYSTEM.
- * AMSTRAD LOCAL AREA NETWORK SYSTEM (FOR AMSTRAD, BBC, APRICOT, IBM MICROCOMPUTER SYSTEMS).

Contact THE U.K. AMSTRAD EDUCATION DISTRIBUTORS:

NORTHERN COMPUTERS LTD.,

Churchfield Road, Frodsham, Cheshire WA6 6RD.

Tel: (0928) 35700 (10 lines)

Telex: 265871 (MONREF G) Quote: (UK)84: CXX123

AA49

ALL IN STOCK

S. P. ELECTRONICS

BBC SPECIALISTS

Acorn Electron	£99.90
BBC Model B 1.2 O.S.	£349.00
CPA 80 Printer (inc. cable)	£229.00
Disc Operating System	£96.00
Disc Drives	from £85.00
G3 WHO RTTY PROGRAM (TAPE)	£7.50
G3 WHO RTTY PROGRAM (EPROM VERSION)	£20.00
Circuit board for RTTY decoder Mk. 3 (inc. instructions)	£7.00
CANNON Dot Matrix 160cps NLQ	£299.00
Joysticks (pair) self centring + analogue	from £17.95
Printer Cable (Centronics)	£12.90
Speech Synthesis	£55.00
Disc Doctor	£33.00
WORDWISE Word Processor	£39.00
Slow Scan TV Circuit Board + Program (inc. instructions)	£17.50

Wide selection of software, books, leads, plugs, etc.
SAE for full list. All available Mail Order

All prices apply while stocks last.



48 Linby Road, Hucknall,
Notts. NG15 7TS
Tel: 0602 640377

(all prices include VAT)

Carriage extra

ACORN USER'S

DIARY

Life on the Cam

Life at Acorn has certainly gone through a lot of changes in the past year (for one thing there's a lot less of it). They now have a new Master to look after the 128keens left (there used to be 512), who isn't much of a Communicator, but at least a lot of Consultants have been in to help them sort things out. So this month we'll let you take a look at life behind the scenes.

Parking marks

Acornsoft is shortly expected to add 'Creative Parking' to its best-selling range which includes *Creative Graphics* and *Creative Sound*. Designed and developed by Acorn R&D (known as RND because you never know what they'll come up with next), the game has been rigorously tested in the Grayhound bus car park.

The game was the brainchild of Andrew McCarpark (more of he later) who inadvertently parked diagonally on the pavement one day. Current hi-score is held by Bruce 'Gudday' Cockprocessor who managed to park across three spaces leaving all the doors and the boot open, plus the engine running.

Business division MD John No-claims-bonus was disqualified by safety officers.

Meantime speed freak Andrew McLegless recently took too many risks at a drag party. Attempting to prove himself even more armless than Mike 'Podd' Howitzer he tripped over his own dress and broke his leg.

When we tried to get through on the phone for an official comment the message from the

switchboard was 'Sorry - we think Andy Hopper's left the company'.

So what did happen to Porsche-driver Andy Doppler? It seems he's shifted himself over to the science park working for a company called 'Qudos'. Sounding like a well-known operating system our suspicions of a defection were confirmed when it was revealed that Qudos stands for 'Quick designs on Sinclair's'.

Apparently two other directors are Peter O'Creep and Hermann Houseboat. We thought their names sounded familiar and, sure enough, it turns out they were on the Acorn board until someone discovered that neither were 100 per cent Italian.

Silly-Billys

Acorn appears to have taken on some ex-Sillydisk engineers judging by the look of the 64k upgrade to the B+ which is designed to be fitted by dealers only. Not content with there being 10 leads to fit, nine are soldered (on the under side of the main circuit board) and there are two tracks to cut. As all the leads are different colours, we suggest you give your dealer an eye test first.

Young gifted and single

A feature of Acorn's RND division is that many of the designers are very young - a high proportion are aged between 25 and 30. This fact, combined with Acorn's 'low staff turnover' (meaning no-one's arriving these days), is causing Acorn's personnel manager, Debbie McGoverness one or two headaches - between the years 2025 and 2030 a large section of the department will retire.

Being a forward looking company, Acorn has to plan for this



Editor TQ's chat-up technique: He shifts, she breaks, he tries control, she escapes, he returns, she runs, he goes to, but in the end they have trouble with his control codes.

We're sure you can come up with a better caption than this one elicited by a competition among the staff of Redwood Publishing - if you can, send it in to Acorn Abuser's Diary.

eventuality. The proposed solution is to make Acorn into a family company and replace the ageing boffins with their sons and daughters who can take over the ropes for another generation.

This scheme has only one problem - most of the wireheads aren't married.

This perhaps explains the following anonymous advertisement placed in a recent issue of the *Cambridge Evening News*:

'Intelligent long-haired girls needed for matching men with a view to long-term co-processing and upgradeability.'

But in a recent secret RND poll the woman voted most eligible female employee was Debbie McMatchmaker herself.

Budget brain surgery

Next month we'll be publishing the first in a three-part series on how to convert an Electron into a

budget second processor. In the first instalment Alex van Side-ways-ROM will concentrate on making use of the extra memory available alongside the ordinary RAM, the screen RAM, the side-ways RAM and the other bit of sideways RAM in your B+ +.

In the second part Kitty looks-better-in-real-life Milne will concentrate on the advantages to be gained from the slower RAM, to be followed up in the third article by Bruce I-want-a-12-meg-Beeb Smith describing the hardware modifications needed to your brain to make you want to use it.

Slipped disc

Is it that certain software isn't selling, or are the lads at Acorn running out of discs? One of them recently had cause to send a disc to *Acorn User*, and underneath the label was the old label for the Acornsoft Accounts Payable package!

“THE HOST IN THE MACHINE”



M.U.D

MULTI USER DUNGEON


M.U.D is here!

If you have a computer, a modem and a telephone, you can play the world's largest multi-user game.

Phone the M.U.D-line now and we'll send you further details.
But hurry - the quicker you call us, the quicker you join us.

01-608 1173

The greatest breakthrough in wrist technology since Seiko introduced quartz.

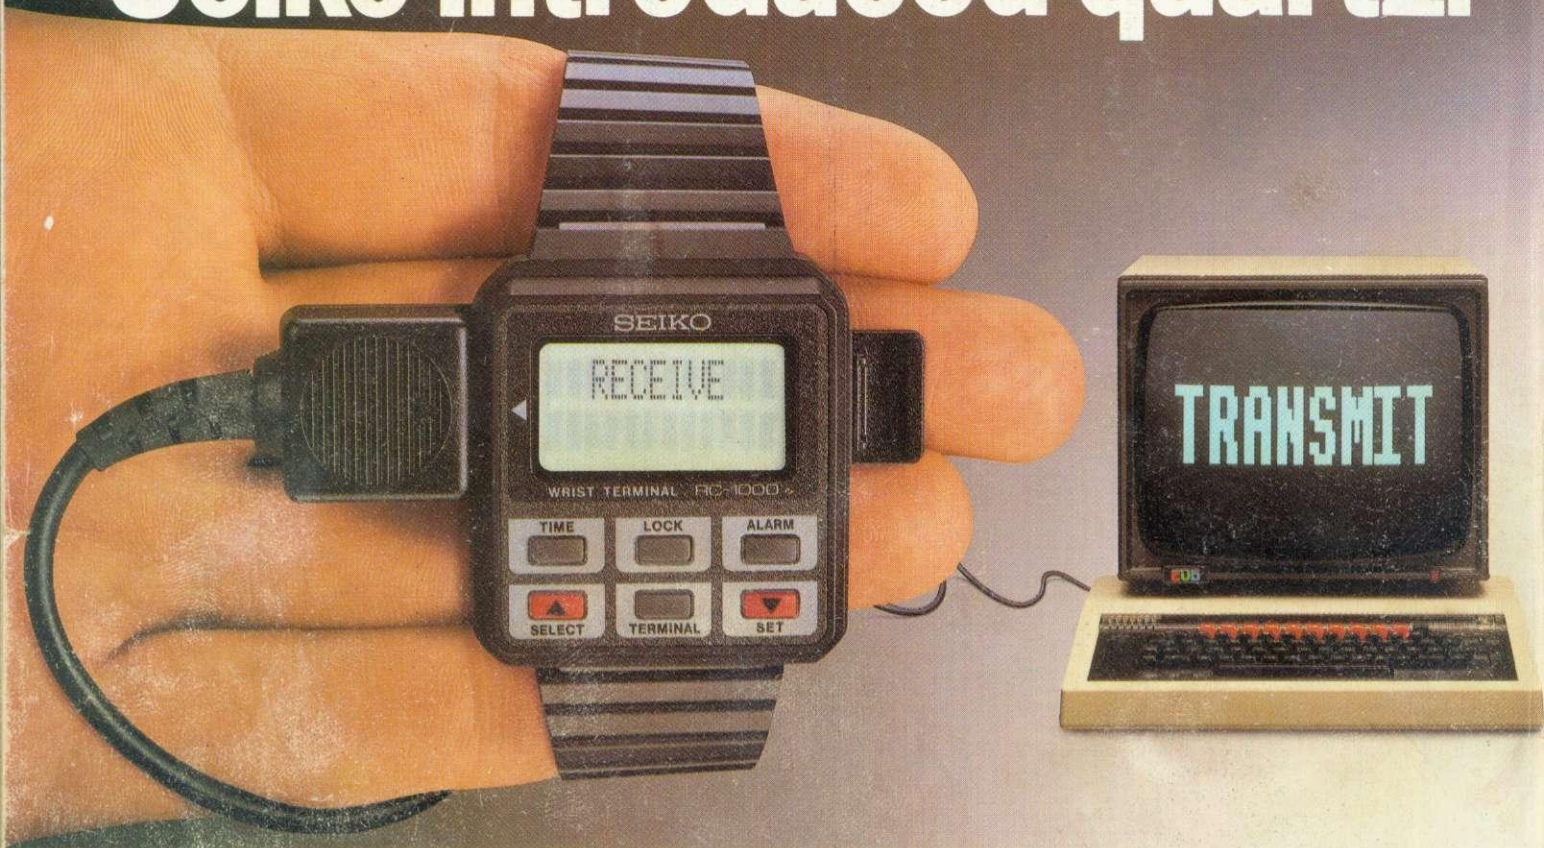

Have you ever forgotten an appointment, the price of a product, or even your own anniversary? Not any more. The new Seiko RC-1000 Wrist Terminal will change all that, permanently.

Only Seiko's advanced micro electronics technology could have produced the RC-1000. It is in fact, a computer terminal:

miniaturised then fitted into a small stylish module to be worn on your wrist like a watch, ready to recall important data from your personal computer* any time, anywhere.

The RC-1000 has a 24 character screen and an extensive memory that holds up to 80 screen 'pages' of information that can be sub-divided into 12 separate data files. A detachable lead allows it

to interface to the RS232 port of your computer and a sophisticated menu-driven database allows you swift access to your files.

Now imagine what the RC-1000 could do for you. As an 'electronic notebook', you can keep addresses, prices, statistics, in fact any type of file, ready to recall at the touch of a button. The

memory also keeps track of world time zones – vital for international business; you can display schedule reminders that can be used with the alarm function up to a year in advance (good for birthdays); or set to repeat at the same time every week. The list of uses is as endless as your busy timetable. The computer has revolutionised working lives. Now let the RC-1000 revolutionise your life.

SEIKO
RC1000 WRIST TERMINAL

LOS ANGELES
AM 11:20 50

BEAUJOLAIS
45.00 CASE

07:15 SQUASH
VS: SARAH

20:10 RECORD
DALLAS

CALL DAVE NY
212-977-2800

The Seiko RC-1000. £99.95. At all good computer specialists, now.

*IBM PC • Apple II E • Epson PX8 • BBC Model B • Commodore 64 • Sinclair Spectrum